ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent N5743A* at our website: *Click HERE*

Agilent N5700 Series System DC Power Supplies

Models: N5741A-49A, N5750A-52A, N5761A-69A, N5770A-72A

Data Sheet

- 24 Models: 750 W and 1500 W output power
- Up to 600 V and up to 180 A
- Small high density 1 U package
- Built-in voltage and current measurement
- Full protection from over-voltage and over-current
- 85-265 Vac Universal AC input
- Command compatibility for Sorensen DLM and Xantrex XFR DC Supplies
- LAN, USB, and GPIB interfaces standard
- Fully compliant to LXI Class C specification

Family of Affordable Basic System DC Power Supplies

The Agilent N5700 Series system DC power supplies give you just the right performance – at just the right price – in a compact (1 U) package. This family of affordable 750 W and 1500 W single-output programmable DC power supplies consists of 24 models for simple DC power applications. They provide stable output power, built-in voltage and current measurement, and output voltage and current from 6 V to 600 V and 1.3 A to 180 A.



These economical supplies offer many system-ready features like multiple standard I/O interfaces to simplify and accelerate test-system development for R&D, design validation, and manufacturing engineers in the aerospace/defense, automotive, component and communications industries.

Small, High-Density Package Saves You Rack Space

The N5700 provides up to 1500 W in a small space-saving 1 U-high, 19-inch-wide package. Its air vents are in the front, side and rear (not on the top or bottom), so you can stack other instruments directly above or below it to save valuable rack space.

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Easy Front-Panel Operation

You can quickly and easily operate the power supply with its rotary knobs and buttons. Using the front-panel controls, you can make coarse or fine adjustments of output voltage and current, protection settings, and set power-on states (last setting memory or factory default setting). The output voltage and current are displayed simultaneously, and LED indicators show power supply status and operating modes. You can lock the front panel controls to protect against accidental power-supply parameter changes.

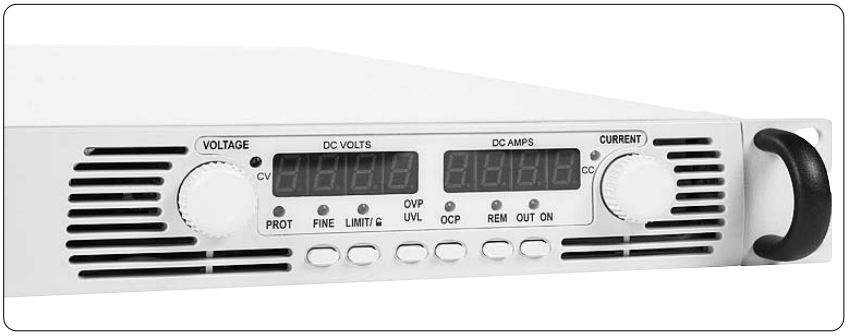


Figure 1. Front-panel control knobs and buttons make it easy to use N5700 power supplies.

Extensive Device Protection

To safeguard your device from damage, the N5700 Series power supplies provide over-temperature, over-current and over-voltage protection (OVP) to shut down the power supply output when a fault condition occurs. They also offer an under-voltage limit (UVL) that prevents adjustment of the output voltage below a certain limit. The combination of UVL and OVP capabilities lets you create a protection window for sensitive load circuitry.



Figure 2. Built-in Ethernet, USB 2.0, and GPIB interfaces enable easy system connections

Simplify System Connections

The N5700 Series power supplies comes standard with GPIB, Ethernet/LAN, and USB 2.0 interfaces giving you the flexibility to use your I/O interface of choice today and in the future. The N5700 is fully compliant with the LXI Class C specification.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Remote Access and Control

The built-in Web server provides remote access and control of the instrument via a standard browser such as Microsoft® Internet Explorer. Using the Web browser, you can set up, monitor and operate the N5700 remotely.

Easy System Integration and Configuration

To simplify system development, the N5700 comes standard with IVI-COM drivers. The N5700 supports the easy-to-use SCPI (Standard Commands for Programmable Instruments).

Command Compatibility

The N5700 includes a compatibility command set for the Xantrex XFR series power supplies, the Sorensen DLM series power supplies, and the Agilent 603x series power supplies. This simplifies system integration when converting to the N5700. For a comparison of these products, see application notes:

- Side-by-side comparison: Agilent N5700 Series System DC Source and Sorensen DLM DC Power Supply, AN 1502-1, 5989-1628EN
- Side-by-side comparison: Agilent N5700 Series System DC Source and Xantrex XFR AN 1502-2, 5989-1630EN

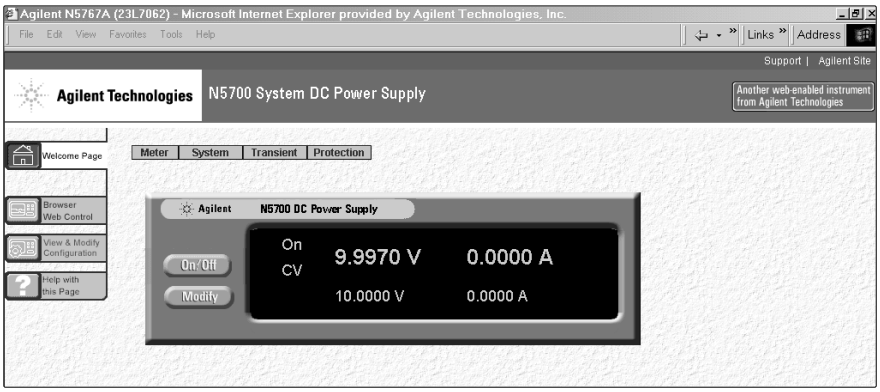


Figure 3. N5700 series web graphical user interface for remote access and control of the power supply

Flexible configuration: Connect Multiple Units in Parallel and Series

Should you need greater output power, the N5700 series power supplies give you the flexibility to connect in parallel up to four similarly rated units for greater output current and connect two similarly rated units in series for greater output voltage (see output terminal isolation information).

Analog Programming and Monitoring

The output voltage and current can be programmed from zero to full scale by either an analog voltage 0 to 5 V or 0 to 10 V or by resistances of 0 to 5 kΩ or 0 to 10 kΩ.

Universal AC input

All N5700 models have universal AC input so they can be automatically operated from any AC mains input voltage worldwide. They can be operated from line voltages of 85 – 265 Vac, 47 to 63 Hz, with no switch to set or fuses to change when you switch from one voltage standard to another. They also provide power factor correction.

Rack Mounting

The rack mount ears and handles are provided standard with every unit. In addition the N5740A rack mount slide kit makes it easy to integrate an N5700 into a test rack by providing all the necessary hardware to rack mount an N5700 series power supply in only 1 U of rack space.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Performance Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 40°C.

			N5741A	N5742A	N5743A	N5744A	N5745A	N5746A
DC Output ratings[1]	Voltage		6 V	8 V	12.5 V	20 V	30 V	40 V
	Current		100 A	90 A	60 A	38 A	25 A	19 A
	Power		600 W	720 W	750 W	760 W	750 W	760 W
Output Ripple and Noise	CV p-p[2]		60 mV	60 mV	60 mV	60 mV	60 mV	60 mV
	CV rms[3]		8 mV	8 mV	8 mV	8 mV	8 mV	8 mV
Load Effect (change from 10% to 90%)	Voltage		2.6 mV	2.8 mV	3.25 mV	4 mV	5 mV	6 mV
	Current		25 mA	23 mA	17 mA	12.6 mA	10 mA	8.8 mA
Source Effect (change from 85-132 VAC input or 170-265 VAC input)	Voltage		2.6 mV	2.8 mV	3.25 mV	4 mV	5 mV	6 mV
	Current		12 mA	11 mA	8 mA	5.8 mA	4.5 mA	3.9 mA
Programming Accuracy[1]	Voltage	0.05%+	3 mV	4 mV	6.25 mV	10 mV	15 mV	20 mV
	Current	0.1%+	100 mA	90 mA	60 mA	38 mA	25 mA	19 mA
Measurement Accuracy	Voltage	0.1%+	6 mV	8 mV	12.5 mV	20 mV	30 mV	40 mV
	Current	0.1%+	300 mA	270 mA	180 mA	114 mA	75 mA	57 mA
Load Transient Recovery Time[4]	Time		≤1.5 ms	≤1.5 ms	≤1.5 ms	≤1 ms	≤1 ms	≤1 ms
Supplemental Characteristics Supplemental characteristics are not warranted but are descriptions of typical performance determined either by design or type testing.								
Output Response Time (settle to within ±1.0% of the rated output, with a resistive load)	Up, full load		0.08 s	0.08 s	0.08 s	0.08 s	0.08 s	0.08 s
	Down, full load		0.05 s	0.05 s	0.05 s	0.05 s	0.08 s	0.08 s
	Down, no load		0.5 s	0.6 s	0.7 s	0.8 s	0.9 s	1.0 s
Command Response Time[5]					55 ms			
Remote Sense Compensation	Volts/load lead		1 V	1 V	1 V	1 V	1.5 V	2 V
Over-voltage Protection	Range		0.5-7.5 V	0.5-10 V	1-15 V	1-24 V	2-36 V	2-44 V
	Accuracy		0.06 V	0.08 V	0.125 V	0.20 V	0.30 V	0.40 V
Output Ripple and Noise[6]	CC rms		200 mA	180 mA	120 mA	76 mA	63 mA	48 m
Programming Resolution Measurement Resolution	Voltage		0.72 mV	0.96 mV	1.5 mV	2.4 mV	3.6 mV	4.8 mV
	Current		12 mA	10.8 mA	7.2 mA	4.56 mA	3 mA	2.3 mA
Front Panel Display Accuracy (4 digits; ±1 count)	Voltage		0.03 V	0.04 V	0.06 V	0.10 V	0.15 V	0.20 V
	Current		0.50 A	0.45 A	0.30 A	0.19 A	0.13 A	0.10 A

Notes:

[1] Minimum voltage is guaranteed to a maximum of 0.2% of the rated output voltage. Minimum current is guaranteed to a maximum of 0.4% of the rated output current.

[2] Up to 20 MHz

[3] From 5 Hz – 1 MHz

[4] Time for output voltage to recover within 0.5% of its rated output for a load change from 10 to 90% of its rated output current. Voltage set point from 10% to 100% of rated output

[5] Add this to the output reponse time to obtain the total programming time

[6] From 5 Hz – 1 MHz, at 10% to 100% of output voltage at full load (for 6 V units from 33% to 100% of output voltage)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Performance Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 40°C.

			N5747A	N5748A	N5749A	N5750A	N5751A	N5752A
DC Output ratings[1]	Voltage		60 V	80 V	100 V	150 V	300 V	600 V
	Current		12.5 A	9.5 A	7.5 A	5 A	2.5 A	1.3 A
	Power		750 W	760 W	750 W	750 W	750 W	780 W
Output Ripple and Noise	CV p-p[2]		60 mV	80 mV	80 mV	100 mV	150 mV	300 mV
	CV rms[3]		8 mV	8 mV	8 mV	12 mV	20 mV	60 mV
Load Effect (change from 10% to 90%)	Voltage		8 mV	10 mV	12 mV	17 mV	32 mV	62 mV
	Current		7.5 mA	6.9 mA	6.5 mA	6 mA	5.5 mA	5.26 mA
Source Effect (change from 85-132 VAC input or 170-265 VAC input)	Voltage		8 mV	10 mV	12 mV	17 mV	32 mV	62 mV
	Current		3.25 mA	2.95 mA	2.75 mA	2.5 mA	2.25 mA	2.13 mA
Programming Accuracy[1]	Voltage	0.05%+	30 mV	40 mV	50 mV	75 mV	150 mV	300 mV
	Current	0.1%+	12.5 mA	9.5 mA	7.5 mA	5 mA	2.5 mA	1.3 mA
Measurement Accuracy	Voltage	0.1%+	60 mV	80 mV	100 mV	150 mV	300 mV	600 mV
	Current	0.1%+	37.5 mA	28.5 mA	22.5 mA	15 mA	7.5 mA	3.9 mA
Load Transient Recovery Time[4]	Time		≤ 1 ms	≤ 1 ms	≤ 1 ms	≤ 2 ms	≤ 2 ms	≤ 2 ms
Supplemental Characteristics Supplemental characteristics are not warranted but are descriptions of typical performance determined either by design or type testing.								
Output Response Time (settle to within ±1.0% of the rated output, with a resistive load)	Up, full load		0.08 s	0.15 s	0.15 s	0.15 s	0.15 s	0.25 s
	Down, full load		0.08 s	0.15 s	0.15 s	0.15 s	0.15 s	0.30 s
	Down, no load		1.1 s	1.2 s	1.5 s	2.0 s	3.0 s	4.0 s
Command Response Time[5]					55 ms			
Remote Sense Compensation	Volts/load lead		3 V	4 V	5 V	5 V	5 V	5 V
Over-voltage Protection	Range		5-66 V	5-88 V	5-110 V	5-165 V	5-330 V	5-660 V
	Accuracy		0.60 V	0.80 V	1 V	1.5 V	3 V	6 V
Output Ripple and Noise[6]	CC rms		38 mA	29 mA	23 mA	18 mA	13 mA	8 mA
Programming Resolution Measurement Resolution	Voltage		7.2 mV	9.6 mV	12 mV	18 mV	36 mV	72 mV
	Current		1.5 mA	1.14 mA	0.9 mA	0.6 mA	0.3 mA	0.156 mA
Front Panel Display Accuracy (4 digits; ±1 count)	Voltage		0.3 V	0.4 V	0.5 V	0.75 V	1.5 V	3 V
	Current		0.0625 A	0.0475 A	0.0375 A	0.0250 A	0.0125 A	0.0065 A

Notes:

[1] Minimum voltage is guaranteed to a maximum of 0.2% of the rated output voltage. Minimum current is guaranteed to a maximum of 0.4% of the rated output current.

[2] Up to 20 MHz

[3] From 5 Hz – 1 MHz

[4] Time for output voltage to recover within 0.5% of its rated output for a load change from 10 to 90% of its rated output current. Voltage set point from 10% to 100% of rated output

[5] Add this to the output reponse time to obtain the total programming time

[6] From 5 Hz – 1 MHz, at 10% to 100% of output voltage at full load (for 6 V units from 33% to 100% of output voltage)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Performance Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 40°C.

			N5761A	N5762A	N5763A	N5764A	N5765A	N5766A
DC Output ratings[1]	Voltage		6 V	8 V	12.5 V	20 V	30 V	40 V
	Current		180 A	165 A	120 A	76 A	50 A	38 A
	Power		1080 W	1320 W	1500 W	1520 W	1500 W	1520 W
Output Ripple and Noise	CV p-p[2]		60 mV	60 mV	60 mV	60 mV	60 mV	60 mV
	CV rms[3]		8 mV	8 mV	8 mV	8 mV	8 mV	8 mV
Load Effect (change from 10% to 90%)	Voltage		2.6 mV	2.8 mV	3.25 mV	4 mV	5 mV	6 mV
	Current		41 mA	38 mA	29 mA	20.2 mA	15 mA	12.6 mA
Source Effect (change from 85-132 VAC input or 170-265 VAC input)	Voltage		2.6 mV	2.8 mV	3.25 mV	4 mV	5 mV	6 mV
	Current		20 mA	18.5 mA	14 mA	9.6 mA	7 mA	5.8 mA
Programming Accuracy[1]	Voltage	0.05%+	3 mV	4 mV	6.25 mV	10 mV	15 mV	20 mV
	Current	0.1%+	180 mA	165 mA	120 mA	76 mA	50 mA	38 mA
Measurement Accuracy	Voltage	0.1%+	6 mV	8 mV	12.5 mV	20 mV	30 mV	40 mV
	Current	0.1%+	540 mA	495 mA	360 mA	228 mA	150 mA	114 mA
Load Transient Recovery Time[4]	Time		≤1.5 ms	≤1.5 ms	≤1.5 ms	≤1 ms	≤1 ms	≤1 ms
Supplemental Characteristics Supplemental characteristics are not warranted but are descriptions of typical performance determined either by design or type testing.								
Output Response Time (settle to within ±1.0% of the rated output, with a resistive load)	Up, full load		0.08 s	0.08 s	0.08 s	0.08 s	0.08 s	0.08 s
	Down, full load		0.05 s	0.05 s	0.05 s	0.05 s	0.08 s	0.08 s
	Down, no load		0.5 s	0.6 s	0.7 s	0.8 s	0.9 s	1.0 s
Command Response Time[5]					55 ms			
Remote Sense Compensation	Volts/load lead		1 V	1 V	1 V	1 V	1.5 V	2 V
Over-voltage Protection	Range		0.5-7.5 V	0.5-10 V	1-15 V	1-24 V	2-36 V	2-44 V
	Accuracy		0.06 V	0.08 V	0.125 V	0.20 V	0.30 V	0.40 V
Output Ripple and Noise[6]	CC rms		360 mA	330 mA	240 mA	152 mA	125 mA	95 mA
Programming Resolution **Measurement Resolution**	Voltage		0.72 mV	0.96 mV	1.5 mV	2.4 mV	3.6 mV	4.8 mV
	Current		21.6 mA	19.8 mA	14.4 mA	9.12 mA	6 mA	4.6 mA
Front Panel Display Accuracy (4 digits; ±1 count)	Voltage		0.03 V	0.04 V	0.0625 V	0.1 V	0.15 V	0.2 V
	Current		0.90 A	0.825 A	0.60 A	0.38 A	0.25 A	0.19 A

Notes:

[1] Minimum voltage is guaranteed to a maximum of 0.2% of the rated output voltage. Minimum current is guaranteed to a maximum of 0.4% of the rated output current.

[2] Up to 20 MHz

[3] From 5 Hz – 1 MHz

[4] Time for output voltage to recover within 0.5% of its rated output for a load change from 10 to 90% of its rated output current. Voltage set point from 10% to 100% of rated output

[5] Add this to the output reponse time to obtain the total programming time

[6] From 5 Hz – 1 MHz, at 10% to 100% of output voltage at full load (for 6 V units from 33% to 100% of output voltage)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Performance Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 40°C.

		N5767A	N5768A	N5769A	N5770A	N5771A	N5772A
DC Output ratings[1]	Voltage	60 V	80 V	100 V	150 V	300 V	600 V
	Current	25 A	19 A	15 A	10 A	5 A	2.6 A
	Power	1500 W	1520 W	1500 W	1500 W	1500 W	1560 W
Output Ripple and Noise	CV p-p[2]	60 mV	80 mV	80 mV	100 mV	150 mV	300 mV
	CV rms[3]	8 mV	8 mV	8 mV	12 mV	20 mV	60 mV
Load Effect (change from 10% to 90%)	Voltage	8 mV	10 mV	12 mV	17 mV	32 mV	62 mV
	Current	10 mA	8.8 mA	8 mA	7 mA	6 mA	5.5 mA
Source Effect (change from 85-132 VAC input or 170-265 VAC input)	Voltage	8 mV	10 mV	12 mV	17 mV	32 mV	62 mV
	Current	4.5 mA	3.9 mA	3.5 mA	3 mA	2.5 mA	2.26 mA
Programming Accuracy[1]	Voltage 0.05%+	30 mV	40 mV	50 mV	75 mV	150 mV	300 mV
	Current 0.1%+	25 mA	19 mA	15 mA	10 mA	5 mA	2.6 mA
Measurement Accuracy	Voltage 0.1%+	60 mV	80 mV	100 mV	150 mV	300 mV	600 mV
	Current 0.1%+	75 mA	57 mA	45 mA	30 mA	15 mA	7.8 mA
Load Transient Recovery Time[4]	Time	≤ 1 ms	≤ 1 ms	≤ 1 ms	≤ 2 ms	≤ 2 ms	≤ 2 ms
Supplemental Characteristics Supplemental characteristics are not warranted but are descriptions of typical performance determined either by design or type testing.							
Output Response Time (settle to within ±1.0% of the rated output, with a resistive load)	Up, full load	0.08 s	0.15 s	0.15 s	0.15 s	0.15 s	0.25 s
	Down, full load	0.08 s	0.15 s	0.15 s	0.15 s	0.15 s	0.30 s
	Down, no load	1.1 s	1.2 s	1.5 s	2.0 s	3.0 s	4.0 s
Command Response Time[5]				55 ms			
Remote Sense Compensation	Volts/load lead	3 V	4 V	5 V	5 V	5 V	5 V
Over-voltage Protection	Range	5-66 V	5-88 V	5-110 V	5-165 V	5-330 V	5-660 V
	Accuracy	0.60 V	0.80 V	1 V	1.5 V	3 V	6 V
Output Ripple and Noise[6]	CC rms	75 mA	57 mA	45 mA	35 mA	25 mA	12 mA
Programming Resolution Measurement Resolution	Voltage	7.2 mV	9.6 mV	12 mV	18 mV	36 mV	72 mV
	Current	3 mA	2.28 mA	1.8 mA	1.2 mA	0.6 mA	0.312 mA
Front Panel Display Accuracy (4 digits; ±1 count)	Voltage	0.3 V	0.4 V	0.5 V	0.75 V	1.5 V	3 V
	Current	0.125 A	0.095 A	0.075 A	0.050 A	0.025 A	0.013 A

Notes:

[1] Minimum voltage is guaranteed to a maximum of 0.2% of the rated output voltage. Minimum current is guaranteed to a maximum of 0.4% of the rated output current.

[2] Up to 20 MHz

[3] From 5 Hz – 1 MHz

[4] Time for output voltage to recover within 0.5% of its rated output for a load change from 10 to 90% of its rated output current. Voltage set point from 10% to 100% of rated output

[5] Add this to the output reponse time to obtain the total programming time

[6] From 5 Hz – 1 MHz, at 10% to 100% of output voltage at full load (for 6 V units from 33% to 100% of output voltage)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Supplemental Characteristics for All Model Numbers

Series and Parallel Capability

Parallel operation
Up to 4 units can be connected in master/slave mode

Series operation
Up to 2 units can be connected in series

Output Terminal Isolation

6 V to 60 V units
No output terminal may be more than ±60 VDC from any other terminal or chassis ground

80 V to 600 V units
No output terminal may be more than ±600 VDC from any other terminal or chassis ground

Store-recall States

Volatile memory locations: 16

Analog Programming

(of output voltage and current)

Input Signal
selectable;
0 to 5 V / 0 to 10 V full scale

Input Impedance
selectable;
0 to 5kΩ / 0 to 10 kΩ full scale

Interface Capabilities

GPIB
SCPI - 1993, IEEE 488.2 compliant interface

USB 2.0
Requires Agilent I/O Library version L.01.01

10/100 LAN
Requires Agilent I/O library version L.01.01

Web Server
Built-in Web server requires Internet Explorer 5+ or Netscape 6.2+

Environmental Conditions

Environment
Indoor use, installation category II (AC input), pollution degree 2

Operating temperature
0°C to 40°C @ 100% load

Storage temperature
–20°C to 70°C

Operating humidity
30% to 90% relative humidity (no condensation)

Storage humidity
10% to 95% relative humidity (no condensation)

Altitude

- Up to 3000 meters. Derate the output current by 2%/100 m above 2000 m.
- Derate the maximum ambient temperature by 1°C/100 m above 2000 m.

Regulatory Compliance

EMC

- European EMC directive 89/336/EEC for Class A products
- Australian C- Tick mark
- This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme à la norme NMB-001 du Canada.

Safety

- European Low Voltage Directive 73/23/EEC
- US and Canadian safety standards
- Any LEDs used in this product are Class 1 as per IEC 825-1

Acoustic Noise Declaration

Emission Directive:

- Sound Pressure Lp <70 dB(A), At Operator Position, *Normal Operation, *According to EN 27779 (Type Test).
- Schalldruckpegel Lp <70 dB(A) *Am Arbeitsplatz, *Normaler Betrieb, *Nach EN 27779 (Typprüfung).

AC Input

Nominal Input
100 – 240 VAC; 50/60 Hz

Input Current 750 W
10.5 A @ 100 VAC nominal;
5 A @ 200 VAC nominal

Input Current 1500 W
21 A @ 100 VAC nominal;
11 A @ 200 VAC nominal

Input Range
85 – 265 VAC; 47 – 63 Hz.

Power Factor
0.99 at nominal input and rated output power

Efficiency
76% – 87% for 750 W units;
77% – 88% for 1500 W units

Inrush Current
<25 A for 750 W units;
<50 A for 1500 W units

Dimensions

(excluding connectors, and handles)


Height 43.6 mm (1.72 in)
Width 422.8 mm (16.65 in)
Depth 432.8 mm (17.04 in)

Weight


750 W 7 Kg (15.4 lbs.)
1500 W 8.5 Kg (18.7 lbs.)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Outline Diagram

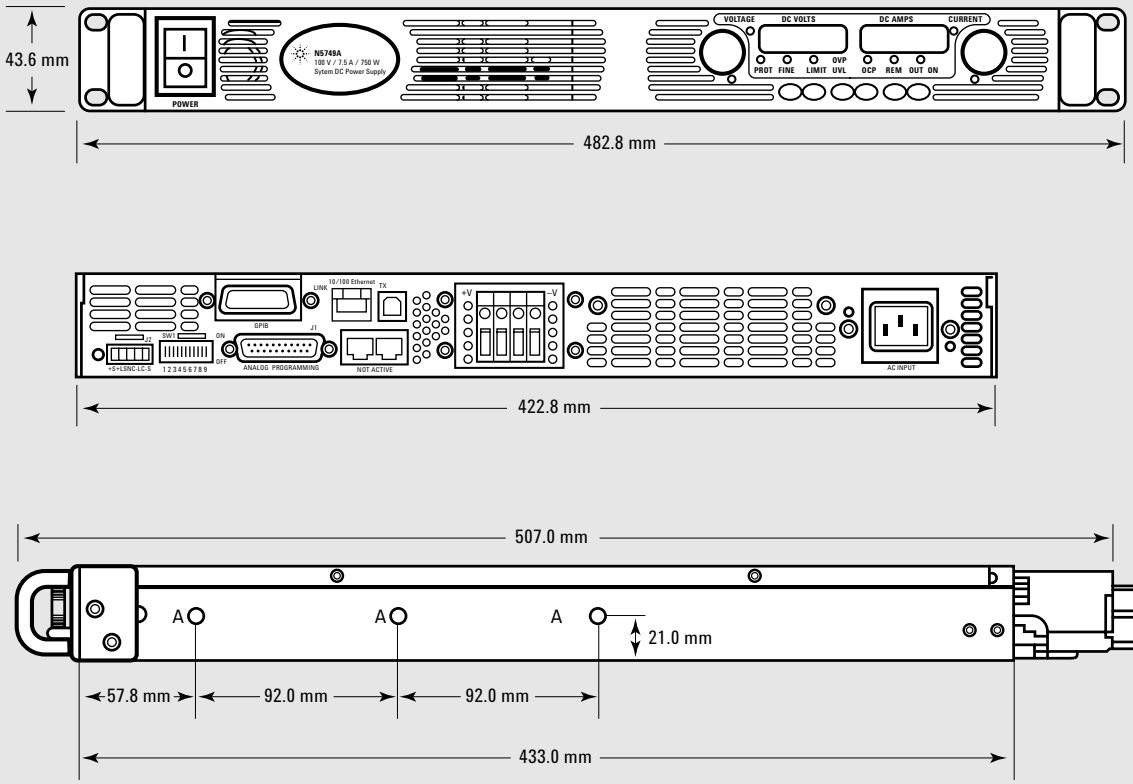

DC Output
Bus-Bar Detail
6 V to 60 V
Models

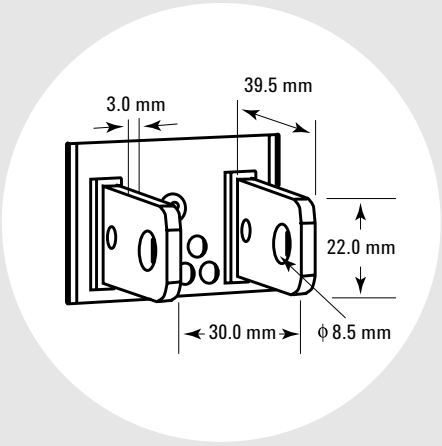


AC Input
Strain-Relief Detail
1500 W Models

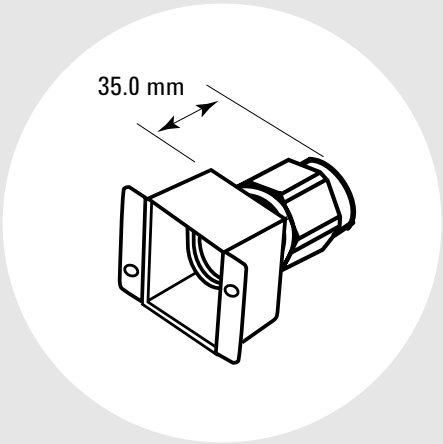

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Front and Rear Panel Detail

Front Panel
(All Models)

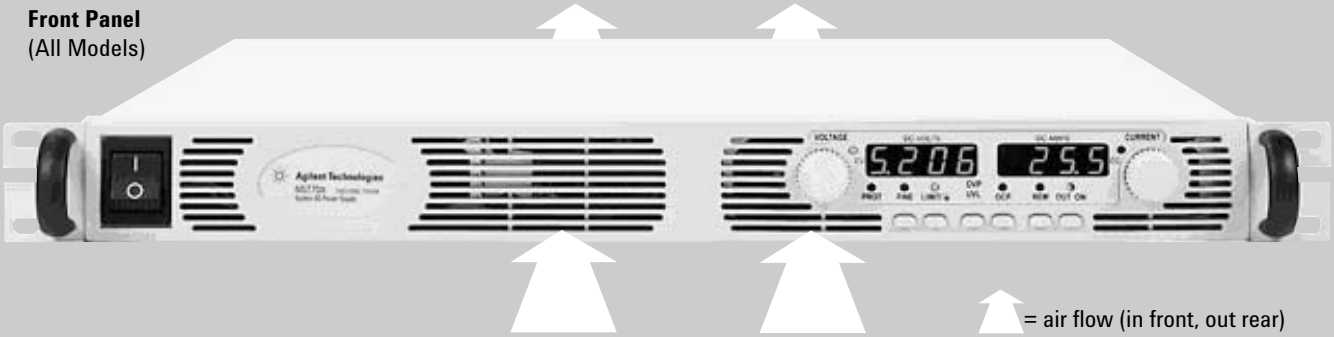

Rear Panel*
(6 V to 60 V, 1500 W Models)



(80 V to 600 V, 1500 W Models)



(6 V to 60 V, 750 W Models)



(80 V to 600 V, 750 W Models)



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ordering Information

Available Models

750 W Models		
N5741A	System DC Power Supply	6 V, 100 A, 600 W
N5742A	System DC Power Supply	8 V, 90 A, 720 W
N5743A	System DC Power Supply	12.5 V, 60 A, 750 W
N5744A	System DC Power Supply	20 V, 38 A, 760 W
N5745A	System DC Power Supply	30 V, 25 A, 750 W
N5746A	System DC Power Supply	40 V, 19 A, 760 W
N5747A	System DC Power Supply	60 V, 12.5 A, 750 W
N5748A	System DC Power Supply	80 V, 9.5 A, 760 W
N5749A	System DC Power Supply	100 V, 7.5 A, 750 W
N5750A	System DC Power Supply	150 V, 5 A, 750 W
N5751A	System DC Power Supply	300 V, 2.5 A, 750 W
N5752A	System DC Power Supply	600 V, 1.3 A, 780 W

1500 W Models		
N5761A	System DC Power Supply	6 V, 180 A, 1080 W
N5762A	System DC Power Supply	8 V, 165 A, 1320 W
N5763A	System DC Power Supply	12.5 V, 120 A, 1500 W
N5764A	System DC Power Supply	20 V, 76 A, 1520 W
N5765A	System DC Power Supply	30 V, 50 A, 1500 W
N5766A	System DC Power Supply	40 V, 38 A, 1520 W
N5767A	System DC Power Supply	60 V, 25 A, 1500 W
N5768A	System DC Power Supply	80 V, 19 A, 1520 W
N5769A	System DC Power Supply	100 V, 15 A, 1500 W
N5770A	System DC Power Supply	150 V, 10 A, 1500 W
N5771A	System DC Power Supply	300 V, 5 A, 1500 W
N5772A	System DC Power Supply	600 V, 2.6 A, 1560 W

Options

1500 W Models

Opt 861
Unterminated Power Cord, USA, Canada, Japan, China, Other

Opt 862
Harmonized Unterminated Power Cord, Europe

750 W Models

Opt 900
Power Cord, United Kingdom

Opt 902
Power Cord, Europe

Opt 903
Power Cord, USA, Canada

Opt 918
Power Cord, Japan

Opt 922
Power Cord, China

Accessories

N5740A
Rack Mount Slide Kit (required for rack mounting; standard system 11 rack-mounting hardware will not work)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Related literature

These application notes will help you compare Agilent system DC sources with power supplies from other manufacturers:

- Side-by-Side Comparison: Agilent N5700 Series System DC Source and Sorensen DLM DC Power Supply, AN 1502-1
  5989-1628EN
  http://cp.literature.agilent.com/litweb/pdf/5989-1628EN.pdf
- How to Convert from a Sorensen DLM to an Agilent N5700, AN 1503-1
  5989-1629EN
  http://cp.literature.agilent.com/litweb/pdf/5989-1629EN.pdf
- Side-by-Side Comparison: Agilent N5700 Series System DC Source and Xantrex XFR System Power Supplies, AN 1502-2
  5989-1630EN
  http://cp.literature.agilent.com/litweb/pdf/5989-1630EN.pdf
- How to Convert from a Xantrex XFR to an Agilent N5700, AN 1503-2
  5989-1631EN
  http://cp.literature.agilent.com/litweb/pdf/5989-1631EN.pdf
- Trends in Medium Power (~1 kW) DC Power Supplies, 5989-1331EN
  http://cp.literature.agilent.com/litweb/pdf/5989-1331EN.pdf

Agilent's IO Libraries Suite ships with the N5700 to help you quickly establish an error-free connection between your PC and instruments - regardless of the vendor. It provides robust instrument control and works with the software development environment you choose.

For additional description of Agilent's IO Libraries Suite features and installation requirements, please go to
www.agilent.com/find/iosuite-datasheet

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Agilent Direct

www.agilent.com/find/agilentdirect
Quickly choose and use your test equipment solutions with confidence.

Agilent Open

www.agilent.com/find/open
Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:
(tel) 800 829 4444
(fax) 800 829 4433

Canada:
(tel) 877 894 4414
(fax) 800 746 4866

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) 31 20 547 2111

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (080) 769 0800
(fax) (080) 769 0900

Latin America:
(tel) (305) 269 7500

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6755 0042
Email: tm_ap@agilent.com
Contacts revised: 09/26/05

Product specifications and descriptions in this document subject to change without notice.

Microsoft® and Windows® are U.S. registered trademarks of Microsoft® Corporation

For the latest and complete specifications, refer to the N5700 User's Guide, Agilent part number 5969-2917. The web contains the most up-to-date version of the User's Guide. Go to **http://www.agilent.com/find/N5700**

© Agilent Technologies, Inc. 2006
Printed in the USA, April 21, 2006
5989-1330EN

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP