ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / Radstone PMCQ1R-100* at our website: *Click HERE*

EmPower PMCQ1

RADSTONE MEZZANINE

High Speed Serial and MIL-STD-1553 Rugged PMC

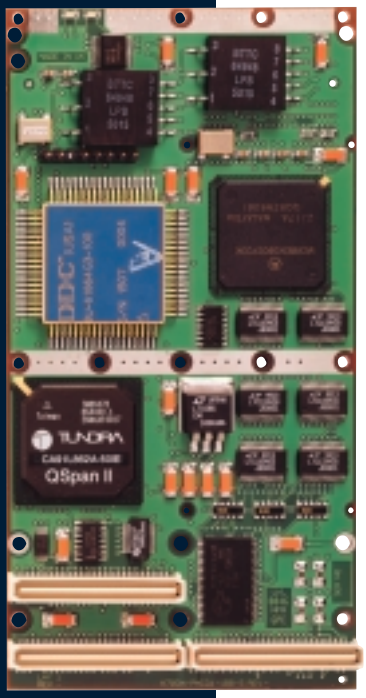

- Available in 5 ruggedization levels
- QUICC (68360) based serial communications offering 4 high-speed sync / async channels
- Modular X.25 stack support
- Optional MIL-STD-1553 interface (Single channel, Dual redundant)
- Built-in test software support (BIT)
- Support for VxWorks and LynxOS
- 32bit / 33MHz PCI 2.1 compatible

Product Overview

Available in five ruggedization levels to meet the needs of the Industrial and Defense OEM marketplace, the PMCQ1 provides a means of adding high speed serial communication capabilities plus optional MIL-STD-1553 interface, to a main processing unit, to achieve cost effective system solutions.

Targeted at rugged communications orientated applications, the PMCQ1 is ideal for use with Radstone's market leading PowerPC based SBCs including the PPCx series and the EP1A-8240 from the ***EmPower*** product range. The PMCQ1 can also be used with Radstone's PMC Carrier Cards, up to 9 PMC cards being addressable using ***PPzero*** (PCI Extensions over P0).

The PMCQ1 features four high-speed serial channels, capable of R232, 422, 485 operation (software selectable), and configurable for synchronous or asynchronous operation. In addition, a single channel, dual redundant MIL-STD-1553 interface is also available as an additional communications option.

COTS software support includes provision for standard HDLC / LAPB / X.25 modules, and drivers for VxWorks/Tornado and LynxOS real-time operating systems.

RADSTONE TECHNOLOGY

Why settle for less

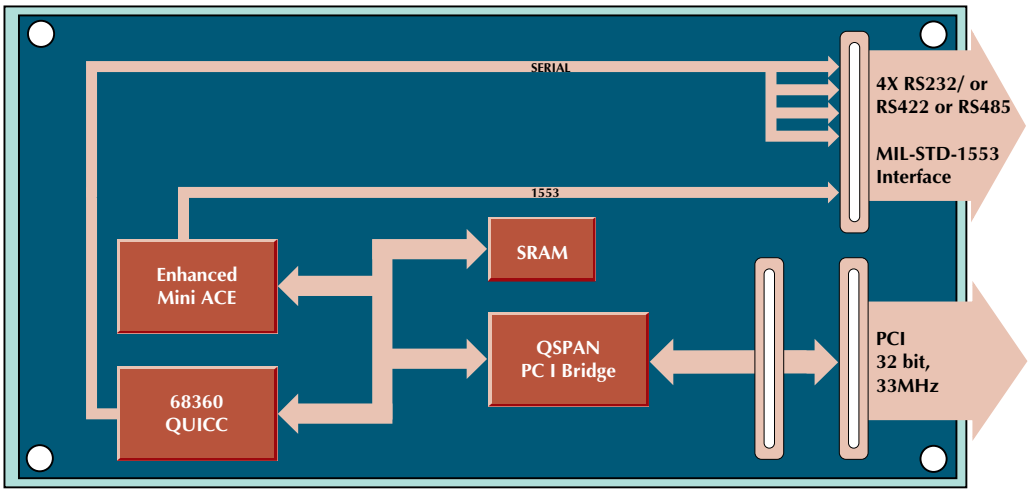


Figure 1: PMCQ1R Functional Block Diagram

68360 - QUICC

The MC68360 Quad Integrated Communication Controller is a versatile one-chip integrated microprocessor and peripheral combination family that can be used in a variety of controller applications, particularly excelling in communication activities. It has seven serial channel controllers including four SCC's (serial communication controllers), two serial management controllers (SMC's) and one serial peripheral interface (SPI).

The PMCQ1 utilizes four of the available SCC's to provided four fully featured high speed sync / async serial channels.

The 68k processing core is not used on the PMCQ1, the 68360 being used in Slave mode only.

BU-61688 – DDC Enhanced Mini-ACE

The PMCQ1 offers an optional MIL-STD-1553 interface using the BU-61688 – DDC Mini-ACE. The Mini-ACE comprises a complete integrated interface to MIL-STD1553A /B

- transceiver
- protocol
- memory management
- processor interface logic

The PMCQ1 provides BC, RT and MT modes of operation. BC mode includes advanced features, such as automatic re-tries, programmable gap times and frame auto repeat. RT mode has buffering for 3 messages and programmable system test features. MT mode allows word monitoring, selective message monitoring or simultaneous RT and MT modes, as may be required for backup BC operation.

I/O Connections

The PMCQ1R provides full Rear I/O through its P14 user defined connector, and the PMCQ1F provides full Front I/O through a 68 way Honda SCSI 2 connector.

Table 1: I/O Connections

	PMCQ1R Ruggedization Levels 1-5	PMCQ1F Ruggedization Levels 1-3
4 serial communication channels	Rear	Front
MIL-STD-1553	Rear	Front

Environmental Ruggedization Levels

The PMCQ1x is available in air and conduction cooled formats across all 5 of Radstone's clearly defined environmental ruggedization levels – see the Radstone ruggedization data sheet for full details of temperature range, shock, vibration, humidity etc.

Table 2: Ruggedization Levels

Level	Cooling	Temp Range	Ruggedization Level
1	Air	0 to +55°C	Standard
2	Air	-20 to +65°C	As 1 but conformal coated
3	Air	-40 to +75°C	Rugged, Coated
4	Conduction	-40 to +75°C	Rugged, Coated
5	Conduction	-40 to +85°C	Rugged, Coated

Table 3: Hardware I/O Specifications

Function	Device	Hardware Features	I/O Location
4 x SCC	MPC68360	Synchronous / Asynchronous 4Mbaud RS232 / RS422 / RS485 (Software Selectable)	Front I/O on PMCQ1F Rear I/O on PMCQ1R
1 X MIL-STD-1553	BU-61688	Single Channel Dual Redundant BC, RT, MT	Front I/O on PMCQ1F Rear I/O on PMCQ1R

Note: Performance Considerations. The above table specifies maximum hardware baud rates for an individual channel. Practical rates tend to depend upon the software overhead, the software configuration and the number of channels running concurrently.

COTS Serial Communications Software

Standard communication protocols are available for the PMCQ1 in the form of a modular X.25 stack, offering straightforward configuration for adaptation to different application situations. The modules forming this stack originate from the highly respected Trillium Digital Systems Inc, a leading provider of communication software solutions and Radstone's technology partner. Further communication software modules originated at Radstone provide fast asynchronous support and 1553 support.

The communication software modules sit above a COTS Operating System (VxWorks or LynxOS) on the Host processor, taking their system services from here. Not all modules need to be present, but for those which are part of the X.25 stack, the higher level modules need to be supported by all lower level modules. (i.e. options are HDLC only, or HDLC + LAPB, or HDLC + LAPB + X.25). Connections to the X.25, LAPB, or low level HDLC may be formed simultaneously for mixed line type operation. Synchronous and asynchronous operation may also be mixed.

1553 Software Support

Radstone provides a 1553 software library for VxWorks and LynxOS that simplifies host system integration by offering functional level commands. Other operating systems are also supported by the C source code package that provides: detailed error reporting, improved interrupt handling that minimizes the processing overhead, supports re-entrancy from multiple tasks and RT broadcast sub-addresses.

The communication modules are identical to those used to support similar hardware functionality on other ***EmPower*** products including :-

EP1A – A 6U VME SBC featuring an MPC8240 integrated PowerPC processor chip with optional serial and MIL-STD-1553 functions onboard.

EPMCQ2 – A PMC featuring an MPC8260 integrated PowerPC processor chip with serial and ethernet functions.

Table 4: Summary of Communication Software Modules for PMCQ1

Modules	Description
EPHDLC	Low level fast synchronous support
EPLAPB	Communication protocol support
EPX25	Full X.25 communication protocol support
EPASYN	Low level fast asynchronous support
EP1553	Full 1553 protocol library support

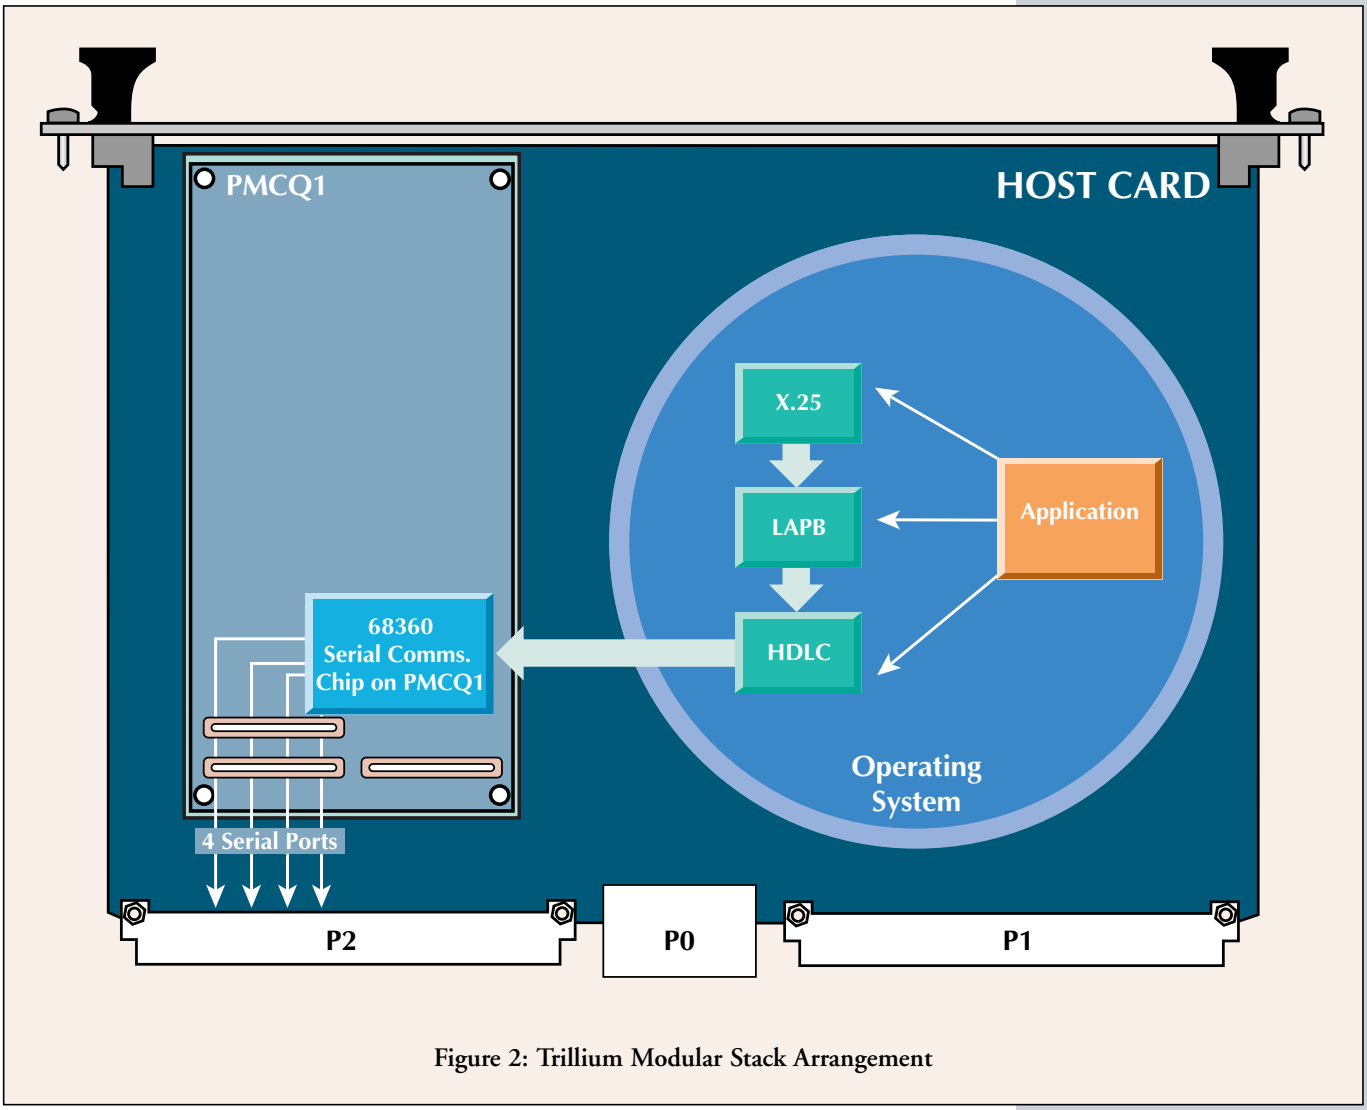


Figure 2: Trillium Modular Stack Arrangement

Table 5: Ordering Information

Sales Code	Product
PMCQ1R-100	PMCQ1R Ruggedization Level 1 (Rear I/O)
PMCQ1R-200	PMCQ1R Ruggedization Level 2 (Rear I/O)
PMCQ1R-300	PMCQ1R Ruggedization Level 3 (Rear I/O)
PMCQ1R-400	PMCQ1R Ruggedization Level 4 (Rear I/O)
PMCQ1R-500	PMCQ1R Ruggedization Level 5 (Rear I/O)
PMCQ1R-x01	PMCQ1R Ruggedization Level x with MIL-STD1553 Option (Rear I/O)
PMCQ1F-x00	PMCQ1F Ruggedization Level x (Front I/O)
PMCQ1F-x01	PMCQ1F Ruggedization Level x with MIL-STD1553 Option (Front I/O)

NOTE: PMCQ1F is on long lead time, please consult your nearest sales office for availablility.

UK
Radstone Technology
Water Lane
Towcester
Northants NN12 6JN
Telephone: +44 (0) 1327 359444
Facsimile: +44 (0) 1327 359662
E-mail: sales@radstone.co.uk
Videoconferencing: +44 (0) 1327 359495
(by arrangement)

USA
Radstone Technology Corporation
50 Craig Road
Montvale NJ 07645-1709
Telephone: +1 800 368-2738
Facsimile: +1 (201) 391-2899
E-mail: sales@radstone.com

North Eastern Region: +1 (201) 391-2700
South Eastern Region: +1 (703) 383-3150
Western Region: +1 (909) 974-1141

FRANCE
Radstone SARL
10 Av. du Québec
BP 116
91 944 Courtaboeuf Cedex
Telephone: +33 (0) 1 64 46 04 03
Facsimile: +33 (0) 1 69 28 03 40
E-mail: radstonefr@radstone.com

RADSTONE
TECHNOLOGY

Meet us on the Web at www.radstone.com

RADSTONE and the Radstone symbol are registered trademarks of Radstone Technology PLC.
All other trademarks are the property of their respective owners.

© Radstone Technology PLC 2001

Printed in UK Publication RT237 5K02/2001

This publication is issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to products or services concerned. The company reserve the right to alter without notice the specification, design, price or conditions of supply of any product or service.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP