

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

USBF TV


USB Connection System for Harsh Environment



Description

USB Field allows you to use a standard USB 2.0 connection in harsh environments :
- Sealed against fluids and dusts (IP67)
- Shock, Vibration and Traction resistant
- No cabling operation in field and no tools required
- Mechanical Coding / Polarization (2 positions)
- Improved EMI protection

With USB Field, you can insert **a standard USB 2.0 cordset** into a metallic plug which will protect it from shocks, dust and fluids.
No hazardous in-field cabling and grounding !

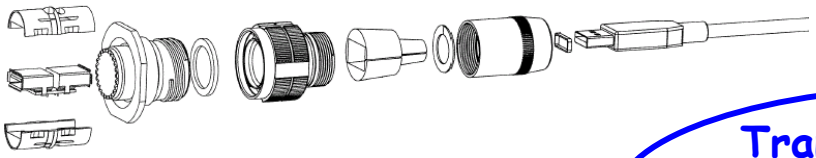

Transform your USB cordset into a Harsh Environment Connector !

This metallic plug is connected into a receptacle, using a Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device for high vibrations.
On the receptacle side, one A USB receptacle is soldered onto a PCB allowing for the following back terminations :
- another USB-A receptacle
- solder : 4 tined holes on the PCB to solder your wires

The USB 2.0 cordset shielding is transmitted to the USB receptacle through grounding fingers.
For an outstanding EMI protection, the conductive plated shells (Ni, Cd) with metallized receptacle inserts, transmit the shielding to the connector shells and finally to the panel.

Applications

- Embedded Computers
- Data Acquisition and Transmission in harsh environment

For :
- Railways
- Battelfield Communication Systems
- Navy Systems

DOC-000046-ANG-C Mai 2005

Amphenol ®

Amphenol Socapex Promenade de l'Arve -B.P.29 - 74311 THYEZ – F
Tel. :+ 33 (0) 4 50 89 28 00 - Fax : + 33 (0) 4 50 96 29 75
www.usbfield.com

Main Characteristics

Data Transmission

• USB Specification 2.0

Data Rate : Up to 480 Mb/s for High Speed USB

Mechanical

• Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device

• 2 mechanical Coding / Polarization possibilities by the user (receptacle insert rotation)

• USBF TV plug retent° in the receptacle : 100 N in the axis

• Mating cycles : 500 to 1500

Environmental Protection

• Sealing (when mated) : IP67 (Temporary immersion)

• Salt Spray : 48 h with Nickel plating

> 500 h with Olive Drab Cadmium

• Fire Retardant / Low Smoke : UL94 V0 and NF F 16 101 & 16 102

• Vibrations : 10 – 500 Hz, 10 g, 3 axes : no discontinuity > 1micro s

• Shocks : IK06 : weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)

• Humidity : 21 days, 43°C, 98% humidity

• Temperature Range : - 55°C / +85°C

Can be used with most of the USB cordset Brands : <u>No tools required</u>


Assembly Instructions

Plug Assembly


1. Only if you need a full sealing (IP67) : Install the white sticker around the plug, covering the 4 little holes of the overmolding
2. Insert the black O Ring around the front face of the USB A plug. This O Ring will ensure the connection sealing.
3. Insert the USB cordset into the metallic backshell
4. Insert laterally to the cable the retention spacer (this spacer is soft, in order to adapt to different shapes of overmolding) and slide the overmolding of the USB-A plug into this retention spacer
5. Insert laterally to the cable the the friction ring
6. Choose the right coding (2 positions) and insert the USB-A plug into the protective plug. Reference is main key.
7. Screw the backshell on the plug body. A spanner can be necessary to fully screw it, and the connection to the receptacle can help.

Important Note : The connection sealing is not done by the black retention spacer (which is sloted), but by the front face ORing (see 2.)

















Receptacle Assembly

Insert the USB module **from the rear**. Reference is main key.

Beware to have a coding compatible with the coding you used for the plug : on front view, the **white shapes** in the USBs **must be on the same side.**




To remove the USB module, insert the removal tool USBF ODE from the Front, and push back the module.






Amphenol Socapex Promenade de l'Arve -B.P.29 - 74311 THYEZ – F
Tel. :+ 33 (0) 4 50 89 28 00 - Fax : + 33 (0) 4 50 96 29 75
www.usbfield.com

Amphenol ®

Plug :


« 6 » Shell

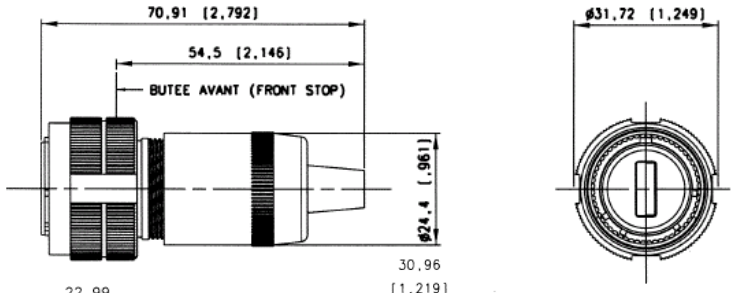


Receptacles :

« 2 » Shell

Square Flange

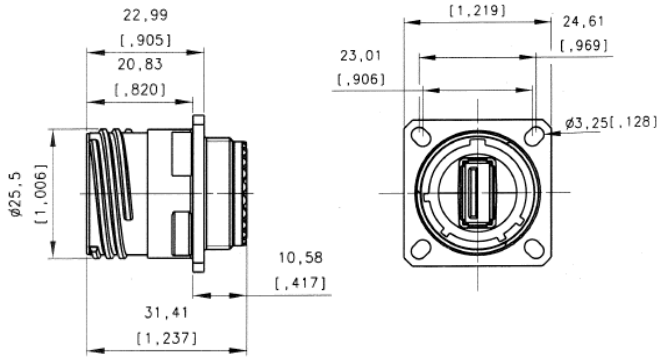





Panel Drilling

« 7 » Shell

Jam Nut

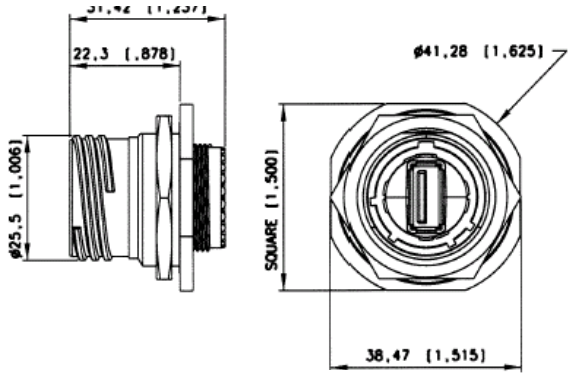


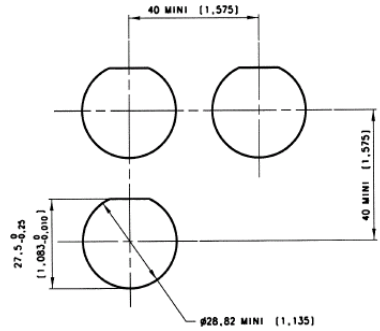


Panel Drilling

« 2PE » and « 7PE » Shells

with Backshell to protect Backtermination from dust, shocks and vibration.

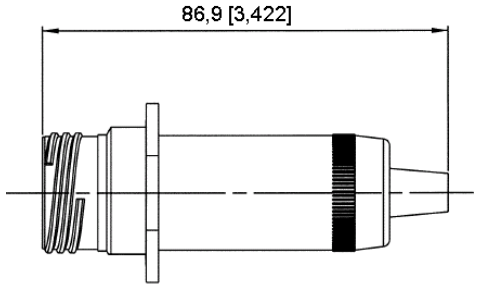


Backshell used with backtermination type 1 :
USB A receptacle
Not sealed

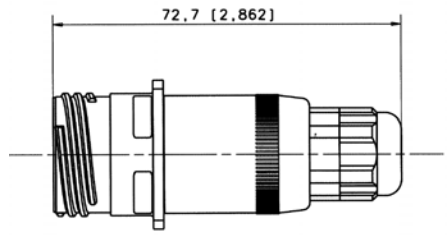


Backshell used with backtermination type 2 :
Solder
Sealed – IP67

Back Terminations :



Type 1 : USB-A Receptacle

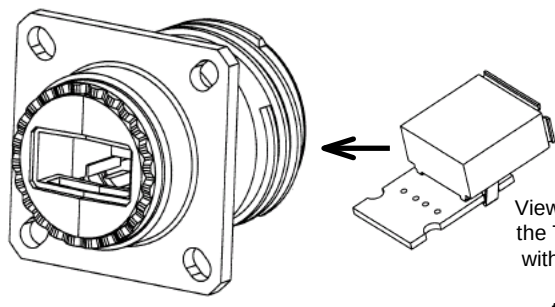

View of the PCB of the Type 2 version with 4 tined holes for solder termination

Type 2 : Solder

4 Tined holes to solder your cable

Amphenol Socapex Promenade de l'Arve -B.P.29 - 74311 THYEZ – F
Tel. :+ 33 (0) 4 50 89 28 00 - Fax : + 33 (0) 4 50 96 29 75
www.usbfield.com

Amphenol ®

Part Number Code

USBF TV	2	1	G

USB Field TV

Shell Type
6 : Plug
2 : Square Flange Receptacle
2PE : Square Flange Receptacle with backshell
7 : Jam Nut Receptacle
7PE : Jam Nut Receptacle with backshell

Back Terminations (Receptacles only)
1 : USB-A receptacle
2 : Solder (4 tined holes)

Shells Plating
N : Nickel
G : Olive Drab Cadmium

Examples :
- **Olive Drab Cadmium Plug : USBF TV 6G**
- **Olive Drab Cadmium Square Flange Receptacle, USB-A back terminat° : USBF TV 21G**
- **Olive Drab Cadmium Jam Nut Receptacle, USB-A receptacle back terminat° : USBF TV 71G**
- **Nickel Jam Nut Receptacle, solder termination : USBF TV 72N**

Square flange receptacle with Self Closing Cap (cap with a spring inside) :

New!







USBF 21N SCC (*)
Nickel and metallized inserts (EMI)

USBF 21B SCC (*)
Black and blank insert

(*) This P/N includes the square flange receptacle and the self closing cap

Note : Panel gasket to use with this version only : **JE18**

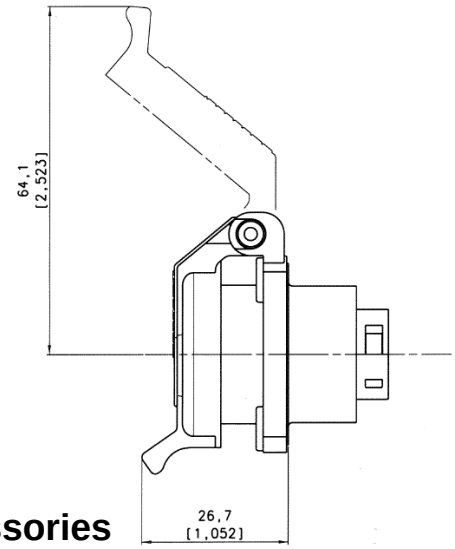

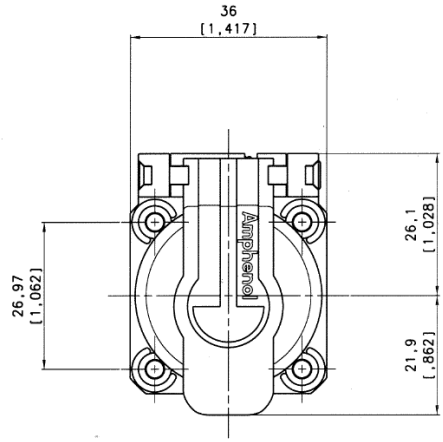


Accessories

• **Metallic Caps**

USBF TVC	2	G

Connector Type
6 : Plug
2 : Square Flange Receptacle
7 : Jam Nut Receptacle

Protection de surface
N : Nickel
G : Olive Drab Cadmium




Plug Cap



Receptacle Cap



Plug Cap end



Square flange receptacle cap end



Jam Nut receptacle cap end

• **Panel Gasket for square flange receptacle (Thickness : 0,8 mm [.031]) : JE15**

• **Receptacle Insert removal tool : USBF ODE**



Amphenol Socapex Promenade de l'Arve -B.P.29 - 74311 THYEZ – F
Tel. :+ 33 (0) 4 50 89 28 00 - Fax : + 33 (0) 4 50 96 29 75
www.usbfield.com

Amphenol ®

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP