ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Basler A602f* at our website: *Click HERE*

Basler A601f / A602f



Camera Specification

Measurement protocol using the EMVA Standard 1288

Document Number: BD000376

Version: 02

Release Date: October 15, 2007

1288
EMVA Standard Compliant

BASLER
VISION TECHNOLOGIES

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For customers in the U.S.A.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

The shielded interface cable recommended in this manual must be used with this equipment in order to comply with the limits for a computing device pursuant to Subpart J of Part 15 of FCC Rules.

For customers in Canada

This apparatus complies with the Class A limits for radio noise emissions set out in Radio Interference Regulations.

Pour utilisateurs au Canada

Cet appareil est conforme aux normes Classe A pour bruits radioélectriques, spécifiées dans le Règlement sur le brouillage radioélectrique.

Life Support Applications

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Basler customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Basler for any damages resulting from such improper use or sale.

Warranty Note

Do not open the housing of the camera. The warranty becomes void if the housing is opened.

All material in this publication is subject to change without notice and is copyright Basler Vision Technologies.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Contacting Basler Support Worldwide

Europe:

Basler AG

An der Strusbek 60 - 62

22926 Ahrensburg

Germany

Tel.: +49-4102-463-500

Fax.: +49-4102-463-599

vc.support.europe@baslerweb.com

Americas:

Basler, Inc.

855 Springdale Drive, Suite 160

Exton, PA 19341

U.S.A.

Tel.: +1-877-934-8472

Fax.: +1-877-934-7608

vc.support.usa@baslerweb.com

Asia:

Basler Asia Pte. Ltd

8 Boon Lay Way

03 - 03 Tradehub 21

Singapore 609964

Tel.: +65-6425-0472

Fax.: +65-6425-0473

vc.support.asia@baslerweb.com

www.basler-vc.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Contents

1 Overview 7

2 Introduction 8

3 Basic Information 9
3.1 Illumination . . . 10
3.1.1 Illumination Setup for the Basler Camera Test Tool . . . 10
3.1.2 Measurement of the Irradiance . . . 10

4 Characterizing Temporal Noise and Sensitivity 11
4.1 Basic Parameters . . . 11
4.1.1 Total Quantum Efficiency . . . 11
4.1.2 Temporal Dark Noise . . . 13
4.1.3 Dark Current . . . 14
4.1.4 Doubling Temperature . . . 14
4.1.5 Inverse of Overall System Gain . . . 15
4.1.6 Inverse Photon Transfer . . . 16
4.1.7 Saturation Capacity . . . 17
4.1.8 Spectrogram . . . 18
4.1.9 Non-Whiteness Coefficient . . . 21
4.2 Derived Data . . . 22
4.2.1 Absolute Sensitivity Threshold . . . 22
4.2.2 Signal-to-noise Ratio . . . 23
4.2.3 Dynamic Range . . . 25
4.3 Raw Measurement Data . . . 26
4.3.1 Mean Gray Value . . . 26
4.3.2 Variance of the Temporal Distribution of Gray Values . . . 27
4.3.3 Mean of the Gray Values Dark Signal . . . 28
4.3.4 Variance of the Gray Value Temporal Distribution in Darkness . . . 29
4.3.5 Light Induced Variance of the Temporal Distribution of Gray Values 30
4.3.6 Light Induced Mean Gray Value . . . 31
4.3.7 Dark Current Versus Housing Temperature . . . 32

5 Characterizing Total and Spatial Noise 33
5.1 Basic Parameters . . . 33
5.1.1 Spatial Offset Noise . . . 33
5.1.2 Spatial Gain Noise . . . 34
5.1.3 Spectrogram Spatial Noise . . . 35
5.1.4 Spatial Non-whiteness Coefficient . . . 38
5.2 Raw Measurement Data . . . 39
5.2.1 Standard Deviation of the Spatial Dark Noise . . . 39
5.2.2 Light Induced Standard Deviation of the Spatial Noise . . . 40

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Bibliography **41**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1 Overview

Basler A601f / A602f					
Item	Symbol	Typ.[1]	Std. Dev.[2]	Unit	Remarks
Temporal Noise Parameters					
Total Quantum Efficiency (QE)	η	33	TBD	%	$\lambda = 545\,\mathrm{nm}$
Inverse of Overall System Gain	$\frac{1}{K}$	59.6	1.85	$\frac{\mathrm{e}^-}{\mathrm{DN}}$	
Temporal Dark Noise	σ_{d_0}	127	3.6	e^-	
Saturation Capacity	$\mu_{e.\mathrm{sat}}$	56000	1900	e^-	
Derived Parameters					
Absolute Sensitivity Threshold	$\mu_{p.\mathrm{min}}$	384	TBD	$\mathrm{p}^\sim$	$\lambda = 545\,\mathrm{nm}$
Dynamic Range	$\mathrm{DYN}_{\mathrm{out.bit}}$	8.8	0.02	bit	
Maximum SNR	$\mathrm{SNR}_{y.\mathrm{max.bit}}$	7.9	0.02	bit	
	$\mathrm{SNR}_{y.\mathrm{max.dB}}$	47.5	0.15	dB	
Item	Symbol	Typ.	Std. Dev.[3]	Unit	Remarks
Spatial Noise Parameters					
Spatial Offset Noise, DSNU_{1288}	σ_o	53.1	2.3	e^-	
Spatial Gain Noise, PRNU_{1288}	S_g	1.0	0.3	%	

Table 1: Most Important Specification Data

Operating Point		
Item	Symbol	Remarks
Video output format		$12\,\mathrm{bits/pixel(Mono16)}$
Gain		0
Offset		768
Exposure time	T_{exp}	$100.0\,\mu\mathrm{s}\ to\ 68.4\,\mathrm{ms}$

Table 2: Operating Point for the Camera Used

[1] The unit e^- is used in this document as a statistically measured quantity.
[2] The standard deviation was calculated from a sampling of 100 cameras.
[3] The standard deviation was calculated from a sampling of 97 cameras.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2 Introduction

This measurement protocol describes the specification of Basler A601f / A602f cameras. The measurement methods conform to the 1288 EMVA Standard, the Standard for Characterization and Presentation of Specification Data for Image Sensors and Cameras (Release A1.03) of the European Machine Vision Association (EMVA) [1].

The most important specification data for Basler A601f / A602f cameras is summarized in table 1.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3 Basic Information

Basic Information	
Vendor	Basler
Model	A601f / A602f
Type of data presented	Typical
Number of samples	100
Sensor	Micron MT9V403
Sensor type	CMOS
Sensor diagonal	Diagonal 8 mm (Type 1/2)
Indication of lens category to be used	C-Mount
Resolution	656 x 491 pixel
Pixel width	$9.20\,\mu\mathrm{m}$
Pixel height	$9.20\,\mu\mathrm{m}$
Readout type	-
Transfer type	-
Shutter type	Global Shutter
Overlap capabilities	
Maximum frame rate	$60\,\mathrm{frames/second}$
General conventions	
Interface type	Firewire 1394a

Table 3: Basic Information

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.1 Illumination

3.1.1 Illumination Setup for the Basler Camera Test Tool

The illumination during the testing on each camera was fixed. The drift in the illumination over a long period of time and after the lamp is changed is measured by a reference Basler A602fc camera. The reference camera provides an intensity factor that was used to calculate the irradiance for each camera measurement.

Light Source				
Item	Symbol	Typ.	Unit	Remarks
Wavelength	λ	545	nm	
Wavelength Variation	$\Delta\lambda$	50	nm	
Distance sensor to light source	d	280	mm	
Diameter of the light source	D	35	mm	
f-Number	$f_{\#}$	8		$f_{\#} = \frac{d}{D}$

Table 4: Light Source

3.1.2 Measurement of the Irradiance

The irradiance was measured using an IL1700 Radiometer from International Light Inc. (Detector: SEL033 #6285; Input optic: W #9461; Filter: F #21487; regular calibration). The accuracy of the Radiometer is specified as $\pm 3.5\%$.

The measured irradiance is plotted in figure 1.

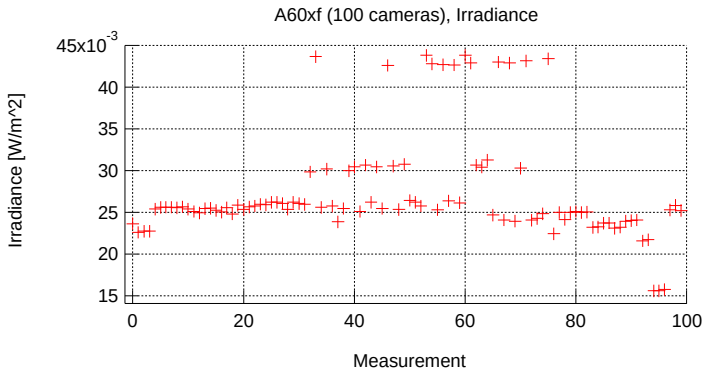


Figure 1: Irradiance for Each Camera Measurement.

The error for each calculated value using the amount of light falling on the sensor is dependent on the accuracy of the irradiance measurement.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4 Characterizing Temporal Noise and Sensitivity

4.1 Basic Parameters

4.1.1 Total Quantum Efficiency

Total Quantum Efficiency for One Fixed Wavelength Total quantum efficiency $\eta(\lambda)$ in $[\%]$ for monochrome light at $\lambda = 545\,\mathrm{nm}$ with a wavelength variation of $\Delta\lambda = 50\,\mathrm{nm}$.

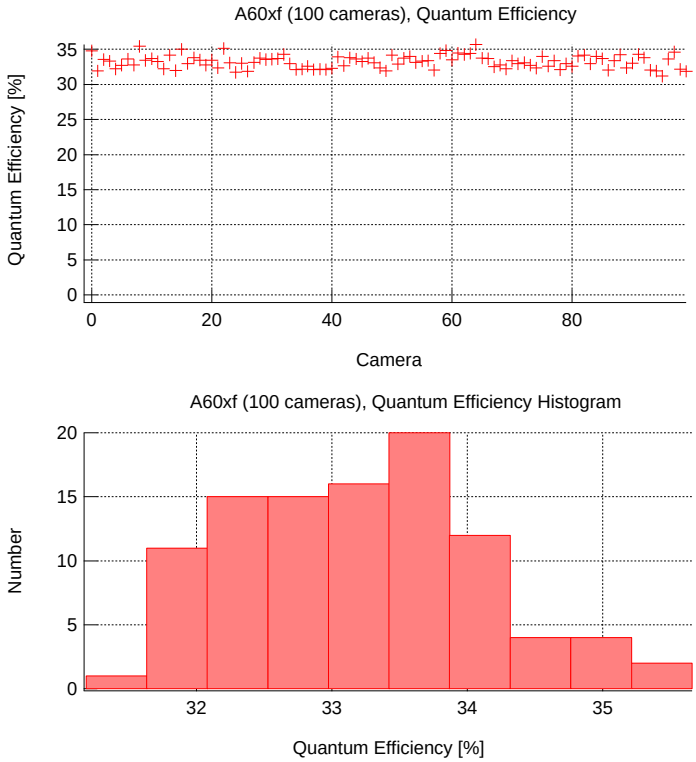


Figure 2: Total Quantum Efficiency (QE)

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Total Quantum Efficiency (QE)	η	33	TBD	$\%$	$\lambda = 545\,\mathrm{nm}$

Table 5: Total Quantum Efficiency (QE)

The main error in the total quantum efficiency $\Delta\eta$ is related to the error in the measurement of the illumination as described in section 3.1.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Total Quantum Efficiency Versus Wavelength of the Light Total quantum efficiency $\eta(\lambda)$ in $[\%]$ for monochrome light versus wavelength of the light in $[\mathrm{nm}]$.

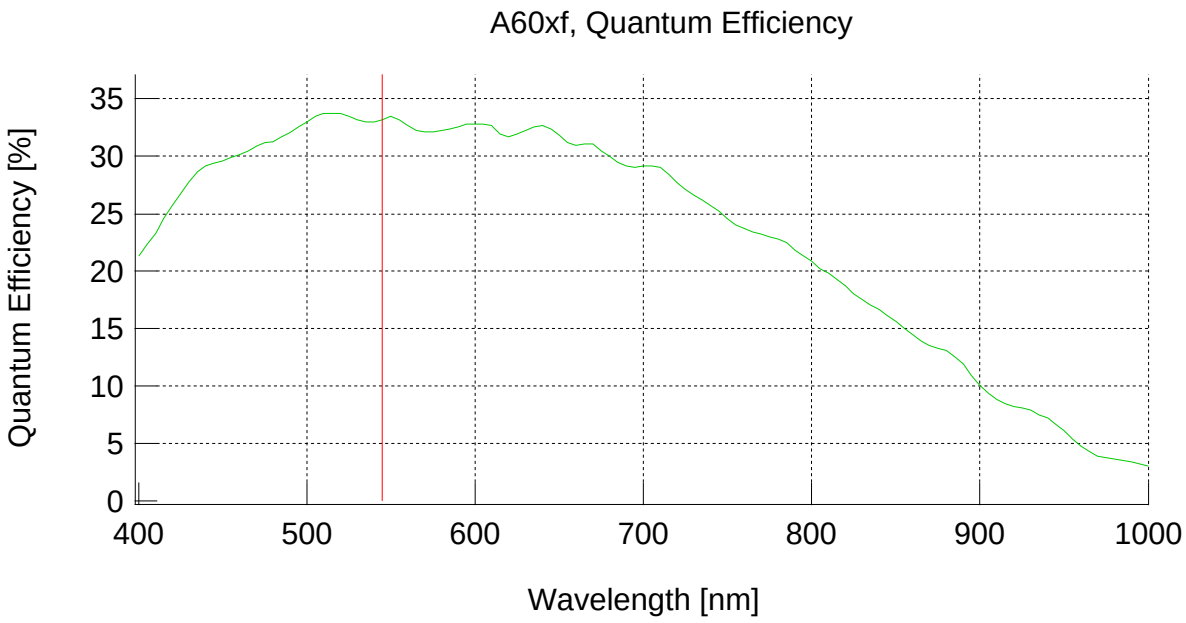


Figure 3: Total Quantum Efficiency Versus Wavelength of the Light

The curve of the total quantum efficiency versus the wavelength as shown in figure 3 was calculated from the single measured total quantum efficiency as presented in section 4.1.1. For the shape of the curve, the data from the sensor data sheet was used.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.2 Temporal Dark Noise

Standard deviation of the temporal dark noise σ_{d_0} referenced to electrons for exposure time zero in $[\mathrm{e}^-]$.

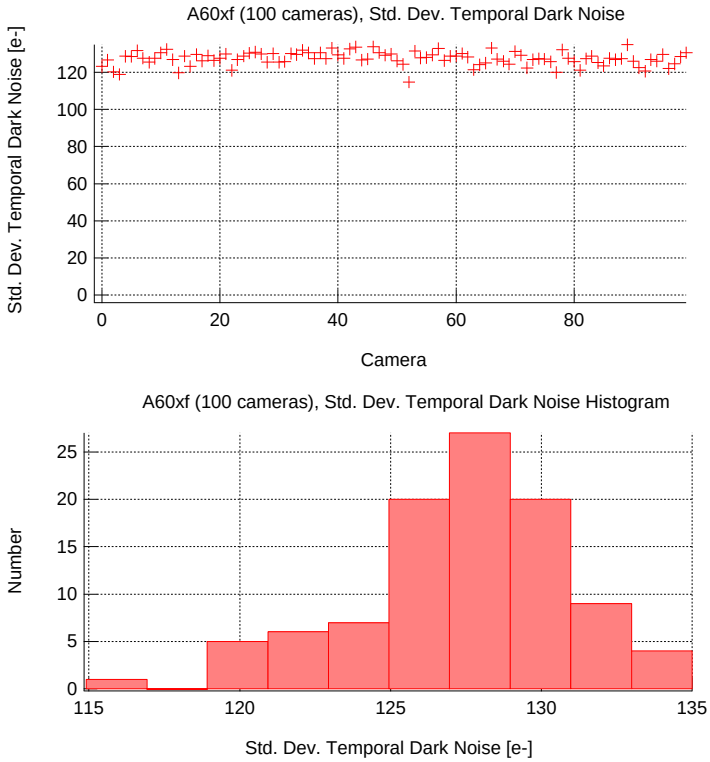


Figure 4: Temporal Dark Noise

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Temporal Dark Noise	σ_{d_0}	127	3.6	e^-	

Table 6: Temporal Dark Noise

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.3 Dark Current

Dark current N_{d30} for a housing temperature of $30^\circ\,\mathrm{C}$ in $[\mathrm{e}^-/\mathrm{s}]$.
Not measured!

4.1.4 Doubling Temperature

Doubling temperature k_d of the dark current in $[^\circ\,\mathrm{C}]$.
Not measured!

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.5 Inverse of Overall System Gain

Inverse of overall system gain $\frac{1}{K}$ in $[\frac{e^-}{DN}]$.

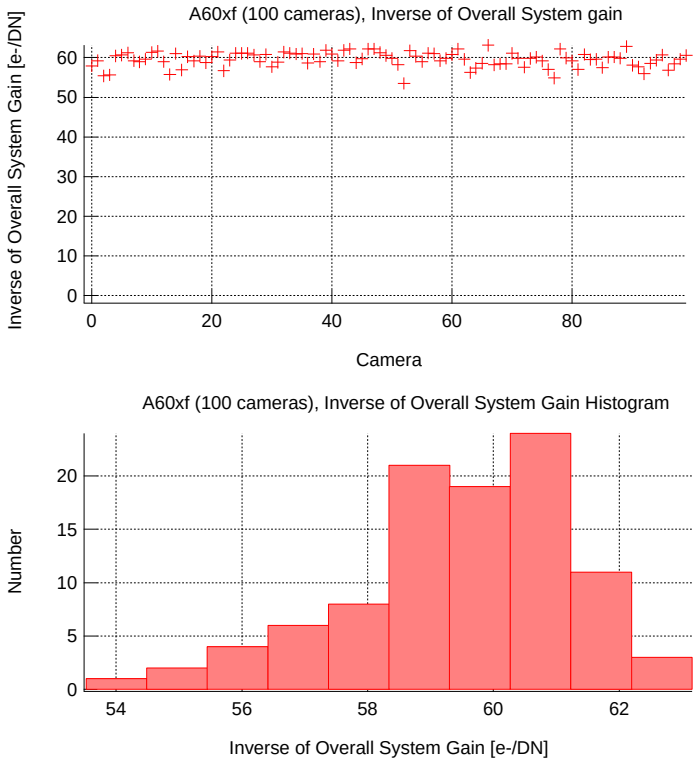


Figure 5: Inverse of Overall System Gain

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Inverse of Overall System Gain	$\frac{1}{K}$	59.6	1.85	$\frac{e^-}{DN}$	

Table 7: Inverse of Overall System Gain

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.6 Inverse Photon Transfer

Inverse photon transfer $\frac{1}{\eta K}$ in $\left[\frac{\tilde{p}}{DN}\right]$.

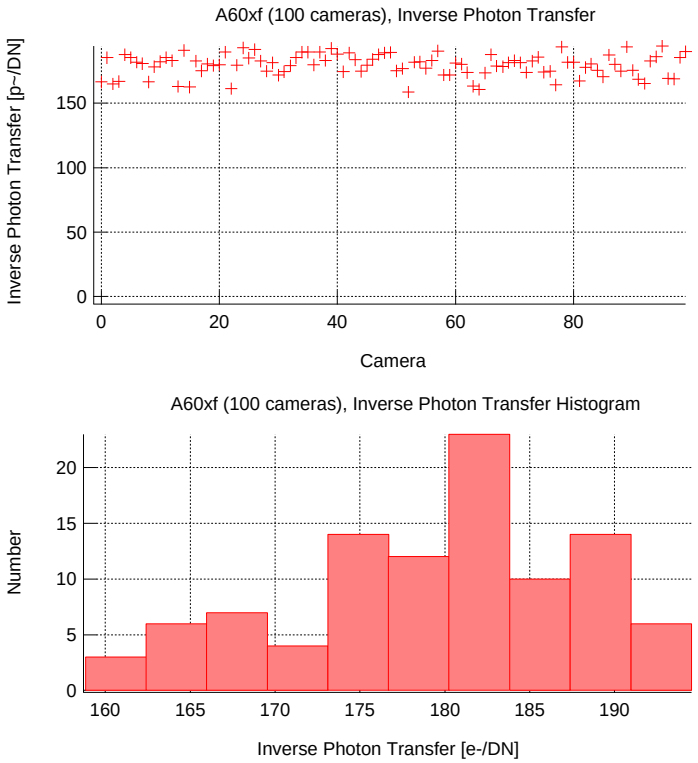


Figure 6: Inverse Photon Transfer

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Inverse Photon Transfer	$\frac{1}{\eta K}$	179.6	TBD	$\frac{\tilde{p}}{DN}$	$\lambda = 545\,nm$

Table 8: Inverse Photon Transfer

The main error in the inverse photon transfer $\frac{1}{\eta K}$ is related to the error in the measurement of the illumination as described in section 3.1.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.7 Saturation Capacity

Saturation capacity $\mu_{e.\mathrm{sat}}$ referenced to electrons in $[\mathrm{e}^-]$.

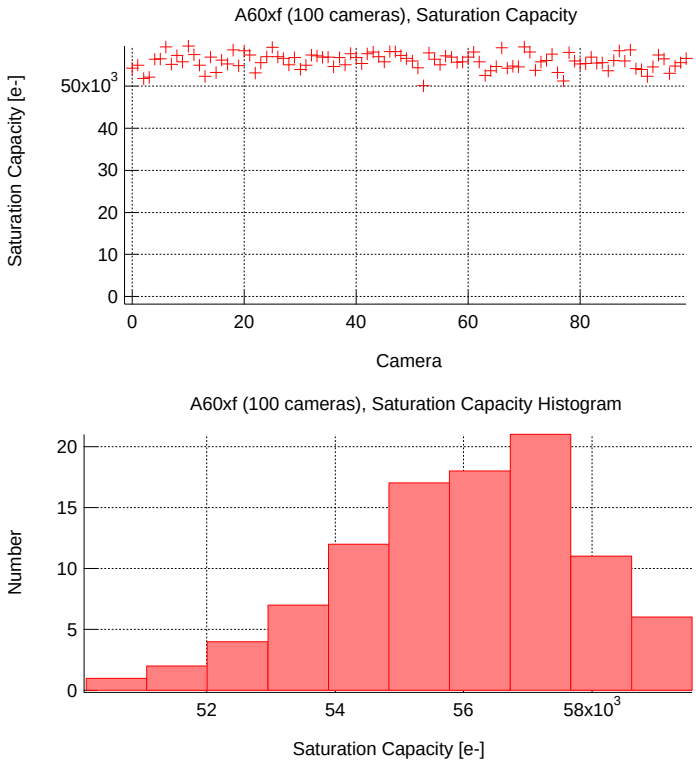


Figure 7: Saturation Capacity

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Saturation Capacity	$\mu_{e.\mathrm{sat}}$	56000	1900	e^-	

Table 9: Saturation Capacity

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.8 Spectrogram

Spectrogram referenced to photons in $[p^{\sim}]$ is plotted versus spatial frequency in $[1/\text{pixel}]$ for no light, 50% saturation, and 90% saturation.

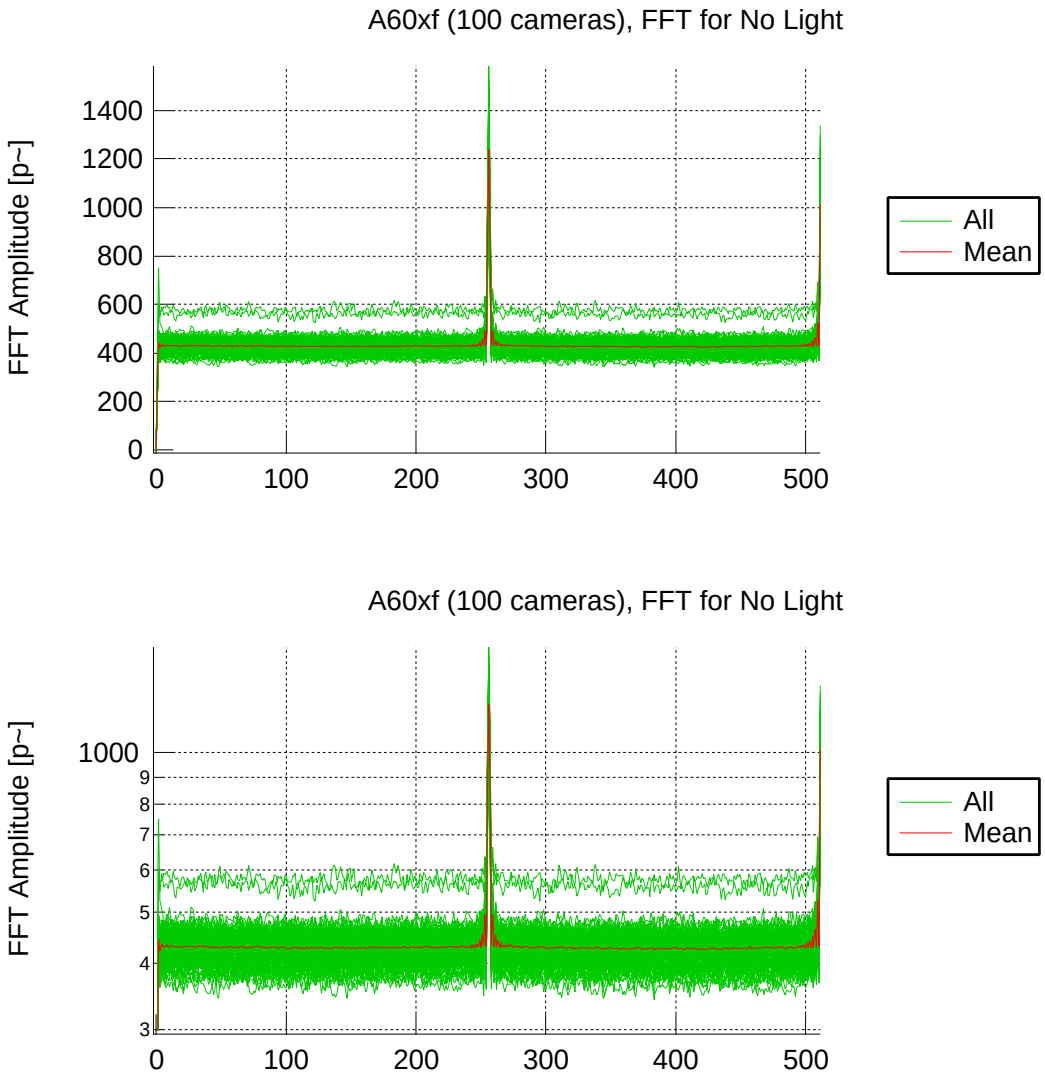


Figure 8: Spectrogram Referenced to Photons for No Light

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

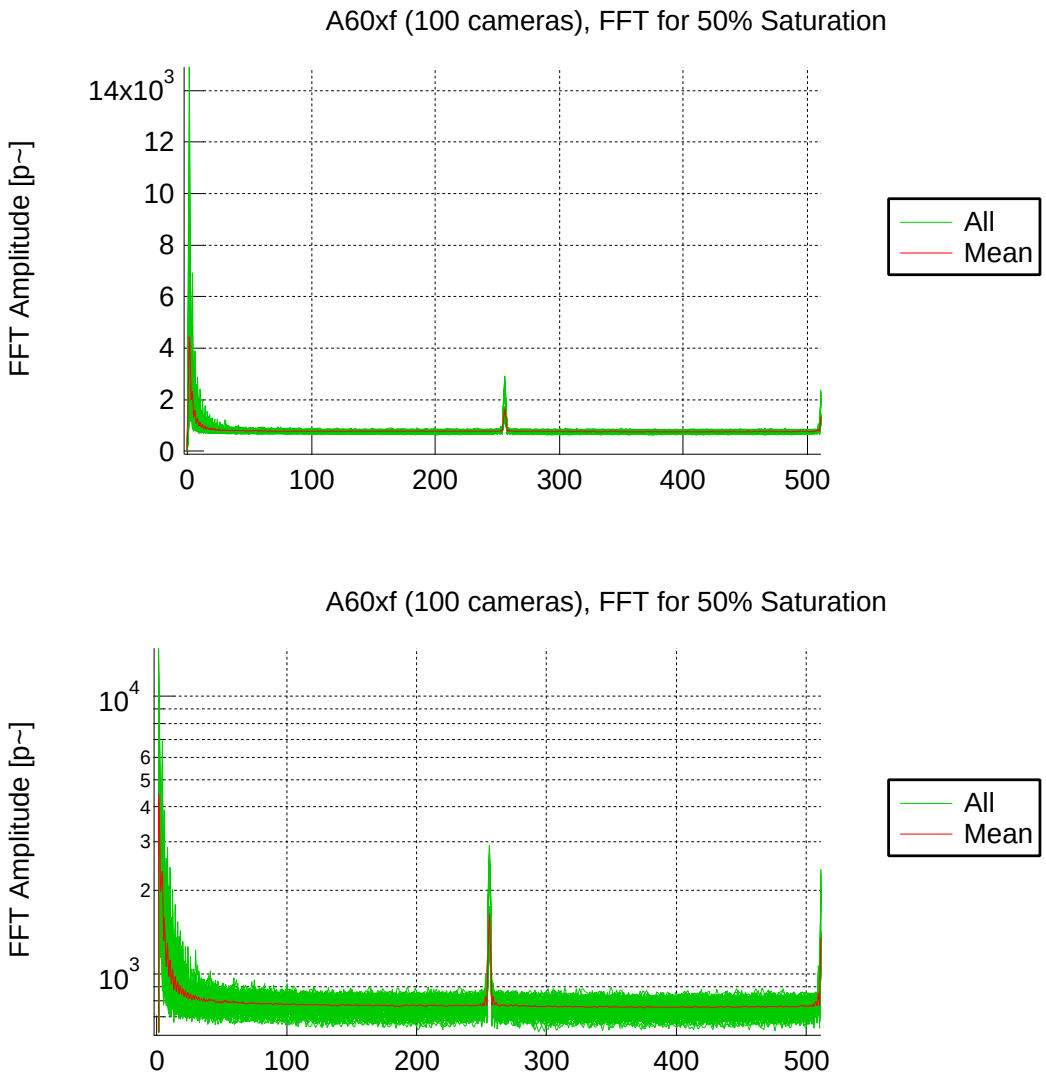


Figure 9: Spectrogram Referenced to Photons for 50% Saturation

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

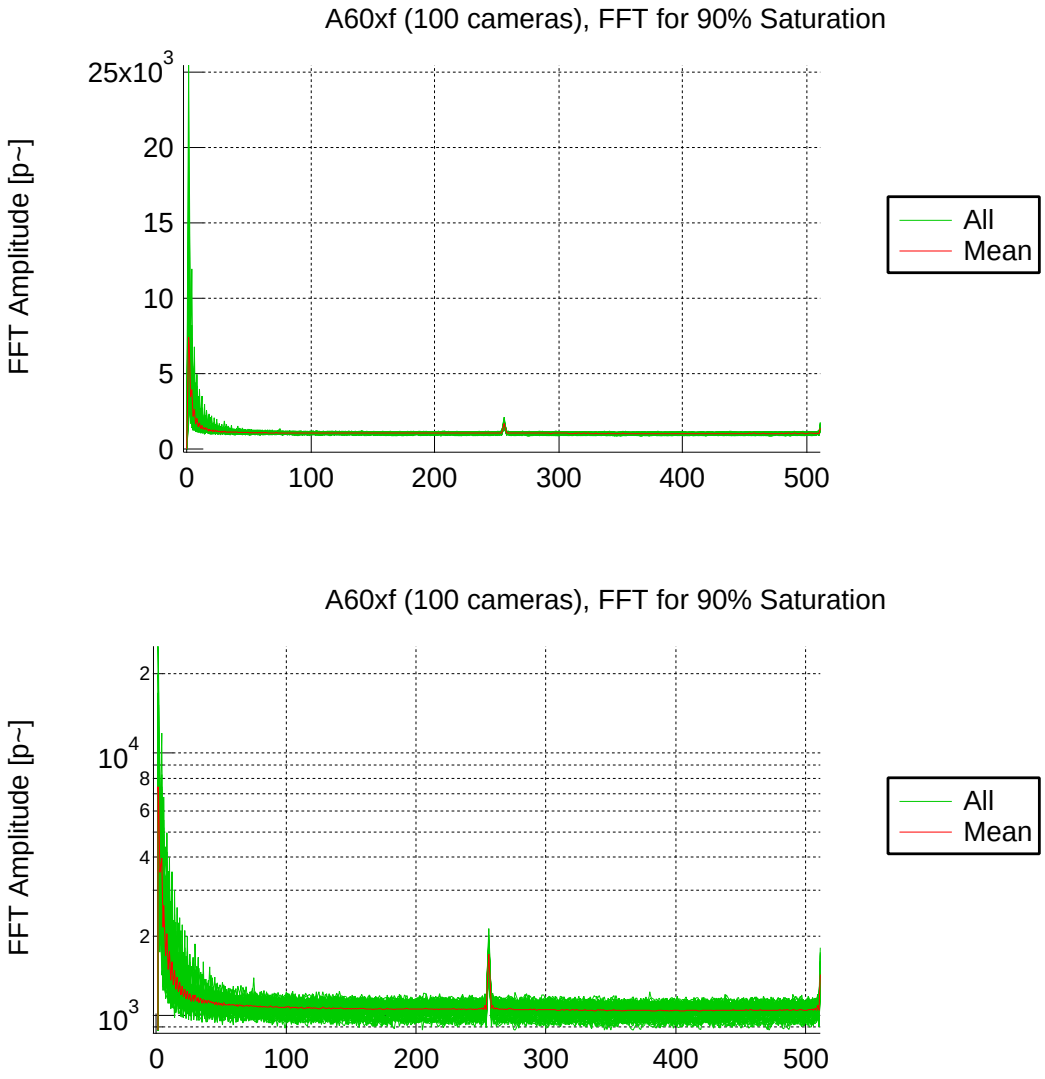


Figure 10: Spectrogram Referenced to Photons for 90% Saturation

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.9 Non-Whiteness Coefficient

The non-whiteness coefficient is plotted versus the number of photons μ_p in $[p^{\sim}]$ collected in a pixel during exposure time.

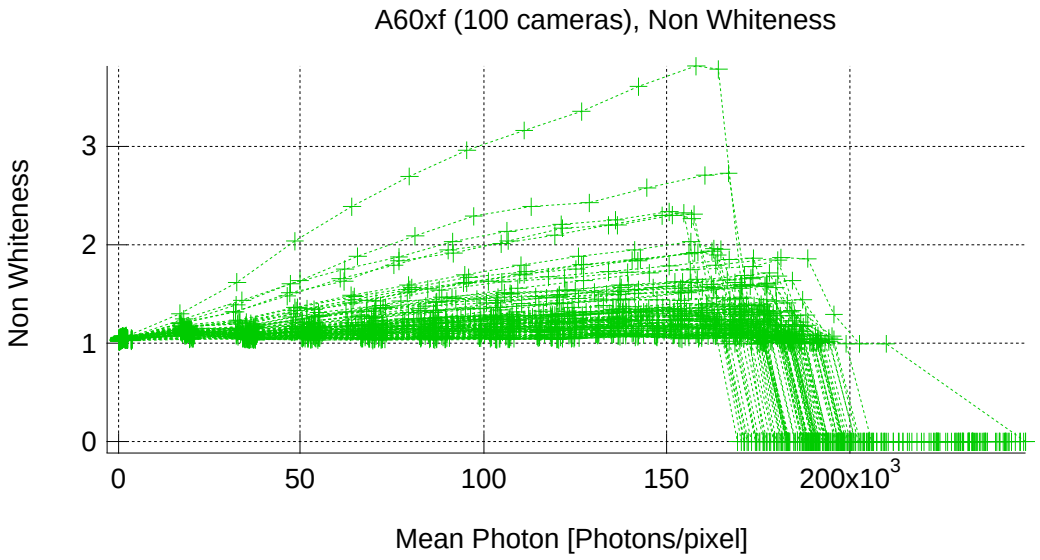


Figure 11: Non-whiteness Coefficient

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.2 Derived Data

4.2.1 Absolute Sensitivity Threshold

Absolute sensitivity threshold $\mu_{p.\min}(\lambda)$ in $[\,\mathrm{p}^{\sim}]$ for monochrome light versus wavelength of the light in $[\mathrm{nm}]$.

$$\mu_{p.min} = \frac{\sigma_{d_0}}{\eta} \tag{1}$$

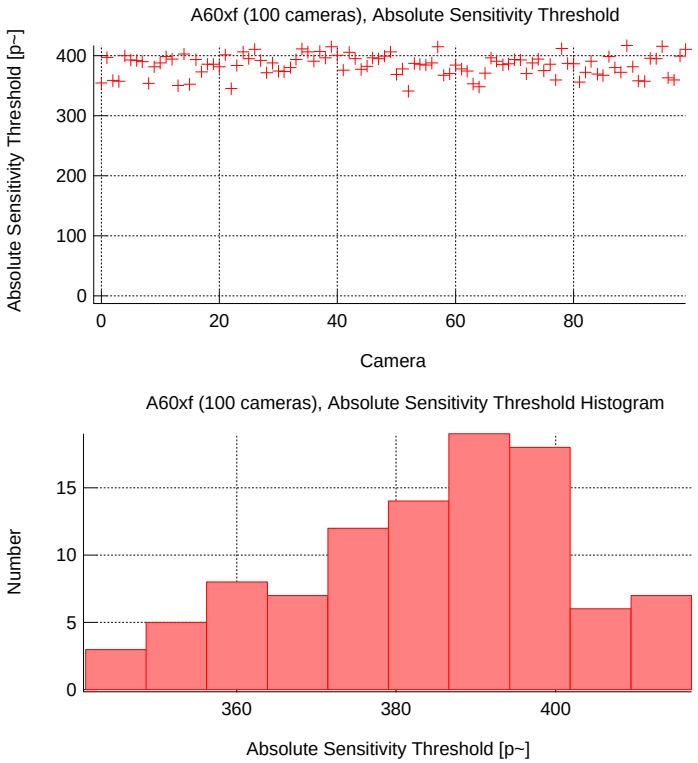


Figure 12: Absolute Sensitivity Threshold

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Absolute Sensitivity Threshold	$\mu_{p.\min}$	384	TBD	$\mathrm{p}^{\sim}$	$\lambda = 545\,\mathrm{nm}$

Table 10: Absolute Sensitivity Threshold

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.2.2 Signal-to-noise Ratio

Signal-to-noise ratio $\mathrm{SNR}_y(\mu_p)$ is plotted versus number of photons μ_p collected in a pixel during exposure time in $[\mathrm{p}^{\sim}]$ for monochrome light with the wavelength λ given in $[\mathrm{nm}]$. The wavelength should be near the maximum of the quantum efficiency.

$$A : \mathrm{SNR}_y = \frac{\mu_y - \mu_{y.dark}}{\sigma_y} \tag{2}$$

$$B : \mathrm{SNR}_y = \frac{\eta\mu_p}{\sqrt{(\eta\mu_p + \sigma_{d_0}^2)}} \tag{3}$$

Figure 13 shows the signal-to-noise ratio SNR_y for monochrome light with the wavelength $\lambda = 545\,\mathrm{nm}$.

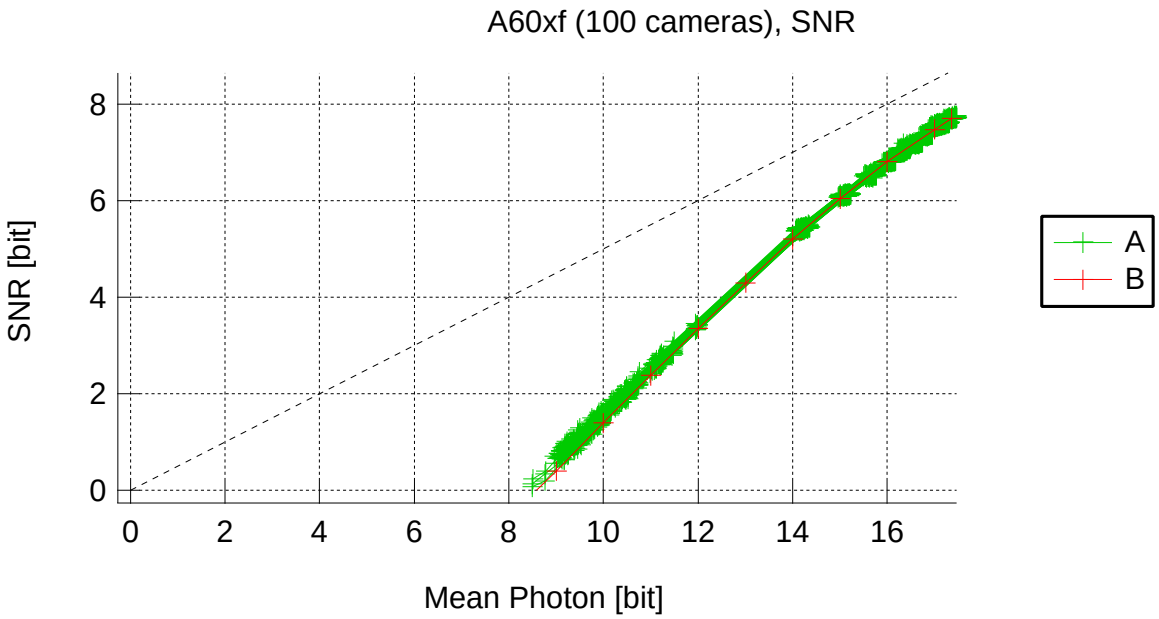


Figure 13: Signal-to-noise Ratio

The maximum achievable image quality is given as

$$\mathrm{SNR}_{y.\max} = \sqrt{\mu_{e.\mathrm{sat}}} \tag{4}$$

$$\mathrm{SNR}_{y.\max.\mathrm{bit}} = \mathrm{ld}\ \mathrm{SNR}_{y.\max} = \frac{\log\ \mathrm{SNR}_{y.\max}}{\log\ 2} \tag{5}$$

$$\mathrm{SNR}_{y.\max.\mathrm{dB}} = 20 \log\ \mathrm{SNR}_{y.\max} \approx 6.02\ \mathrm{SNR}_{y.\max.\mathrm{bit}} \tag{6}$$

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

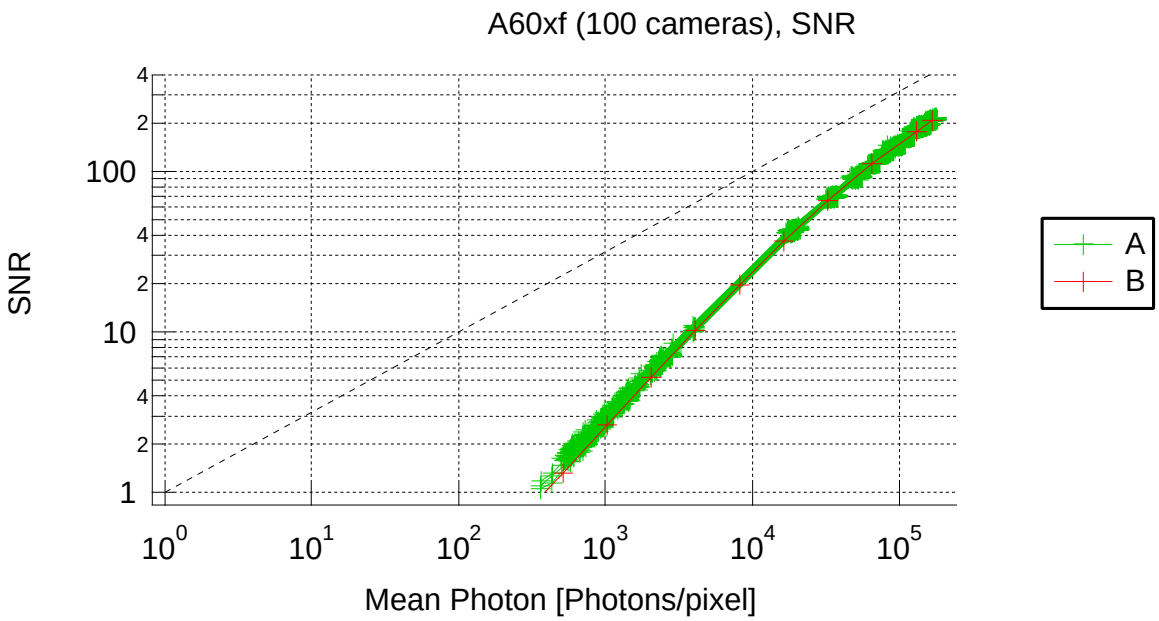


Figure 14: Signal-to-noise Ratio

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Maximum achievable SNR [bit]	$SNR_{y.max.bit}$	7.9	0.02	bit	

Table 11: Maximum achievable SNR [bit]

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Maximum achievable SNR [dB]	$SNR_{y.max.dB}$	47.5	0.15	dB	

Table 12: Maximum achievable SNR [dB]

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.2.3 Dynamic Range

Dynamic range $\mathrm{DYN}_{\mathrm{out.bit}}$ in $[\,\mathrm{bit}]$.

$$\mathrm{DYN}_{\mathrm{out}} = \frac{\mu_{e.\mathrm{sat}}}{\sigma_{d_0}} \tag{7}$$

$$\mathrm{DYN}_{\mathrm{out.bit}} = \log_2\left(\mathrm{DYN}_{\mathrm{out}}\right) \tag{8}$$

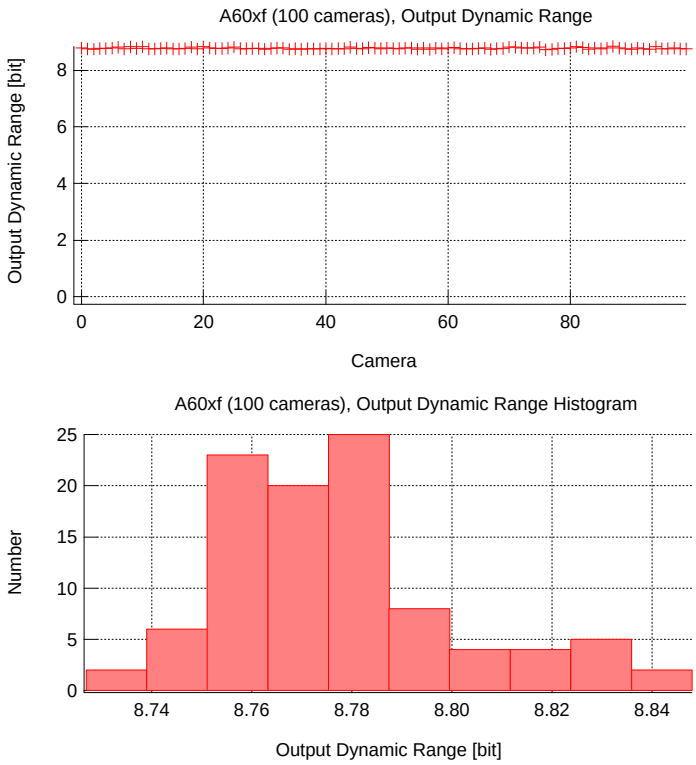


Figure 15: Output Dynamic Range

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Output Dynamic Range	$\mathrm{DYN}_{\mathrm{out.bit}}$	8.8	0.02	bit	

Table 13: Output Dynamic Range

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3 Raw Measurement Data

4.3.1 Mean Gray Value

Mean gray value $\mu_y(\mu_p)$ in $[\mathrm{DN}]$ is plotted versus number of photons μ_p in $[\mathrm{p}^{\sim}]$ collected in a pixel during exposure time.

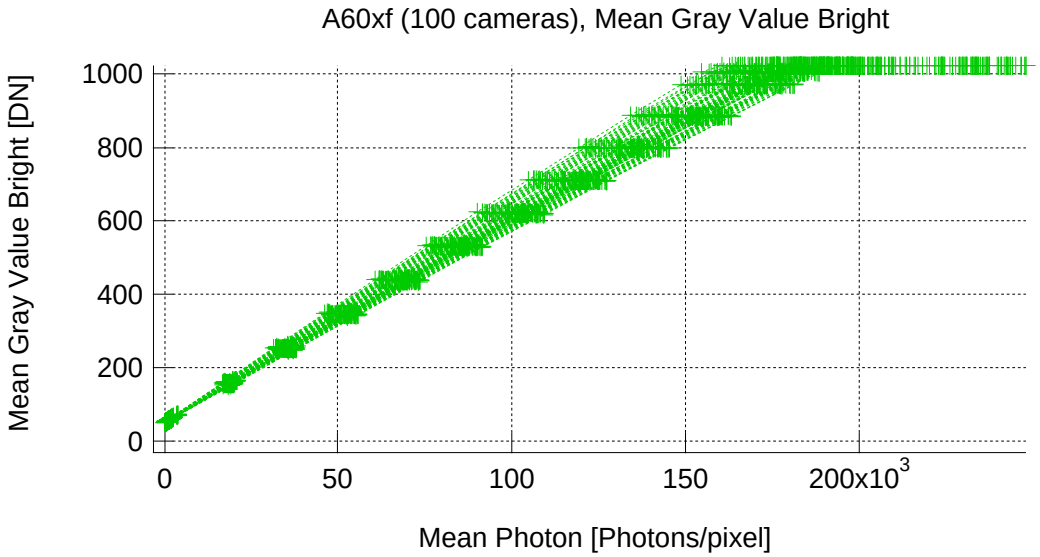


Figure 16: Mean Gray Values of the Cameras with Illuminated Pixels

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.2 Variance of the Temporal Distribution of Gray Values

The variance of the temporal distribution of gray values $\sigma^2_{y.temp}(\mu_p)$ in $[\mathrm{DN}^2]$ is plotted versus number of photons μ_p in $[p^{\sim}]$ collected in a pixel during exposure time.

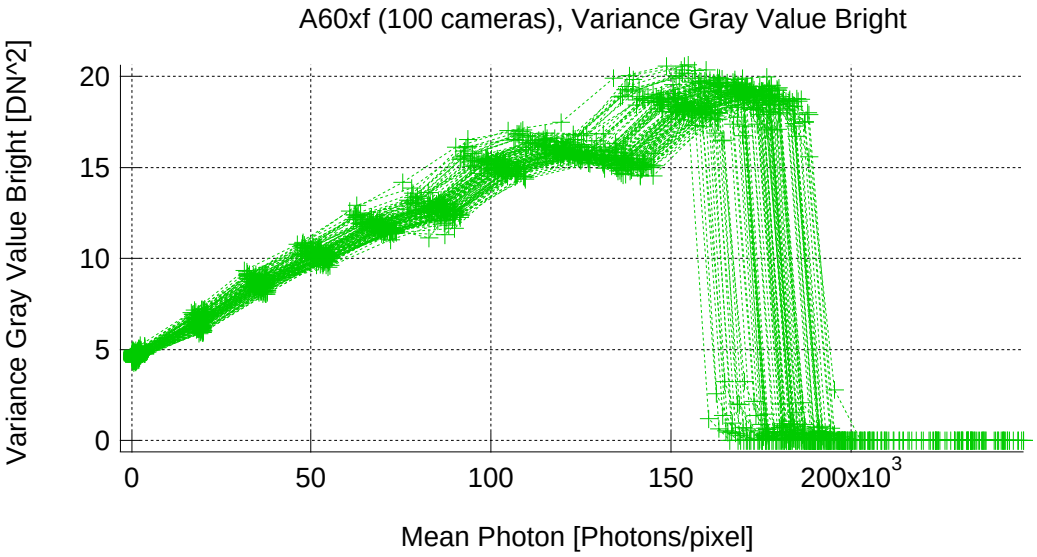


Figure 17: Variance Values for the Temporal Distribution of Gray Values with Illuminated Pixels

Saturation Capacity The saturation point is defined as the maximum of the curve in figure 17. The abscissa of the maximum point is the number of photons $\mu_{p.sat}$ where the camera saturates. The saturation capacity $\mu_{e.sat}$ in electrons is computed according to the mathematical model as:

$$\mu_{e.sat} = \eta \mu_{p.sat} \tag{9}$$

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.3 Mean of the Gray Values Dark Signal

Mean of the gray values dark signal $\mu_{y.dark}(T_{exp})$ in $[\mathrm{DN}]$ is plotted versus exposure time in $[\mathrm{s}]$.

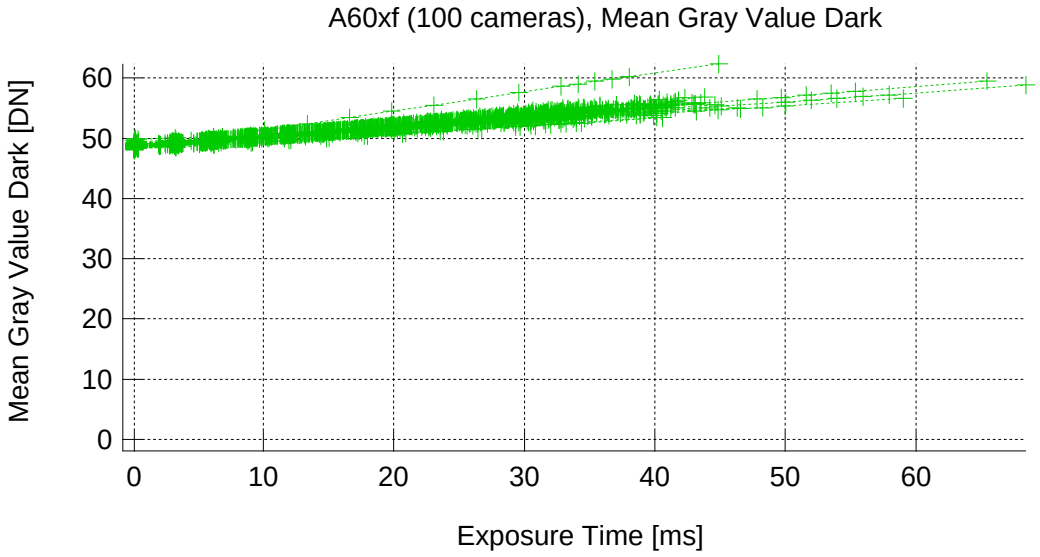


Figure 18: Mean Gray Values for the Cameras in Darkness

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.4 Variance of the Gray Value Temporal Distribution in Darkness

The variance of the temporal distribution of gray values in darkness $\sigma^2_{y.temp.dark}(T_{exp})$ in $[\mathrm{DN}^2]$ is plotted versus exposure time T_{exp} in $[\mathrm{s}]$.

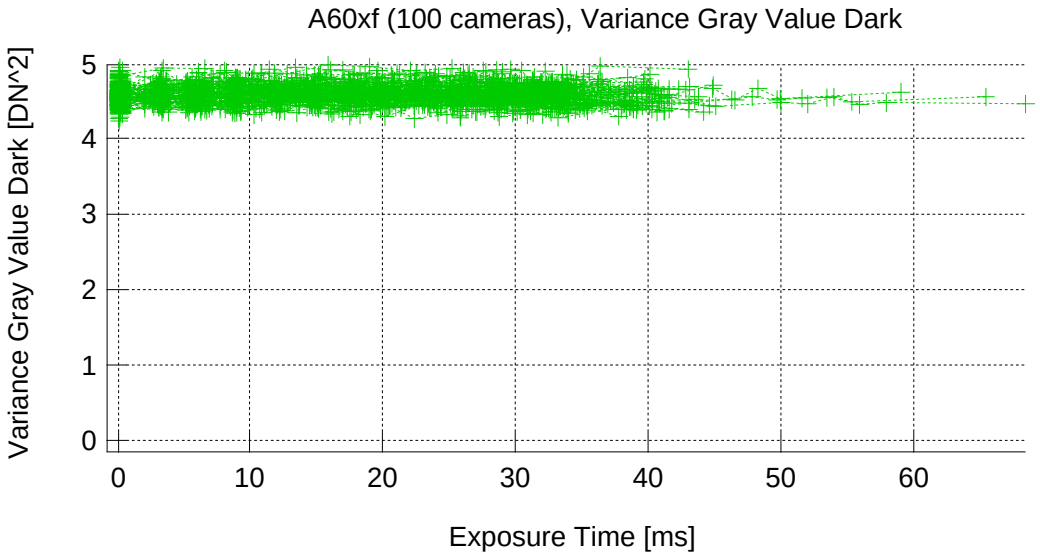


Figure 19: Variance Values for the Temporal Distribution of Gray Values in Darkness

Temporal Dark Noise The dark noise for exposure time zero is found as the offset of the linear correspondence in figure 19. Match a line (with offset) to the linear part of the data in the diagram. The dark noise for exposure time zero $\sigma^2_{d_0}$ is found as the offset of the line divided by the square of the overall system gain K.

$$\sigma_{d_0} = \sqrt{\frac{\sigma^2_{y.temp.dark}(T_{exp} = 0)}{K^2}} \tag{10}$$

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.5 Light Induced Variance of the Temporal Distribution of Gray Values

The light induced variance of the temporal distribution of gray values in $[\mathrm{DN}^2]$ is plotted versus light induced mean gray value in $[\mathrm{DN}]$.

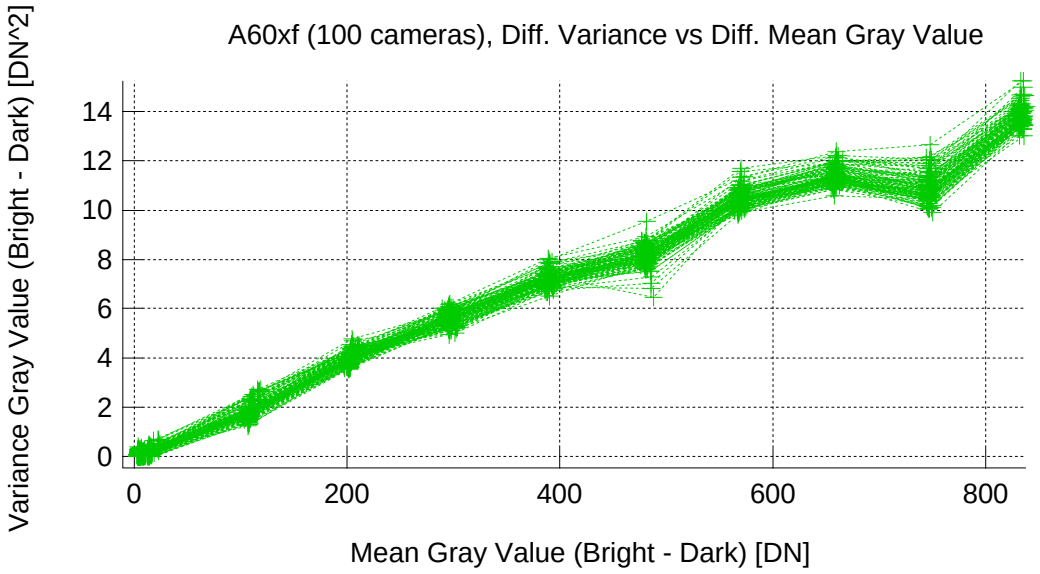


Figure 20: Light Induced Variance of the Temporal Distribution of Gray Values Versus Light Induced Mean Gray Value

Overall System Gain The overall system gain K is computed according to the mathematical model as:

$$K = \frac{\sigma^2_{y.temp} - \sigma^2_{y.temp.dark}}{\mu_y - \mu_{y.dark}} \tag{11}$$

which describes the linear correspondence in figure 20. Match a line starting at the origin to the linear part of the data in this diagram. The slope of this line is the overall system gain K.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.6 Light Induced Mean Gray Value

The light induced mean gray value $\mu_y - \mu_{y.dark}$ in $[\,\mathrm{DN}]$ is plotted versus the number of photons collected in a pixel during exposure time $K\mu_p$ in $[\,\mathrm{p}\,\tilde{}\,]$.

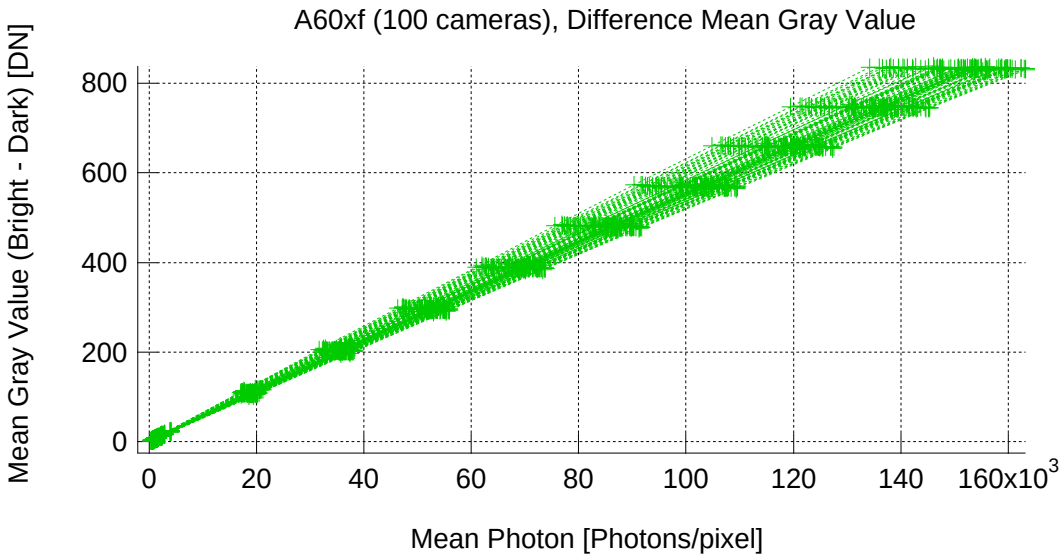


Figure 21: Light Induced Mean Gray Value Versus the Number of Photons

Total Quantum Efficiency The total quantum efficiency η is computed according to the mathematical model as:

$$\eta = \frac{\mu_y - \mu_{y.dark}}{K\mu_p} \tag{12}$$

which describes the linear correspondence in figure 21. Match a line starting at the origin to the linear part of the data in this diagram. The slope of this line divided by the overall system gain K yields the total quantum efficiency η.

The number of photons μ_p is calculated using the model for monochrome light. The number of photons Φ_p collected in the geometric pixel per unit exposure time $[\mathrm{p}\tilde{}/\mathrm{s}]$ is given by:

$$\Phi_p = \frac{EA\lambda}{hc} \tag{13}$$

with the irradiance E on the sensor surface $[\mathrm{W/m^2}]$, the area A of the (geometrical) pixel $[\mathrm{m^2}]$, the wavelength λ of light $[\mathrm{m}]$, the Planck's constant $h \approx 6.63 \cdot 10^{-34}\,\mathrm{Js}$, and the speed of light $c \approx 3 \cdot 10^8\,\mathrm{m/s}$. The number of photons can be calculated by:

$$\mu_p = \Phi_p T_{exp} \tag{14}$$

during the exposure time T_{exp}. Using equation 12 and the number of photons μ_p, the total quantum efficiency η can be calculated as:

$$\eta = \frac{hc}{AT_{exp}} \;\frac{1}{E}\;\frac{1}{\lambda}\;\frac{\mu_p - \mu_{y.dark}}{K}. \tag{15}$$

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.7 Dark Current Versus Housing Temperature

The logarithm to the base 2 of the dark current in $[\mathrm{e}^{-}/\mathrm{s}]$ versus deviation of the housing temperature from 30°C in $[\,^{\circ}\mathrm{C}]$

Not measured!

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5 Characterizing Total and Spatial Noise

5.1 Basic Parameters

5.1.1 Spatial Offset Noise

Standard deviation of the spatial offset noise σ_o referenced to electrons in $[\mathrm{e}^-]$.

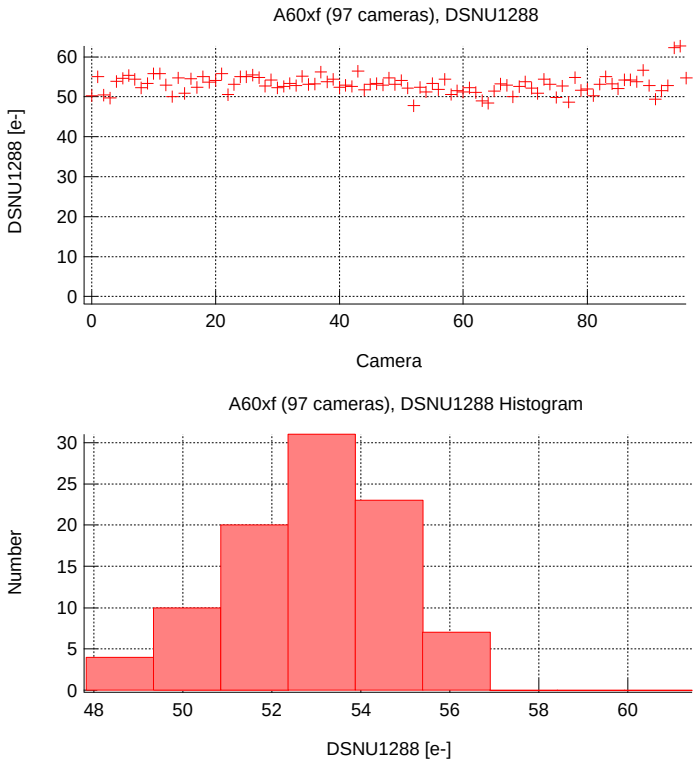


Figure 22: Spatial Offset Noise (DSNU_{1288})

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Spatial Offset Noise (DSNU_{1288})	σ_o	53.1	2.3	e^-	

Table 14: Spatial Offset Noise (DSNU_{1288})

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.1.2 Spatial Gain Noise

Standard deviation of the spatial gain noise S_g in $[\%]$.

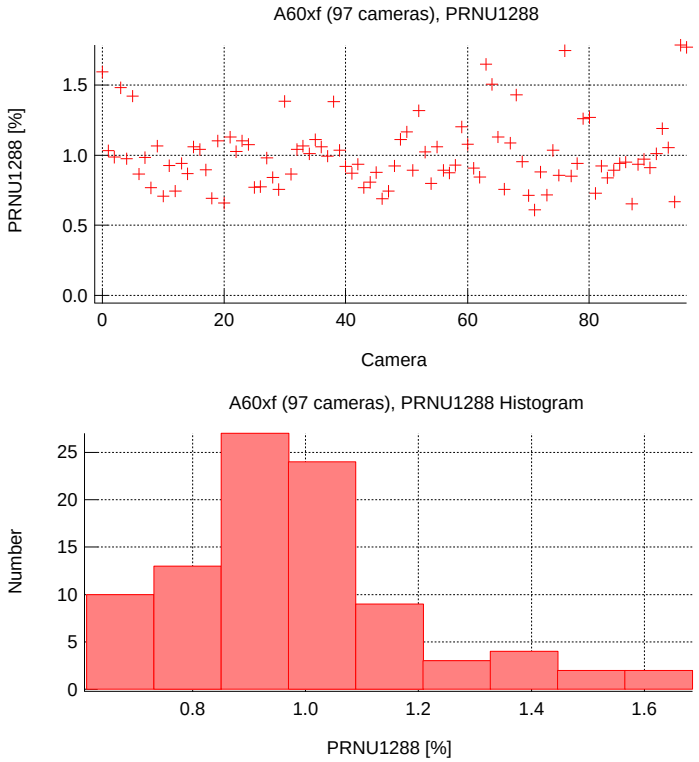


Figure 23: Spatial Gain Noise ($PRNU_{1288}$)

Item	Symbol	Typ.	Std. Dev.	Unit	Remarks
Spatial Gain Noise ($PRNU_{1288}$)	S_g	1.0	0.3	$\%$	

Table 15: Spatial Gain Noise ($PRNU_{1288}$)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.1.3 Spectrogram Spatial Noise

Spectrogram referenced to photons in $[p\tilde{}]$ is plotted versus spatial frequency in $[1/\text{pixel}]$ for no light, 50% saturation, and 90% saturation.

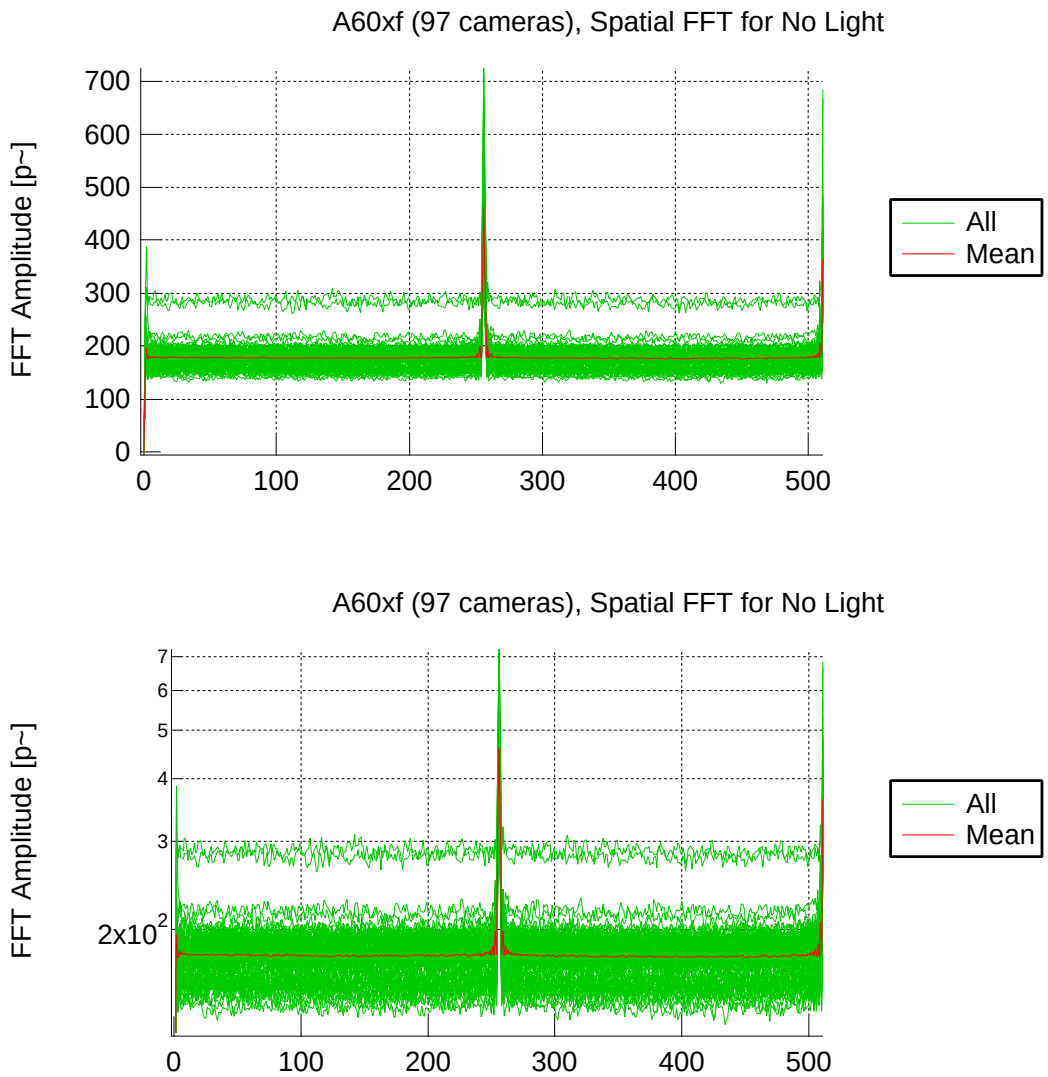


Figure 24: Spectrogram Referenced to Photons for No Light

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

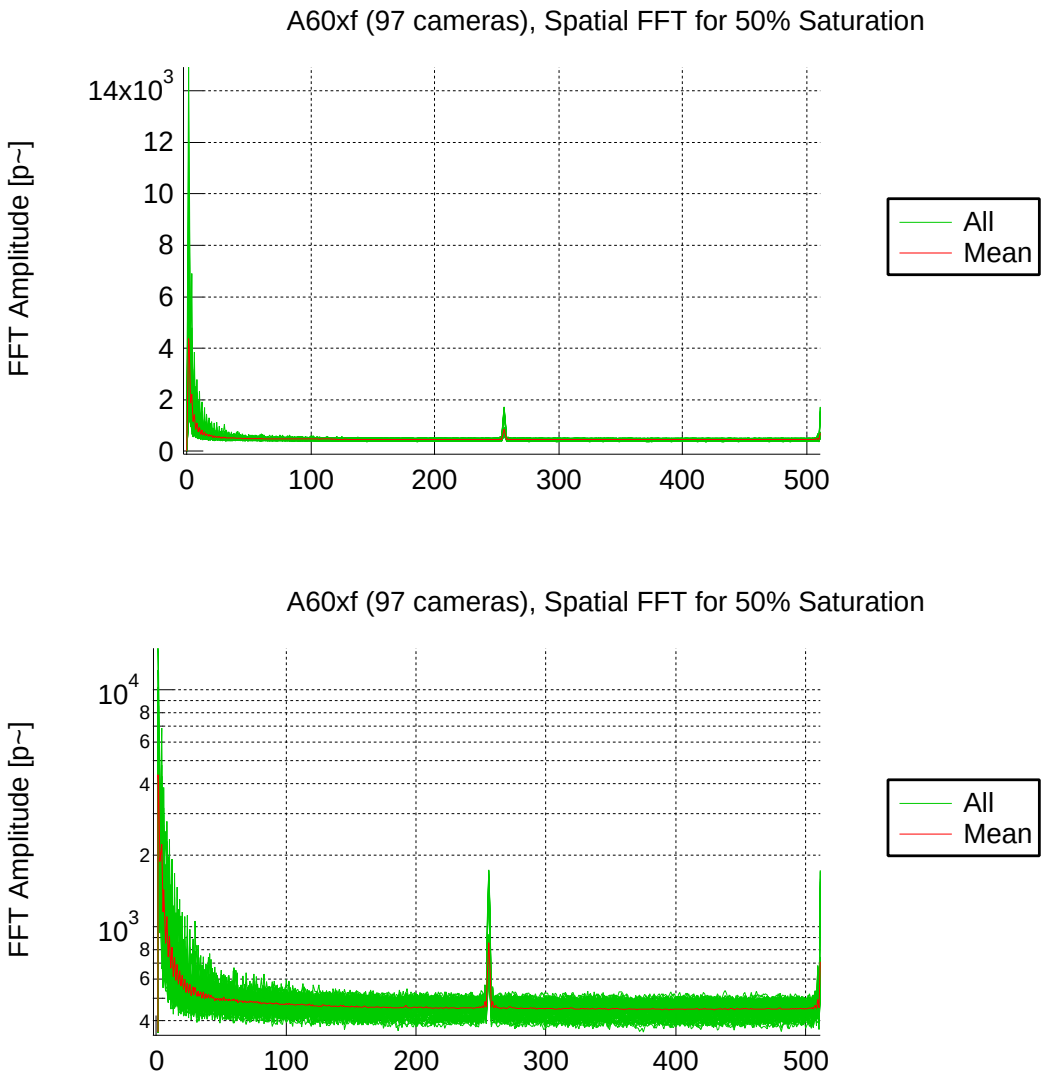


Figure 25: Spectrogram Referenced to Photons for 50% Saturation

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

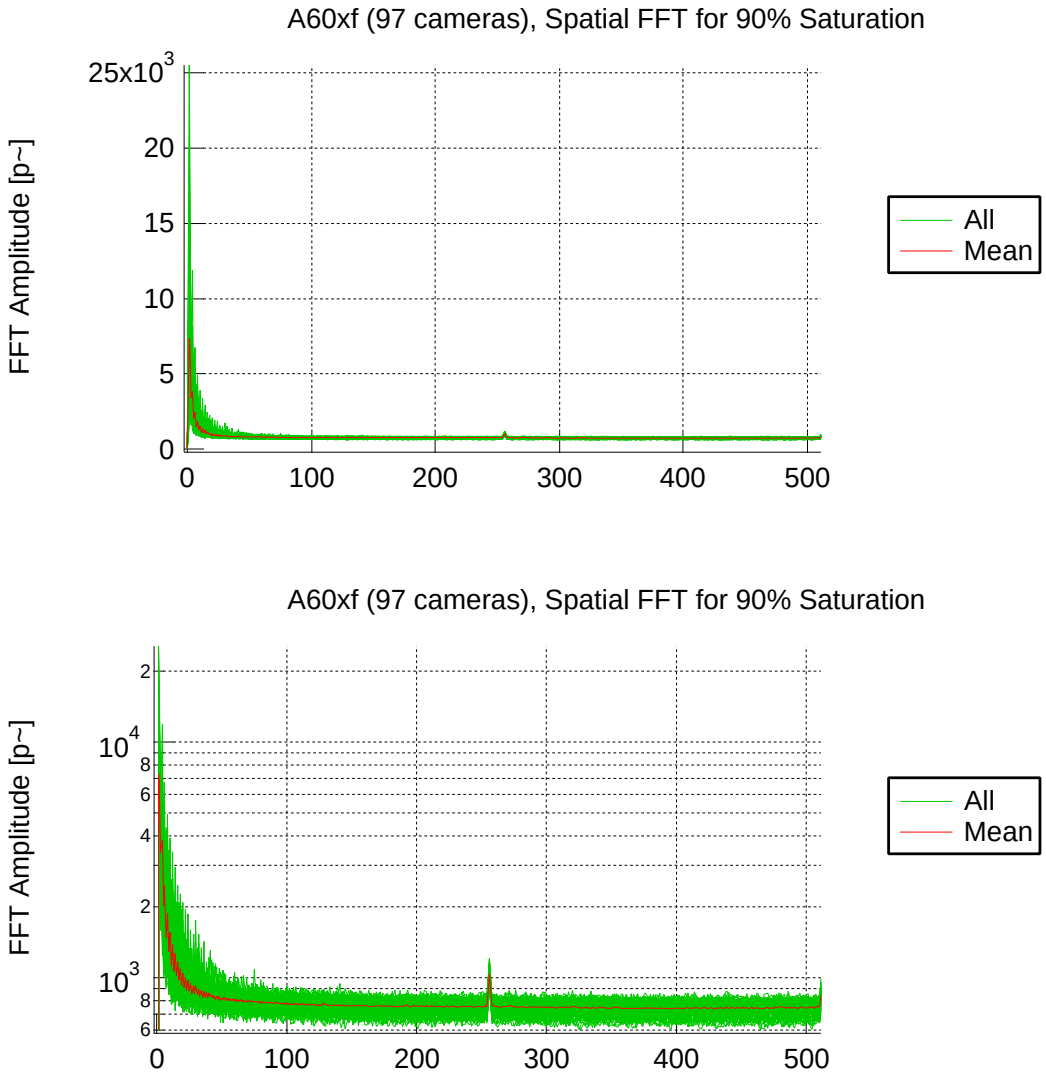


Figure 26: Spectrogram Referenced to Photons for 90% Saturation

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.1.4 Spatial Non-whiteness Coefficient

The non-whiteness coefficient is plotted versus the number of photons μ_p in $[p^{\sim}]$ collected in a pixel during exposure time.

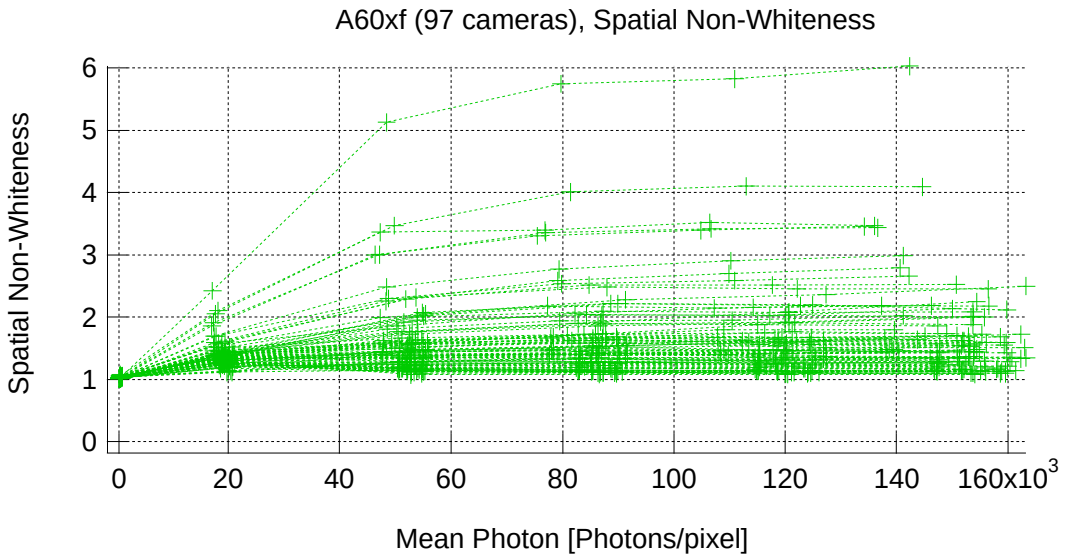


Figure 27: Spatial Non-whiteness Coefficient

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2 Raw Measurement Data

5.2.1 Standard Deviation of the Spatial Dark Noise

Standard deviation of the spatial dark noise in $[\mathrm{DN}]$ versus exposure time in $[\mathrm{s}]$.

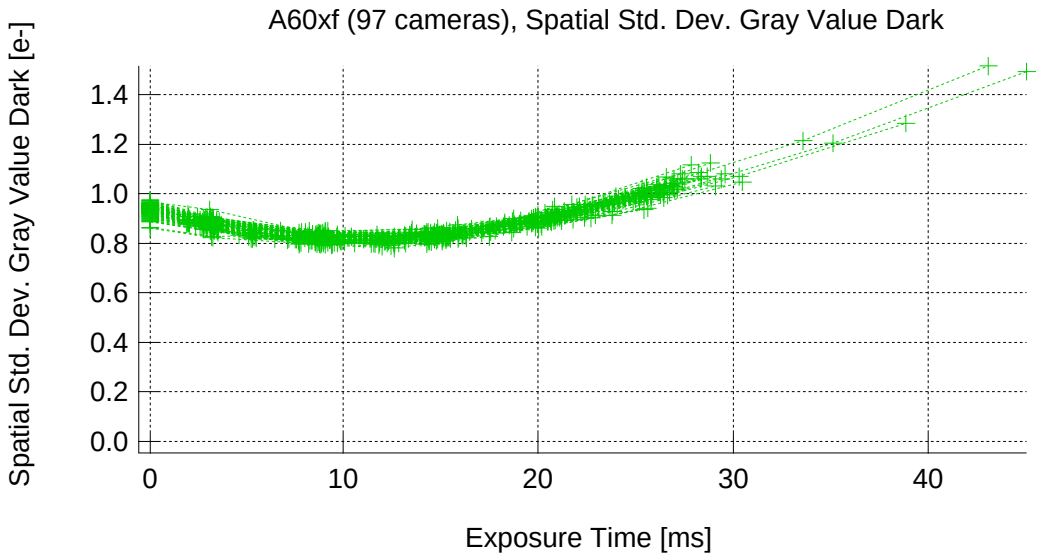


Figure 28: Standard Deviation of the Spatial Dark Noise

From the mathematical model, it follows that the **variance of the spatial offset noise** σ_o^2 should be constant and not dependent on the exposure time. Check that the data in the figure 28 forms a flat line. Compute the mean of the values in the diagram. The mean divided by the conversion gain K gives the standard deviation of the spatial offset noise σ_o .

$$\mathrm{DSNU}_{1288} = \sigma_o = \frac{\sigma_{y.spat.dark}}{K} \tag{16}$$

The square of the result equals the variance of the spatial offset noise σ_o^2.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2.2 Light Induced Standard Deviation of the Spatial Noise

Light induced standard deviation of the spatial noise in $[\mathrm{DN}]$ versus light induced mean of gray values $[\mathrm{DN}]$.

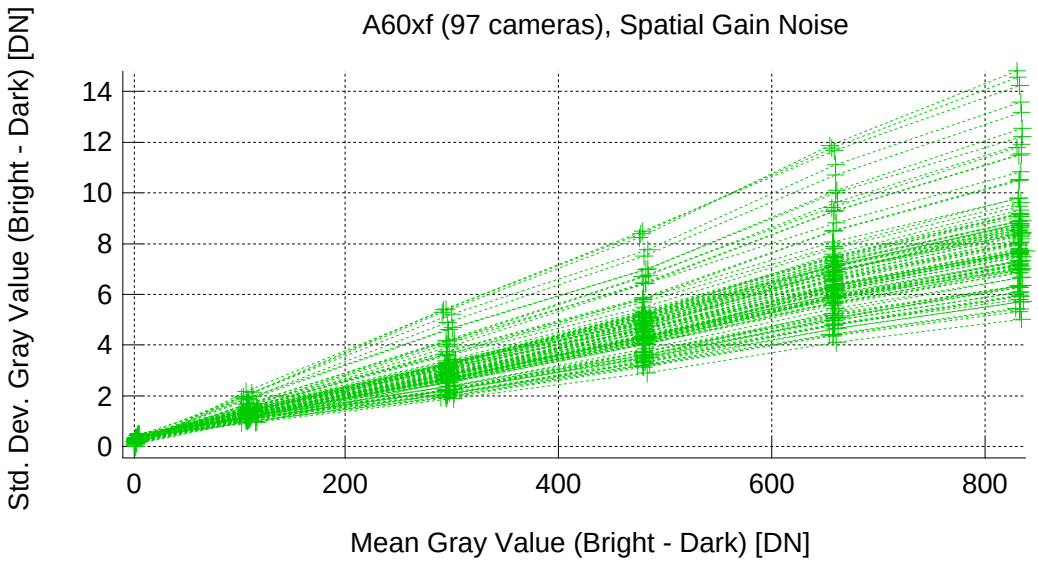


Figure 29: Light Induced Standard Deviation of the Spatial Noise

The **variance coefficient of the spatial gain noise** S_g^2 or its standard deviation value S_g respectively, is computed according to the mathematical model as:

$$\mathrm{PRNU}_{1288} = S_g = \frac{\sqrt{\sigma_{y.spat}^2 - \sigma_{y.spat.dark}^2}}{\mu_y - \mu_{y.dark}}, \tag{17}$$

which describes the linear correspondence in figure 29. Match a line through the origin to the linear part of the data. The line's slope equals the standard deviation value of the spatial gain noise S_g .

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

References

[1] EUROPEAN MACHINE VISION ASSOCIATION (EMVA): *EMVA Standard 1288 - Standard for Characterization and Presentation of Specification Data for Image Sensors and Cameras (Release A1.03)*. 2006

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP