

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Cosel ACE900F* at our website: ***Click HERE***


COSEL AC-DC Power Supplies Configurable type

ACE series

Ordering information

AC □ - □ □ □ □ □ □ - □ □ - □ □

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

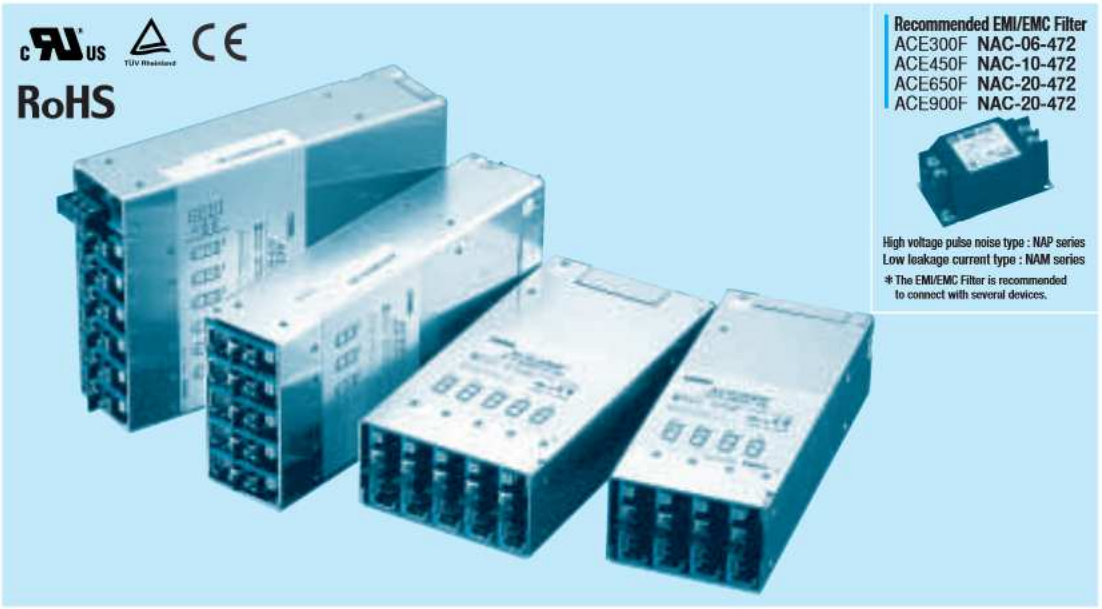


Recommended EMI/EMC Filter

ACE300F	NAC-06-472
ACE450F	NAC-10-472
ACE650F	NAC-20-472
ACE900F	NAC-20-472

High voltage pulse noise type : NAP series
Low leakage current type : NAM series

* The EMI/EMC Filter is recommended to connect with several devices.

① Abbreviation type name of ACE series
② Abbreviation power of ACE series
3 : ACE300F
4 : ACE450F
6 : ACE650F
9 : ACE900F
③ Slot 6 Output module
④ Slot 5 Output module
⑤ Slot 4 Output module
⑥ Slot 3 Output module
⑦ Slot 2 Output module
⑧ Slot 1 Output module
⑨ Parallel code
⑩ Option (series code) *8
Refer to instruction manual 5.1 Safety : UL60601-1, EN60601-1
Refer to instruction manual 7. for details.



Slot

* The number of slot is different depending on the model.
* Empty slot is code:0

SPECIFICATIONS

	MODEL		ACE300F	ACE450F	ACE650F	ACE900F
INPUT	VOLTAGE[V]		AC85 - 264 1φ / DC120 - 350 (option=-U AC70 or DC100 - refer to instruction manual 5)			
	FREQUENCY[Hz]		47 - 63			
	CURRENT[A]	AC100V *1	3.7typ	5.7typ	8.0typ	11typ
		AC200V *1	2.0typ	3.1typ	4.2typ	5.7typ
	POWER FACTOR	AC100V *1	0.99typ			
		AC200V *1	0.95typ			
	INRUSH CURRENT [A]	AC100V *2	15 / 30typ *7			15 / 50typ *7
		AC200V *2	30 / 30typ *7			30 / 50typ *7
	EFFICIENCY[%]	AC100V *1	74typ	75typ	77typ	77typ
		AC200V *1	78typ	78typ	80typ	80typ
	LEAKAGE CURRENT[mA]	AC100V *3	0.5max			
		AC230V *3	0.95max			
OUTPUT	NUMBER OF SLOT		4	5	5	6
	TOTAL OUTPUT[W]	AC90 - 150V *4	250	400	600	800 (Peak 1k)
		AC170 - 264V *4	300	450	650	900 (Peak 1k)
	START-UP TIME[ms]		500max (ACIN100V, Io=100%)			
	HOLD-UP TIME[ms]	*1	20typ (ACIN100V, Io=100%)			
FUNCTION	AUXILIARY POWER (AUX)		12V 0.1A (Only for Remote ON/OFF) (option=-J 5V0.1A)			
	ALARM (PR)		FAN alarm, LINE alarm			
ISOLATION	INPUT-OUTPUT, RC, AUX		AC3,000V 1minute, Cutoff current=10mA, DC500V 50MΩ min (At Room Temperature)			
	INPUT-FG		AC2,000V 1minute, Cutoff current=10mA, DC500V 50MΩ min (At Room Temperature)			
	OUTPUT, RC, AUX(PR)-FG	*5	AC500V 1minute, Cutoff current=100mA, DC500V 50MΩ min (At Room Temperature)			
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	*4	-20 to +70℃, 20 - 90%RH (Non condensing) 3,000m (10,000feet) max			
	STORAGE TEMP., HUMID. AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing) 9,000m (30,000feet) max			
	VIBRATION		19.6m/s² (2G) , 10 - 55Hz, 3minutes period, 60minutes each along X, Y and Z axis			
	IMPACT		196.1m/s² (20G) , 11ms, once each X, Y and Z axis			
SAFTY AND NOISE REGULATIONS	AGENCY APPROVALS		UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178, Complies with DEN-AN (At only AC input) UL60601-1, EN60601-1 (At only AC input) (Refer to instruction manual 7)			
	CONDUCTED NOISE		Complies with FCC-B, VCCI-B, CISPR22-B and EN55022-B			
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 *9			
OTHERS	CASE SIZE	*6	103×63.5×254mm (W×H×D) [4.06×2.5×10 inches]	127×63.5×254mm (W×H×D) [5×2.5×10 inches]	127×63.5×279mm (W×H×D) [5×2.5×10.98 inches]	177.5×63.5×254mm (W×H×D) [6.99×2.5×10 inches]
	WEIGHT[kg]		1.7max	2.2max	2.4max	3.0max
	COOLING METHOD		Forced cooling (built-in)			

*1 In case of modular power supply, the value changes by composing and load factor of installed ouput modules. The values in specifications mean each the model are composed of voluntary modules that are 5V (code : C), 12V (code : E), 24V (code : H) and the output power is total ouput wattage under the prescribed conditions.
*2 More than 3sec. to restart. Io=100%
*3 Complies with IEC60950 and DEN-AN 60Hz and 100% load.
*4 Refer to instruction manual 4.2 Derating in detail.
*5 Each output module, RC and AUX are isolated.
*6 Case size contains neither the terminal blocks, screw nor.
*7 Primary inrush current / Secondary inrush current.
*8 Please contact us about safety approvals for the model with option.
*9 Please contact us about class C.
* A sound may occur from power supply at pulse loading.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Output module specifications

ITEM	CODE	150W suitable single output A	B	C	D	E	F	G	H	J	K	50W suitable single output L	M	N	P	R	75W dual output Y*7	W*7	Z*7	9*7
Number of slots used		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
VOLTAGE[V]		+2	+3.3	+5	+7.5	+12	+15	+18	+24	+34	+48	+3.3	+5	+12	+15	+24	±5	±12	±15	±24
MINIMUM CURRENT[A]		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CURRENT1[A]		26	26	26	18	13	10	8.5	6.5	4.5	3.2	10	10	5	4	2.5	3	3.2	2.5	1.6
CURRENT2[A]		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	7	4.2	3.5	2.5
PEAK CURRENT[A]	*1	—	—	—	—	14	12	10	8	5.5	4	—	—	—	—	—	—	5	4	—
LINE REGULATION[mV]max		20	20	20	36	48	60	72	96	120	192	20	20	48	60	96	20	48	60	60
LOAD REGULATION1[mV]max	*5	40	40	40	100	100	120	120	150	180	300	40	40	100	120	150	250	600	600	600
LOAD REGULATION2[mV]max	*6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	500	750	750	750
RIPPLE [mVp-p]max	0 to +50℃ *2	80	80	80	120	120	120	120	120	120	150	80	80	120	120	120	80	120	120	120
	-20 to 0℃ *2	140	140	140	160	160	160	160	160	160	300	140	140	160	160	160	140	160	160	160
RIPPLE NOISE [mVp-p]max	0 to +50℃ *2	120	120	120	150	150	150	150	150	150	350	120	120	150	150	150	120	150	150	150
	-20 to 0℃ *2	160	160	160	180	180	180	180	180	180	400	160	160	180	180	180	160	180	180	180
TEMPERATURE COEFFICIENT[mV]max	0 to +50℃	50	50	50	90	120	150	180	240	300	480	50	50	120	150	240	50	120	150	150
DRIFT[mV]max	*3	20	20	20	36	48	60	72	96	120	192	20	20	48	60	96	20	48	60	60
OUTPUT VOLTAGE SETTING[V]		2.00–2.20	3.25–3.45	4.99–5.30	7.20–7.80	11.5–12.5	14.4–15.6	17.3–18.7	23.0–25.0	33.0–35.0	46.0–50.0	3.25–3.45	4.99–5.30	11.5–12.5	14.4–15.6	23.0–25.0	4.99–5.30	11.5–12.5	14.4–15.6	23.0–25.0
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	*4	1.60–2.60	2.60–3.60	4.00–5.50	6.00–8.20	9.00–13.2	13.2–16.5	16.5–19.2	19.2–26.4	27.2–37.4	38.4–52.8	2.60–3.60	4.00–5.50	9.00–13.2	13.2–16.5	19.2–26.4	4.99–6.00	9.60–13.2	13.2–16.5	19.2–26.4
OVERCURRENT PROTECTION[A]		Works over 105%min of rated current or 101%min of peak current. Automatic recovery.																		
OVERVOLTAGE PROTECTION[V]		3.00–4.80	4.00–5.25	Works at 115 - 140% of rated voltage								4.00–5.25	Works at 115 - 140% of rated voltage				6.90–8.40	13.8–16.8	17.25–21.0	27.6–33.6
FUNCTION		Remotesensing, remote ON/OFF, alarm (LV)										Remote ON/OFF, alarm (LV)								

ITEM	CODE	300W suitable single output 2A	2B	2C	2D	2E	2F	2G	2H	2J	2K	100W insulation dual output S*8	T*8	U*8	150W dual output Q*7	V*7	★ I
Number of slots used		2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1
VOLTAGE[V]		+2	+3.3	+5	+7.5	+12	+15	+18	+24	+34	+48	V1:+5 V2:+5	V1:+5 V2:+12	V1:+5 V2:+24	±12	±15	Input module Refer to instruction manua 6 nput.
MINIMUM CURRENT[A]		0	0	0	0	0	0	0	0	0	0	0 0	0 0	0 0	0	0	
CURRENT1[A]		60	60	60	40	25	20	17	14	10	7	10 5	10 4.2	10 2.1	6.4	5.5	
CURRENT2[A]		—	—	—	—	—	—	—	—	—	—	— —	— —	— —	8	7	
PEAK CURRENT[A]	*1	—	—	—	—	34	27	23	20	14	10	— —	— —	— —	10	8	
LINE REGULATION[mV]max		20	20	20	36	48	60	72	96	120	192	20 20	20 48	20 96	48	60	
LOAD REGULATION1[mV]max	*5	40	40	40	100	100	120	120	150	180	300	40 40	40 100	40 150	600	600	
LOAD REGULATION2[mV]max	*6	—	—	—	—	—	—	—	—	—	—	— —	— —	— —	750	750	
RIPPLE [mVp-p]max	0 to +50℃ *2	80	80	80	120	120	120	120	120	120	150	80 80	80 120	80 120	140	140	
	-20 to 0℃ *2	140	140	140	160	160	160	160	160	160	300	140 140	140 160	140 160	200	200	
RIPPLE NOISE [mVp-p]max	0 to +50℃ *2	120	120	120	150	150	150	150	150	150	350	120 120	120 150	120 150	230	230	
	-20 to 0℃ *2	160	160	160	180	180	180	180	180	180	400	160 160	160 180	160 180	350	350	
TEMPERATURE COEFFICIENT[mV]max	0 to +50℃	50	50	50	90	120	150	180	240	300	480	50 50	50 120	50 240	120	150	
DRIFT[mV]max	*3	20	20	20	36	48	60	72	96	120	192	20 20	20 48	20 96	48	60	
OUTPUT VOLTAGE SETTING[V]		2.00–2.20	3.25–3.45	4.99–5.30	7.20–7.80	11.5–12.5	14.4–15.6	17.3–18.7	23.0–25.0	33.0–35.0	46.0–50.0	4.99–5.30 4.99–5.30	4.99–5.30 11.5–12.5	4.99–5.30 23.0–25.0	11.5–12.5	14.4–15.6	
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		1.60–2.60	2.60–3.60	4.00–5.50	6.00–8.20	9.00–13.2	13.2–16.5	16.5–19.2	19.2–26.4	27.2–37.4	38.4–52.8	4.99–5.50 3.00–5.50	4.99–5.50 7.50–13.2	4.99–5.50 15.0–26.4	9.60–13.2	13.2–16.5	
OVERCURRENT PROTECTION[A]		Works over 105%min of rated current or 101%min of peak current. Automatic recovery.															
OVERVOLTAGE PROTECTION[V]		3.00–4.80	4.00–5.25	Works at 115 - 140% of rated voltage													
FUNCTION		Remotesensing, remote ON/OFF, alarm (LV)										Remote ON/OFF			Same as W,Z		—


*1 Operating condition of peak current : Peak current is less than 10sec., duty is less than 35% and average current is less than rated current. (rated current2 at Module W, Z, 9, Q and V)
*2 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN : RM101). Ripple and Ripple Noise is measured by using measuring board with capacitor of 22μF within 150mm from output terminal.
*3 Drift is changed in DC output for an eight hour period after half-hour warm-up at 25℃, with the input voltage held constant at the rated input/output.
*4 When the output voltage of module A is used less than 2.0V, keep minimum output current 2.6A.
*5 It is a value from 0 to rated output current1. The current on non-measurement side is fixed.
*6 It is a value from 0 to rated output current2. The current on non-measurement side is fixed.
*7 The sum of +power and -power must be less than output power(Y:50W, W:76.8W, Z:75W, 9:76.8W, Q:153.6W, V:165W).
*8 Ratings of V2 can draw up to 50% of rated current at the time of 0A in load of V1. (Only module S,T,U. refer to instruction manual 4.2 for details.)
* Each output of module Y-Z, 9, Q and V is a ground common type (not isolated),each output of module S, T and U is isolated.
★ For ACE300F,450F and 650F , input and output terminals can be set at the same side if Input module (code:I) is installed instead of the most left module.
* Modules which can correspond to medical electrical equipment (UL2601-1, EN60601-1) are all modules except module S, T and U. Refer to instruction manual 7. for details.

Block diagram

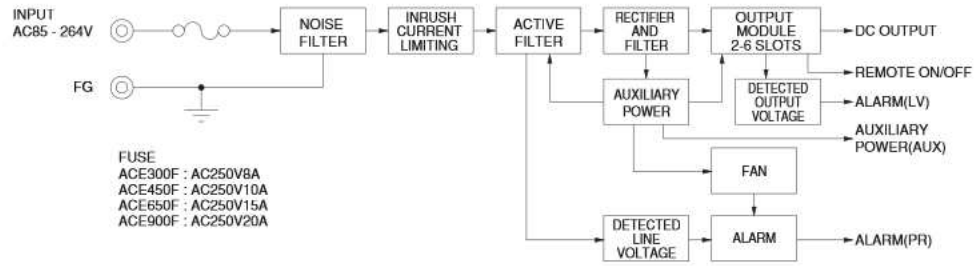

ACE

ACE300F external view

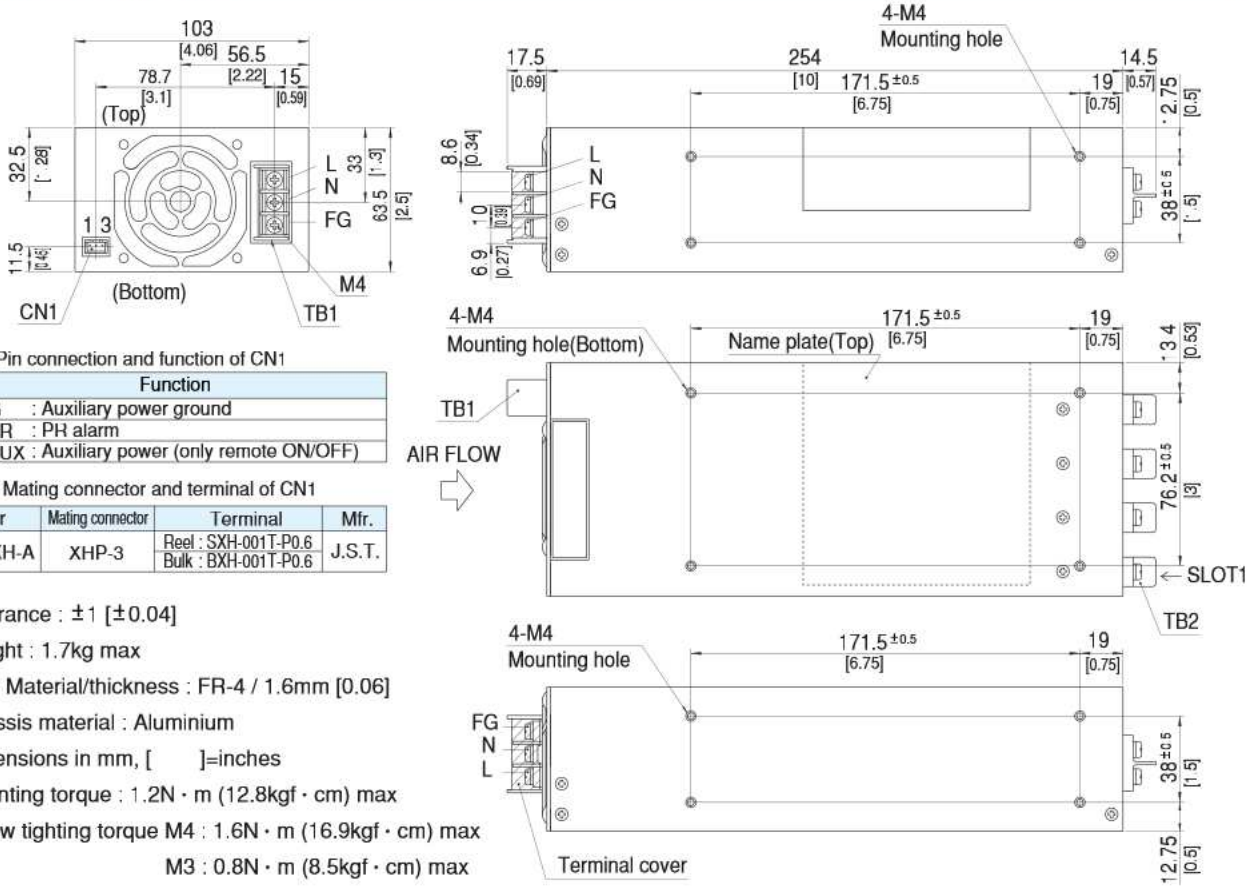

Pin connection and function of CN1


Pin No.	Function
1	G : Auxiliary power ground
2	PR : PR alarm
3	AUX : Auxiliary power (only remote ON/OFF)

Mating connector and terminal of CN1

Connector		Mating connector	Terminal	Mfr.
CN1	S3B-XH-A	XHP-3	Reel : SXH-001T-P0.6 Bulk : BXH-001T-P0.6	J.S.T.

※ Tolerance : ±1 [±0.04]
※ Weight : 1.7kg max
※ PCB Material/thickness : FR-4 / 1.6mm [0.06]
※ Chassis material : Aluminium
※ Dimensions in mm, [ ]=inches
※ Mounting torque : 1.2N · m (12.8kgf · cm) max
※ Screw tighting torque M4 : 1.6N · m (16.9kgf · cm) max
M3 : 0.8N · m (8.5kgf · cm) max

ACE450F external view

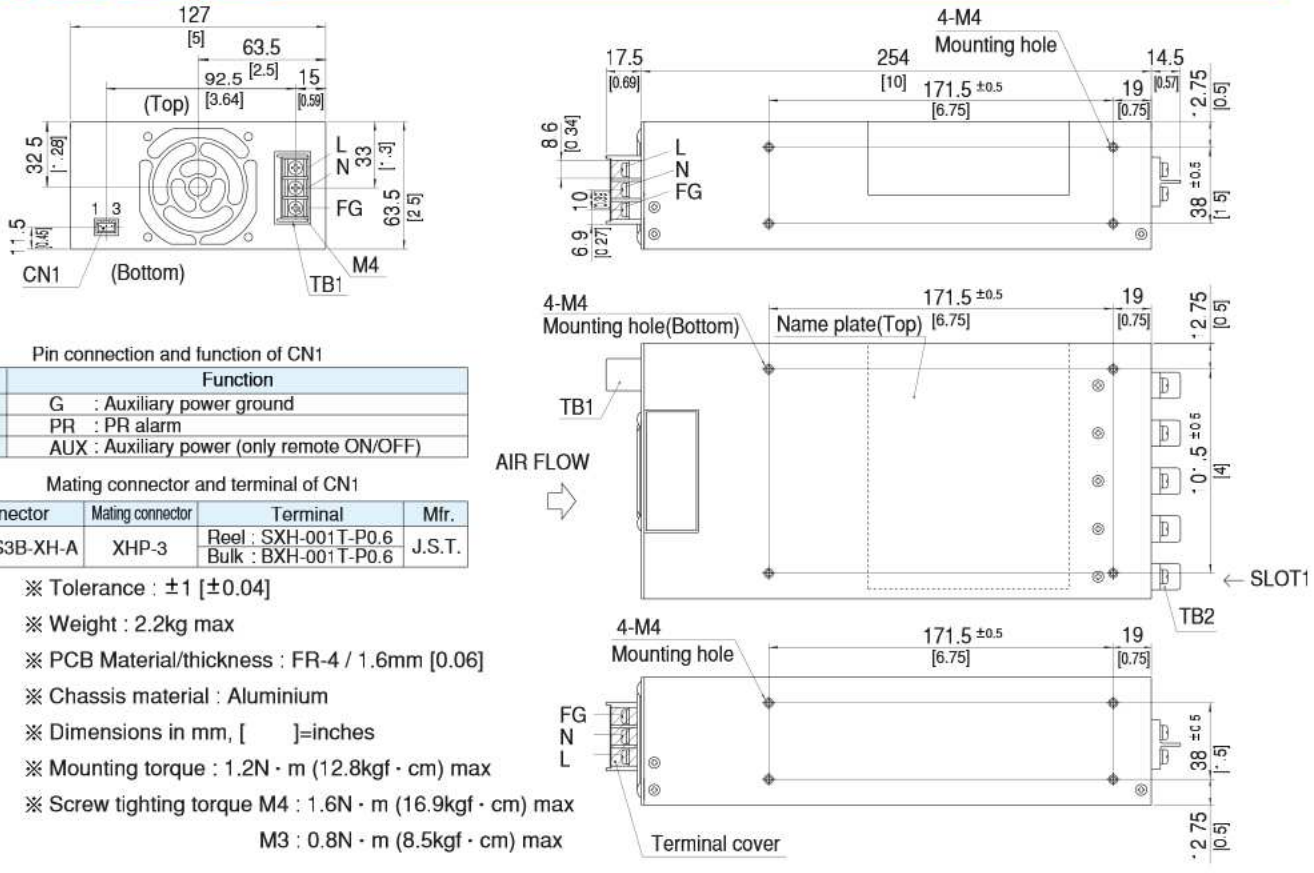

Pin connection and function of CN1

Pin No.	Function
1	G : Auxiliary power ground
2	PR : PR alarm
3	AUX : Auxiliary power (only remote ON/OFF)


Mating connector and terminal of CN1


Connector		Mating connector	Terminal	Mfr.
CN1	S3B-XH-A	XHP-3	Reel : SXH-001T-P0.6 Bulk : BXH-001T-P0.6	J.S.T.

※ Tolerance : ±1 [±0.04]
※ Weight : 2.2kg max
※ PCB Material/thickness : FR-4 / 1.6mm [0.06]
※ Chassis material : Aluminium
※ Dimensions in mm, [ ]=inches
※ Mounting torque : 1.2N · m (12.8kgf · cm) max
※ Screw tighting torque M4 : 1.6N · m (16.9kgf · cm) max
M3 : 0.8N · m (8.5kgf · cm) max

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ACE650F external view

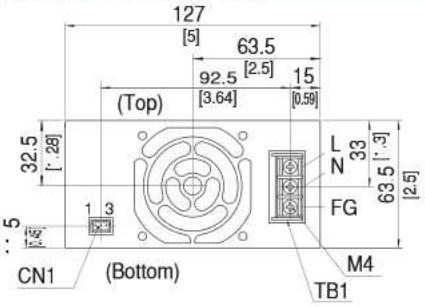

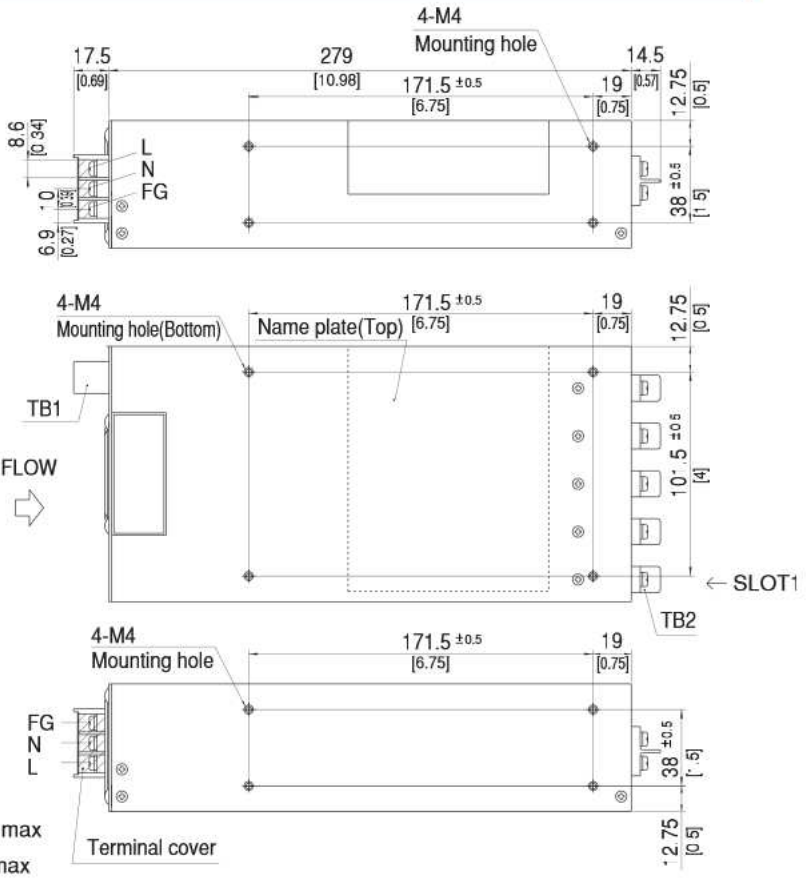

Pin connection and function of CN1


Pin No.	Function
1	G : Auxiliary power ground
2	PR : PR alarm
3	AUX : Auxiliary power (only remote ON/OFF)


Mating connector and terminal of CN1

Connector		Mating connector	Terminal	Mfr.
CN1	S3B-XH-A	XHP-3	Reel : SXH-001T-P0.6 Bulk : BXH-001T-P0.6	J.S.T.

※ Tolerance : ±1 [±0.04]
※ Weight : 2.4kg max
※ PCB Material/thickness : FR-4 / 1.6mm [0.06]
※ Chassis material : Aluminium
※ Dimensions in mm, [ ]=inches
※ Mounting torque : 1.2N · m (12.8kgf · cm) max
※ Screw tighting torque M4 : 1.6N · m (16.9kgf · cm) max
M3 : 0.8N · m (8.5kgf · cm) max

ACE900F external view

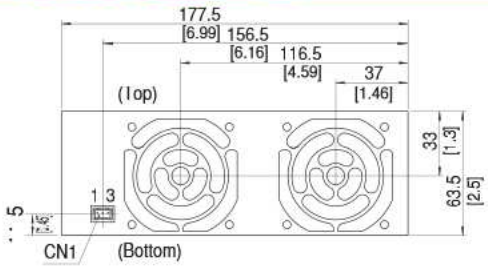

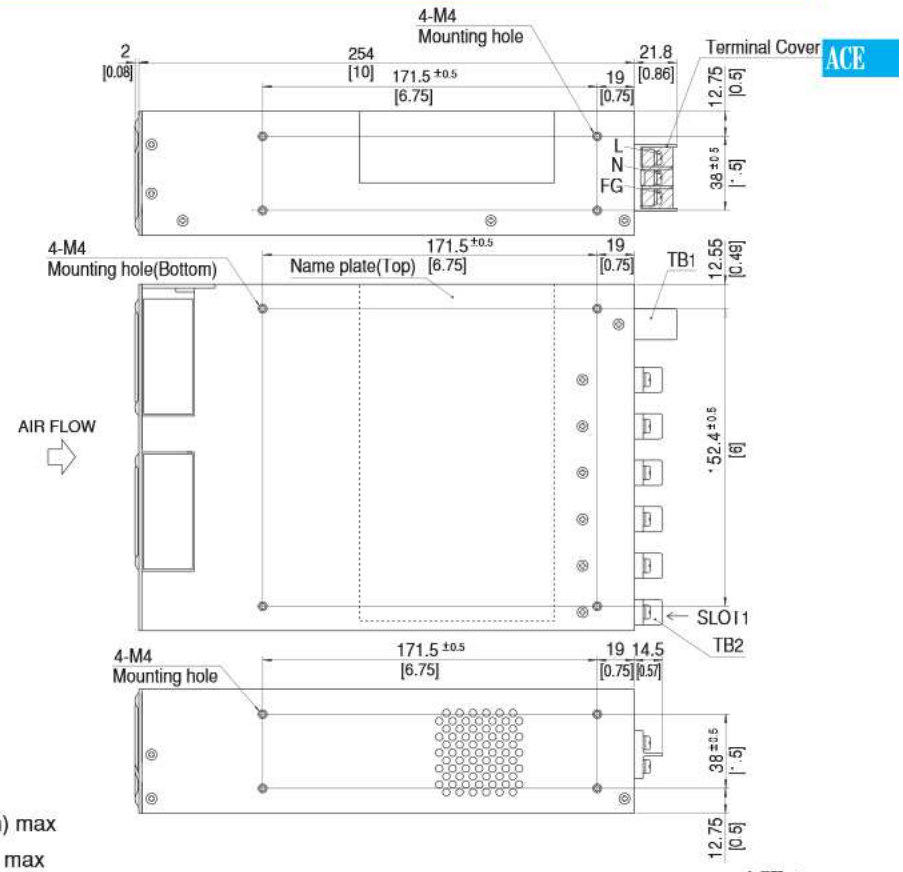

Pin connection and function of CN1

Pin No.	Function
1	G : Auxiliary power ground
2	PR : PR alarm
3	AUX : Auxiliary power (only remote ON/OFF)

Mating connector and terminal of CN1

Connector		Mating connector	Terminal	Mfr.
CN1	S3B-XH-A	XHP-3	Reel : SXH-001T-P0.6 Bulk : BXH-001T-P0.6	J.S.T.


※ Tolerance : ±1 [±0.04]
※ Weight : 3kg max
※ PCB Material/thickness : FR-4 / 1.6mm [0.06]
※ Chassis material : Aluminium
※ Dimensions in mm, [ ]=inches
※ Mounting torque : 1.2N · m (12.8kgf · cm) max
※ Screw tighting torque M4 : 1.6N · m (16.9kgf · cm) max
M3 : 0.8N · m (8.5kgf · cm) max

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Output module and connector pin assign

1.Output side view


ACE300F Output side view



ACE450F/650F Output side view




ACE900F Output side view

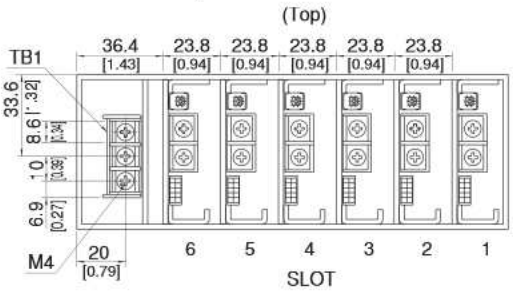


※Tolerance : ±˙ ±0 04]
※Dimensions in mm,] =inches


2.Output module side view and connector pin assign

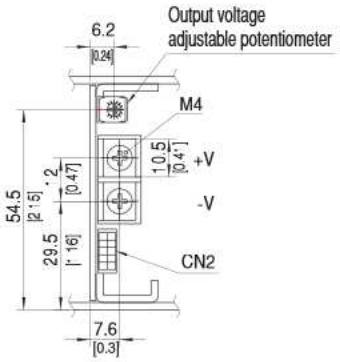


Module : A-K,L,M,N,P,R

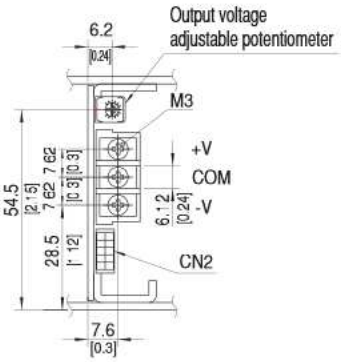


Module : Y,W,Z,9,Q,V

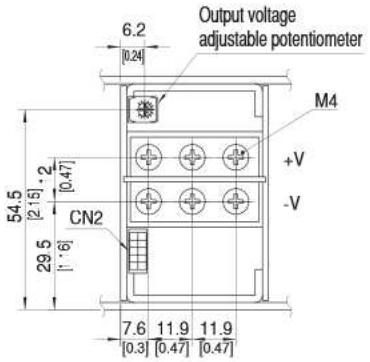

Module : 2A-2K

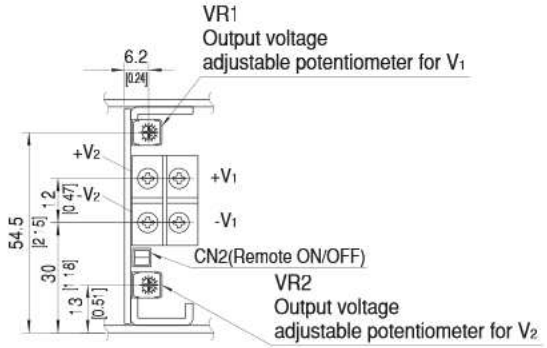

Module : S,T,U



※Tolerance : ±˙ ±0 04]
※Dimensions in mm,] =inches

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output module and connector pin assign


●CN2 connector pin assign except module S,T,U

Mating connector and terminal of CN2 in Output Module

Connector		Mating connector	Terminal	Mfr.
CN2	S10B-PHDSS	PHDR-10VS	Chain : SPHD-002T-P0.5 Loose : BPHD-001T-P0.5 BPHD-002T-P0.5 *1	J.S.T.

※ The housing for the remote sensing unused is mounted on CN2 of each output module(applying module : A - K,2A - 2K).

*1 Please consult J.S T for a non−standard crimping tool




Pin connection and function of CN2 in Output Module

Pin No.	Function	
	Applying module : A - K,2A - 2K	Applying module : L,M,N,P,R,Y,W,Z,9,Q,V
1	RC+ : Remote ON/OFF +	RC+ : Remote ON/OFF +
2	RC− : Remote ON/OFF −	RC− : Remote ON/OFF −
3	N/C : N.C.	N/C : N.C.
4	N/C : N.C.	N/C : N.C.
5	LV+ : LV alarm	LV+ : LV alarm
6	LV− : LV alarm ground	LV− : LV alarm ground
7	+M : Self sensing terminal. (Do not wire for external connection.)	N/C : N.C.
8	+S : + Remote sensing	N/C : N.C.
9	−M : Self sensing terminal. (Do not wire for external connection.)	N/C : N.C.
10	−S : − Remote sensing	N/C : N.C.

●CN2 connector pin assign of module S,T,U

Mating connector and terminal of CN2 in Output Module

Connector		Mating connector	Terminal	Mfr.
CN2	S2B-PH-K-S	PHR-2	Chain:SPH-002T-P0.5S Loose:BPH-002T-P0.5S	J.S.T.



Pin connection and function of CN2 in Output Module

Pin No.	Function
1	Remote ON/OFF +
2	Remote ON/OFF −

ACE

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP