

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*



Automotive
Energy & Power Analysis
Aerospace & Defense
Transportation
General Test & Measurement

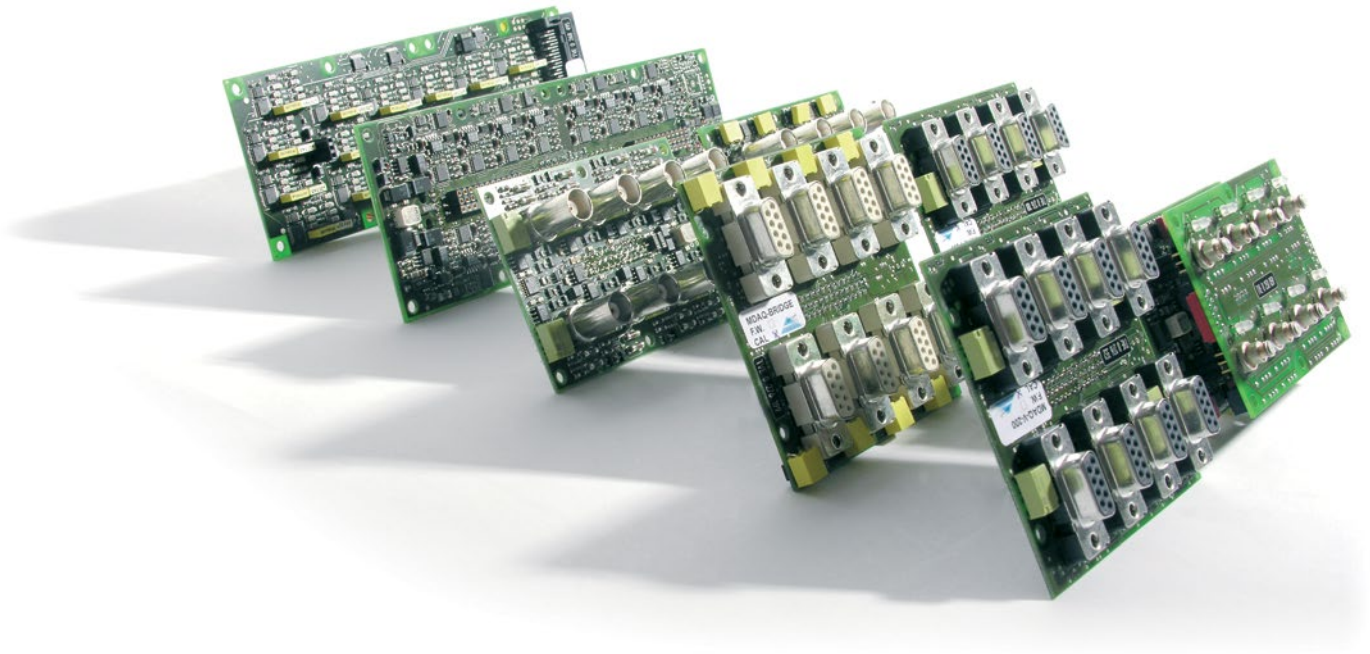

Differential Amplifiers

MDAQ Series

MDAQ series modules are dynamic differential signal amplifiers with high bandwidth.

All are multi-channel and have an analog voltage output. The configuration is done via RS-485 interface. Models with multi-pin connectors offer sensor supply for single cable sensor connection.

MDAQ series modules are cost-effective and space saving, thus the ideal solution for applications requiring hundreds of dynamic input channels. The modules fit into many DEWETRON instruments.

Key Features

- *Multi channel*
- *High bandwidth up to 300 kHz*
- *±5 V conditioned signal output*
- *Differential inputs*
- *Easy configuration*

Configuring MDAQ inputs

MDAQ modules are configured according a building block system. There is a MDAQ-BASE, the "motherboard" which holds up to two MDAQ-SUB modules. The MDAQ-BASE defines the conditioned signal output of ±5 V. A range of MDAQ-SUB modules define the supported input signals. Finally a filter board MDAQ-FILT can be added.

worldwide DEWETRON

MDAQ Series Amplifiers


- *Multi channel*
- *Small form factor for high channel density*
- *Cost effective*
- *High bandwidth up to 300 kHz*
- *Support of MSI (Modular Smart Interface)*




Selection Guide

SUB Modules for MDAQ-BASE-x


Module	# CH	Input type	Ranges	TEDS	Bandwidth (BW), Highpass filters (HP)	Excitation
MDAQ-SUB-STG-D Connector: DB-9	8	Strain-gage (Full-, half and quarter-bridge, incl. shunt calibration) for strain gage application	14 ranges from ±0.5 to 1000 mV/V (@ 5 V_{DC} excitation	✓	BW: 30 kHz	0 to 12 V_{DC}
		Voltage up to ±10 V	15 ranges from ±2.5 mV to ±10 V			
		ICP via MSI-BR-ACC	7 ranges from ±0.25 mV to ±10 V			
		Voltage up to 200 V via MSI-BR-V-200	6 ranges from ±10 to ±200 V			
		Thermocouple via MSI-BR-TH-x	full range of TC type			
		Pt100, Pt200, Pt500, Pt1000, Pt2000 and resistance via MSI-BR-RTD	-200 °C to 1000 °C and 0 to 6.5 kOhm			
MDAQ-SUB-V-200-D Connector: DB-9	8	Voltage up to ±200 V	13 ranges from ±0.125 to ±200 V	✓	BW: 300 kHz	±15 V_{DC} and 0 to 12 V_{DC}
		ICP, via MSI-V-ACC	7 ranges from ±0.25 mV to ±10 V			
		Pt100, Pt200, Pt500, Pt1000, Pt2000 and resistance via MSI-V-RTD	-200 °C to 1000 °C and 0 to 6.5 kOhm			
		Note: for safety reasons, max. 120 V_{DC} or 50 V_{AC} are allowed at this connector				
MDAQ-SUB-V-200-BNC Connector: BNC	8	Voltage up to ±200 V	13 ranges from ±0.125 to ±200 V	-	BW: 300 kHz	-
		Note: for safety reasons, max. 120 V_{DC} or 50 V_{AC} are allowed at this connector				
MDAQ-SUB-ACC-BNC Connector: BNC	8	ICP® or voltage up to ±10 V	8 ranges from ±125 mV to ±10 V	✓	BW: 300 kHz HP: 3.4 Hz	4 / 8 mA
		Single-ended or differential input and one highpass filter *3.4 Hz highpass filter for noise and shock response measurement*				
		MDAQ-SUB-ACC-BNC-S1 *0,16 Hz for structural and modal analysis, human body vibration measurement* *(rest same as MDAQ-SUB-ACC-BNC)*		✓	BW: 300 kHz HP: 0.16 Hz	4 / 8 mA
MDAQ-SUB-ACC-A-BNC Connector: BNC	8	ICP® or voltage up to ±10 V	8 ranges from ±125 mV to ±10 V	✓	BW: 300 kHz HP: 0.16 Hz, 3.4 Hz	4 / 8 mA
		Single-ended input and two HP filters *0.16 Hz for structural and modal analysis, human body vibration measurement* *3.4 Hz for noise and shock response measurement*				

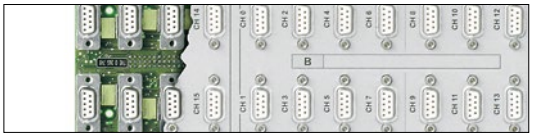


MDAQ modules - available in most of the DEWETRON multichannel systems




DEWE-51-USB2-32 2x MDAQ-SUB-V-200-D, 2x MDAQ-SUB-ACC-A modules and USB-A/D converter




Typical combination with two SUB modules mounted on a BASE module, and FILTER board (optional)



All MDAQ boards are equipped with highest quality components


Filter modules for MDAQ				
Module	**# CH**	**Filter characteristics**	**Cut-off frequencies**	**Order**
MDAQ-AAF4-5-BU 	16	Butterworth	100 Hz, 1, 10, 30, 100 kHz, Bypass *Note:* *not possible in all system configurations.* *Please contact factory for details.*	4th
MDAQ-FILT-5-BU 	16	Butterworth	30, 100, 300 Hz, 1, 10 kHz, Bypass	2nd
MDAQ-FILT-5-BU-S1 	16	Butterworth	100 Hz, 1, 10, 30, 100 kHz, Bypass	2nd
MDAQ-FILT-5-BE 	16	Bessel	30, 100, 300 Hz, 1, 10 kHz, Bypass	2nd

MDAQ-BASE boards			
	Sub modules	**Bandwidth**	**Output**
MDAQ-BASE-5 	2	300 kHz	±5 V

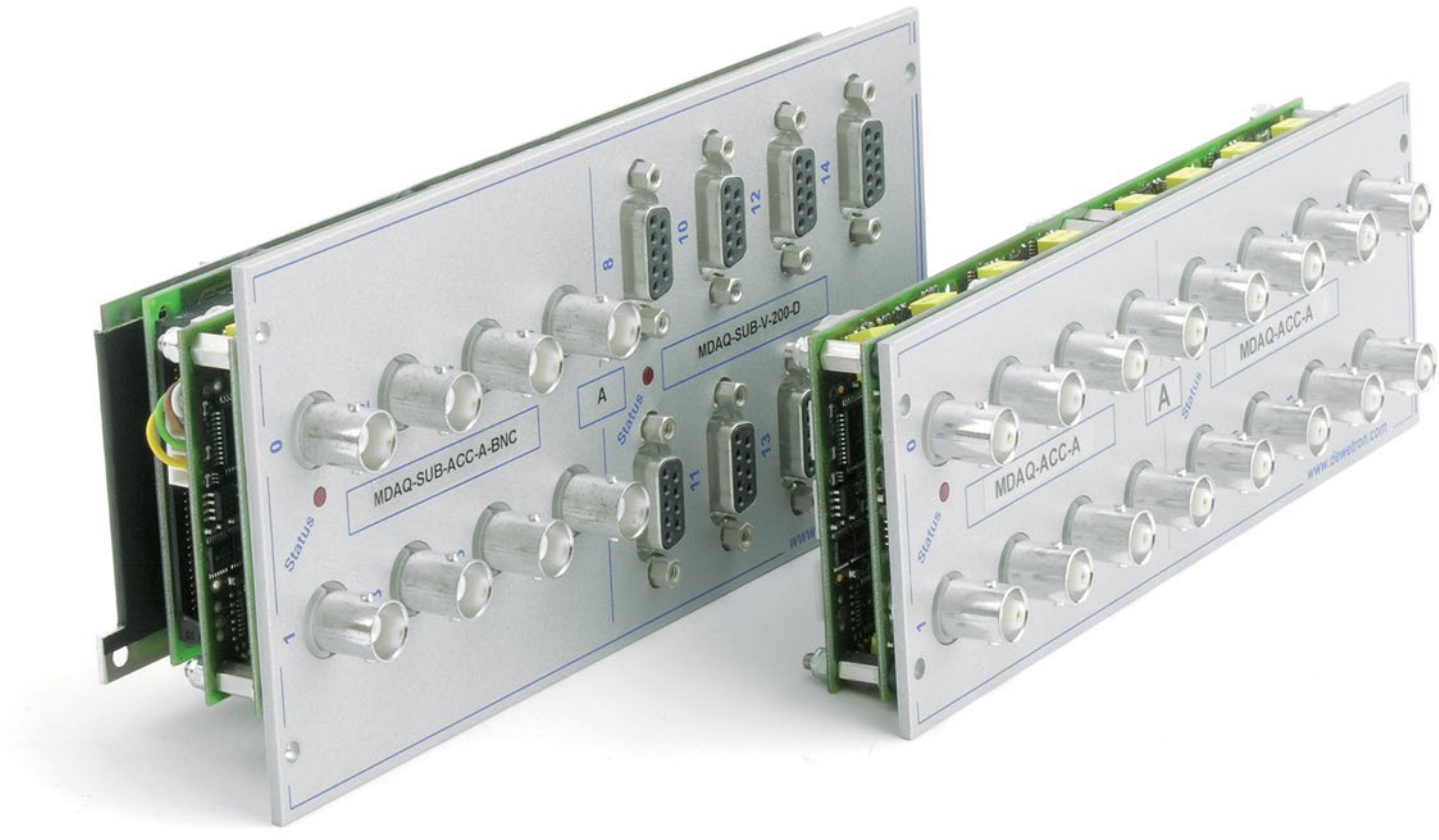

MDAQ-SUB-STG-D

- *15 input ranges from ±2.5 mV to ±10 V*
- *1 mV steps programmable excitation from 0 to 12 V*
- *Internal bridge completion for ½ and ¼ bridge*
- *Internal 50 k and 100 k shunt resistor*
- *TEDS support*

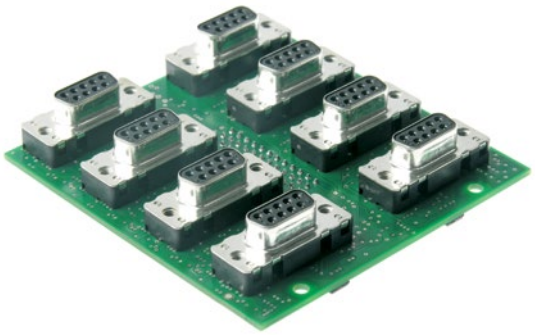


Specifications

MDAQ-SUB-STG-D combined with MDAQ-BASE-5				
Gain	0.5 to 2000			
Input ranges	±2.5, 5, 10, 20, 25, 50, 100, 200, 250, 500, 1000, 1250, 2500, 5000, 10 000 mV			
@ 5 V_{DC} excitation	±0.5, 1, 2, 4, 5, 10, 20, 40, 50, 100, 200, 250, 500, 1000 mV/V			
Input impedance	>100 MOhm			
Input noise	3.5 nV * √Hz			
Typ. input offset drift	0.5 µV/K (for ranges < 200 mV)			
DC Accuracy High Gain			Without software correction table	
±2.5 mV;5 mV/V;10 mV/V;±25 mV	±0.03% of reading	±15 µV [±3 µV/V @5 V_{EXC}]	±0.15% of reading	±15 µV [±3 µV/V @5 V_{EXC}]
20 mV	±0.03% of reading	±0.12% of range	±0.15% of reading	±0.12% of range
50 mV	±0.03% of reading	±0.06% of range	±0.15% of reading	±0.06% of range
±100 mV to ±200 mV	±0.03% of reading	±0.03% of range	±0.15% of reading	±0.03% of range
±0.250 to ±1 V Low Gain	±0.03% of reading	400 µV [±80µV/V@5 V_{EXC}]	±0.15% of reading	400 µV [±80µV/V @5V_{EXC}]
±1.25 V; ±2.5 V	±0.03% of reading	±1mV	±0.15% of reading	±1 mV
±5;10 V	±0.02% of reading	±0.03% of range	±0.15% of reading	±0.03% of range
Gain drift @ 5 V_{DC} excitation	10 ppm/K of range ±0.02 µV/V/K			
Excitation voltage	0 to 12 V programable in 1 mV steps. (5 V default)			
Excitation accuracy	±0.05 % ±0.7 mV			
Excitation drift	±10 ppm/K ±50 µV/K			
Excitation protection	Continuous short to ground			
Excitation current limit	50 mA/Channel			
Bridge Types	4- or 6-wire full bridge 3- or 5-wire ½ bridge with internal completion (software programmable) 3- wire Quarter bridge with internal 120 Ohm and 350 Ohm completion (software programmable)			
Shunt Resistor	Internal 100 k and 50 k Resistor (software programable)			
Completion and Shunt resistor accuracy	0.05% 5ppm/°K			
Bridge resistance	120 Ohm to 10 k Ohm			
Automatic bridge balance [1]	absolute Voltage	mV/V @ 5 V_{EXC}	µm/m @ 5V_{EXC} k=2 Quarter bridge	
2.5 mV to 20 mV	±10 mV	±2 mV/V	±4000 µm/m	
25 mV to 200 mV	±100 mV	±20 mV/V	±40000 µm/m	
250 mV to 1 V	±0.5 V	±100 mV/V	±200,000 µm/m	
2 V to 10 V	± 5 V	±1000 mV/V	±2,000,000 µm/m	
Bandwidth (-3 dB)	30 kHz			
Filters (lowpass)	In combination with MDAQ-FILT-xx			
Typ. SNR @ 30 kHz [1 kHz]	64 dB [82 dB] @ 1 mV/V			
and 5 V_{DC} excitation	82 dB [96 dB] @ 50 mV/V			
Typ. CMR @ 0.1 mV/V [1 mV/V]	125 dB [120 dB] @ DC			
and 5 V_{DC} excitation	115 dB [110 dB] @ 400 Hz			
	110 dB [105 dB] @ 1 kHz			
Max. common mode voltage range	±12 V			
Input overvoltage protection	±25 V_{DC}			
Output voltage	±5 V			
Output resistance	< 10 Ohm			
Output current	Max. 5 mA			
Output protection	Continuous short to ground			
TEDS	Hardware support for TEDS (Transducer Electronic Data Sheet)			
Supported TEDS chips	DS2406, DS2430A, DS2432, DS2433			
Power consumption				
@ 5 VDC excitation	350 Ohm 16 Channels typ. 8 W			
	120 Ohm 16 Channels typ. 15 W			
@ 10 VDC	350 Ohm 16 Channels typ. 15 W			
Standard operating temperature	0 °C to 70 °C (32 °F to 158 °F)			

MDAQ-SUB-V-200-xx

- *16 programmable ranges from ±0.125 V to ±200 V*
- *Bandwidth 300 kHz*
- *Programmable sensor supply 0 to 12 V*
- *High signal to noise ratio*
- *TEDS support*

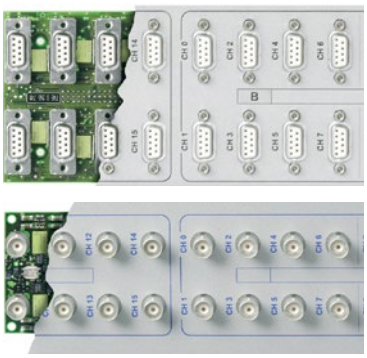

Specifications

MDAQ-SUB-V-200-xx					
Input voltage range:	Divider Off	±0.125 V, 0.25 V, 0.5 V, 1 V, 1.25 V, 2.5 V, 5 V, 10 V (common mode voltage up to 12 V)			
	Divider On	±2.5 V, 5 V, 10 V, 20 V, 25 V, 50 V, 100 V, 200 V (common mode voltage up to 250 V)			
Input impedance		1 MOhm to GND, 2 MOhm differential			
DC accuracy	Divider Off			Without software correction table	
±0.125 to ±1 V		±0.03% of reading	±400 µV	±0.15% of reading	400 µV
±1.25 V; ±2.5 V		±0.03% of reading	±1 mV	±0.15% of reading	±1 mV
±5; ±10V		±0.02% of reading	±0.03% of range	±0.15% of reading	±0.03% of range
±2.5 to ±20 V	Divider On	±0.06% of reading	±8 mV	±0.25% of reading	±8 mV
±25 V; ±50 V		±0.03% of reading	±20 mV	±0.25% of reading	±20 mV
±100; ±200 V		±0.02% of reading	±0.03% of range	±0.25% of reading	±0.03% of range
Gain drift		Typ. 15 ppm/K (max. 40 ppm/K)			
Input offset drift					
125 mV to 10 V	Divider Off	Typ. 10 µV/K (max. 20 µV/K)			
2.5 V to 200 V	Divider On	Typ. 100 µV/K (max. 200 µV/K)			
Overvoltage protection		±250 V_{DC}			
Bandwidth (-3 dB)	Divider Off	300 kHz (200 kHz at range 0.125 V and 1.25 V)			
	Divider On	300 kHz (200 kHz at range 2.5 V and 25 V)			
Channel separation @ 10 kHz		> 80 dB			
CMRR @ 50 Hz (@ 1 kHz)	Divider Off	> 94 dB (> 80 dB)			
	Divider On	> 70 dB (> 56 dB)			
Typ. SNR @ 50 kHz BW	Divider Off				
±0.125 V and ±0.25 V		> 87 dB			
±0.5 V to ±10 V		> 96 dB			
±2.5 V and ±10 V	Divider On	> 84 dB			
±10 V to ±25 V		> 88 dB			
±25 V to ±200 V		> 93 dB			
Programmable sensor supply (1)		0 to 12 V short circuit protected; 50 mA current limmitation			
Sensor supply accuracy (1)		±0.05 % ±2 mV			
Fixed sensor supply (1)		±15 V (50 mA/channel)			
Output voltage		±5 V			
Output impedance		5 Ohm			
Output current		±20 mA			
Programming interface		RS-485, RS-232, USB			
Power supply		±15 V			
Power consumption		Typ. 4.5 W / 10 W (1)			
Sensor connection		BNC or DSUB (1) female			
Output connector		68-pin Amplimite series (AMP Nr. 174339-6)			
Supported TEDS chips (1)		DS2406, DS2430A, DS2432, DS2433			
Dimensions (W x D x H)		BNC: 175 x 61 x 30 mm (6.9 x 2.4 x 1.2 in.) DSUB: 175 x 82 x 22 (6.9 x 3.2 x 0.9)			

(1) MDAQ-SUB-V-200-D only!

MDAQ-SUB-ACC




- *16 channel IEPE® amplifier*
- *Several voltage measurement modes (AC/DC coupling, single ended/differential)*
- *Bandwidth up to 300 kHz*
- *Channel separation 96 dB*
- *TEDS support*
- *Ideally suited for sound and vibration measurement*

Specifications

MDAQ-SUB-ACC				
Input voltage range	±0.125 V, 0.25 V, 0.5 V, 1 V, 1.25 V, 2.5 V, 5 V, 10 V			
Gain	0.5, 1, 2, 4, 5, 10, 20, 40			
Input modes Voltage modes	IEPE® or voltage Single ended or differential DC or AC coupled (3 Hz standard, on request down to 0.1 Hz)			
Input impedance	1 MOhm			
DC accuracy			without software correction table	
±0.125 to ±1 V	±0.03% of reading	400 µV	±0.15% of reading	400 µV
±1.25 V; ±2.5 V	±0.03% of reading	±1 mV	±0.15% of reading	±1 mV
±5;10 V	±0.02% of reading	±0.03% of range	±0.15% of reading	±0.03% of range
Gain drift	typ. 10 ppm/K (max. 20 ppm/K)			
Input offset drift	typ. 3 µV/K (max. 12 µV/K)			
Over voltage protection	IN+ differential ±40 V IN- differential: max ±40 V IN- Single ended: max 300 mA			
Max. common mode voltage	IN differential mode: ±12 V			
Bandwidth (-3 dB)	300 kHz (200 kHz at range 1.25 V and 0.125 V)			
Channel separation @ 10 kHz	> 96 dB			
CMR @ 50 Hz (@ 1 kHz)	> 94 dB (> 80 dB)			
Typ. SNR @ 50 kHz bandwidth Range ±0.125 V Range ±0.25 V Range ±0.5 V to ±1.25 V Range ±2.5 V to ±10 V	 > 87 dB > 93 dB > 96 dB > 100 dB			
Sensor excitation	4 or 8 mA, 5 % up to 24 V_{DC}			
Current noise	150 nA * sqrt (Hz)			
Input connectors	BNC			
Output voltage	±5 V			
Output impedance	5 Ohm			
Output current	±20 mA			
Programming interface	RS-485, RS-232			
Power supply	±15 V_{DC}			
Power consumption:	Typ. 10 W (max 12 W @ 8 mA sensor excitation)			
Sensor connection:	BNC female			
Output connector	68-pin Amplimite series (AMP Nr. 174339-6)			
TEDS	DS 2406, DS 2430A, DS 2432, DS2433			

MDAQ-SUB-ACC-A-BNC

- *16 channel IEPE® amplifier*
- *AC and DC coupled voltage measurement mode*
- *2 programmable high-pass filters*
- *Bandwidth up to 300 kHz*
- *Channel separation 96 dB*
- *TEDS support*
- *Ideally suited for sound and vibration measurement*

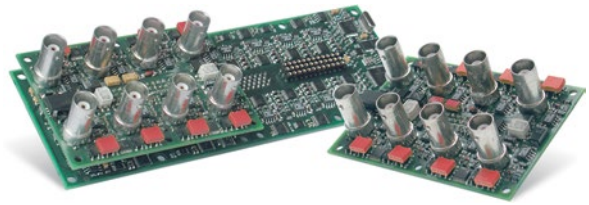


Specifications

MDAQ-SUB-ACC-A				
Input voltage range	±0.125 V, 0.25 V, 0.5 V, 1 V, 1.25 V, 2.5 V, 5 V, 10 V			
Gain	0.5, 1, 2, 4, 5, 10, 20, 40			
Input modes Voltage modes	ICP® or Voltage Single ended DC or AC coupled with two selectable high pass filter (0.15 and 3.4 Hz as standard, others on request)			
Input impedance	1 MOhm			
DC accuracy [1]			Without software correction table	
±0.125 V and ±0.25 V	±0.03% of reading	350 µV	±0.15% of reading	350 µV
±0.5 V to ±1.25 V	±0.03% of reading	±0.04% of range	±0.15% of reading	±0.04% of range
±2.5 V to ±10 V	±0.02% of reading	±0.03% of range	±0.15% of reading	±0.03% of range
Gain drift	Typ. 10 ppm/K (max. 20 ppm/K)			
Input offset drift	Typ. 3 µV/K (max. 12 µV/K)			
Over voltage protection	IN+ ±40 V IN- Single ended: max 300 mA			
Bandwidth (-3 dB)	300 kHz (200 kHz at range 1.25 V and 0.125 V)			
Channel separation @ 10 kHz	> 96 dB			
CMR @ 50 Hz (@ 1 kHz)	> 94 dB (> 80 dB)			
Typ. SNR @ 50 kHz bandwidth Range ±0.125 V Range ±0.25 V Range ±0.5 V to ±1.25 V Range ±2.5 V to ±10 V	 > 87 dB > 93 dB > 96 dB > 100 dB			
Sensor excitation	4 or 8 mA, 5 % up to 24 V_{DC}			
Current noise	150 nA * sqrt (Hz)			
Input connectors	BNC			
Output voltage	±5 V			
Output impedance	5 Ohm			
Output current	±20 mA			
Programming interface	RS-485, RS-232			
Power supply	15 V_{DC}			
Power consumption:	Typ. 10 W (max 12 W @ 8 mA sensor excitation)			
Sensor connection:	BNC female			
Output connector	68-pin Amplimite series (AMP Nr. 174339-6)			
Dimensions (W x D x H)	175 x 61 x 30 mm (6.9 x 2.4 x 1.2 in.)			

MDAQ-FILT-5-Bx


- *MDAQ-FILT-5-BE: Bessel characteristics*
  MDAQ-FILT-5-BU: Butterworth characteristics
- *16 channel 2nd order low pass filter*
- *5 selectable filters including bypass function*
- *5 different cut off frequencies*
- *Discrete low noise filter design*
- *Independent filter settings for each channel*
- *Direct control from MDAQ-xx amplifier series*

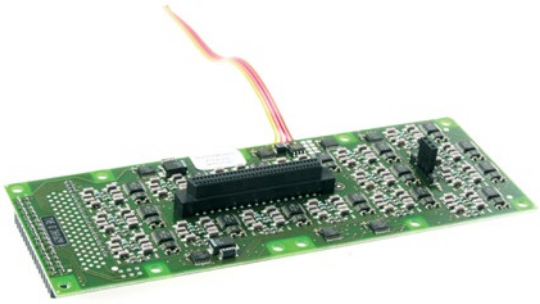

Specifications

MDAQ-FILT-5-Bx	
Filter range (-3 dB) Standard MDAQ-FILT-5-Bx Ordering option MDAQ-FILT-5-BU-S1	 30 Hz, 100 Hz, 300 Hz, 1 kHz, 10 kHz, bypass 100 Hz, 1 kHz, 10 kHz, 30 kHz, 100 kHz, bypass other frequencies on request
Bypass bandwidth	> 700 kHz
Filter characteristics	2-Pole Bessel characteristic 2-Pole Butterworth characteristic
Attenuation slope	40 dB/decade (12 dB/octave)
Filter accuracy	±1.5 dB @ f_c
DC gain	1 (0 dB)
Offset Error	Max. 1 mV (typ <0.2 mV) Max. 0.02% of range with MDAQ-BASE-5
Input voltage range	±10 V_{PP}
Channel separation @ 50 kHz	> 96 dB
Input configuration	Single ended, designed for use with MDAQ-V and MDAQ-BASE-5
Output configuration	Single ended
SNR @ bandwidth	> 100 dB
Output impedance	5 Ohm
Output current	Max. ±20 mA
Output connector	68-pin Amplimite series (AMP Nr. 174339-6), SCSI II Type
Power supply	±7.5 V to ±15 V direct via MDAQ-BASE or -V
Power consumption	Typ. 3 W
Dimensions (W x D x H)	175 x 61 x 14 mm (6.9 x 2.4 x 0.9 in.)

MDAQ-AAF4-5-Bx

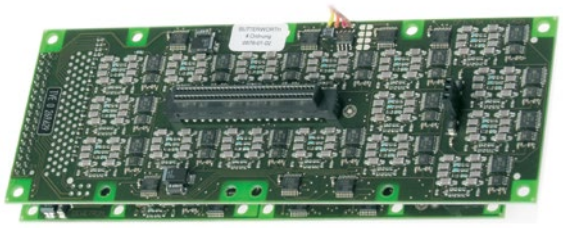

- *MDAQ-AAF4-5-BE: Bessel characteristics*
  MDAQ-AAF4-5-BU: Butterworth characteristics
- *16 channel 4th order low pass filter*
- *5 selectable filters including bypass function*
- *5 different cut off frequencies*
- *Discrete low noise filter design*

Specifications

MDAQ-AAF4-5-Bx	
Filter range (-3 dB) standard ordering option MDAQ-AAF4-5-BU-S1 ordering option MDAQ-AAF4-5-BU-S2 ordering option MDAQ-AAF4-5-BE-S1	 100 Hz, 1 kHz, 10 kHz, 30 kHz, 100 kHz, bypass 163 Hz, 500 Hz, 2.5 kHz, 10 kHz, bypass, bypass 10 Hz, 100 Hz, 1 kHz, 10 kHz, 20 kHz, bypass 100 Hz, 1 kHz, 10 kHz, 20 kHz, 30 kHz, bypass other frequencies on request
Bypass Bandwidth	> 700 kHz
Filter characteristics	Ordering option BE: 4-Pole Bessel characteristic Ordering option BU: 4-Pole Butterworth characteristic
Attentuation slope	80 dB/decade (24 dB/octave)
Filter accuracy	±1.5 dB @ f_0
DC gain	1 (0 dB)
Offset Error	Max. 1 mV (typ <0.2 mV) max. 0.02% of range with MDAQ-BASE-5
Input voltage range [2)]	±10 V_{PP}
Channel separation @ 50 kHz	> 96 dB
Input configuration	Single ended; designed for use with MDAQ-V and MDAQ-BASE-5
Output configuration	Single ended
SNR @ full Bandwidth	> 100 dB
Output impedance	5 Ohm
Output current	Max. ±20 mA
Output connector	68-pin Amplimite series (AMP Nr. 174339-6), SCSI II Type
Power supply	±7.5 V to ±15 V direct via MDAQ-BASE or -V
Power consumption	Typ. 3 W
Dimensions (W x D x H)	175 x 61 x 25 mm (6.9 x 2.4 x 1 in.)


MDAQ-SUB-I-200
Status
www.dewetron.com
MDAQ-SUB-I-200
Status
www.dewetron.com
B0 CNT0 B0 CNT1

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP