

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Electronic Circuit Protector ESX10-T.-DC 24 V

Description

E-T-A's ESX10-T electronic circuit protector is only 12.5 mm wide and selectively protects all DC 24 V load circuits, thereby increasing the uptime of machines and systems. This is achieved by a combination of active electronic current limitation in the event of a short circuit and overload disconnection typically from 1.1 times rated current. The ESX10-T responds faster than frequently used DC 24 V switch mode power supplies without tripping fast and thus prevents disastrous voltage dips of the supply. It works with a single trip curve for all loads. Even capacitive loads up to 75,000 µF can be handled very easily. Besides fixed current ratings from 0.5 A to 12 A, adjustable current rating versions are also available. The integral fail-safe element (fuse) is adjusted to the circuit protector's rated current and can thus very easily be synchronised with the wired cable cross section. This makes planning much easier.

US patent number: US 6,490,141 B2
US 8,237,311 B2



ESX10-TD

Features

- Track-mountable
- Active linear current limitation
- Capacitive loads up to 75,000 µF
- ESX10-TA/-TB: fixed current ratings 0.5 A...12 A
- ESX10-TD: adjustable current ratings, e.g. [0,5 A / 1 A / 2 A]; [2 A / 4 A / 6 A]; [6 A / 8 A / 10 A]
- Approvals: UL, CSA, DNV GL
- OPTION: Control inputs, signalling
- OPTION: ATEX and IECEx-approval

Your benefits

- Increases machine uptime through clear failure detection and stable power supply
- Reduces downtimes through quick fault resolution
- Simplifies planning through clear sizes and ratings
- Saves costs and time through fast and flexible mounting including integral power distribution solution

Preferred types – for more details on all configurations please see order numbering code

Preferred types are E-T-A products most frequently used by E-T-A customers. We manufacture E-T-A preferred types in particularly high volumes. Our preferred types are supplied at shorter lead times than non-standard versions.

Preferred types	Short description	Preferred ratings (A)											
ESX10-TA/-TB	**fixed current rating**	0.5	1	2	3	4	6	8	10	12	0.5/1/2	2/4/6	6/8/10
ESX10-TA-100-DC24V-	without auxiliary contacts	·	·	·	·	·	·	·	·	·	–	–	–
ESX10-TB-101-DC24V-	auxiliary contact "make contact"	·	·	·	·	·	·	·	·	·	–	–	–

ESX10-TD	**adjustable current rating**	0.5	1	2	3	4	6	8	10	12	0.5/1/2	2/4/6	6/8/10
ESX10-TD-101-DC24V-	auxiliary contact "make contact"	–	–	–	–	–	–	–	–	–	·	·	·

Approvals

Information online

For access to the latest documents please follow:

http://www.e-t-a.de/qr1006/

Compliances

Technical data (T_{amb} = 25 °C, U_B = DC 24 V)

Operating data	
Operating voltage U_B	DC 24 V (18...32 V)
Current ratings I_N	**fixed rating:** **types ESX10-TA-... and -TB-...:** 0.5 A, 1 A, 2 A, 3 A, 4 A, 6 A, 8 A, 10 A, 12 A **adjustable current ratings:** **type ESX10-TD-...:** [0.5 A/1 A/2 A], [2 A/4 A/6 A], [6 A/8 A/10 A]
Standby current I_0	in ON condition: typically 20 ... 30 mA depending on signal output
Visual status indication via	• multicoloured LED: **green:** - device is ON (S1 = ON) - load circuit/Power-MOSFET connected **orange:** - overload or short circuit until electronic disconnection **red:** - device switched OFF electronically - load circuit/Power-MOSFET disconnected - undervoltage (U_B < 8 V) - after switch-on until the end of the switch-on delay period **OFF:** - manually switched off (S1 = OFF) or device is dead-voltage • status output SF (optional) • potential-free signal contact F (optional) • On/off position of the switch S1
Load circuit	
Load output	power MOSFET switching output (plus switching)
Overload disconnection (OL)	typically 1.1 x I_N (1.05...1.35 x I_N)
Short circuit current I_K	active current limitation with I_{Limit} = typically 1.8/1.5/1.4/1.3 x I_N, I_{Limit} depending on I_N (typically I_{Limit} - values, see table 1)
Trip times	see time/current characteristic
Trip thresholds/trip times (t_1, t_2) at overcurrent (I_{Limit} see table 1)	**1. threshold:** at I_{load} > typically 1.1 x I_N...I_{Limit} : t_1 = typically 3 s **2. threshold:** at I_{load} = I_{Limit} : t_2 = typically 100 ms...3 s
Temperature disconnection	internal temperature monitoring with electronic disconnection
Low voltage monitoring of load output	with hysteresis, no reset required load “OFF” at U_B < 8 V
Switch-on delay t_{Start} after applying of U_B	typically 0.5 s after each ON operation, after reset and
Disconnection of load circuit	electronic disconnection after overload/short circuit

Technical data (T_{amb} = 25 °C, U_B = DC 24 V)

Free-wheeling diode	external free-wheeling diode recommended for inductive load
Parallel connection of several load outputs not permitted	
Signal output F	**ESX10-T.-101/-102**
Electrical data	potential-free auxiliary change-over contact max. DC 30 V/0.5 A min. 10 V/10 mA
Standard condition LED green	U_B is applied and switch S1 is ON and no overload, no short circuit
OFF condition, LED off	• device switched off (switch S1 to OFF) • no operating voltage U_B
Fault condition LED orange until electronic disconnection	overload conditions > 1.1 times I_N
Fault condition LED red	electronic disconnection after overload or short circuit
ESX10-TB-101	single signal, make contact contact open, terminal 13-14
ESX10-TB-102	single signal, make contact contact closed, terminal 11-12
Error	signal output is in fault condition, if • there is no operating voltage U_B • the ON/OFF switch S1 is in OFF position • the red LED is lighted (electronic disconnection)
Status output SF	**ESX10-T.-114/-124/-127**
Electrical data	plus switching signal output, connects U_B to pin 23 Current ratings: DC 24 V/max. 0.2 A (short circuit proof) The status output is connected internally with a 10 kOhm resistor against 0 V.
Status OUT	ESX10-TB-114/-124 (signal status OUT), at U_B = + 24 V + 24 V = S1 is ON, load output connected 0 V = S1 is ON, load output locked and/ or switch S1 is OFF red LED lighted
Status $\overline{\text{OUT}}$	ESX10-TB-127 (signal status OUT inverted), at U_B = + 24 V + 24 V = S1 is ON, load output locked red LED lighted. 0 V = S1 is ON, load output connected and/or switch S1 is OFF.
OFF condition	0 V level at status output whenever: • switch S1 is in ON position, but device is still in ON delay • switch S1 in OFF position, or control signal OFF, device is switched off • No operating voltage U_B
Reset input RE	**ESX10-T.-124/-127**
Electrical data	voltage max. DC 32 V High > DC 8 V ≤ DC 32 V Low < DC 3 V > 0 V current consumption typically 2.6 mA (DC 24 V) min. pulse duration 10 ms

Technical data (T_{amb} = 25 °C, U_B = DC 24 V)

Reset signal RE terminal 22	with the falling edge of a + DC 24 V pulse the electronically blocked ESX10-TB-124/-127 can be reset via an external momentary switch. A joint reset signal can also be applied to more than one device at a time. Devices in ON condition will remain unaffected.
Control input I_N+	**ESX10-T-114**
Electrical data	as reset input RE
Control signal I_N+ on by a Terminal 21	+24 V level (HIGH): device is switched remote ON/OFF signal. 0 V level (LOW) device is switched off by a remote ON/OFF signal.
Switch S1 ON/OFF when a HIGH level is applied to I_N+	device can only be S1 switched on
LED indication	ON: LED green OFF: LED red
General data	
Fail-safe element	back-up fuse for ESX10-T not required, due to an integral redundant fail-safe element (protective element)
Terminals	**LINE+ / LOAD+ / 0V**
screw terminals	M4
max. cable cross section	
rigid and flexible	0.5 - 16 mm²
flexible with wire end ferrule w/wo plastic sleeve	0.5 mm – 10 mm²
stripping length	10 mm
tightening torque (EN60934)	1.5 - 1.8 Nm
multi-lead connection (2 identical cables)	
rigid / flexible	0.5 – 4 mm²
flexible with wire end ferrule without plastic sleeve	0.5 – 2.5 mm²
flexible with TWIN wire end ferrule with plastic sleeve	0.5 – 6 mm²
Terminals	**signal terminals**
Screw terminals	M3
max. cable cross section	
flexible with wire end ferrule w/wo plastic sleeve	0.25 – 2.5 mm²
stripping length	8 mm
tightening torque (EN60934)	0.5 - 0.6 Nm
Housing material	moulded
Mounting	symmetrical rail to EN 60715-35x7.5
Ambient temperature	-25...60 °C [1] (without condensation, cf. EN 60204-1) [1] ambient temperature range can differ depending on approvals.
Storage temperature	-40...70 °C
Humidity	96 hrs / 95% RH 40°C to IEC 60068-2-78, test Cab climate class 3K3 to EN60721
Vibration	3g test to IEC 60068-2-6, test Fc
Protection class	housing IP20 EN60529 terminals IP20 DIN 60529

Technical data (T_{amb} = 25 °C, U_B = DC 24 V)

EMC requirements (EMC directive, CE marking)	noise emission EN 61000-6-3 noise immunity: EN 61000-6-2
Insulation co-ordination (IEC 60934)	0.5 kV / pollution degree 2 reinforced insulation at operating area
Dielectric strength	max. DC 32 V (load circuit)
Insulation resistance (OFF condition:)	n/a, only electronic disconnection
Conformity	CE marking to 2014/30/EU
Dimensions (w x h x d)	12.5 x 80 x 83 mm
Mass	approx. 65 g

Preferred types

Preferred types are E-T-A products most frequently used by E-T-A customers. We manufacture E-T-A preferred types in particularly high volumes. Our preferred types are supplied at shorter lead times than non-standard versions.

Preferred types	Short description	Preferred ratings (A)											
ESX10-TA/-TB	**fixed current rating**	**0.5**	**1**	**2**	**3**	**4**	**6**	**8**	**10**	**12**	**0.5/1/2**	**2/4/6**	**6/8/10**
ESX10-TA-100-DC24V-	without auxiliary contacts	·	·	·	·	·	·	·	·	·	–	–	–
ESX10-TB-101-DC24V-	auxiliary contact “make contact”	·	·	·	·	·	·	·	·	·	–	–	–

ESX10-TD	**adjustable current rating**	**0.5**	**1**	**2**	**3**	**4**	**6**	**8**	**10**	**12**	**0.5/1/2**	**2/4/6**	**6/8/10**
ESX10-TD-101-DC24V-	auxiliary contact “make contact”	–	–	–	–	–	–	–	–	–	·	·	·

Order numbering code

Type No.
ESX10 Electronic Circuit Protector, with current limitation
- **Mounting**
  - **TA** rail mounting, without aux. contact
  - **TB** rail mounting, with signal contact and hole for signal busbars
  - **TD** Version: rail mounting, with auxiliary contact and slide actuation for 3-step current rating adjustment
- **Version**
  - **1** without physical isolation
- **Signal input**
  - **0** without signal input
  - **1** with control input IN+ (only ESX10--114)
  - **2** reset input RE (only -124, -127)
- **Signal output**
  - **0** without signal output (only ESX10-TA)
  - **1** signal make contact
  - **2** signal break contact
  - **4** status output SF (only -114, -124)
  - **7** status output inverted (only ESX10-T-127)
- **Operating voltage**
  - **DC 24 V** voltage rating DC 24 V
- **Current ratings**
  - **0.5 A**
  - **1 A**
  - **2 A**
  - **3 A**
  - **4 A**
  - **6 A**
  - **8 A**
  - **10 A**
  - **12 A**
  - **16 A** (only ESX10-TB-101)
  - **0.5/1/2 A** adjustable (only ESX10-TD-...-X278)
  - **2/4/6 A** adjustable (only ESX10-TD-...-X279)
  - **6/8/10 A** adjustable (only ESX10-TD-...-X280)
  - **2/3/4 A** adjustable (only ESX10-TD-101/102-...-X282)

ESX10 - TB - 1 0 1 - DC 24 V - 6 A ordering example

Caution!
Please observe separate data sheet for ESX10-TB-101-DC 24 V-16 A.

Description of ESX10-T signal inputs /outputs see wiring diagrams.

Custom designed versions

Looking for a version you cannot find in our ordering number code? Please get in touch. We will be pleased to find a solution for you.

Ordering number code for ATEX version ...-E

Type No.
ESX10 Electronic Circuit Protector, with current limitation
- **Mounting**
  - **TA** rail mounting, without aux. contact
  - **TB** rail mounting, with aux. contact
- **Version**
  - **1** without physical isolation
- **Signal input**
  - **0** without signal input
  - **1** with control input IN+ (only ESX10-T.-114)
  - **2** with reset input RE (only ESX10-T.-124, ESX10-T.-127)
- **Signal output**
  - **0** without signal output (only ESX10-TA)
  - **1** signal make contact
  - **2** signal break contact
  - **4** status output SF (only -114, -124)
  - **7** status output inverted (only ESX10-T-127)
- **Operating voltage**
  - **DC 24 V** voltage rating DC 24 V
- **Current ratings**
  - **0.5 ... 12 A**
- **Approvals**
  - **E** ATEX / IECEx

ESX10 -TB- 1 0 1-DC 24 V- 6 A - E ordering example

Table 1: Voltage drop, current limitation, max. load current

current rating I_N	typical voltage drop U_{ON} at I_N	active current limitation I_{Limit} (typically)	max. load current at 100 % ON duty, U_B DC 24 V T_{amb} = 40 °C T_{amb} = 60 °C	T_U = 50 °C	
0.5 A	70 mV	1.8 x I_N	0.5 A	0.5 A	0.5 A
1 A	80 mV	1.8 x I_N	1 A	1 A	1 A
2 A	130 mV	1.8 x I_N	2 A	2 A	2 A
3 A	80 mV	1.8 x I_N	3 A	3 A	3 A
4 A	100 mV	1.8 x I_N	4 A	4 A	4 A
6 A	130 mV	1.8 x I_N	6 A	6 A	6 A
8 A	120 mV	1.5 x I_N	8 A	8 A	8 A
10 A	150 mV	1.5 x I_N	10 A	10 A	9.8 A
12 A	180 mV	1.3 x I_N	12 A	11 A	9.8 A
[0.5/1/2 A]	70/80/130 mV	1.4 x I_N	0.5/1/2 A	0.5/1/2 A	0.5A/1A/2A
[2/3/4 A]	130/80/100 mV	1.4 x I_N	2/3/4 A	2/3/4 A	2A/3A/4A
[2/4/6 A]	130/100/130 mV	1.4 x I_N	2/4/6 A	2/4/6 A	2A/4A/6A
[6/8/10 A]	130/120/150 mV	1.4 x I_N	6/8/10 A	6/8/10 A	6A/8A/9.8A

Note:
When mounted side-by-side without convection, the devices can only carry max. 80 % of their rated current continuously (100 % ON duty) due to the thermal effect.


Table 2: ESX10-T – product versions

Version		Signal input			Signal output					
					Signal output F (signal contact)			Status output SF		
ESX10-..		w/o	control input ON/OFF +24 V Control IN+	reset input +24 V ↓RE	w/o	single signal make contact (normally open NO)	single signal break contact (normally closed NC)	w/o	status OUT +24 V = OK	status OUT 0 V = OK
-TA	-100	x	–	–	x	–	–	x	–	–
-TB/-TD	-101	x	–	–	–	x	–	x	–	–
-TB/-TD	-102	x	–	–	–	–	x	x	–	–
-TB/-TD	-114	–	x	–	–	–	–	–	x	–
-TB/-TD	-124	–	–	x	x	–	–	–	x	–
-TB/-TD	-127	–	–	x	x	–	–	–	–	x


Notes

- The user has to ensure that the cable cross section of the load circuit in question complies with the current rating of the ESX10-T used.
- In addition special precautions have to be taken in the system or machinery to exclude automatic re-start (e.g. by using a safety PLC) (cf. Machinery Directive 2006/42/EG und EN 60204-1, Safety of Machinery). In the event of a failure (short circuit/ overload) the load circuit will be disconnected electronically by the ESX10-T.

Connection diagram ESX10-TB-6A (example)

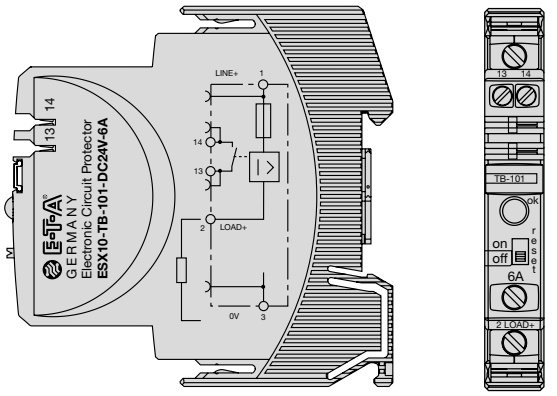

Connection and actuation ESX10-Tx

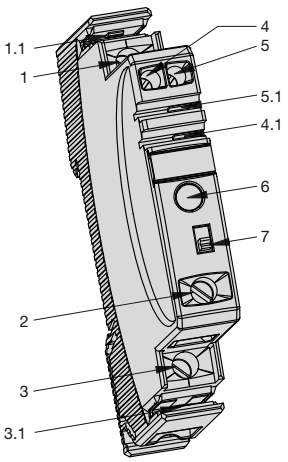

1	LINE + 1 DC 24 V
1.1	LINE + 1 (busbar)
2	LOAD +
3	0 V
3.1	0 V (busbar)
4	13 depending on the version, see data sheet
4.1	13 depending on the version, see data sheet
5	14 depending on the version, see data sheet
6	status LED
7	ON/OFF button (reset)

Approvals

ESX10-TA/-TB and -TD					
Approval authority	**Standard**	**File certificate no.**	**Voltage rating**	**Current rating range**	**Certified temperature range**
Bureau Veritas	ATEX (EU Directive 2014/34/EU) EN 60079-0 EN 60079-7 EN 60079-15	EPS 18 ATEX 1 127 X	DC 24 V	0.5 A...12 A	-20...60 °C
UL	UL 2367	E306740	DC 24 V	0.5 A...12 A	0...50 °C
UL	UL 121201 (Class **I**, Division 2, Groups A, B, C, D)	E320024	DC 24 V	0.5 A...12 A	0...50 °C
UL	UL 508 CSA C22.2 No 14	E322549	DC 24 V	0.5 A...12 A	0...50 °C
DNV GL	CG-0339 (classes: temperature, vibration: B*); humidity, EMC: A) *with busbars	TAE000025Y	DC 24 V	0.5 A...12 A	0...50 °C
ESX10-TA and -TB					
Approval authority	**Standard**	**File certificate no.**	**Voltage rating**	**Current rating range**	**Certified temperature range**
CSA	CSA C22.2 No 213-M (Class **I**, Division 2, Groups A, B, C, D)	016186	DC 24 V	0.5 A...12 A	0...50 °C
IECEx	IEC 60079-0 IEC 60079-7 IEC 60079-15	IECEx EPS 18.0059X	DC 24 V	0.5 A...12 A	-20...60 °C

Declaration of Conformity for ATEX version ESX10-TA/-TB-...-E

E-T-A ENGINEERING TECHNOLOGY

E-T-A Elektrotechnische Apparate GmbH

EU-Konformitätserklärung Nr. 100.218.1053-01

Declaration of Conformity

Wir / We: **E-T-A Elektrotechnische Apparate GmbH**, Industriestraße 2-8, D-90518 Altdorf, Germany

(Name und Anschrift des Anbieters / supplier's name and address)

erklären in alleiniger Verantwortung, dass das Produkt / declare under our sole responsibility that the product

Elektronische Schutzschalter / Electronic circuit-breaker

Typ/type:

ESX10-1...-E
ESX10-TA...-E
ESX10-TB...-E
ESX10-TC... -E

(Bezeichnung, Typ/Modell, evtl. Spezifikation/ name, type/model, optionally specification)

auf das sich diese Erklärung bezieht, mit den wesentlichen Anforderungen folgender Richtlinie(n) übereinstimmt: / to which this declaration relates, is in conformity with the essential requirements of following Directive(s)

Diese Konformitätserklärung folgt den grundlegenden Anforderungen der Norm EN ISO/IEC 17050-1:2010 Konformitätsbewertung - Konformitätserklärung von Anbietern – Teil 1: Allgemeine Anforderungen.

This Declaration of Conformity is following the basic requirements of the standard EN ISO/IEC 17050-1:2010 Conformity assessment - Supplier's declaration of conformity – Part 1: General requirements.

2014/30/EU — EMV-Richtlinie / EMC directive

2014/34/EU — ATEX-Richtlinie / ATEX directive

2011/65/EU — Beschränkung bestimmter gefährlicher Stoffe (RoHS) / Restriction of hazardous substances (RoHS)

Zur Beurteilung der Übereinstimmung wurde(n) folgende Norm(en) oder normativen Dokumente herangezogen: / For evaluation of the conformity following standard(s) or normative document(s) were consulted:

EN 61000-6-2: 2005 Elektromagnetische Verträglichkeit (EMV) Teil 6-2: Fachgrundnormen – Störfestigkeit für Industriebereiche / Electromagnetic compatibility (EMC) Part 6-2: Generic standards – Immunity for industrial environments

EN 61000-6-3: 2007 +A1:2011 Elektromagnetische Verträglichkeit (EMV) Teil 6-3: Fachgrundnormen – Störaussendung für Wohnbereich, Geschäfts- und Gewerbebereiche sowie Kleinbetriebe / Electromagnetic compatibility (EMC) Part 6-3: Generic standards – Emission standard for residential, commercial and light-industrial environments

EN 60079-0:2012+A11:2013 Explosionsgefährdete Bereiche - Teil 0: Betriebsmittel - Allgemeine Anforderungen/ Explosive atmospheres - Part 0: Equipment - General requirements

EN 60079-7: 2015 Explosionsfähige Atmosphäre - Teil 7: Geräteschutz durch erhöhte Sicherheit "e" / Explosive atmospheres - Part 7: Equipment protection by increased safety "e"

EN 60079-15:2010 Explosionsfähige Atmosphäre - Teil 15: Geräteschutz durch Zündschutzart "n" / Explosive atmospheres - Part 15: Equipment protection by type of protection "n"

E-T-A Elektrotechnische Apparate GmbH • Tel. +49 9187 100 • Fax +49 9187 10398

1/2 form: KE_01.12.2015

E-T-A ENGINEERING TECHNOLOGY

E-T-A Elektrotechnische Apparate GmbH

EN ISO/IEC 80079-34:2011 Explosionsgefährdete Bereiche - Teil 34: Anwendung von Qualitätsmanagementsystemen für die Herstellung von Ex-Produkten / Explosive atmospheres. Application of quality systems for equipment manufacture

EN 50581:2012 Technische Dokumentation zur Beurteilung von Elektro- und Elektronikgeräten hinsichtlich der Beschränkung gefährlicher Stoffe / Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances

(Titel und/oder Nr. sowie Ausgabedatum der Norm(en) oder der anderen normativen Dokumente / Title and /or number and date of issue of the standard(s) or other normative document(s)

Altdorf, 19.September 2018

(Ort und Datum der Ausstellung / Place and date of issue)


ppa. Ralf Dietrich (Mitglied der Geschäftsleitung)

(Name, Position und Unterschrift oder gleichwertige Kennzeichnung des Befugten / name, position and signature or equivalent of authorized person)


E-T-A Elektrotechnische Apparate GmbH • Tel. +49 9187 100 • Fax +49 9187 10398

2/2 form: KE_01.12.2015


Dimensions ESX10-TA

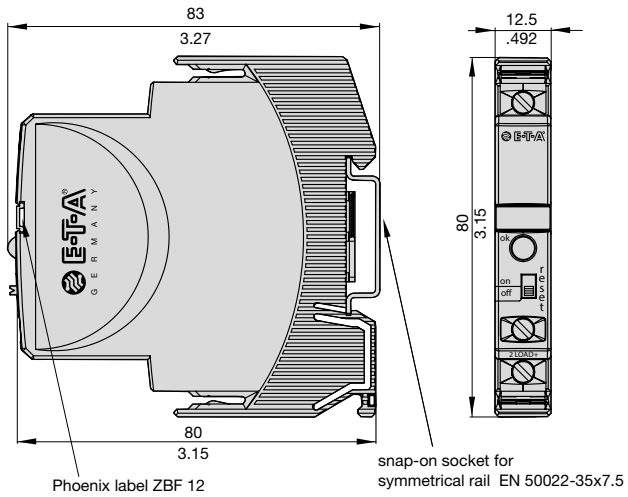

Dimensions ESX10-TB

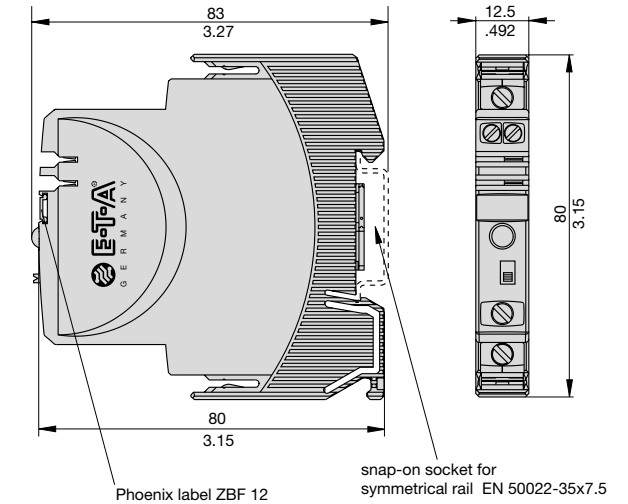

Dimensions ESX10-TD

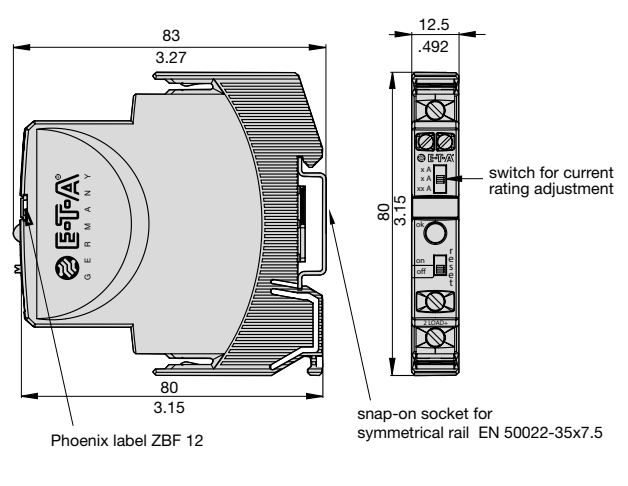

Information on UL and CSA approvals

ESX10-TA / -TB
UL 121201
UL File # E320024

ESX10-TA / -TB / -TD
UL2367
Solid State Overcurrent Protectors
UL File # E306740

UL 508, CSA C22.2 No: 14
Auxiliary Devices - Industrial Control Equipment
UL File # E322549

E322549
INDUSTRIAL CONTROL EQUIPMENT

Operating Temperature Code T4
- This equipment is suitable for use in Class **I**, Division 2, Groups A, B, C and D or non-hazardous locations only. T4 A / 0°C to 50°C

WARNING – EXPLOSION HAZARD:
- Do not disconnect equipment unless power has been removed or the area is known to be non-hazardous.


This device is OPEN type equipment that must be used within a suitable end-use system enclosure, the interior of which is accessible only through the use of a tool. The suitability of the enclosure is subject to investigation by the local Authority Having Jurisdiction at the time of installation.

Wiring to or from this device, which enters or leaves the system enclosure, must utilize wiring methods suitable for Class **I**, Division 2 Hazardous Locations, as appropriate for the installation.


ESX10-TA / -TB
CSA C22.2 No: 14
CSA C22.2 No: 213
(Class **I**, Division 2, Group A, B, C, D) - File # 016186

ESX10-T signal inputs / outputs / (wiring diagrams)

ESX10-TA-100
without signal input/output

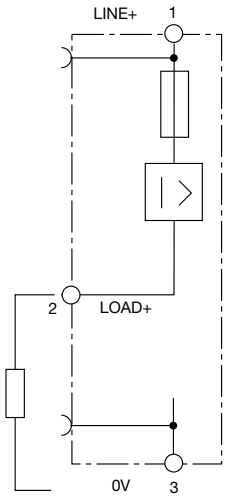


ESX10-TB-101
without signal input
with signal output F
(single signal, N/O)

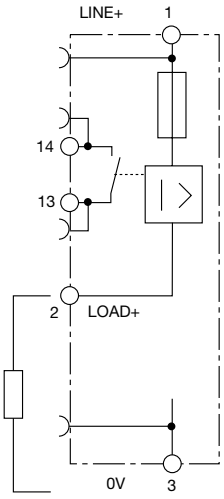


operating condition: 13-14 closed
fault condition: 13-14 open

ESX10-TB-102
without signal input
with signal output F
(single signal, N/C)

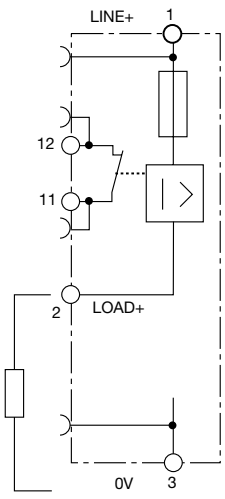


operating condition: 11-12 open
fault condition: 11-12 closed

ESX10-TB-114
with control input IN+
(+DC 24 V)
with status output SF
(+24 V = load output ON)

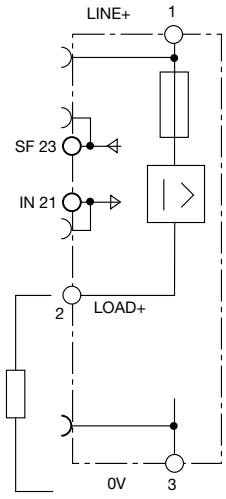


operating condition: SF +24 V = OK
fault condition: SF 0 V

ESX10-TB-124
with reset input RE
(+DC 24 V ↓)
with status output SF
(+24 V = load output ON)

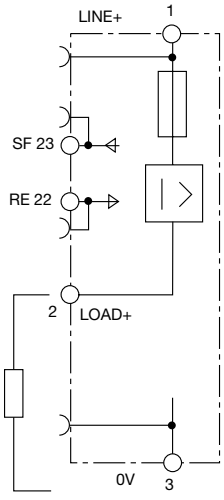

operating condition: SF +24 V = OK
fault condition: SF 0 V


ESX10-TB-127
with reset input RE
(+DC 24 V ↓)
with inverse status output SF
(0 V = load output ON)

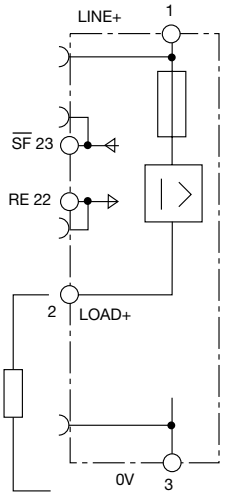

operating condition: SF 0 V = OK
fault condition: SF +24 V

ESX10-TD
Wiring diagram similar to ESX10-TB without busbars (on the front)

Typical time/current characteristic (T_{amb} = 25 °C)

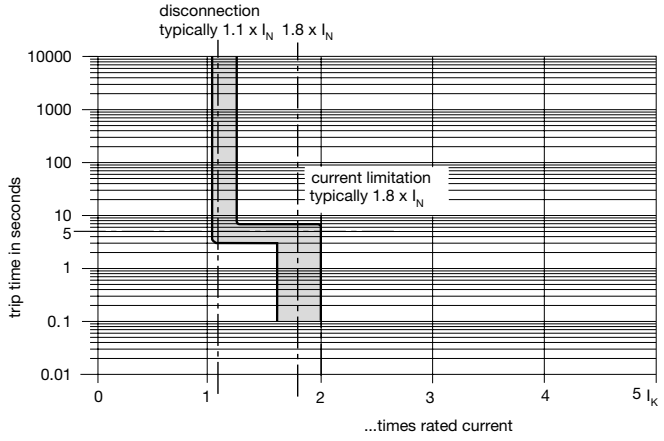



- In a range of 1.1...1.8 x I_N*1) the trip time is typically 3 s. (e.g. ESX10-TB-...-6 A)
- The electronic current limitation typically begins in at 1.8 x IN. This means: under all overload conditions (independent of power supply and load circuit resistance) **typically 1.8 times rated current is applied until disconnection.** The corresponding current limitation value I_{Limit} depends on the current rating of the device I_N (see table 1) The trip time varies between 100 ms and 3 s depending on the multiple of the current rating or at short circuit (I_K).
- Without the current limitation getting into effect at typically 1.8 x I_N there would be a much higher overcurrent in the event of an overload or short circuit.


Table 3: Reliable disconnection of the ESX10-T

Reliable disconnection of the ESX10-T at different cable lengths and cable cross sections							
Resistivity copper ρ_0 = 0.0178 (Ohm x mm²) / m							
U_B = DC 19.2 V (= 80 % v. 24 V)	Voltage drop on ESX10-T and tolerance of the shut-off point (typically 1.1 x I_N **=1.05...1.35 x I_N**) has already been taken into account.						
ESX10-T current rating adjustment I_N (in A) →	**3**	**6**					
e. g. trip current I_{ab} = 1.25 x I_N (in A) →	3.75	7.5	→ **ESX10-T trips after 3 s**				
R_{max} in Ohm = (U_B / I_{ab}) - 0.050	**5.07**	**2.51**					
ESX10-T reliably trips from 0 Ω to the max. circuit resistance R_{max}							
cable cross section **A** in mm² →	0.14	0.25	0.34	0.5	0.75	1	1.5
distance **L** in metres (= one-way length)	**total cable resistance in Ohm = (R_0 x 2 x L) / A**						
5	1.27	0.71	0.52	0.36	0.24	0.18	0.12
10	2.54	1.42	1.05	0.71	0.47	0.36	0.24
15	3.81	2.14	1.57	1.07	0.71	0.53	0.36
20	5.09	2.85	2.09	1.42	0.95	0.71	0.47
25	6.36	3.56	2.62	1.78	1.19	0.89	0.59
30	7.63	4.27	3.14	2.14	1.42	1.07	0.71
35	8.90	4.98	3.66	2.49	1.66	1.25	0.83
40	10.17	5.70	4.19	2.85	1.90	1.42	0.95
45	11.44	6.41	4.71	3.20	2.14	1.60	1.07
50	12.71	7.12	5.24	3.56	2.37	1.78	1.19
75	19.07	10.68	7.85	5.34	3.56	2.67	1.78
100	25.34	14.24	10.47	7.12	4.75	3.56	2.37
125	31.79	17.80	13.09	8.90	5.93	4.45	2.97
150	38.14	21.36	15.71	10.68	7.12	5.34	3.56
175	44.50	24.92	18.32	12.46	8.31	6.23	4.15
200	50.86	28.48	20.94	14.24	9.49	7.12	4.75
225	57.21	32.04	23.56	16.02	10.68	8.01	5.34
250	63.57	35.60	26.18	17.80	11.87	8.90	5.93
Example 1:	max. distance at 1.5 mm² and 3 A → **214 m**						
Example 2:	max. distance at 1.5 mm² and 6 A → **106 m**						
Example 3:	mixed wiring: R1 = 40 m in 1.5mm² 2 and R2 = 5 m in 0.25mm² : (control cabinet - sensor/actuator level)R1 = 0.95 Ohm, R2 = 0.71 Ohm **Total (R1 + R2) = 1.66 Ohm**						

Mounting examples for ESX10-T

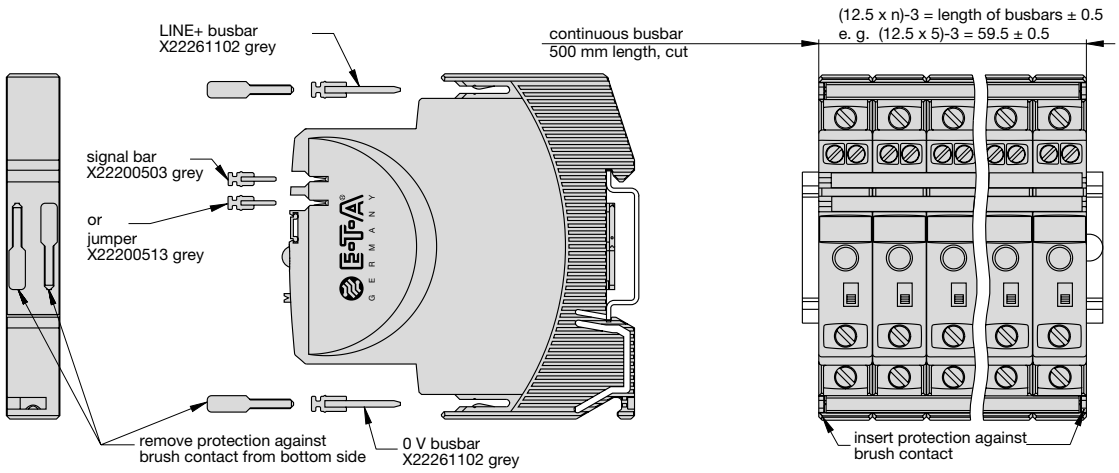

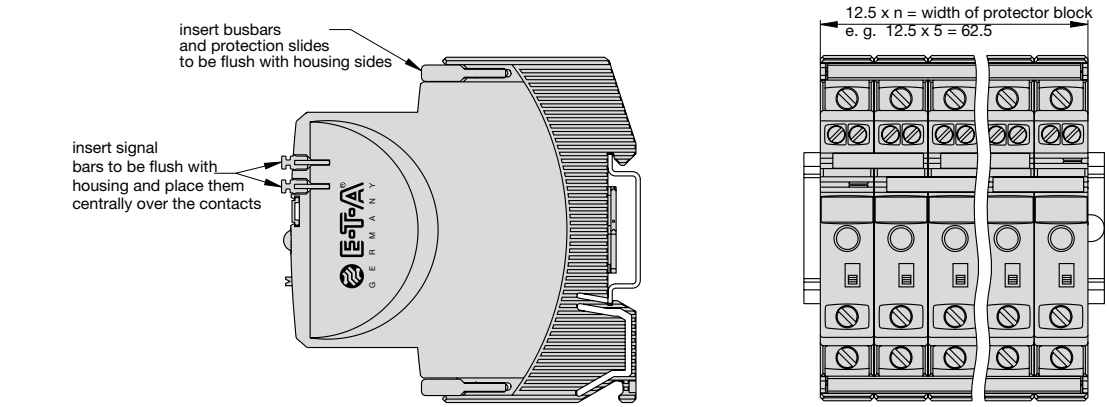

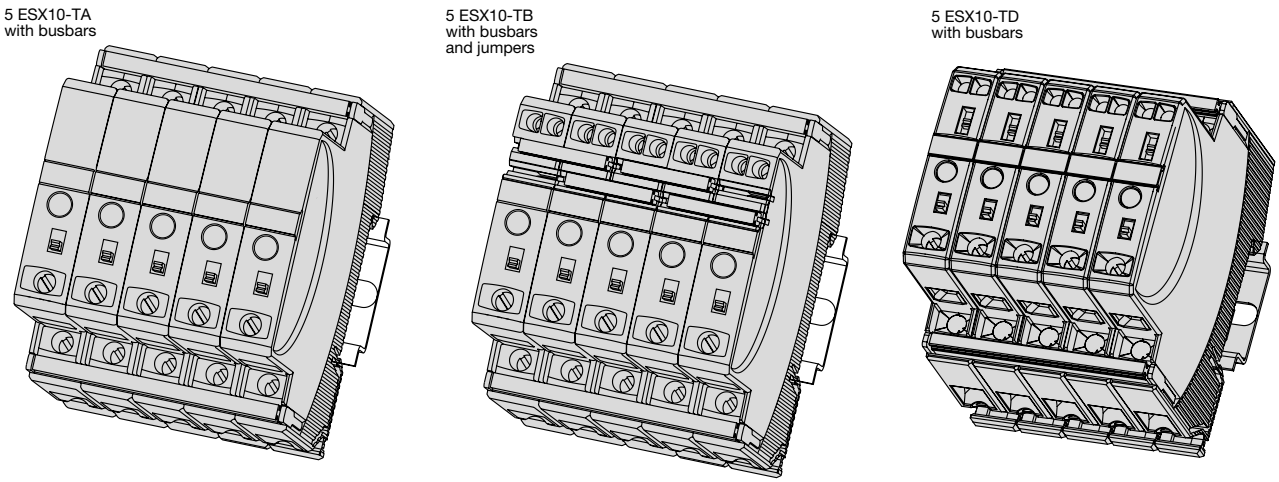

Description of installation:
With a block of devices the busbars have to be inserted before wiring.
Max. 10 plug-in cycles for busbars allowed.

Recommendation:
The line entry busbars and signal busbars should be interrupted after 10 devices and line entry should start anew.

Table of busbar lengths
(X 222 611 02 and X 222 005 03 or their cut lengths - see accessories)


Number of devices	2	3	4	5	6	7	8	9	10
Length of rail [mm] ± 0,5 mm	22	34.5	47	59.5	72	84.5	97	109.5	122

Wiring diagrams, application examples ESX10-T

Connection diagrams and application examples ESX10-T...


Signal contacts are shown in OFF or fault condition.

ESX10-TA-100

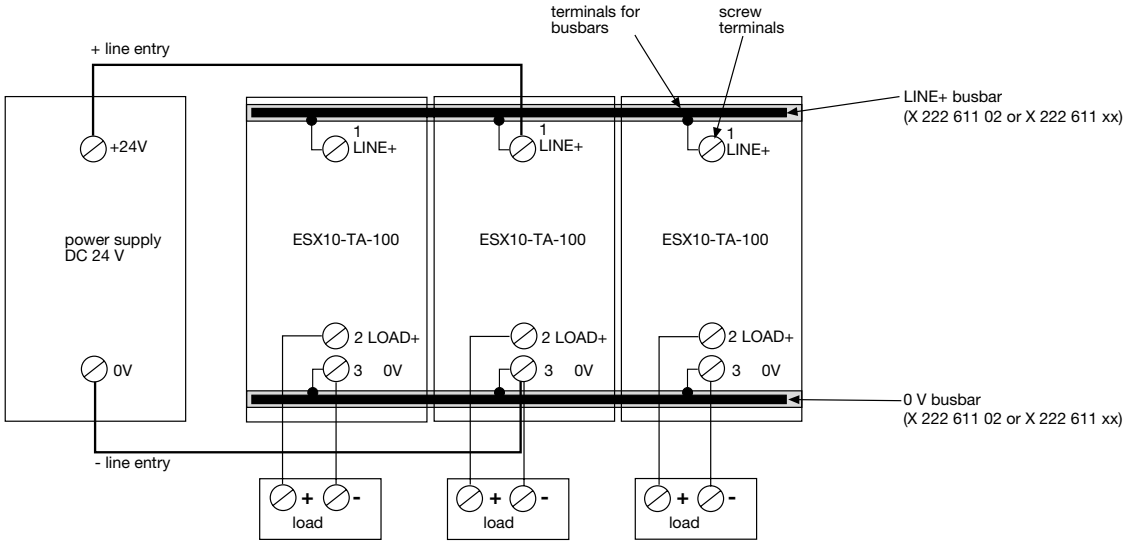

ESX10-TB-101


group signalling (series connection)

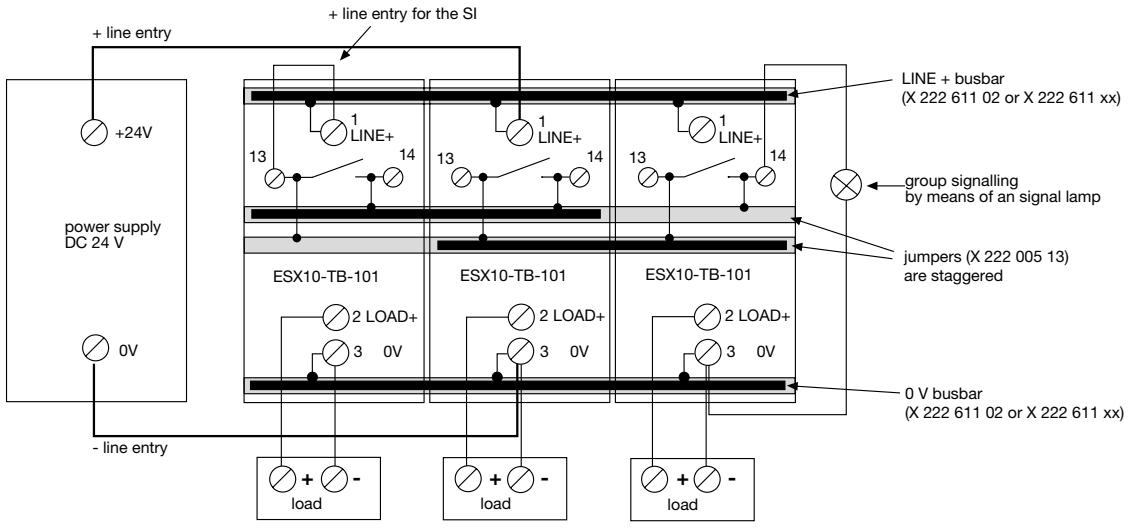

Wiring diagrams, application examples ESX10-T


ESX10-TB-102

Single signalling with common line entry

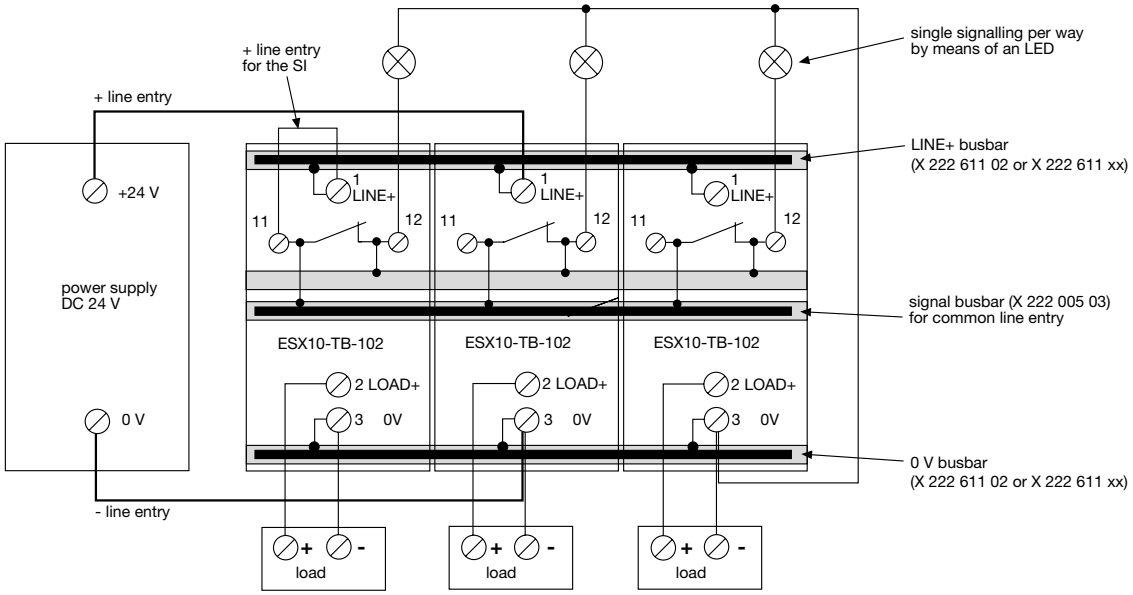

ESX10-TB-124

Single signalling with common reset

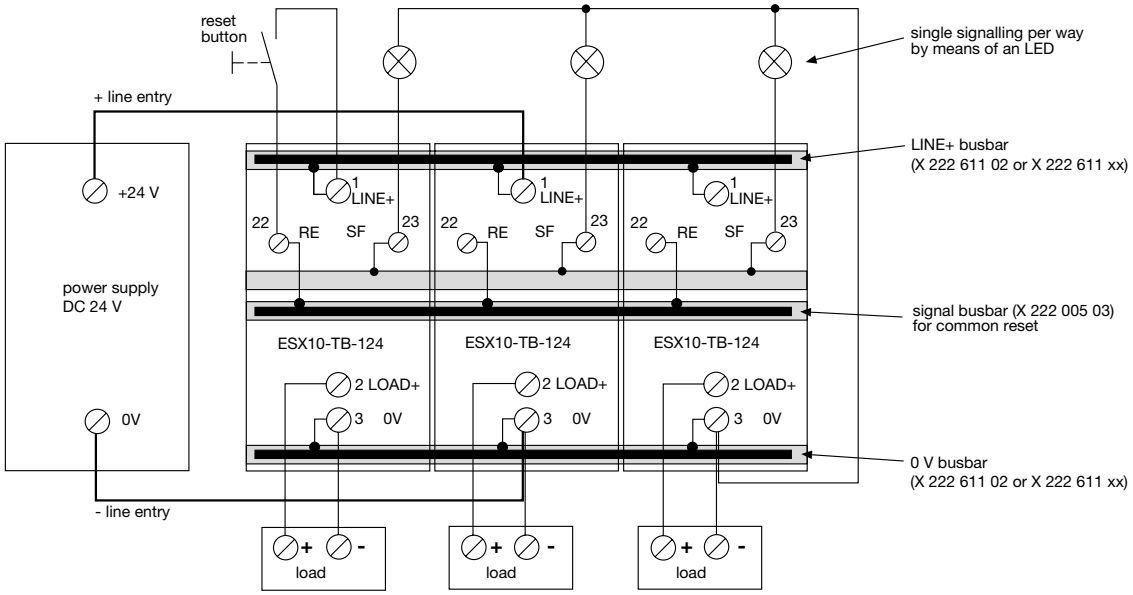


Wiring diagrams, application examples ESX10-T


Applications examples: line entry DC 24 V with protection of signal circuit and direct connection of loads

Auxiliary contacts are shown on the OFF of fault condition

ESX10-TB-101
Group signalisation (series connection)
Type ESX10-TA-100-DC24V-0.5A can be used as a supply module including protection of auxiliary circuit
Optional: passive supply module AD-TX-EM01 (without protection)

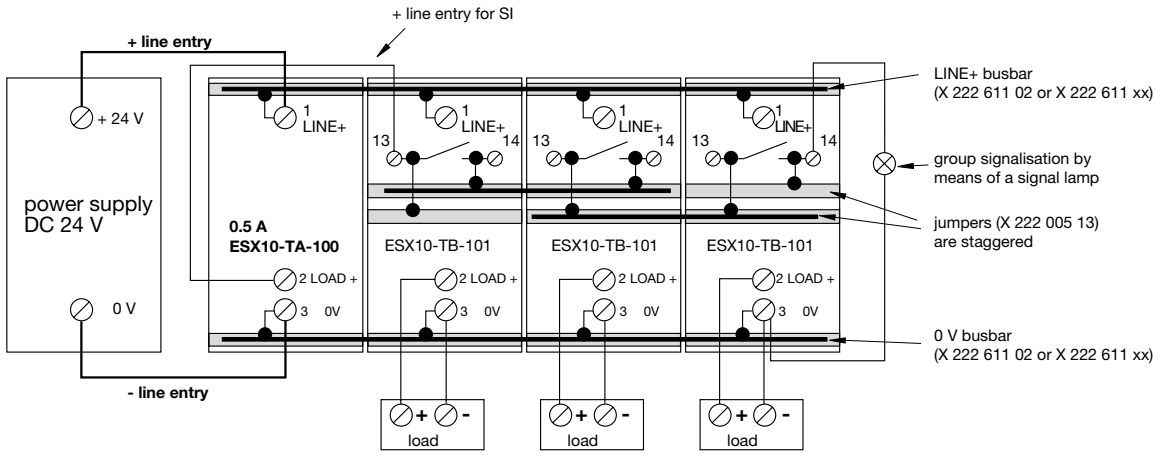

ESX10-TB-102
Single signalisation with common line entry
Type ESX10-TA-100-DC24V-0.5A can be used as a supply module including protection of auxiliary circuit
Optional: passive supply module AD-TX-EM01 (without protection)

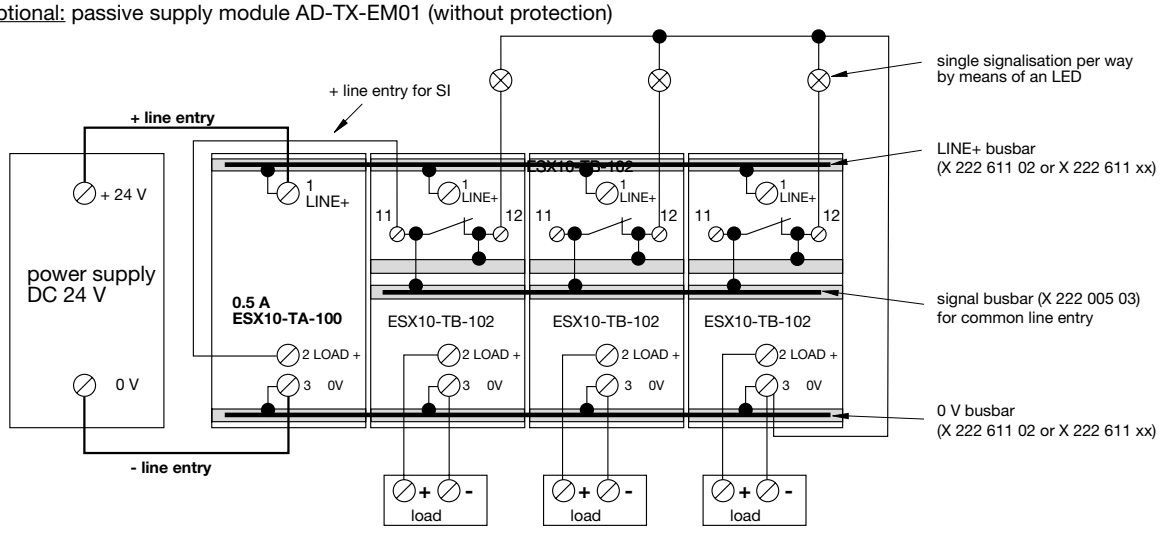


Description

The ESX10-T has an integral power distribution system. The following wirings can be carried out with different plug-in type busbars:

- LINE +(DC 24 V)
- 0 V
  Important: The electronic devices ESX10-T require a 0 V connection.
- Auxiliary contacts
- Reset inputs

Accessories


Busbars for LINE+ and 0 V
ampacity with one input I_{max} 50 A
(recommendation: central supply)
ampacity with two inputs I_{max} 63 A
grey insulated, length: 500 mm
part no. X 222 611 02




Busbars for LINE+ and 0 V
grey insulated
max. 10 plug-in cycles allowed

X 222 611 22 (block of 2 ESX10-Ts), length: 22 mm
X 222 611 34 (block of 3 ESX10-Ts), length: 34.5 mm
X 222 611 47 (block of 4 ESX10-Ts), length: 47 mm
X 222 611 59 (block of 5 ESX10-Ts), length: 59.5 mm
Packaging unit: 10 pcs


X 222 611 72 (block of 6 ESX10-Ts), length: 72 mm
X 222 611 97 (block of 8 ESX10-Ts), length: 97 mm
X 222 611 12 (block of 10 ESX10-Ts), length: 122 mm
Packaging unit: 4 pcs




Signal busbars for aux. contacts and reset inputs
suitable for signal busbars ESX10-TB-...
ampacity with one input I_{max} 1 A
with aux. contacts connected in series I_{max} 0.5 A
grey insulated, length: 500 mm
part no. X 222 005 03

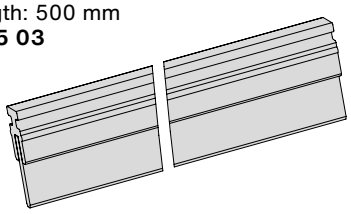


Busbars for auxiliary contacts
suitable for signal busbars ESX10-TB-...
grey insulated, length: 21 mm
part no. X 222 005 13
Packaging unit: 10 pcs



Insulated wire bridge (for aux. contact)
optional as jumper for ESX10-TB-101.../ESX10-TD-101...
for group signalling
(series connection of make contacts 13 - 14)
X 223 108 01
Packaging unit: 10 pcs



Connector bus link –K10
suitable for auxiliary contacts (series connection)
X 210 589 02 (1.5 mm², brown),




Accessories

Passive supply module for LINE+ and 0 V (without protection)

Ampacity I_{max} 50 A
Max. cable cross section see ESX10-T

part no. AD-TX-EM01

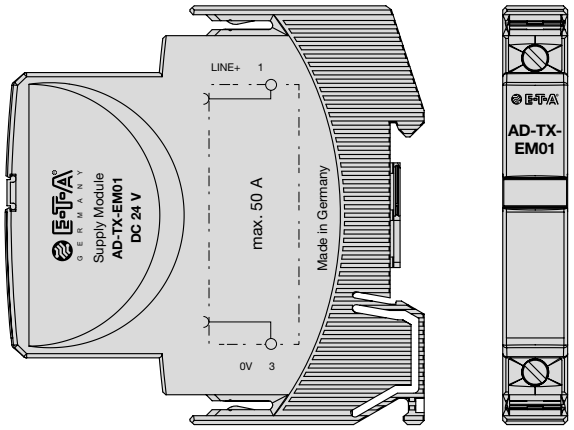


Labels, pack of 10
suitable for ESX10-TD, cover of current rating adjustment
Y 309 705 11 (0.5 A, 1 A, 2 A)
Y 309 705 12 (2 A, 4 A, 6 A)
Y 309 705 13 (6 A, 8 A, 10 A)
Y 309 705 14 (2 A, 3 A, 4 A)



Labels, pack of 30
suitable for ESX10-TD , cover of current rating adjustment
Y 309 705 21 (0.5 A)
Y 309 705 22 (1 A)
Y 309 705 23 (2 A)
Y 309 705 24 (3 A)
Y 309 705 25 (4 A)
Y 309 705 26 (6 A)
Y 309 705 27 (8 A)
Y 309 705 28 (10 A)

ESX10-TD-. Application example of adhesive label

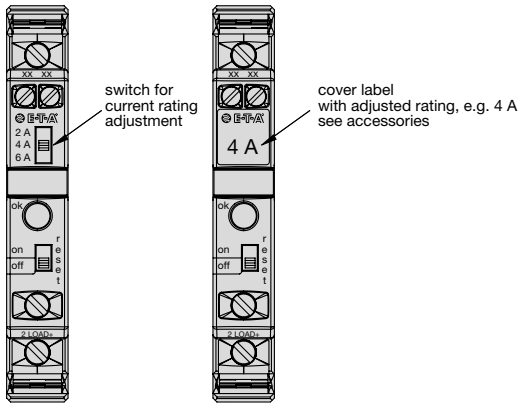

All information and data given on our products are accurate and reliable to the best of our knowledge, but E-T-A does not accept any responsibility for the use in applications which are not in accordance with the present specification. E-T-A reserves the right to change specifications at any time in the interest of improved design, performance and cost effectiveness, Dimensions are subject to change without notice. Please enquire for the latest dimensional drawing with tolerances if required. All dimensions, data, pictures and descriptions are for information only and are not binding. Amendments, errors and omissions excepted. Ordering codes of the products may differ from their marking.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP