ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Emerson / Artesyn Technologies LPS203-M* at our website: *Click HERE*


LPS200-M Series

250 Watts (forced air)

150 Watts (convection)

ITE / Medical

Total Power: 125-250 Watts
Input Voltage: 90-264 Vac
# of Outputs: Single Main

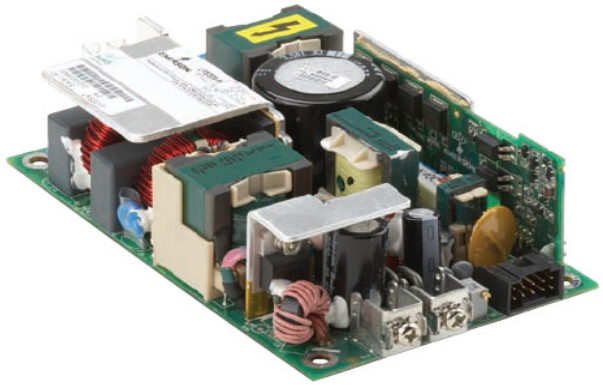

Special Features

- Medical and ITE safeties
- Active power factor correction
- 3"×5" footprint
- Less than 1U high
- EN61000-3-2 compliant
- Remote sense
- Power fail
- Adjustable main output
- Built-in Class B EMI filter
- Overvoltage protection
- Overload protection
- Thermal overload protection
- Isolated 12V Fan output
- LPX200 enclosure kit available

Safety

TUV	60950,60601-1
UL	60950,60601-1
cULus	60950,60601-1
CB	Certificate & report
CE	Mark (LVD)

Product Descriptions

The LPS200-M series power supplies are compact open-frame designs; measuring just 3 x 5 inches, with a height of only 1.5 inches, they have a typical full load efficiency of 88 percent and a power density in excess of 11 watts per cubic inch. The supplies are primarily intended for use in information technology equipment (ITE) and light industrial systems, as well as for equipment intended for non-patient contact and non-patient critical use in low power medical, dental and laboratory applications.

The LPS200-M series power supplies feature a universal 90-264 Vac input - enabling them to be used anywhere in the world - and are also capable of operating from a 120-300 Vdc input. The power supply produces a regulated main output, together with an isolated 12 Vdc fan output; the latter is rated at 1A, while the main output can deliver up to 125W continuously with convection cooling, or up to 250W continuously with 30 CFM forced air cooling.

Active power factor correction is employed to minimize input harmonic current distortion and ensure compliance with the international EN61000-3-2 standard - LPS200-M series supplies have a power factor of 0.99 typical. The power supplies have a maximum safety-ground leakage current of 275 µA, and have a main output hold-up time of 16 ms minimum when fed with a 120 Vac input and delivering 250 watts of output power.

The power supplies have a full load ambient operating temperature range of 0 to +50 degree Celsius without de-rating and can cold-start from temperatures as low as -20 degrees Celsius. Between 50 and 70 degrees Celsius, the output should be derated by 2.5 percent per degree.

ARTESYN™
EMBEDDED TECHNOLOGIES

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Model Numbers

Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Maximum Load with 30CFM Forced Air	Peak Load*1	Regulation*2	Ripple P/P(PARD)*3
LPS202-M	5V	0A	20A	40A	44A	±2%	50mV
LPS203-M	12V	0A	10.3A	20.8A	22A	±2%	120mV
LPS204-M	15V	0A	8.3A	16.6A	18A	±2%	150mV
LPS205-M	24V	0A	5.2A	10.4A	11.5A	±2%	240mV
LPS208-M	48V	0A	2.6A	5.2A	5.8A	±2%	480mV

1.Peak current lasting＜30seconds with a maximum 10% duty cycle.

2.At 25℃ including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.

3.Peak-to-peak with 20MHz bandwidth and 10uF (tantalum capacitor) in parallel with a 0.1uF capacitor at rated line voltage and load ranges

Options

None

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Electrical Specifications

Absolute Maximum Ratings

Stress in excess of those listed in the "Absolute Maximum Ratings" may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply's reliability.

Table 1. Absolute Maximum Ratings:

Parameter	Model	Symbol	Min	Typ	Max	Unit
Input Voltage:						
AC continuous operation	All models	$V_{IN,AC}$	90	-	264	Vac
DC continuous operation	All models	$V_{IN,DC}$	120	-	300	Vdc
Maximum Output Power (Main+Fan) Convection continuous operation	LPS202-M	$P_{O,maxCC}$	-	-	100	W
	LPS203-M		-	-	125	
	LPS204-M		-	-	125	
	LPS205-M		-	-	125	
	LPS208-M		-	-	125	
Maximum Output Power (Main+Fan) Force air continuous operation-30CFM	LPS202-M	$P_{O,maxFA}$	-	-	200	W
	LPS203-M		-	-	250	
	LPS204-M		-	-	250	
	LPS205-M		-	-	250	
	LPS208-M		-	-	250	
Isolation Voltage						
Input to outputs	All models		-	-	4000	Vac
Input to safety ground	All models		-	-	1500	Vac
Output to output Isolation	All models		-	-	100	Vdc
Outputs to safety ground	All models		-	-	500	Vac
Ambient Operating Temperature	All models	T_A	0	-	+70[1]	ºC
Cold Start-up Temperature	All models	T_{ST}	-20	-	-	ºC
Storage Temperature	All models	T_{STG}	-40	-	+85	ºC
Humidity (non-condensing)						
Operating	All models		10	-	90	%
Non-operating	All models		10	-	95	%
Altitude						
Operating	All models		-500	-	13,000[2]	feet
Non-operating	All models		-1000	-	50,000	feet

Note 1 - Derate each output at 2.5% per degree C from 50ºC to 70ºC
Note 2 - Derate maximum operating temperature by 1ºC per 1,000 feet above 13,000 feet

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Input Specifications

Table 2. Input Specifications:

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Operating Input Voltage, AC	All	V_{IAC}	90	-	264	Vac_{RMS}
Input AC Source Frequency	All	f_{IAC}	47	-	63	Hz
Operating Input Voltage,DC	All	$V_{IN,DC}$	120		300	V_{DC}
Maximum Input Current ($I_O = I_{O,max}$,)	$V_{IAC} = 90V_{AC}$ $V_{IAC} = 264V_{AC}$	$I_{I,max}$	-	-	3.5 1.5	A_{RMS}
No Load Input Power	All	W_{IN}	-	-	10	W
No Load Input Current	$V_{IAC} = 90V_{AC}$ $V_{IAC} = 264V_{AC}$	I_{I,no_load}	-	-	250 150	mA_{RMS}
Harmonic Line Currents	All	THD	Per EN61000-3-2			
Power Factor	All		-	0.99	-	
Startup Surge Current (Inrush) @ 25°C	$V_{IAC} = 230V_{AC}$ Cold start		-	-	50	A_{PK}
Input AC Low Line Start-up Voltage	$I_O = I_{O,maxFA}$	$V_{IN,AC-start}$	84	-	89	Vac
Input DC Low Line Start-up Voltage	$I_O = I_{O,maxFA}$	$V_{IN,AC-start}$	110	-	119	Vdc
Isolation – Input to Output			-	4000	-	Vac
Isolation – Input to Chassis			-	1500	-	Vac
PFC Switching Frequency	$180V_{AC}$	$f_{SW,PFC}$	30	-	68	KHz
DCDC Switching Frequency	All	$f_{SW,DC-DC}$	260	-	300	KHz
Operating Efficiency @ 25°C	$I_O = I_{O,max}$ $V_{IAC} = 100V_{AC}$	η	-	86	-	%
Hold Up Time	$V_{IN,AC}$=115Vac	$t_{Hold-Up}$	16	-	-	mSec
Turn On Delay	$V_{IN,AC}$=90Vac	$t_{Turn-on}$	-	-	2	Sec
Leakage Current to safety ground	V_{IN}=264Vac,f_{IN}=50/60 Hz	$I_{IN,leakage}$	-	-	275	uA
System Stability: Phase Margin Gain Margin	330uF/A Capacitive Load		 45 10		 - -	 Ø dB

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output Specifications

Table 3. Output Specifications:

Parameter		Condition	Symbol	Min	Typ	Max	Unit
Output Regulation	LPS202-M LPS203-M LPS204-M LPS205-M LPS208-M	Vo=90~264Vac	Vo	4.90 11.76 14.70 23.52 47.04	5.00 12.00 15.00 24.00 48.00	5.10 12.24 15.30 24.48 48.96	V
	All models		V_{FAN}	11.4	12.0	12.6	
Output Ripple, pk-pk	LPS202-M LPS203-M LPS204-M LPS205-M LPS208-M	Measure with a 0.1µF ceramic capacitor in parallel with a 10µF tantalum capacitor, 0 to 20MHz bandwidth	V_O	- - - - -	- - - - -	50.0 120.0 150.0 240.0 480.0	mV_{PK-PK}
	All models		V_{FAN}	-	-	120.0	
Output Current	LPS202-M LPS203-M LPS204-M LPS205-M LPS208-M	Convection Cooling	I_O	0 0 0 0 0	- - - - -	20 10.3 8.3 5.2 2.6	A
	All models		V_{FAN}	0	-	0.5	
Output Current	LPS202-M LPS203-M LPS204-M LPS205-M LPS208-M	30CFM Force Air	I_O	0 0 0 0 0	- - - - -	40 20.8 16.6 10.4 5.2	A
	All models		V_{FAN}	0	-	1.0	
Output Power	LPS202-M LPS203-M LPS204-M LPS205-M LPS208-M	Vo=90~264Vac/ 127~300Vdc Natural convection cooling	Wo	- - - - -	100 125 125 125 125	- - - - -	W
Output Power	LPS202-M LPS203-M LPS204-M LPS205-M LPS208-M	Vo=90~264Vac/ 127~300Vdc Lengthwise/Sideways Forced air cooling of 30CFM	Wo	- - - - -	200 250 250 250 250	- - - - -	W
V_O Load Capacitance	All models	Start up Using CR load and capacitive load in parallel	-	0	-	330	µF/A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output Specifications con't

Table 3. Output Specifications, con't

Parameter		Condition	Symbol	Min	Typ	Max	Unit
V_O Dynamic Response - Peak Deviation		50% load change (From 50% to 100%), slew rate = 1A/µs 100uF/A	$\pm\%V_O$	-	-	3	%
V_O Dynamic Response - Settling Time		50% load change (From 50% to 100%), slew rate = 1A/µs 100uF/A	T_s	-	-	500	uSec
Output Adjust Range	LPS202-M LPS203-M LPS204-M LPS205-M LPS208-M	$V_{IN,AC}$ = 115V_{AC} I_O = 50% of $I_{O,maxFA}$ I_{FAN} = 0	V_O	4.5 10.8 13.5 21.6 43.2	- - - - -	5.5 13.2 16.5 26.4 52.8	V
V_O Turn On Overshoot	LPS202-M LPS203-M LPS204-M LPS205-M LPS208-M	I_O = 0, I_{FAN} = 0	V_O	- - - - -	- - - - -	5.15 12.36 15.45 24.72 49.44	V
V_O Long Term Stability	All models	Io=Full load, Vo=100Vac, Max change over 24 hours after thermal equilibrium (30 mins)	$\pm\%V_O$	-	-	1.0	%
V_O Over Voltage Protection		Latch off (AC recycle to reset)	$\%V_O$	130	-	150	%
V_O Over Current Protection		All	$\%I_O$	110	-	160	%
Over Temperature Protection		All		Auto Recovery			
Short Circuit Protection		All		Auto Recovery			
Remote Sense, + and -		Maximum compensation at each output line	V_{SENSE}	-	-	400	mV

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS202-M Performance Curves

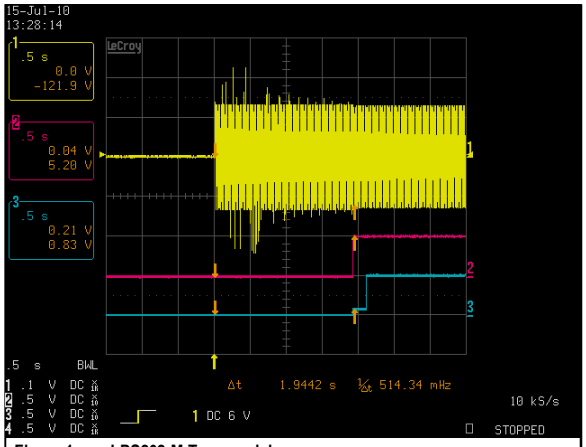


Figure 1: LPS202-M Turn-on delay
Vin = 90Vac Load: Io = 40A
Ch 1: AC Mains Ch 2: Vo Ch3: Power Fail

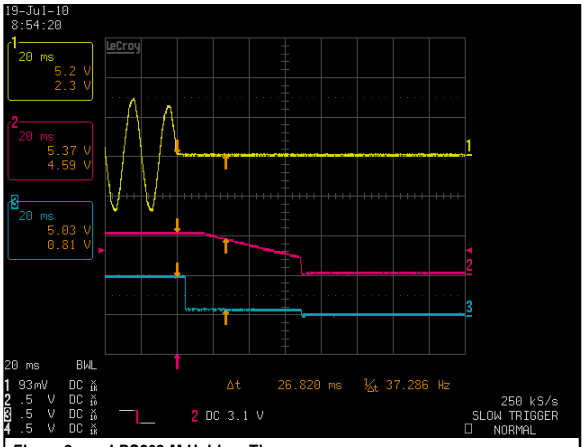


Figure 2: LPS202-M Hold-up Time
Vin = 90Vac Load: Io = 40A
Ch 1: AC Mains Ch 2: Vo Ch 3: Power Fail

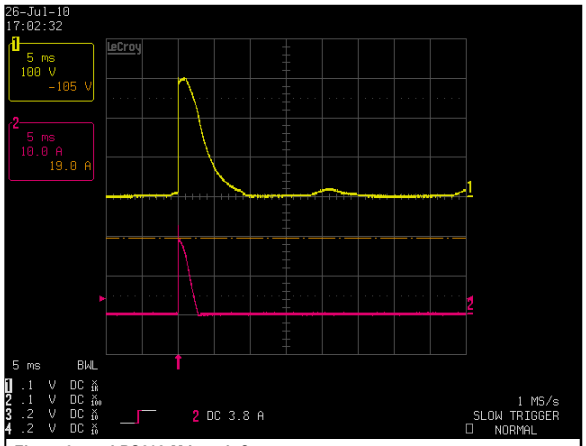


Figure 3: LPS202-M Inrush Current
Vin = 230Vac Load: Io = 0A, I_{FAN} = 0A, Turn on Angle = 90 deg
Ch 1: AC Mains Ch 2: Iin

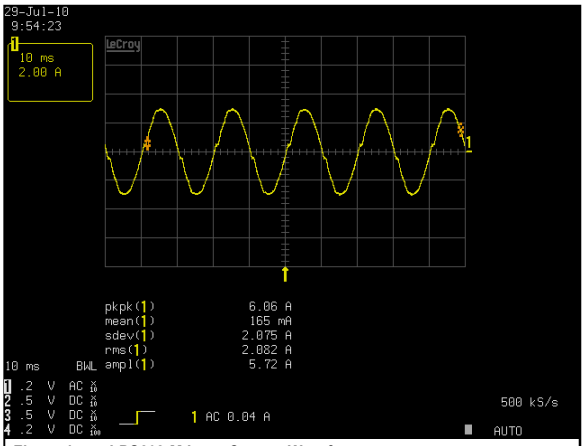


Figure 4: LPS202-M Input Current Waveform
Vin = 115Vac Load: Io = 40A, I_{FAN} = 0A
Ch 1: I_{IN}

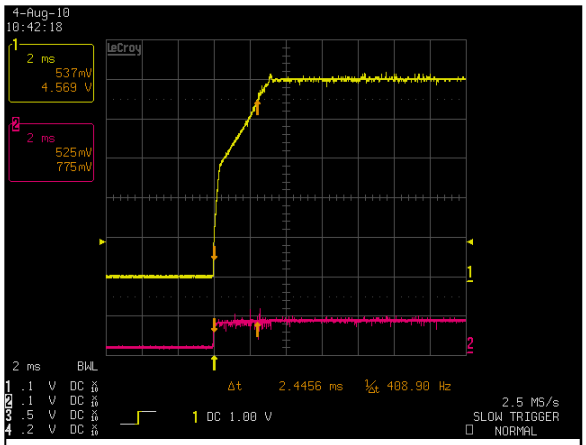


Figure 5: LPS202-M Output Voltage Startup Characteristic
Vin = 90Vac Load: Io = 40A, I_{FAN} = 0A, Output Capacitance = 330uF/A
Ch 1: Vo

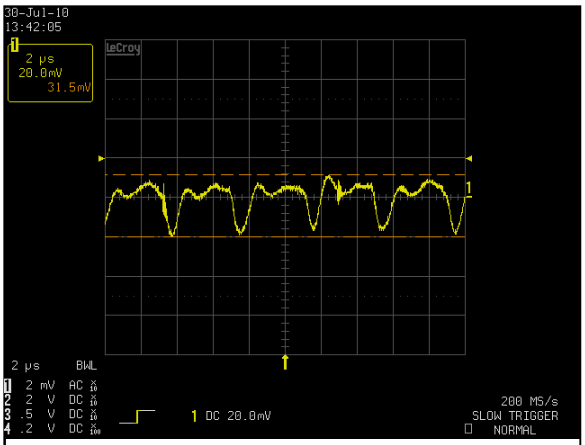


Figure 6: LPS202-M Ripple and Noise Measurement
Vin = 115Vac Load: Io = 40A, I_{FAN} = 0A
Ch 1: Vo

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS202-M Performance Curves

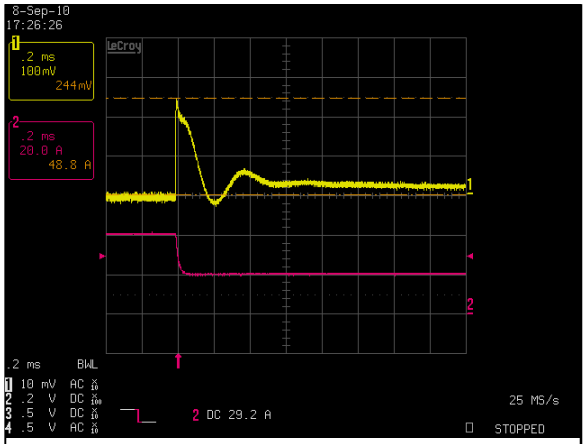


Figure 7: LPS202-M Transient Response – Vo Deviation (High to Low)
Vin = 115Vac Load: Io = 100% to 50% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

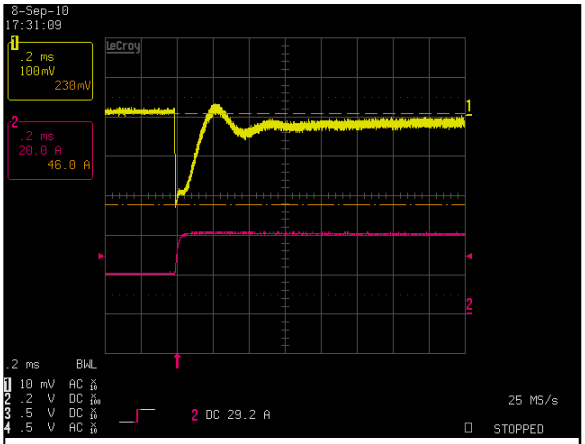


Figure 8: LPS202-M Transient Response – Vo Deviation (Low to High)
Vin = 115Vac Load: Io = 50% to 100% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

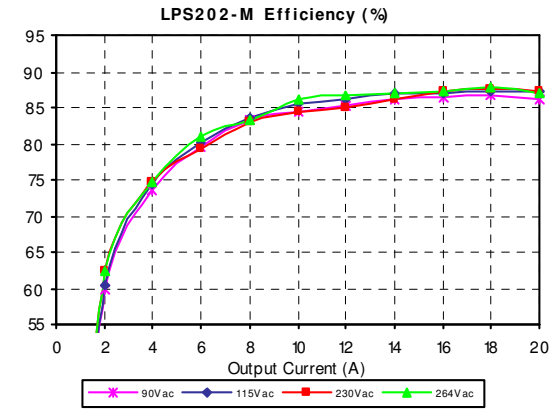


Figure 9: LPS202-M Efficiency Curves @ 25 degC, Convection Cool
Vin = 90 to 264Vac Load: Io = 0 to 20A, I_{FAN} = 0A

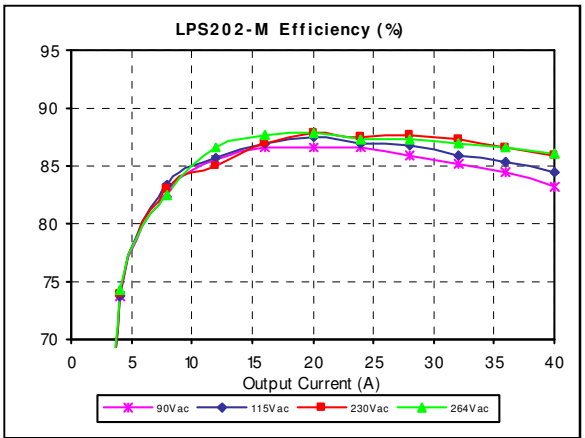


Figure 10: LPS202-M Efficiency Curves @ 25 degC, Forced Air Cool
Vin = 90 to 264Vac Load: Io = 0 to 40A, I_{FAN} = 0A

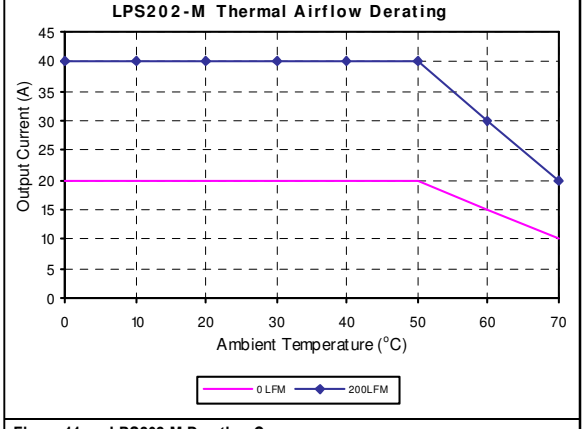


Figure 11: LPS202-M Derating Curves
Vin = 115Vac Load: Io = 0 to40A, I_{FAN} = 0A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS203-M Performance Curves

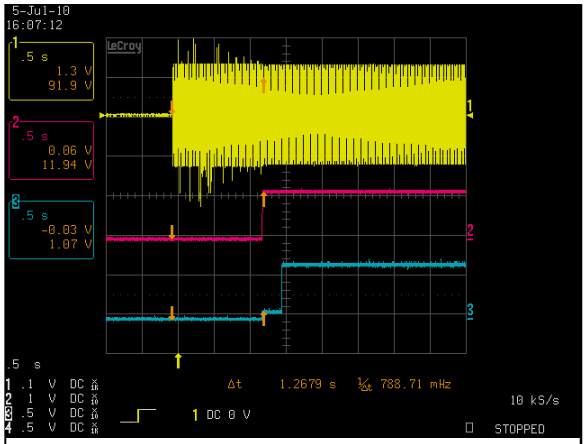


Figure 12: LPS203-M Turn-on delay
Vin = 90Vac Load: Io = 20.8A
Ch 1: AC Mains Ch 2: Vo Ch3: Power Fail

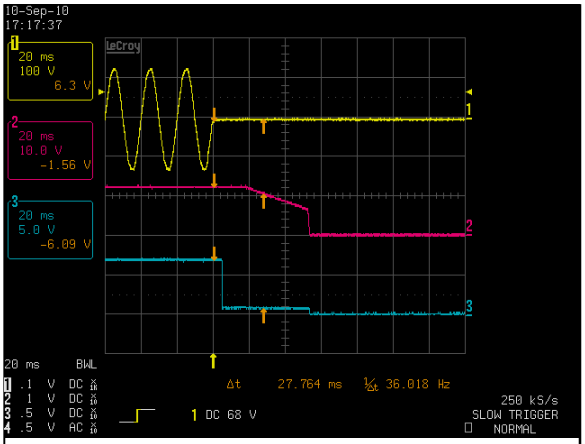


Figure 13: LPS203-M Hold-up Time
Vin = 90Vac Load: Io =20.8A
Ch 1: AC Mains Ch 2: Vo Ch 3: Power Fail

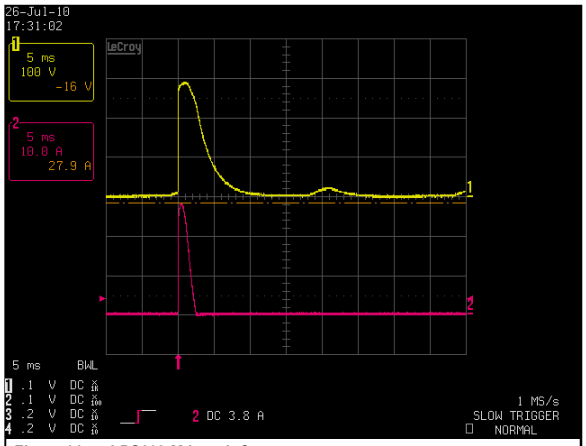


Figure 14: LPS203-M Inrush Current
Vin = 230Vac Load: Io = 0A, I_{FAN} = 0A, Turn on Angle = 90 deg
Ch 1: AC Mains Ch 2: Iin

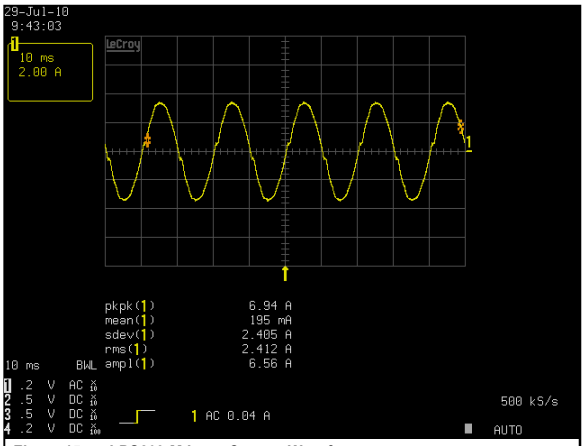


Figure 15: LPS203-M Input Current Waveform
Vin = 115Vac Load: Io = 20.8A, I_{FAN} = 0A
Ch 1: I_{IN}

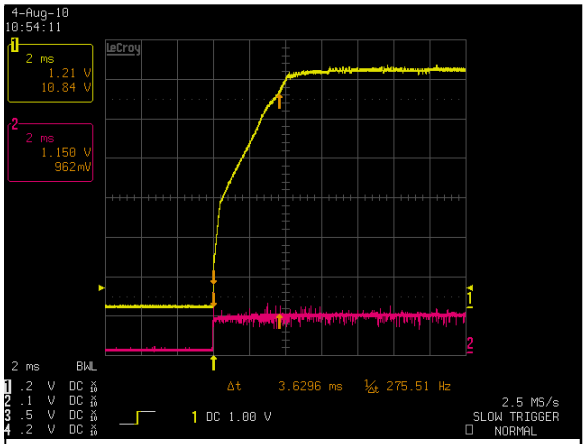


Figure 16: LPS203-M Output Voltage Startup Characteristic
Vin = 90Vac Load: Io =20.8A, I_{FAN} = 0A, Output Capacitance = 330uF/A
Ch 1: Vo

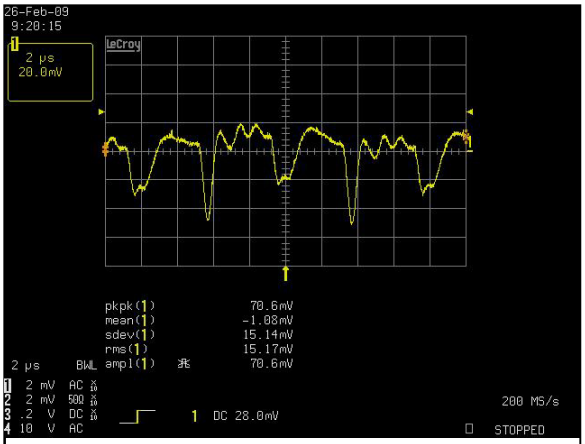


Figure 17: LPS203-M Ripple and Noise Measurement
Vin = 115Vac Load: Io = 20.8A, I_{FAN} = 0A
Ch 1: Vo

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS203-M Performance Curves

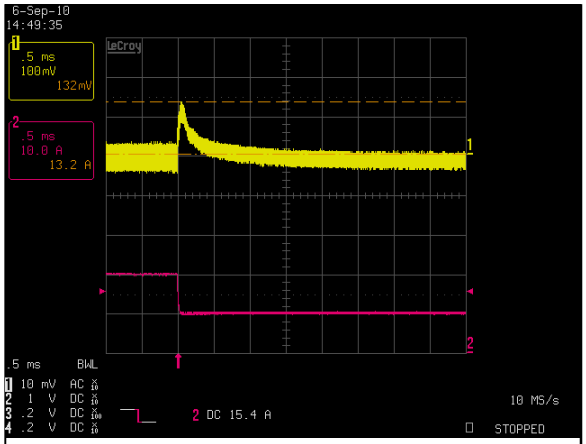


Figure 18: LPS203-M Transient Response – Vo Deviation (High to Low)
Vin = 115Vac Load: Io = 100% to 50% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

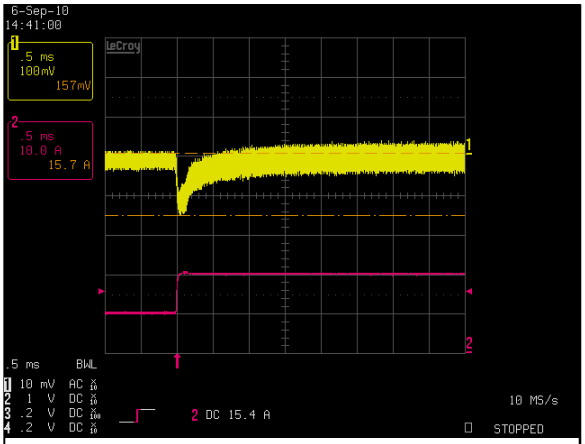


Figure 19: LPS203-M Transient Response – Vo Deviation (Low to High)
Vin = 115Vac Load: Io = 50% to 100% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

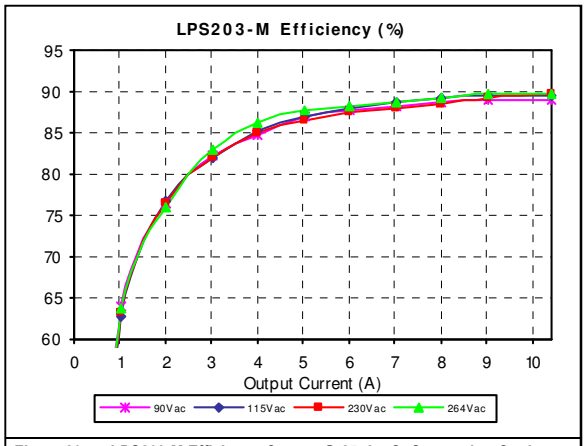


Figure 20: LPS203-M Efficiency Curves @ 25 degC, Convection Cool
Vin = 90 to 264Vac Load: Io = 0 to 10.4A, I_{FAN} = 0A

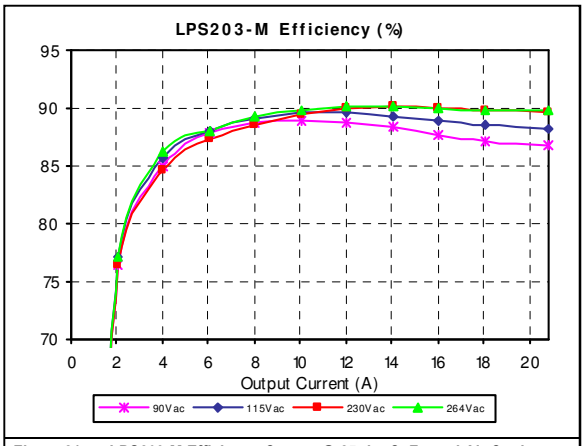


Figure 21: LPS203-M Efficiency Curves @ 25 degC, Forced Air Cool
Vin = 90 to 264Vac Load: Io = 0 to 20.8A, I_{FAN} = 0A

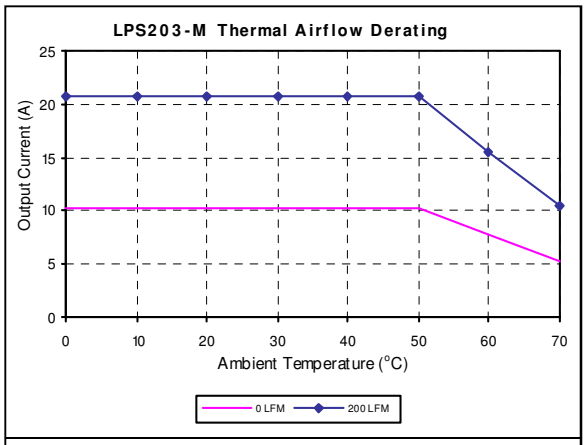


Figure 22: LPS203-M Derating Curves
Vin = 115Vac Load: Io = 0 to 20.8A , I_{FAN} = 0A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS204-M Performance Curves

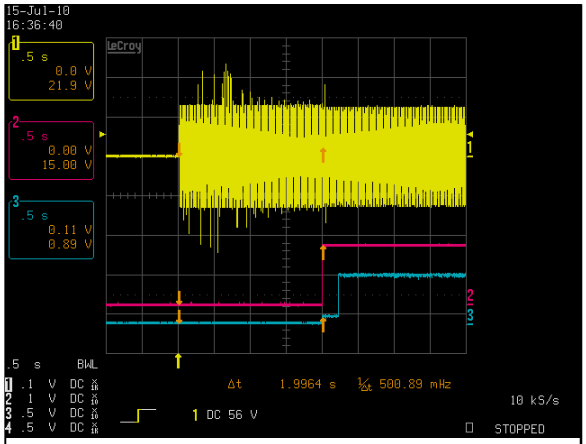


Figure 23: LPS204-M Turn-on delay
Vin = 90Vac Load: Io = 16.6A
Ch 1: AC Mains Ch 2: Vo Ch3: Power Fail

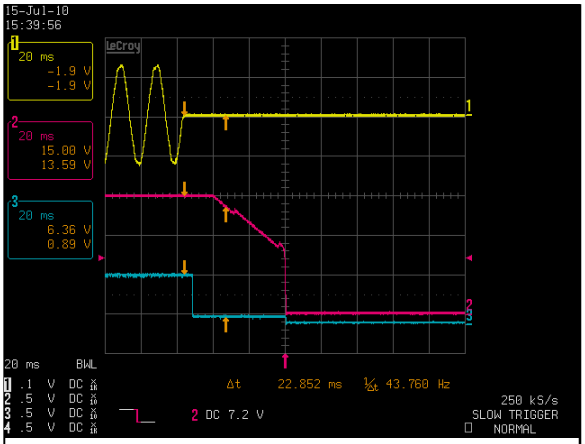


Figure 24: LPS204-M Hold-up Time
Vin = 90Vac Load: Io = 16.6A
Ch 1: AC Mains Ch 2: Vo Ch 3: Power Fail

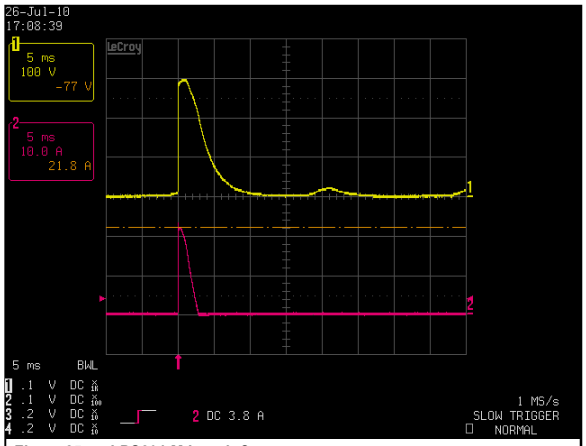


Figure 25: LPS204-M Inrush Current
Vin = 230Vac Load: Io = 0A, I_{FAN} = 0A, Turn on Angle = 90 deg
Ch 1: AC Mains Ch 2: Io

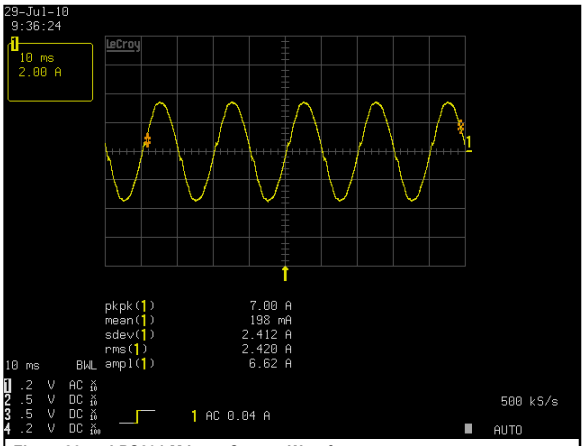


Figure 26: LPS204-M Input Current Waveform
Vin = 115Vac Load: Io =16.6A, I_{FAN} = 0A
Ch 1: I_{IN}

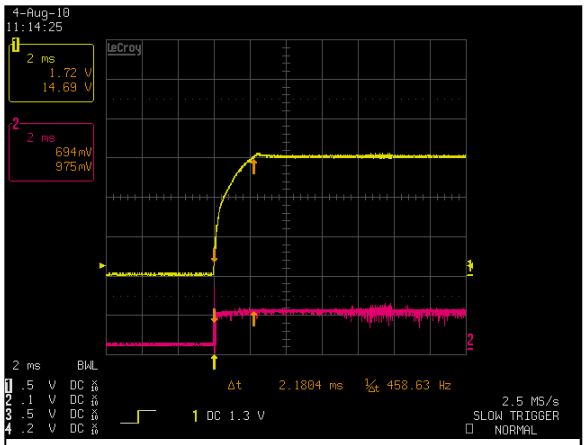


Figure 27: LPS204-M Output Voltage Startup Characteristic
Vin = 90Vac Load: Io =16.6A, I_{FAN} = 0A, Output Capacitance = 330uF/A
Ch 1: Vo

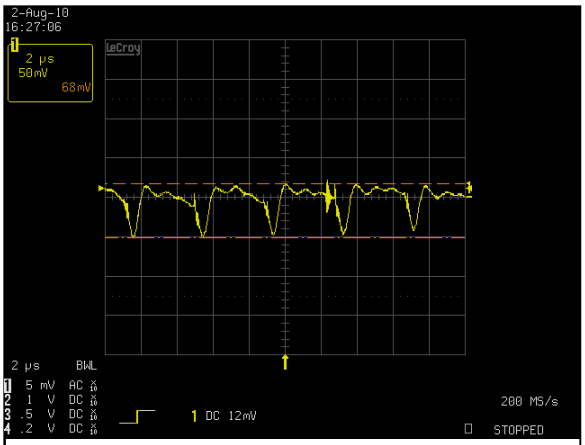


Figure 28: LPS204-M Ripple and Noise Measurement
Vin = 115Vac Load: Io = 16.6A, I_{FAN} = 0A
Ch 1: Vo

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS204-M Performance Curves

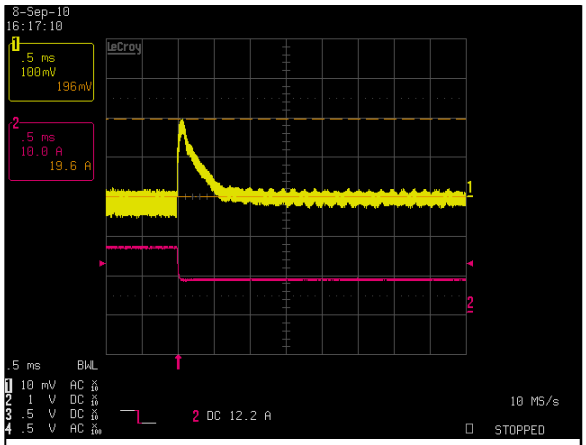


Figure 29: LPS204-M Transient Response – Vo Deviation (High to Low)
Vin = 115Vac Load: Io = 100% to 50% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

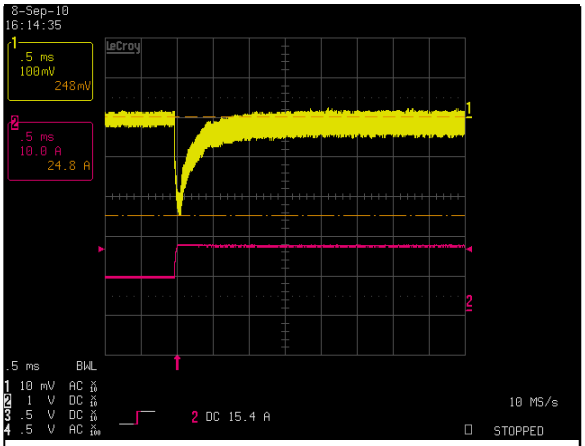


Figure 30: LPS204-M Transient Response – Vo Deviation (Low to High)
Vin = 115Vac Load: Io = 50% to 100% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

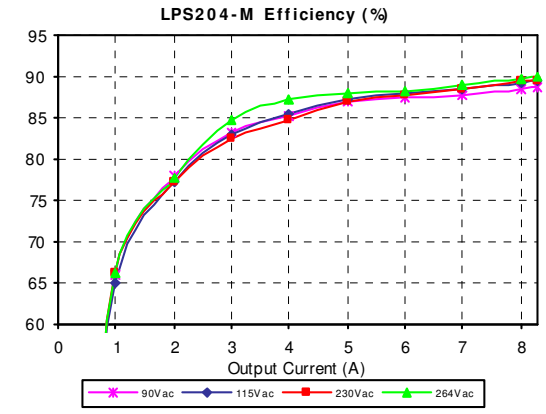


Figure 31: LPS204-M Efficiency Curves @ 25 degC, Convection Cool
Vin = 90 to 264Vac Load: Io = 0 to 8.3A, I_{FAN} = 0A

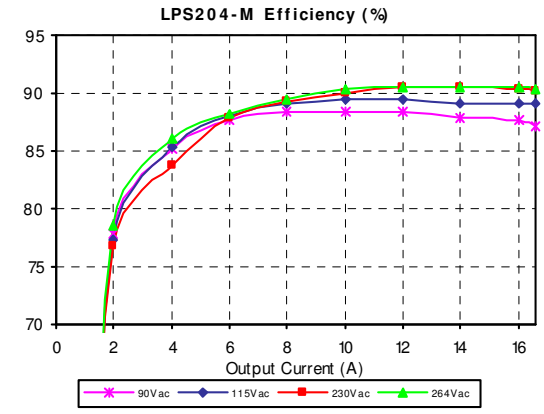


Figure 32: LPS204-M Efficiency Curves @ 25 degC, Forced Air Cool
Vin = 90 to 264Vac Load: Io = 0 to 16.6A, I_{FAN} = 0A

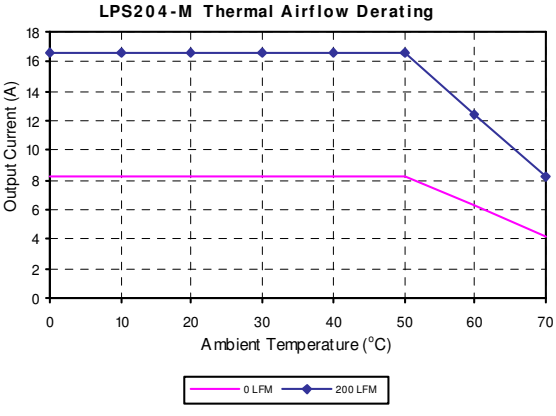


Figure 33: LPS204-M Derating Curves
Vin = 115Vac Load: Io = 0 to16.6A, I_{FAN} = 0A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS205-M Performance Curves

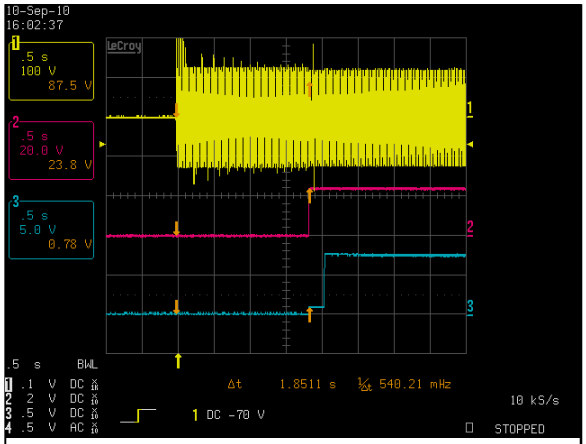


Figure 34: LPS205-M Turn-on delay
Vin = 90Vac Load: Io = 10.8A
Ch 1: AC Mains Ch 2: Vo Ch3: Power Fail

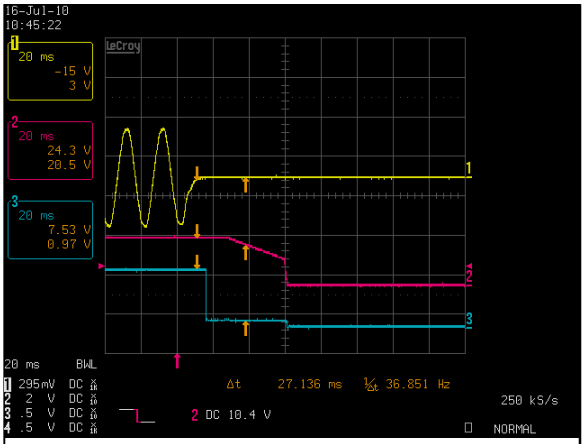


Figure 35: LPS205-M Hold-up Time
Vin = 90Vac Load: Io = 10.4A
Ch 1: AC Mains Ch 2: Vo Ch 3: Power Fail

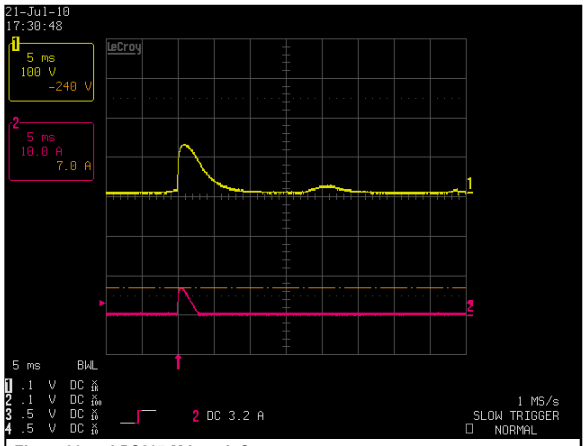


Figure 36: LPS205-M Inrush Current
Vin = 230Vac Load: Io = 0A, I_{FAN} = 0A, Turn on Angle = 90 deg
Ch 1: AC Mains Ch 2: Io

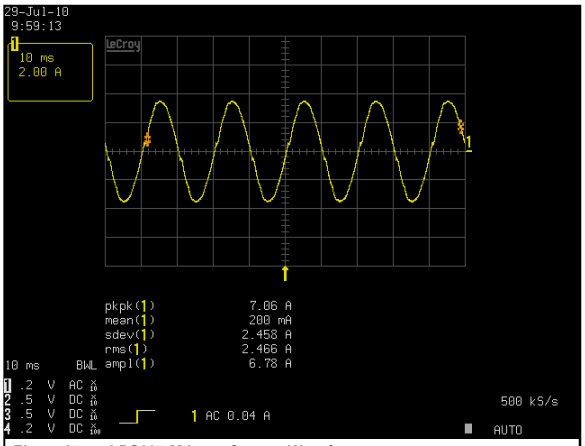


Figure 37: LPS205-M Input Current Waveform
Vin = 115Vac Load: Io =10.4A, I_{FAN} = 0A
Ch 1: I_{IN}

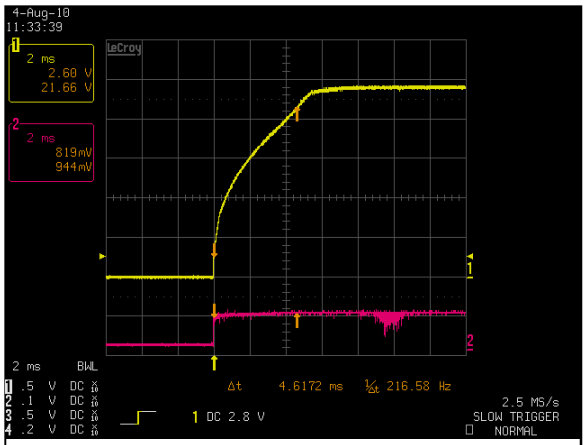


Figure 38: LPS205-M Output Voltage Startup Characteristic
Vin = 90Vac Load: Io = 10.4A, I_{FAN} = 0A, Output Capacitance = 330uF/A
Ch 1: Vo

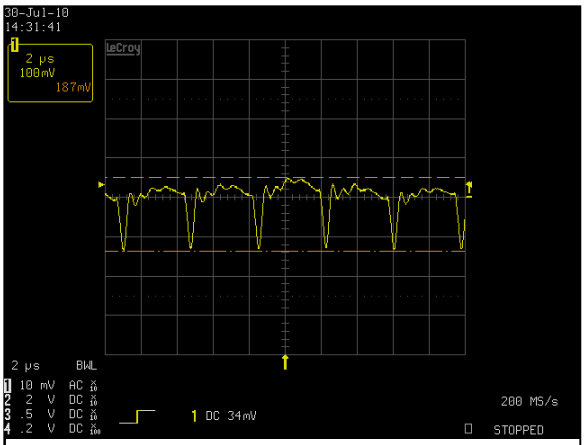


Figure 39: LPS205-M Ripple and Noise Measurement
Vin = 115Vac Load: Io = 10.4A, I_{FAN} = 0A
Ch 1: Vo

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS205-M Performance Curves

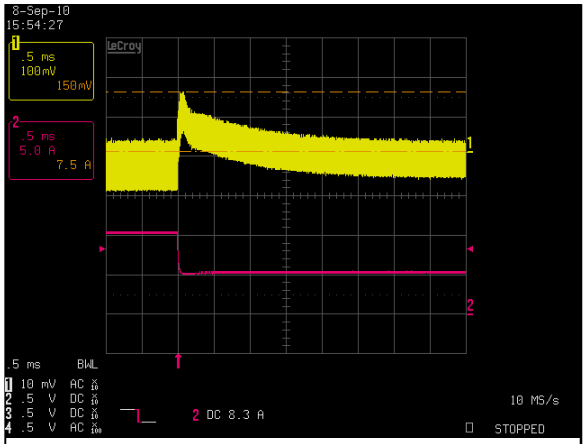


Figure 40: LPS205-M Transient Response – Vo Deviation (High to Low)
Vin = 115Vac Load: Io = 100% to 50% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

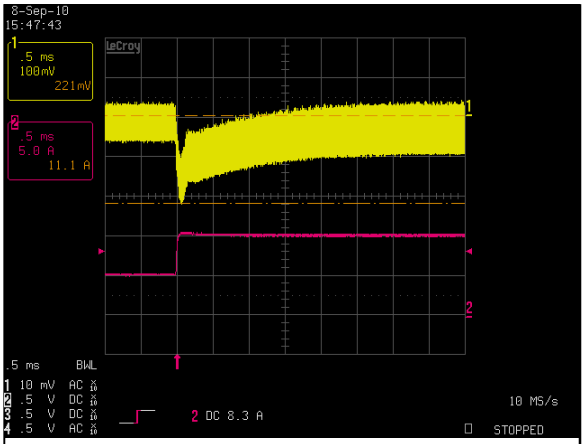


Figure 41: LPS205-M Transient Response – Vo Deviation (Low to High)
Vin = 115Vac Load: Io = 50% to 100% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

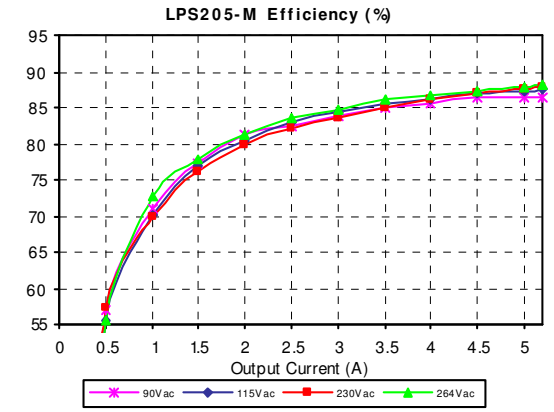


Figure 42: LPS205-M Efficiency Curves @ 25 degC, Convection Cool
Vin = 90 to 264Vac Load: Io = 0 to 5.2A, I_{FAN} = 0A

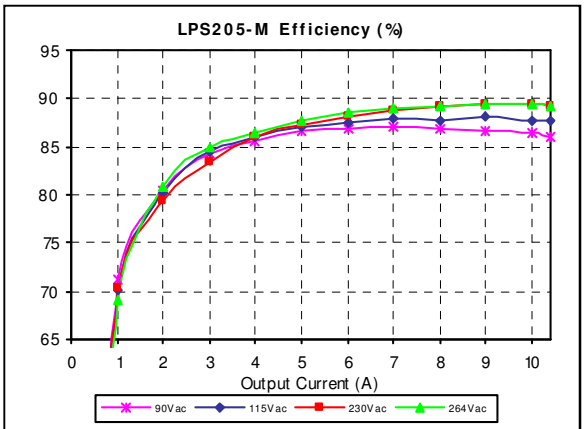


Figure 43: LPS205-M Efficiency Curves @ 25 degC, Forced Air Cool
Vin = 90 to 264Vac Load: Io = 0 to 10.4A, I_{FAN} = 0A

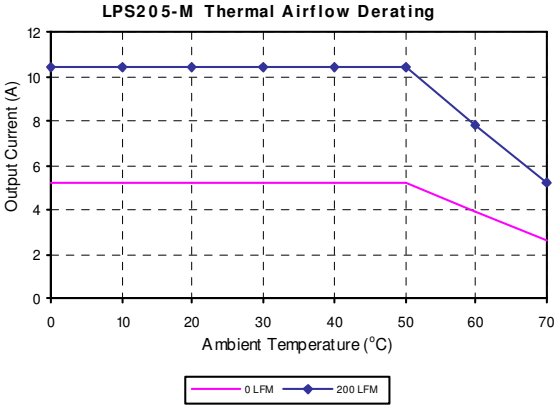


Figure 44: LPS205-M Derating Curves
Vin = 115Vac Load: Io = 0 to 10.4A, I_{FAN} = 0A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS208-M Performance Curves

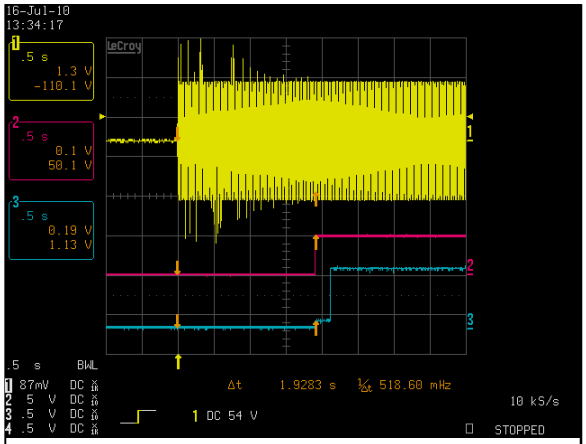


Figure 45: LPS208-M Turn-on delay
Vin = 90Vac Load: Io = 5.2A
Ch 1: AC Mains Ch 2: Vo Ch3: Power Fail

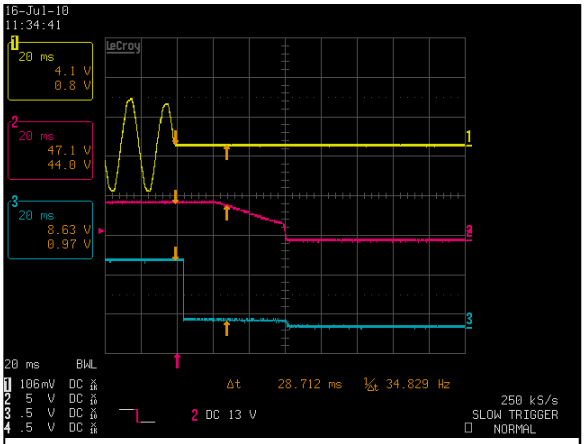


Figure 46: LPS208-M Hold-up Time
Vin = 90Vac Load: Io = 5.2A
Ch 1: AC Mains Ch 2: Vo Ch 3: Power Fail

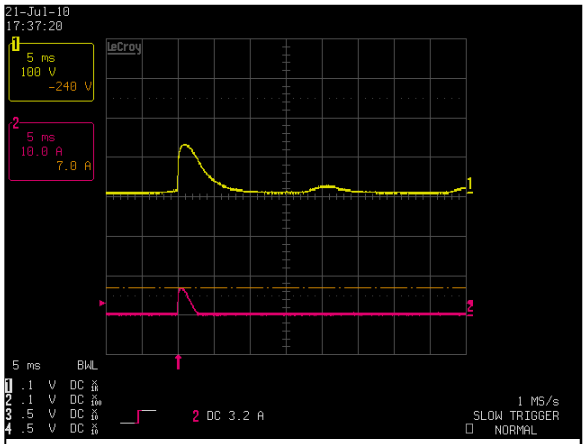


Figure 47: LPS208-M Inrush Current
Vin = 230Vac Load: Io = 0A, I_{FAN} = 0A, Turn on Angle = 90 deg
Ch 1: AC Mains Ch 2: Io

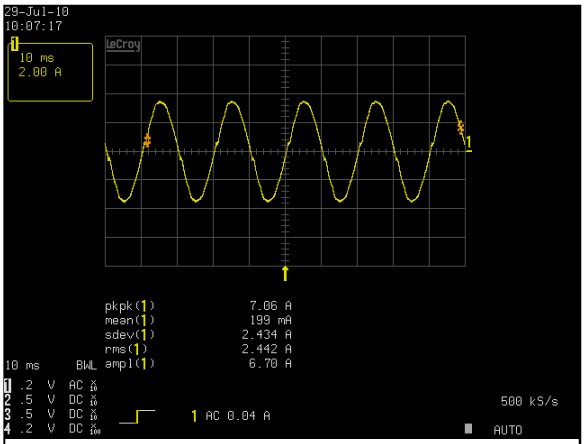


Figure 48: LPS208-M Input Current Waveform
Vin = 115Vac Load: Io = 5.2A, I_{FAN} = 0A
Ch 1: I_{IN}

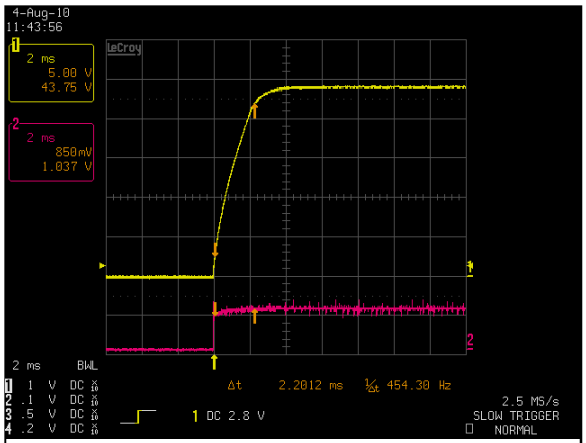


Figure 49: LPS208-M Output Voltage Startup Characteristic
Vin = 90Vac Load: Io = 5.2A, I_{FAN} = 0A
Ch 1: Vo

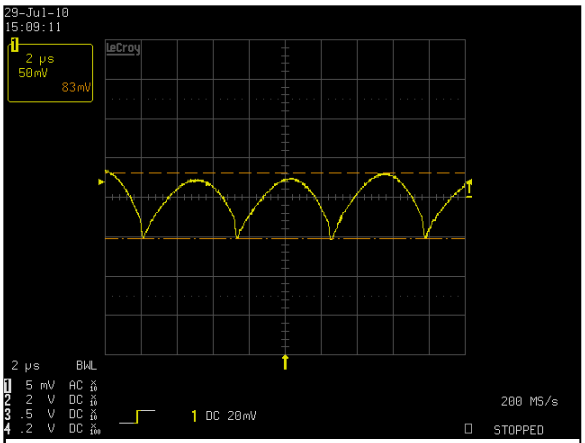


Figure 50: LPS208-M Ripple and Noise Measurement
Vin = 115Vac Load: Io = 5.2A, I_{FAN} = 0A
Ch 1: Vo

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

LPS208-M Performance Curves

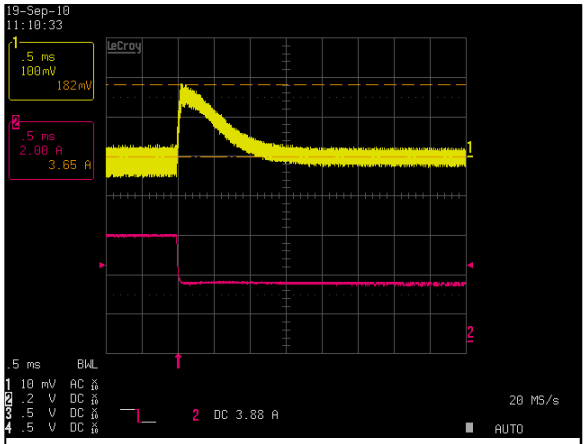


Figure 51: LPS208-M Transient Response – Vo Deviation (High to Low)
Vin = 115Vac Load: Io = 100% to 50% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

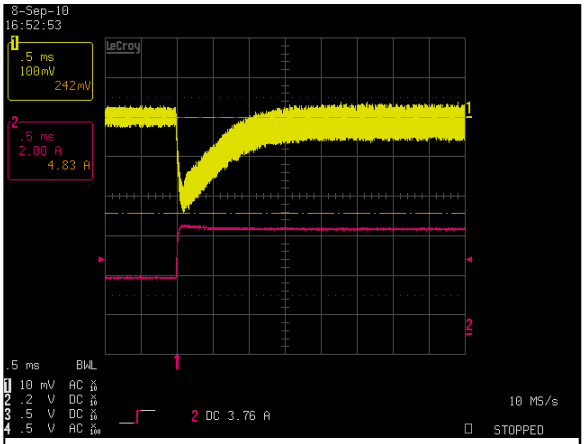


Figure 52: LPS208-M Transient Response – Vo Deviation (Low to High)
Vin = 115Vac Load: Io = 50% to 100% load change, 1A/us slew rate
Ch 1: Vo Ch 2: Io

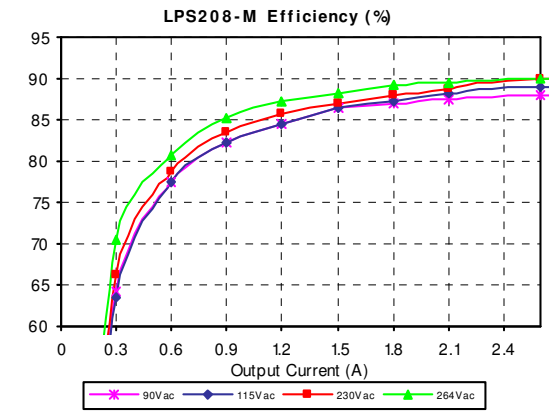


Figure 53: LPS208-M Efficiency Curves @ 25 degC, Convection Cool
Vin = 90 to 264Vac Load: Io = 0 to 2.6A, I_{FAN} = 0A

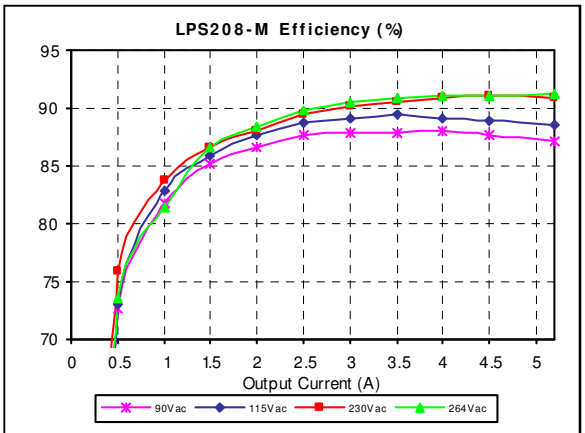


Figure 54: LPS208-M Efficiency Curves @ 25 degC, Forced Air Cool
Vin = 90 to 264Vac Load: Io = 0 to 5.2A, I_{FAN} = 0A

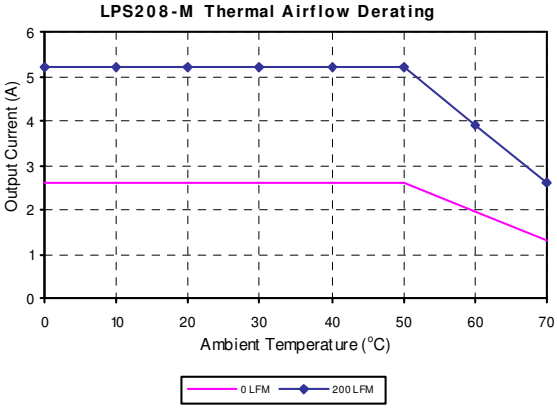


Figure 55: LPS208-M Derating Curves
Vin = 115Vac Load: Io = 0 to 5.2A, I_{FAN} = 0A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Protective Function Specifications

Input Fusing

LPS200-M series power supply is equipped with an internal non user serviceable 5A, 250 Vac for fault protection in both the 'line' and 'neutral' lines input.

Over Voltage Protection (OVP)

The power supply main Vo output will latches off during output overvoltage with the AC line recycled to reset the latch.

LPS202-M

Parameter	Min	Nom	Max	Unit
Vo Output Overvoltage	6.5	/	7.5	V

LPS203-M

Parameter	Min	Nom	Max	Unit
Vo Output Overvoltage	15.6	/	18.0	V

LPS204-M

Parameter	Min	Nom	Max	Unit
Vo Output Overvoltage	19.5	/	22.5	V

LPS205-M

Parameter	Min	Nom	Max	Unit
Vo Output Overvoltage	31.2	/	36.0	V

LPS208-M

Parameter	Min	Nom	Max	Unit
Vo Output Overvoltage	62.4	/	72.0	V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Over Current Protection (OCP)

LPS200-M series power supply includes internal current limit circuitry to prevent damage in the event of overload or short circuit. In the event of overloads, the output voltage may deviate from the regulation band but recovery is automatic when the load is reduced to within specified limits.

Parameter	Min	Nom	Max	Unit
Vo Output Overcurrent	44	/	64	A

Parameter	Min	Nom	Max	Unit
Vo Output Overcurrent	22.88	/	33.28	A

Parameter	Min	Nom	Max	Unit
Vo Output Overcurrent	18.337	/	26.672	A

Parameter	Min	Nom	Max	Unit
Vo Output Overcurrent	11.44	/	16.64	A

Parameter	Min	Nom	Max	Unit
Vo Output Overcurrent	5.72	/	8.32	A

Short Circuit Protection (SCP)

The power supply will withstand a continuous short circuit with no permanent damage. The power supply will automatically restart when the short circuit is removed. A short is defines as impedance less than 50 milliohms.


Over Temperature Protection (OTP)

The power supply latches off during over-temperature condition and returns back to normal operation when the power supply is cooled down. The LPS200-M series power supply might experience over-temperature conditions during a persistent overload on the output. Overload conditions can be caused by external faults. OTP might also be entered due to a loss of control of the environmental conditions e.g. an increase in the converter's ambient temperature due to a failing fan or external cooling system etc.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Mechanical Specifications

Mechanical Drawing (Dimensioning and Mounting Locations)

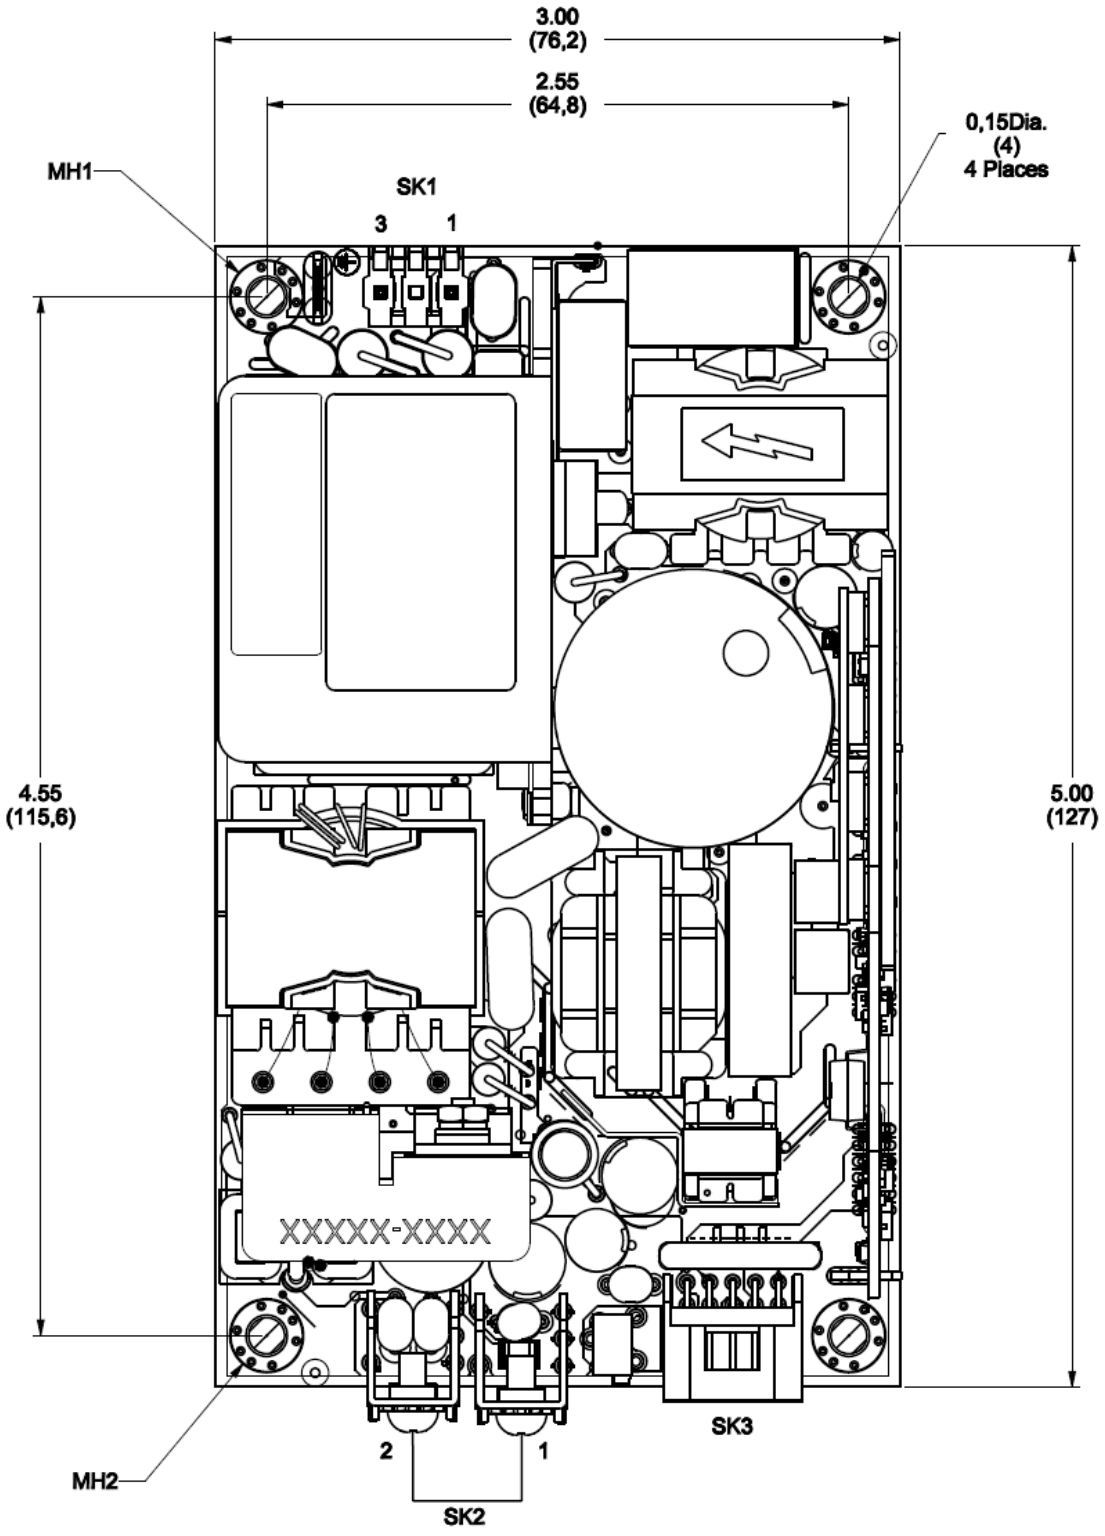

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Mechanical Drawing (Dimensioning and Mounting Locations)

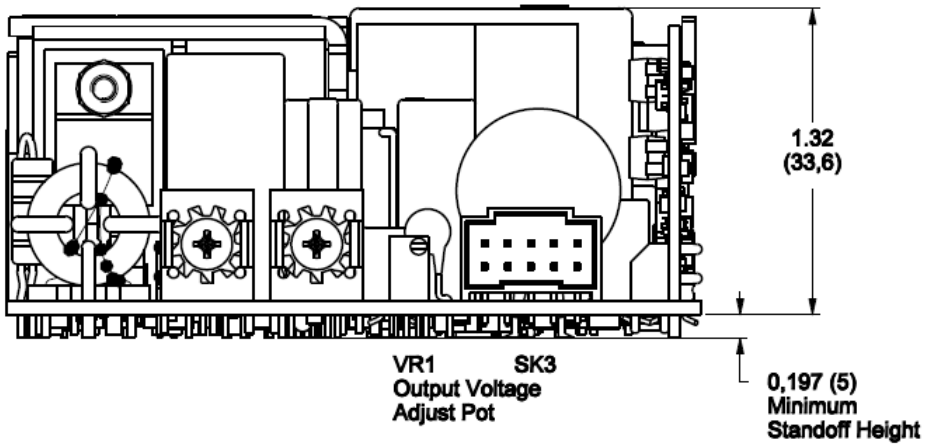

-All dimensions in inches (mm), tolerance is ±0.02”(0.5mm)

-Mounting holes M1 and M2 should be grounded for EMI purpose

-Mounting hole M1 is safety ground connection

-This power supply requires mounting on standoffs 0.20”(5.0mm) in height


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Connector Definitions

AC Input Connector – SK1

Pin 1 – Neutral

Pin 3 – Line

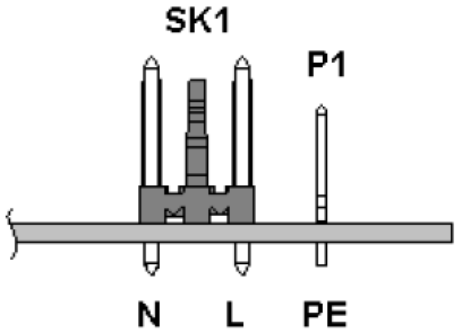

Earth Ground – GND

Output Connector – SK2

TB-1 – Common

TB-2 – Main output

Control Signal Header – SK3

Pin 1 – + Remote Sense

Pin 2 – - Remote Sense

Pin 3 – N/C

Pin 4 – N/C

Pin 5 – Power Fail


Pin 6 – Common

Pin 7 – N/C

Pin 8 – Common

Pin 9 – +12V FAN

Pin 10 – 12V FAN (isolated)[1]

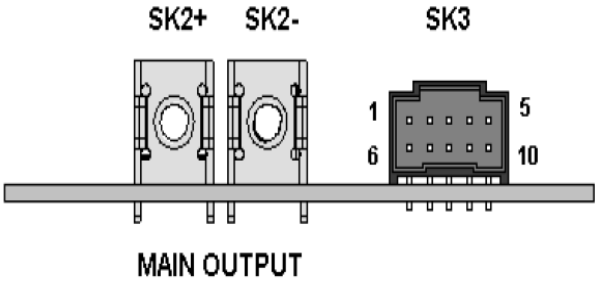

Note 1 - FAN Return is isolated from the main Output Return

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Power / Signal Mating Connectors and Pin Types

Table 4. Mating Connectors for LPS200-M series (or equivalent)

Reference	Vendor	Mating Connector or Equivalent	Mating Pins/Terminals or Equivalent
SK1	Molex	09-50-8031	08-52-0113
	Landwin	3060S0302	3360T011P
GND	Molex	01-90020001	
SK2	Molex	01-90990044	
SK3	Molex	90142-0010	90119-2110
	AMP	87977-3	87309-8

LPS200-M connector kit can be ordered separately from Emerson. Use Connector Kit # 70-841-025 to order. Each LPS200-M connector kit contains the following:

- 1pcs Molex 09-50-8031 header housing for SK1
- 4pcs Molex 08-52-0113 crimp pins for Molex 09-50-8031
- 1pcs Molex 01-90020001 insulated female lug for GND
- 2pcs Molex 01-90990044 insulated snap spade terminals for SK2
- 1pcs Molex 90142-0010 header housing for SK5
- 12pcs Molex 90119-2110 crimp pins for Molex 90142-0010

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Weight

The LPS200-M series weight is 1.5 lbs. maximum.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


EMI Emissions

The LPS200-M series has been designed to comply with the Class B limits of EMI requirements of EN55022 (FCC Part 15) and CISPR 22 (EN55022) for emissions and relevant sections of EN61000 (IEC 61000) for immunity.

The unit is enclosed inside a metal box, tested at 150W using resistive load with cooling fan.

Conducted Emissions

The applicable standard for conducted emissions is EN55022 (FCC Part 15). Conducted noise can appear as both differential mode and common mode noise currents. Differential mode noise is measured between the two input lines, with the major components occurring at the supply fundamental switching frequency and its harmonics. Common mode noise, a contributor to both radiated emissions and input conducted emissions, is measured between the input lines and system ground and can be broadband in nature.

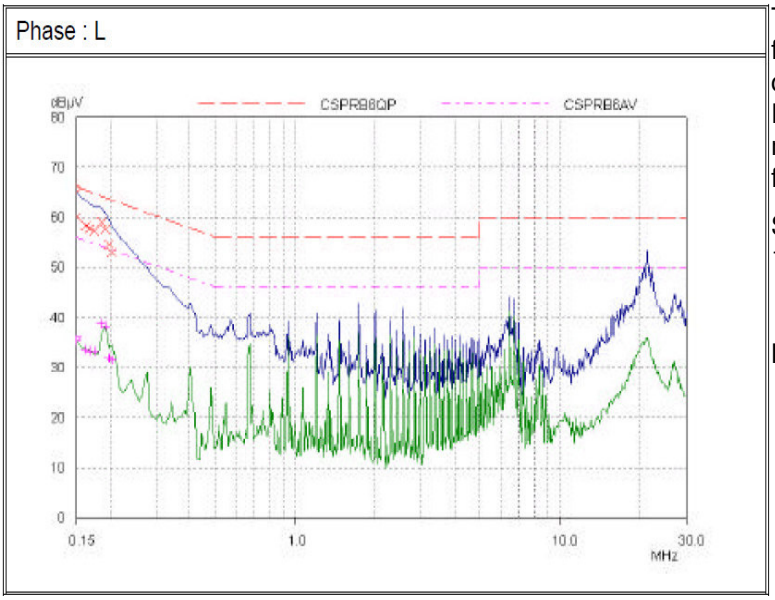

The LPS200-M series power supply have internal EMI filters to ensure the convertor's conducted EMI levels comply with EN55022 (FCC Part 15) Class B and EN55022 (CISPR 22) Class B limits. The EMI measurements are performed with resistive loads under forced air convection at maximum rated loading.

Sample of EN55022 Conducted EMI Measurement at 100Vac input

Note: Orange Line refers to Emerson Quasi Peak which is 6dB below the CISPR international limit. Pink Line refers to the Emerson Average margin, which is 6dB below the CISPR international limit.

Table 5. Conducted EMI emission specifications of the LPS200-M series

Parameter	Model	Symbol	Min	Typ	Max	Unit
FCC Part 15, class B	All	Margin	-	-	6	dB
CISPR 22 (EN55022) class B	All	Margin	-	-	6	dB
EN 60601-1-2: 2001	All	Margin	-	-	6	dB
VCCI Class II	All	Margin	-	-	6	dB

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Radiated Emissions

Unlike conducted EMI, radiated EMI performance in a system environment may differ drastically from that in a stand-alone power supply. The shielding effect provided by the system enclosure may bring the EMI level from Class A to Class B. It is thus recommended that radiated EMI be evaluated in a system environment. The applicable standard is EN55022 Class A (FCC Part 15). Testing ac-dc convertors as a stand-alone component to the exact requirements of EN55022 can be difficult, because the standard calls for 1m leads to be attached to the input and outputs and aligned such as to maximize the disturbance. In such a set-up, it is possible to form a perfect dipole antenna that very few ac-dc convertors could pass. However, the standard also states that 'an attempt should be made to maximize the disturbance consistent with the typical application by varying the configuration of the test sample'.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Environmental Specifications

The LPS200-M series power supply is designed to meet all of its specifications during any combination of operating ambient conditions and after exposure to any combination of non-operating ambient conditions specified in this section.

Table 6. Maximum Ambient Conditions:

Parameter	Model	Symbol	Min	Typ	Max	Unit
Ambient Operating Temperature	All	T_A	0	-	+70[1]	ºC
Cold Start-up Temperature	All	T_{ST}	-20	-	-	ºC
Storage Temperature	All	T_{STG}	-40	-	+85	ºC
Shock Operating	All	Accordance to IEC 68-2-27 Three positive and negative pulses in each axis 30G, half sine, 11mSec duration				
Vibration		Accordance to IEC 68-2-6 to levels IEC 721-3-2 Tested in three mutually perpendicular axes				
MTBF Forced air 25ºC	All	At nominal input lines >550,000hrs				

Note 1 - Derate each output at 2.5% per degree C from 50ºC to 70ºC

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Power / Control Signal Interface Descriptions

AC Input (SK1)

This connector supplies the AC Mains to the LPS200-M series power supply.

Pin 1 - Neutral

Pin 3 - Line

Earth Ground (GND)

This tab connector is the safety ground connection and should be connected to AC input earth ground.

GND – Earth Ground (Safety Ground)

Main Output (SK2)

These terminals provide the main output for the LPS200-M.

TB-1 – Common

TB-2 – Main output

Vo Output voltage adjustment

The main output of the LPS200-M series power supply can be adjusted by +/- 10% from its nominal output voltage via the potentiometer VR1. Since the 12V Fan Supply is not independently regulated, its output voltage may change according to Vo set point.

10-Pin header connector (SK3)

The LPS200-M series power supply contains an isolated 12V output for powering a cooling fan or as a aux power source. This 12V Fan Supply is provided by pin9/pin10 of header connector SK3.

Pin 1– +Remote Sense

Pin 2– -Remote Sense

Pin 3– NC

Pin 4– NC

Pin 5– Power Fail

Pin 6– Common

Pin 7– NC

Pin 8– Common


Pin 9– +12V Fan

Pin 10– -12V Fan Return


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Power Fail – (SK203 – Pin 2)

Power Fail is an open collector output capable of sinking 10ma maximum at 0.5VDC. This signal is referenced to Output Return. Add a pull-up resistor (10K) to an external supply (12V max) for the Power Fail signal.

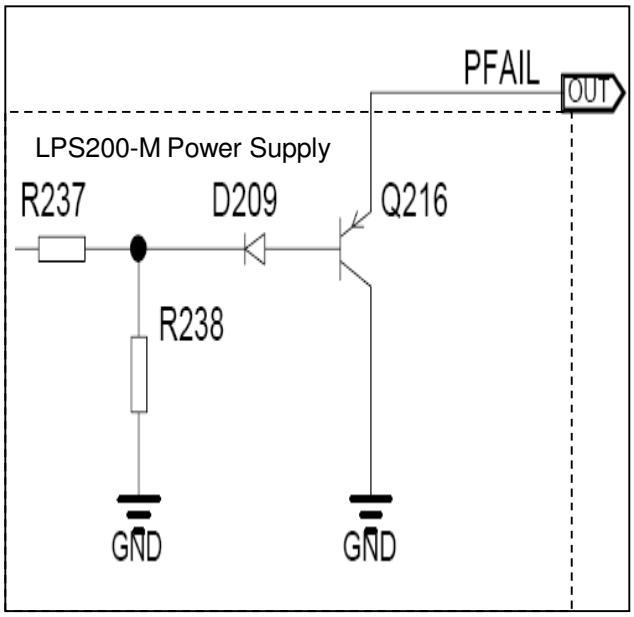

Power Fail signal output equivalent circuit

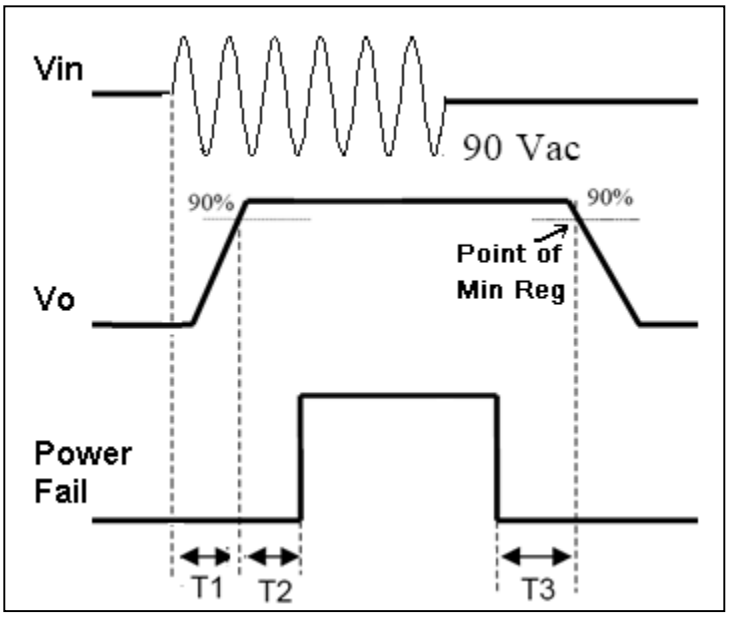

Power Fail signal timing diagram

Low to High Transition (Power OK)

Mains AC Application - Delay time measurement between the application of the Mains AC at the power supply input to the availability of the regulated Vo – T1 (Turn On Delay) and the delay time T2 to when Power Fail signal indicates output voltage Vo is OK. AC line should be considered at 0 degrees at time of initial application to the AC input.

High to Low Transition (Power Fail)

Loss of Main AC - The high to low transition of the Power Fail signal shall be an indication of the impending loss of Vo regulation due to a shutdown condition such as the loss of Mains AC, Overvoltage Protection or Over Temperature Protection. The AC line should be considered at 0 degrees at the time of removal from the power supply input.

Table 7. Timing specifications of the Power Fail signal:

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Turn On Delay	$V_{IN,AC}$ = 90 Vac $P_O = P_{O,maxFA}$	T1	-	-	2	Sec
Power Fail Delay	$V_{IN,AC}$ = 115 Vac $P_O = P_{O,maxFA}$	T2	100	-	500	mSec
Turn Off Delay	$V_{IN,AC}$ = 115 Vac $P_O = P_{O,maxFA}$	T3	6	-	-	mSec

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

+Remote Sense, -Remote Sense (Remote Sensing) – (SK3 – Pin 1 and Pin 2)

The main output of the LPS200-M series power supply is equipped with a Remote Sensing capability that will compensate for a voltage drop of up to a 0.5V between the output terminals of the supply and the sensed voltage point (load). This feature is implemented by connecting the Vo +Remote Sense (pin 1) and the Vo –Remote Sense (pin 2) terminals to the positive and negative rails of the main output, respectively, at a location that is near to the load. Care should be taken in the routing of the sense lines as any noise sources or additional filtering components introduced into the voltage rail may affect the stability of the power supply. The LPS200-M series power supply will operate appropriately without the sense lines connected; however it is recommended that the sense lines be connected directly to the main output terminals if remote sensing is not required.

The power supply is protected against damage caused by inadvertent reverse connection of the Remote Sense lines.

Remote sensing has no effect on the +12V V_{FAN} output.


Note: The maximum output voltage of the LPS200-M series power supply is limited to +10% above the nominal setting, trimming the main output above the nominal may limit the maximum amount of voltage sense compensation.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Application Notes

Block Diagram

Below is the block diagram of the LPS200-M series power supply.

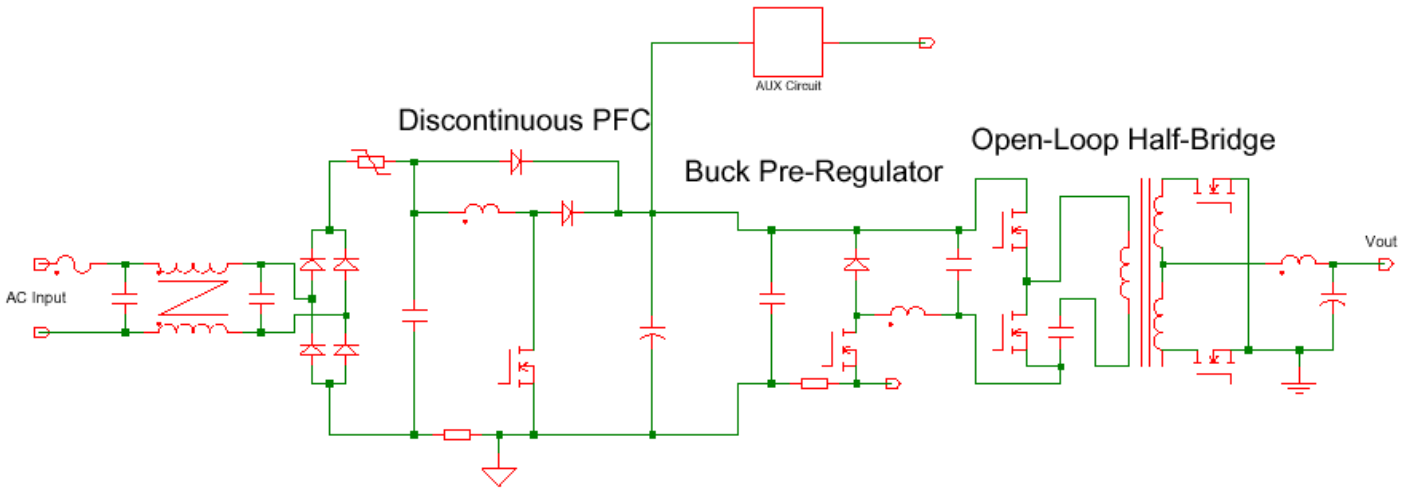


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Application Notes

Output Ripple and Noise Measurement

The setup outlined in the diagram below has been used for output voltage ripple and noise measurements on the LPS200-M Series. When measuring output ripple and noise, a scope jack in parallel with a 0.1uF ceramic chip capacitor, and a 10uF aluminum electrolytic capacitor should be used. Oscilloscope should be set to 20 MHz bandwidth for this measurement.

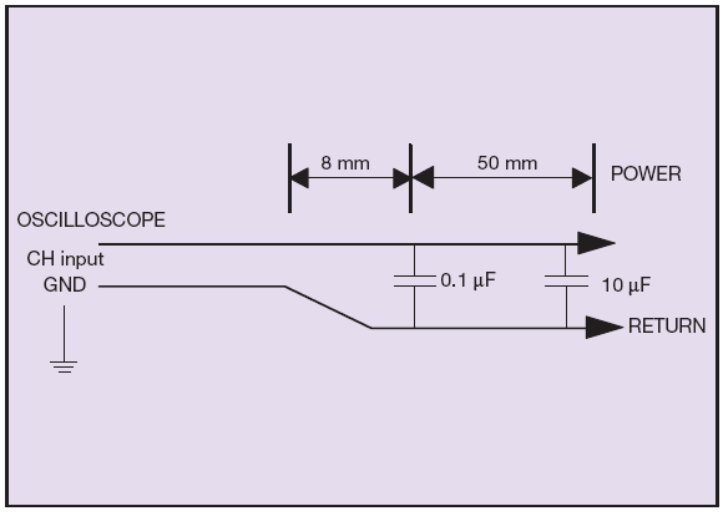

WORLDWIDE OFFICES

Americas
2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)
Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)
14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN EMBEDDED TECHNOLOGIES

www.artesyn.com

For more information: **www.artesyn.com/power**
For support: **productsupport.ep@artesyn.com**

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
© 2014 All rights reserved.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP