ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acopian VA5H3200M* at our website: *Click HERE*

Acopian Power Supplies

Gold Box & Narrow Profile

LINEAR REGULATED

AC-DC dual output

- Dual Tracking Models

- Dual Isolated 5v/12v Models

- Dual Isolated User-selectable Models

- **Shipped Within 3 Days**
- **All Models U.L. Recognized**
- **CE Certified** ***(Gold Box Dual Tracking and 5v/12v models)***
- **Five Year Warranty**



Don't forget these facts about Acopian....

1. **We ship within 3 Days after receipt of order.**
2. **Acopian power supplies last a *very long time*.**
3. **The *Voltage Finder* is the quickest way to find a power supply with the specs you need.**
4. **The *Online System Builder* (www.acopian.com/SystemBuilder) is a convenient way to get your own custom power supply or power system (and they ship within 9 Days).**
5. **You ALWAYS talk to a real person when you call Acopian.**
6. **You can order Acopian power supplies factory direct.**
7. **You can order Acopian power supplies online.**
8. **ALL Acopian products are made in the USA.**



Acopian POWER SUPPLIES

Easton, PA & Melbourne, FL

1-800-523-9478 • www.acopian.com

Order Factory Direct

Made in USA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Gold Box & Narrow Profile

DUAL TRACKING OUTPUTS

LINEAR REGULATED
AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- CE (Gold Box models)
- Five Year Warranty



Narrow Profile Gold Box

These dual output power supplies are a convenient source of the tracking voltages required for powering operational amplifiers and related circuits. Their positive/common/negative output terminal configuration minimizes system wiring. Provision for remote sensing permits compensation of load line effects. Although moderately priced, they are sturdily constructed and conservatively rated.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Voltages: Tracking within 1%.

Load Regulation: ±0.1%.

Line Regulation: ±0.1%.

Ripple: 1.5 mV rms.

Polarity: Positive output, common, and negative output.

Remote Voltage Sensing: Standard.

Overload/Short Circuit Protection: Electronic current limiting.

Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature: –10 to +71°C.

Storage Temperature: –55 to +85°C.

Dimensions: See page F18 for case dimensions.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page H3.

OPTIONS

Overvoltage Protection: A built-in preset overvoltage protection circuit is available on all models. If either output fails, both outputs are 'crowbarred'. To order, add prefix "V" to the model number, and increase standard price by $30.00.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and $5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "–230" to model number and $25.00 to price. The "–230" option requires two additional days.

GOLD BOX MODELS

Nominal Output Voltages	Adjust Range ± V	Amps. per Output at 40°C	55°C	71°C	($) Price	Model	Case Size
±5	.5	.750	.650	.550	275	TD5-75	TG5
±5	.5	1.5	1.25	1.0	315	TD5-150	TG6
±5	.5	2.5	2.0	1.5	380	TD5-250	TG9
±12	1	1.0	.900	.800	280	TD12-100	TG5
±12	1	1.6	1.4	1.0	320	TD12-160	TG6
±12	1	2.5	2.0	1.5	380	TD12-250	TG9
±12	.5	4.5	3.7	3.0	460	TD12-450	TG13
±12	.5	8.5	7.0	5.5	580	TD12-850	TH11
±15	1	.400	.400	.400	220	TD15-40	TG5
±15	1	1.0	.900	.800	280	TD15-100	TG5
±15	1	1.6	1.4	1.0	320	TD15-160	TG6
±15	1	2.5	2.0	1.5	380	TD15-250	TG9
±15	.5	4.5	3.7	3.0	460	TD15-450	TG13
±15	.5	8.5	7.0	5.5	580	TD15-850	TH11

FRONT COVER CONNECTIONS:
(See page F18 for complete drawing.)




NARROW PROFILE MODELS
(for limited space applications)

Nominal Output Voltages	Adjust Range ± V	Amps. per Output at 40°C	55°C	71°C	($) Price	Model	Case Size
±12*	1	.500	.500	.400	230	FD12-50A	TN6T
±12*	.5	1.0	.900	.800	305	LD12-100	TN8H
±15*	1	.500	.500	.400	230	FD15-50A	TN6T
±15*	.5	1.0	.900	.800	305	LD15-100	TN8H

* Not CE certified.

See page F18 for complete drawing.

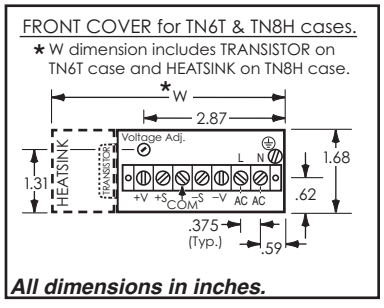

All dimensions in inches.

Online Ordering and Instant Quotes for ALL Acopian power supplies at ***www.acopian.com***
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Gold Box

DUAL ISOLATED OUTPUTS
(User-selectable)

LINEAR REGULATED
AC-DC



- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty

Acopian general purpose duals furnish two completely independent outputs, either identical or different, in less space and at less cost than two equivalent single output supplies. Thousands of output voltage/current rating combinations are available. Mounting and system wiring are simplified. Quality components, generously derated, insure long-term reliability.

HOW TO ORDER: Select two **sections** (from the same table) on pages F19 and F20. The complete model number is the combination of the two **sections** selected. Example: The combination of section 5GT20D and section 8GT50D is Model 5GT20D-8GT50D. Always assign the lower voltage section first. (Two of the same section can also be selected.) For pricing purposes, add the costs of the individual sections selected.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Specifications: See pages 64 and 65.

Short Circuit Protection: Delivers current surges without damage—built-in fuse protects supply against prolonged overloads and shorts.

Polarity: Outputs are floating. Each output may be independently connected to provide any combination of positive and negative voltages. Outputs may be floated up to 300 volts above ground.

Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature: –10 to +71°C.
No derating required.

Storage Temperature: –55 to +85°C.

Case size: G5D.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page H3.

OPTIONS


Overvoltage Protection: Two separate, preset overvoltage protection circuits, one for each output. To order, add prefix "V" to model number and add $30.00 to the standard price for 1.5 to 70 volt outputs; add $50.00 if either or both outputs are greater than 70 volts.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and $5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "–230" to model number and $25.00 to the standard price. The "–230" option requires two additional days.

Dual Tracking & Dual Isolated Case Sizes:

(on page F17) (on page F18)

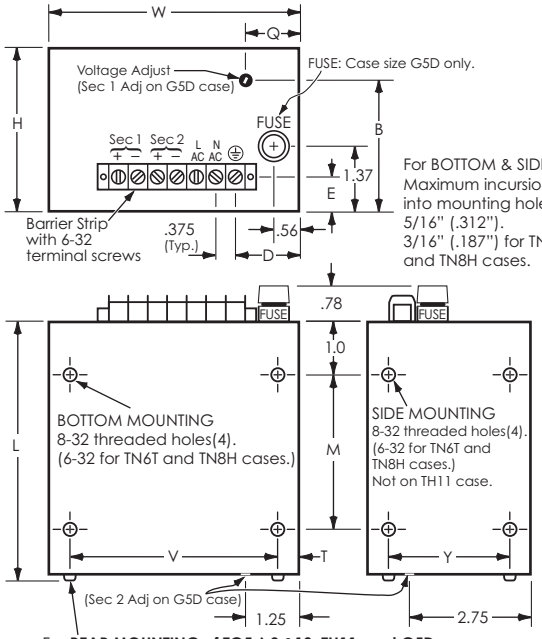

For BOTTOM & SIDE MOUNTING Maximum incursion of screws into mounting holes: 5/16" (.312"). 3/16" (.187") for TN6T and TN8H cases.

For **REAR MOUNTING of TG5,6,9 &13, TH11, and G5D cases**, remove original screws(4) and use 8-32 Type F self-tapping screws. They should extend at least 5/16" (0.312") into the power supply case. (When **rear mounting G5D case**, a hole is required in the mounting surface for access to the Section 2 output adjustment.)

For **REAR MOUNTING of TN6T and TN8H cases**, remove original 6-32 screws(4). These screws may then be used for mounting, provided they extend at least 1/4" (0.250") into the power supply case.

Case Size	L	W	H	M	V	Y	E	Q	B	D	T	Approx. Weight
G5D	5.09	5.12	3.44	3.0	4.50	3.0	.75	1.25	2.73	1.44	.31	4 lb.
TG5	5.09	5.12	3.44	3.0	4.50	3.0	.75	1.25	2.73	1.44	.31	3 lb. 4 oz.
TG6	6.59	5.12	3.44	4.0	4.50	3.0	.75	1.25	2.73	1.44	.31	4 lb. 4 oz.
TG9	9.25	5.12	3.44	6.0	4.50	3.0	.75	1.25	2.73	1.44	.31	6 lb. 8 oz.
TG13	13.25	5.12	3.44	10.0	4.50	3.0	.75	1.25	2.73	1.44	.31	12 lb.
TH11	11.25	7.37	5.12	8.0	6.75	4.56	.75	2.73	4.36	2.38	.31	18 lb. 4 oz.
TN6T	6.59	3.84*		4.0	3.12	1.31					.156	2 lb. 4 oz.
TN8H	8.47	4.68*		5.0	3.12	1.31					.156	3 lb. 14 oz.

All dimensions in inches.

* see page F17 for front cover drawing.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DUAL OUTPUT (User-selectable)

(OUTPUTS TO 500 MA)

Nominal Output Voltage	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')	
			Load ± %	Line ± %		Price per Section ($)	Section
1.5	.5	.200	.4	.05	1	120	1.5GT20D
1.5	.5	.400	.5	.1	1	130	1.5GT40D
2.5	.5	.200	.4	.05	1	120	2.5GT20D
2.5	.5	.400	.5	.1	1	130	2.5GT40D
3	.5	.200	.3	.05	1	120	3GT20D
3	.5	.400	.5	.1	1	130	3GT40D
3.3	.5	.200	.2	.05	1	120	3.3GT20D
3.3	.5	.400	.3	.1	1	130	3.3GT40D
5	.5	.200	.2	.05	1	120	5GT20D
5	.5	.500	.3	.05	1	130	5GT50D
6	1	.200	.05	.05	1	120	6GT20D
6	1	.500	.15	.05	1	130	6GT50D
7	1	.200	.05	.05	1	120	7GT20D
7	1	.500	.15	.05	1	130	7GT50D
8	1	.200	.05	.05	1	120	8GT20D
8	1	.500	.1	.05	1	130	8GT50D
9	1	.200	.05	.05	1	120	9GT20D
9	1	.500	.1	.05	1	130	9GT50D
10	1	.250	.05	.05	1	120	10GT25D
10	1	.500	.1	.05	1	130	10GT50D
11	1	.250	.05	.05	1	120	11GT25D
11	1	.500	.1	.05	1	130	11GT50D
12	1	.250	.05	.05	1	120	12GT25D
12	1	.500	.1	.05	1	130	12GT50D
13	1	.250	.05	.05	1	120	13GT25D
13	1	.500	.1	.05	1	130	13GT50D
15	1	.250	.05	.05	1	120	15GT25D
15	1	.500	.1	.05	1	130	15GT50D
16	1	.250	.05	.05	1	120	16GT25D
16	1	.500	.1	.05	1	130	16GT50D
17	1	.250	.05	.05	1	120	17GT25D
17	1	.500	.1	.05	1	130	17GT50D
18	1	.250	.05	.05	1	120	18GT25D
18	1	.500	.1	.05	1	130	18GT50D
19	1	.250	.05	.05	1	120	19GT25D
19	1	.500	.1	.05	1	130	19GT50D
20	1	.250	.05	.05	1	120	20GT25D
20	1	.500	.1	.05	1	130	20GT50D
21	1	.250	.05	.05	1	120	21GT25D
21	1	.500	.1	.05	1	130	21GT50D
22	1	.250	.05	.05	1	120	22GT25D
22	1	.500	.1	.05	1	130	22GT50D
23	1	.250	.05	.05	1	120	23GT25D
23	1	.500	.1	.05	1	130	23GT50D
24	1	.250	.05	.05	1	120	24GT25D
24	1	.500	.05	.05	1	130	24GT50D
25	1	.250	.05	.05	1	120	25GT25D
25	1	.500	.05	.05	1	130	25GT50D
26	1	.250	.05	.05	1	120	26GT25D
26	1	.400	.05	.05	1	130	26GT40D
28	1	.250	.05	.05	1	120	28GT25D
28	1	.400	.05	.05	1	130	28GT40D
30	1	.250	.05	.05	1	120	30GT25D
30	1	.400	.05	.05	1	130	30GT40D
31	1	.100	.05	.05	1	120	31GT10D
31	1	.300	.05	.05	1	130	31GT30D
32	1	.100	.05	.05	1	120	32GT10D
32	1	.300	.05	.05	1	130	32GT30D
33	1	.100	.05	.05	1	120	33GT10D
33	1	.300	.05	.05	1	130	33GT30D

Nominal Output Voltage	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')	
			Load ± %	Line ± %		Price per Section ($)	Section
34	1	.100	.05	.05	1	120	34GT10D
34	1	.300	.05	.05	1	130	34GT30D
35	1	.100	.05	.05	1	120	35GT10D
35	1	.200	.05	.05	1	130	35GT20D
36	1	.100	.05	.05	1	120	36GT10D
36	1	.200	.05	.05	1	130	36GT20D
38	1	.100	.05	.05	1	120	38GT10D
38	1	.200	.05	.05	1	130	38GT20D
40	1	.100	.05	.05	1	120	40GT10D
40	1	.200	.05	.05	1	130	40GT20D
42	1	.100	.05	.05	1	120	42GT10D
42	1	.200	.05	.05	1	130	42GT20D
44	1	.100	.05	.05	1	120	44GT10D
44	1	.200	.05	.05	1	130	44GT20D
45	1	.100	.05	.05	1	120	45GT10D
45	1	.200	.05	.05	1	130	45GT20D
46	1	.100	.05	.05	1	120	46GT10D
46	1	.200	.05	.05	1	130	46GT20D
48	1	.100	.05	.05	1	125	48GT10D
48	1	.200	.05	.05	1	135	48GT20D
50	1	.100	.05	.05	1	125	50GT10D
50	1	.200	.05	.05	1	135	50GT20D
52	1	.100	.05	.05	1	130	52GT10D
52	1	.200	.05	.05	1	140	52GT20D
54	1	.100	.05	.05	1	130	54GT10D
54	1	.200	.05	.05	1	140	54GT20D
55	1	.100	.05	.05	1	130	55GT10D
55	1	.200	.05	.05	1	140	55GT20D
56	1	.050	.05	.05	1	130	56GT05D
56	1	.100	.05	.05	1	140	56GT10D
58	1	.050	.05	.05	1	130	58GT05D
58	1	.100	.05	.05	1	140	58GT10D
60	1	.050	.05	.05	1	130	60GT05D
60	1	.100	.05	.05	1	140	60GT10D
62	1	.050	.05	.05	1	130	62GT05D
62	1	.100	.05	.05	1	140	62GT10D
64	1	.050	.05	.05	1	130	64GT05D
64	1	.100	.05	.05	1	140	64GT10D
65	1	.050	.05	.05	1	130	65GT05D
65	1	.100	.05	.05	1	140	65GT10D
67	1	.050	.05	.05	1	130	67GT05D
67	1	.100	.05	.05	1	140	67GT10D
68	1	.050	.05	.05	1	130	68GT05D
68	1	.100	.05	.05	1	140	68GT10D
69	1	.050	.05	.05	1	130	69GT05D
69	1	.100	.05	.05	1	140	69GT10D
70	1	.050	.05	.05	1	130	70GT05D
70	1	.100	.05	.05	1	140	70GT10D
75	1	.050	.05	.05	1	130	75GT05D
75	1	.100	.05	.05	1	140	75GT10D
76	1	.020	.05	.05	1	130	76GT02D
76	1	.050	.05	.05	1	140	76GT05D
80	1	.020	.05	.05	1	130	80GT02D
80	1	.050	.05	.05	1	140	80GT05D
85	1	.020	.05	.05	1	135	85GT02D
85	1	.050	.05	.05	1	155	85GT05D
90	1	.020	.05	.05	1	135	90GT02D
90	1	.050	.05	.05	1	155	90GT05D
95	1	.020	.05	.05	1	140	95GT02D
95	1	.050	.05	.05	1	160	95GT05D
100	1	.020	.05	.05	1	155	100GT02D
100	1	.050	.05	.05	1	165	100GT05D

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DUAL OUTPUT (User-selectable)

(OUTPUTS TO 2 AMPS.)

Nominal Output Voltage	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')	
			Load ± %	Line ± %		Price per Section ($)	Section
1.5	.5	.400	.5	.1	1	130	1.5GT40D
2.5	.5	.400	.5	.1	1	130	2.5GT40D
3	.5	.400	.5	.1	1	130	3GT40D
3	.5	.700	.5	.1	1	135	3GT70D
3	.5	1.0	.5	.1	1	140	3GT100D
3.3	.5	.400	.3	.1	1	130	3.3GT40D
3.3	.5	.700	.4	.1	1	135	3.3GT70D
3.3	.5	1.0	.5	.1	1	140	3.3GT100D
5	.5	.500	.3	.05	1	130	5GT50D
5	.5	.700	.4	.05	1	135	5GT70D
5	.5	1.0	.5	.05	1	140	5GT100D
5	.25	2.0	.5	.05	1	165	5GT200D
6	1	.500	.15	.05	1	130	6GT50D
6	.5	.700	.2	.05	1	135	6GT70D
6	.5	1.0	.3	.05	1	140	6GT100D
7	1	.500	.15	.05	1	130	7GT50D
7	.5	.700	.2	.05	1	135	7GT70D
7	.5	1.0	.3	.05	1	140	7GT100D
8	1	.500	.1	.05	1	130	8GT50D
8	.5	.700	.15	.05	1	135	8GT70D
8	.5	1.0	.2	.05	1	140	8GT100D
9	1	.500	.1	.05	1	130	9GT50D
9	.5	.700	.15	.05	1	135	9GT70D
9	.5	1.0	.2	.05	1	140	9GT100D
10	1	.500	.1	.05	1	130	10GT50D
10	.5	.700	.15	.05	1	135	10GT70D
10	.5	1.0	.2	.05	1	140	10GT100D
12	1	.500	.1	.05	1	130	12GT50D
12	.5	.700	.1	.05	1	135	12GT70D
12	.5	1.0	.1	.05	1	140	12GT100D
14	1	.500	.1	.05	1	130	14GT50D
14	.5	.700	.1	.05	1	135	14GT70D
14	.5	1.0	.1	.05	1	140	14GT100D
15	1	.500	.1	.05	1	130	15GT50D
15	.5	.700	.1	.05	1	135	15GT70D
15	.5	1.0	.1	.05	1	140	15GT100D
16	1	.500	.1	.05	1	130	16GT50D
16	.5	.700	.1	.05	1	135	16GT70D
16	.5	1.0	.1	.05	1	155	16GT100D
18	1	.500	.1	.05	1	130	18GT50D
18	.5	.700	.1	.05	1	135	18GT70D
18	.5	1.0	.1	.05	1	155	18GT100D
19	1	.500	.1	.05	1	130	19GT50D
19	.5	.750	.1	.05	1	140	19GT75D
20	1	.500	.1	.05	1	130	20GT50D
20	.5	.750	.1	.05	1	140	20GT75D

(90 TO 150 VOLTS)

Nominal Output Voltage	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')	
			Load ± %	Line ± %		Price per Section ($)	Section
90	1	.050	.05	.05	1	155	90GT05D
90	1	.100	.05	.05	1	175	90GT10D
95	1	.050	.05	.05	1	160	95GT05D
95	1	.100	.05	.05	1	180	95GT10D
100	1	.050	.05	.05	1	165	100GT05D
100	1	.100	.05	.05	1	185	100GT10D
105	1	.050	.05	.05	1	165	105GT05D
105	1	.100	.05	.05	1	185	105GT10D
110	1	.050	.05	.05	1	175	110GT05D
110	1	.100	.05	.05	1	190	110GT10D
115	1	.050	.05	.05	1	175	115GT05D
115	1	.100	.05	.05	1	190	115GT10D
120	1	.050	.05	.05	1	180	120GT05D
120	1	.100	.05	.05	1	195	120GT10D
125	1	.050	.05	.05	1	185	125GT05D
125	1	.100	.05	.05	1	200	125GT10D
130	1	.050	.05	.05	1	185	130GT05D
130	1	.100	.05	.05	1	200	130GT10D
135	1	.050	.05	.05	1	185	135GT05D
135	1	.100	.05	.05	1	200	135GT10D
140	1	.050	.05	.05	1	185	140GT05D
140	1	.100	.05	.05	1	200	140GT10D
145	1	.050	.05	.05	1	185	145GT05D
145	1	.100	.05	.05	1	200	145GT10D
150	1	.050	.05	.05	1	185	150GT05D
150	1	.100	.05	.05	1	200	150GT10D

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Gold Box

DUAL ISOLATED OUTPUTS
(5v/12v combinations)

LINEAR REGULATED
AC-DC



- Shipped Within 3 Days
- All Models U.L. Recognized
- CE
- Five Year Warranty

Dual isolated output power supplies may be connected to provide any desired arrangement of positive and negative output voltages. Each voltage is independently adjustable. No derating is required up to +60°C. A separate overvoltage protector on each output is available as a built-in option.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Polarity: Outputs are floating. Each may be independently connected to provide any combination of positive and negative voltages. Outputs may be floated up to 300 volts above ground.

Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature: –10 to +60°C. No derating required.

Storage Temperature: –55 to +85°C.


Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page H3.

OPTIONS

Overvoltage Protection: Two separate, preset overvoltage protection circuits, one for each output. To order, add prefix “V” to model number and add $45.00 to the standard price.

Terminal Strip Cover: Clips on. To order, add suffix “M” to model number and $5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix “–230” to model number and $25.00 to the standard price. The “–230” option requires two additional days.

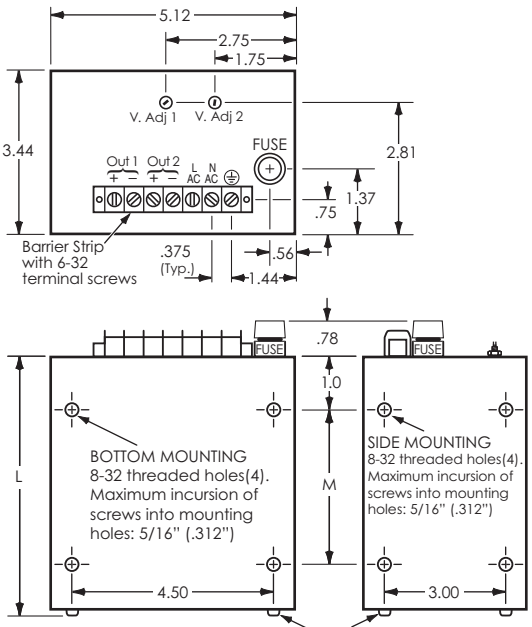

Case Size	L	M	Approx. Weight
DG5	5.09	3.0	4 lb.
DG6	6.59	4.0	4 lb. 4 oz.
DG9	9.25	6.0	6 lb. 8 oz.

All dimensions in inches.


Nominal Output Voltages	Adjust Range ± V	Output Current Amps.	Regulation Load ± %	Regulation Line ± %	Ripple mV RMS	($) Price	Model	Case Size
5	.25	2.0	.15	.15	1	280	512D5A	DG5
12	1	.600	.15	.15	1			
5	.25	3.0	.15	.15	1	320	512D6A	DG6
12	1	1.2	.15	.15	1			
5	.25	6.0	.15	.15	1	390	512D9A	DG9
12	1	2.4	.15	.15	1			

Online Ordering and Instant Quotes for ALL Acopian power supplies at ***www.acopian.com***
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

WALL MOUNTING KITS ...$10

These kits provide a way of mounting power supplies on a wall or panel when the other side of the mounting surface is inaccessible. Each kit consists of four aluminum brackets and four machine screws for fastening them to the power supply, effectively adding mounting flanges to the power supply.



All dimensions in inches.


For 'Gold Box' and (modular) 'High Voltage' power supplies:

GB8 Mounting Kit *(#8-32 mounting holes)*

Can be used on these case sizes:

CM6, CM9, CM13, CH11, CH16, DG5, DG6, DG9, G3, G5, G5D, G6, G9, G13, GT5, GT6, GT9, GT13, H8, H11, H16, HD345, HD355, HA349, HA359, HT11, HT16, LM6A*, LM8A*, LM10A*, M6, M9, M13, RM6, RW6 TG5, TG6, TG9, TG13, TH11, WG7, WM6, WM9, Y3, Y5, Y6, YH11, YA

For rear mounting brackets horizontally on **LM cases only, use GBR Mounting Kit...$15*



For 'Narrow Profile' power supplies:

NP6 Mounting Kit *(#6-32 mounting holes)*

Can be used on these case sizes:


AMC, CN8T, DN6B, DN6A, DN8A, DN8, F6T, F8T, N8T, WL9, WN6A, WN6B, WN8, WN8A, WN8B, TN6T


NP6L Mounting Kit *(#6-32 mounting holes)*

Can be used on these case sizes:

CN8H, N8H, TN8H

Model NP6L consists of two brackets 1.5" long as shown above, and two 2.5" long brackets (to extend beyond heat sink).





DIN RAIL MOUNTING KITS ...$15*

CH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes: RM6, RW6

GH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes:

CM6	DG5	G3	GT5	M6	TG5	Y3
CM9	DG6	G5	GT6	M9	TG6	Y5
CM13	DG9	G5D	GT9	M13	TG9	Y6
		G6	GT13		TG13	
		G9				
		G13				

GR35DIN Mounting Kit (Rear mounting)

Can be used on these case sizes:

CM6	DG5	G3	GT5	HD345	M6	RM6	TG5	Y3
CM9	DG6	G5	GT6	HD355	M9	RW6	TG6	Y5
	DG9	G5D	GT9				TG9	Y6
		G6						
		G9						

(GR35DIN can be used, but is not recommended on case sizes: G13, GT13, M13, TG13)

LR35DIN Mounting Kit* (Rear mounting)

LV35DIN Mounting Kit* (Vertical mounting)

LH35DIN Mounting Kit* (Horizontal mounting)

Can be used on these case sizes: LM6A, LM8A, LM10A

**All DIN Kits for LM cases $20*

NPH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes:

CN8H	DN6A	F6T	N8H	TN6T	WN6A
CN8T	DN6B	F8T	N8T	TN8H	WN6B
	DN8				WN8
	DN8A				WN8A
					WN8B

NPR35DIN Mounting Kit (Rear mounting)

Can be used on these case sizes:

CN8H	F6T	N8H	TN6T
CN8T	F8T	N8T	TN8H

NPV35DIN Mounting Kit (Vertical mounting)

Can be used on these case sizes:

CN8H	DN6A	F6T	N8H	TN6T	WN6A
CN8T	DN6B	F8T	N8T	TN8H	WN6B
	DN8				WN8
	DN8A				WN8A
					WN8B


WH35DIN Mounting Kit (Horizontal mounting)


Can be used on these case sizes: WM6, WM9


WL35DIN Mounting Kit (Vertical mounting)


WLH35DIN Mounting Kit (Horizontal mounting)


Can be used on these case sizes: WL7, WL9


GH35DIN


LH35DIN


NPH35DIN



GR35DIN




LR35DIN


NPV35DIN


WLH35DIN


WH35DIN


NPR35DIN

Acopian

*Online Ordering and Instant Quotes for ALL Acopian power supplies at **www.acopian.com***

P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ACOPIAN SELLS FACTORY DIRECT WORLDWIDE: We do not use representatives or distributors. Contact Acopian for technical information or a quote.

WARRANTY: Acopian power supplies are warranted to be free from defects in material and workmanship for a period of five years (encapsulated devices, for one year) from date of original shipment. Acopian's obligation under this warranty is limited to repairing any power supply returned to the factory Service Department in Easton, PA and replacing any defective parts. Mini Encapsulated power supplies are not repairable. Authorization must be obtained from Acopian before a power supply may be returned for repair. Units must be well packed when shipping to Acopian; the repair of any damage incurred during shipment will be charged. Transportation charges are to be paid by the purchaser. A reinspection and handling charge will be applied to returned units found to have no defects. If a failure has been caused by misuse, operation in excess of specifications, or modification by the customer, repairs will be billed at cost; in such cases, a cost estimate will be submitted before work is started.

Acopian reserves the right to make changes or improvements in its products without incurring any obligation to install the same on products previously manufactured.

This warranty is in lieu of all other warranties, obligations, and liabilities, expressed or implied, and is the purchaser's exclusive remedy. Acopian makes no warranty, either express or implied, of merchantability, fitness for a particular purpose or otherwise. In no event shall Acopian be liable whether in contract, tort, or negligence, for special, indirect, incidental or consequential damages of any kind, including loss of business or profits, or any other losses incurred by the purchaser or any third party, the Customer's remedies being limited, at Acopian's option, to replacement, repair or credit at the price on the date of claim.

The validity, performance and construction of all terms and conditions and any sale made by Acopian shall be determined by the law of Pennsylvania, without regard to its conflict of law principles, and all parties to the transaction expressly consent to the jurisdiction of such courts and consent to the venue of the Court of Common Pleas for Northampton County, Pennsylvania.

PRICES: The prices shown are F.O.B. our factory; Easton, PA or Melbourne, FL. ('EXW Factory' if outside the 50 United States.) All prices and specifications are subject to change without notice.

TERMS: Net 30 days, subject to credit approval. Visa, MasterCard and American Express also accepted.

SHIPPING: Location permitting, small shipments are made by United Parcel Service, or by Parcel Post; larger shipments, by insured motor freight collect. Shipments can be made by air upon request. Risk of loss shall be F.O.B. Our Factory, even in cases where freight may be prepaid or allowed to destination by Acopian. If equipment is received in damaged condition, it is the customer's responsibility to contact the carrier and file a claim for damages.

TIME FOR DELIVERY: The time for delivery quoted by Acopian is the time required to ship from our plants. We will not be liable for delays in delivery caused by any reason beyond our control, including but not limited to acts of God, casualty, civil disturbance, labor disputes, transportation or supply difficulties, or any interruption of our facilities, and the quoted time for delivery shall be extended during the continuance of such conditions and for a reasonable time thereafter. In no event will Acopian be liable for any premium transportation, reprocurement, or similar costs incurred by the Customer as a result of conditions beyond Acopian's control resulting in Acopian's inability to deliver product in accordance with customer's requested delivery schedules.

QUANTITY DISCOUNTS: Discounts are available to quantity buyers and are dependent upon the order quantity and the manufacturing scheduling anticipated by the order, and apply only to the quantity and delivery ordered. Partial shipments are considered as separate orders for discounting purposes.

EXPORT ORDERS: A minimum export documentation charge of $60.00 applies. (A minimum charge of $25.00 applies on orders to certain U.S. territories requiring customs forms.)

MOISTURE/FUNGUS PROOFING: Power supplies can be furnished with a moisture and fungus resistant varnish applied to interior surfaces. To order, add the suffix letter F to the model number. This option requires two additional days and is not available on High Voltage, Mini Encapsulated, Rack Mounting, and Gold Box Switching models.

TAGGING: Add $10.00 to price.

TEST DATA: Cost, $35.00 or 2% of order, whichever is greater.

SPECIAL MODELS/MODIFICATIONS: Cataloged models can be altered at the factory to meet special requirements. Contact the Applications Engineering Department to discuss your needs.

PARTS: The designs used in Acopian power supplies utilize standard components to the greatest practical extent. When replacements are required, the types originally used, or their equivalents, can usually be obtained most quickly from a local electronic components distributor.

Special components, such as transformers, are stocked at the factory warehouses. Contact the Applications Engineering Department for information on the parts required, referencing the model number of the power supply, the circuit designation of the component, and a description.

PURCHASE ORDER ACCEPTANCE: Orders are accepted subject to Acopian's Terms and Conditions. Any Terms and Conditions of any Purchaser's order, agreement, or understanding which are in addition to or inconsistent with Acopian's shall not be binding upon Acopian unless made in writing and accepted over the signature of an authorized officer of Acopian. Orders shall not be considered accepted until entered into production at our plant. Acopian reserves the right to refuse any order. All typographical and clerical errors are subject to correction by Acopian.

RETURNED GOODS: Acopian products are built on a per-order basis, and ordinarily no credit can be extended for their return. No goods will be accepted for return unless authorized in writing by Acopian.

CHANGES: The customer may, by a written notice, request changes within the general scope of the order, in the drawings, designs or specifications; method of shipment; and place of delivery. If any such change causes an increase or decrease in the cost, or the time required for the processing of any part of the order, an equitable adjustment shall be made in the price or delivery schedule, or both, and the order shall be modified in writing accordingly.

CANCELLATION: Suspension or cancellation of orders may be made only upon our written approval and on terms that will indemnify us against all loss.

OVERTIME: It is anticipated that any order will be processed during regular working hours on regular working days. If for any reason the Purchaser requests Acopian to process the order, or any portion of it, outside of such regular working hours, any overtime or other additional expense occasioned thereby shall be billed to and paid by the Purchaser as an extra cost. Acopian reserves the right to decline to process the order outside regular working hours.

CUSTOMER DELAY OF WORK: If the performance of all or any part of the work is delayed or interrupted by Customer's failure to act within the time specified (or within a reasonable time if no time is specified) and such act is not expressed or implied by the order, an adjustment shall be made in the cost of performance of the order caused by such delay or interruption and the order modified in writing accordingly. Adjustment will also be made in the delivery or performance dates and any other contractual provisions affected by such delay or interruption.

GOVERNMENT SPECIFICATIONS: Pricing is based upon industrial-grade construction, marking, packing, and packaging. Exception is taken to any MIL specifications, and to any requirements for the use of special forms, documentation other than quoted, and Government Source Inspection. Acopian must decline to quote on any other basis.

APPLICATIONS ASSISTANCE: ***Questions regarding the specifications, features, and use of any Acopian product should be directed to the Applications Engineering Department. A staff of power supply specialists will be pleased to assist you.***

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP