

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

3gen

600W/1000W Configurable Switch Mode Power Supply

6 slot package size



FEATURES

- 1 to 12 isolated outputs with full user configurability
- 1.45V to 28V standard output voltages
- Bias Supply Voltage 5V @ 50mA
- Class B Conducted Emissions
- 600 and 1000 Watts of output power
- Series and parallel capability
- Zero load operation
- EN61000-3-2 compliant
- Universal input
- Fully floating outputs
- Individual control signals on each module
- Modular construction
- Industry standard footprint
- 3 Year warranty

APPLICATIONS INCLUDE

- Industrial equipment
- Test and measurement
- Telecommunications
- Peripherals
- Audio/broadcast
- Automation
- Linear and rotary motion

3gen provides an instant, no compromise power solution for any power requirements where a unique set of voltage and current requirements is needed. Excelsys has coupled a 2 transistor forward converter front end with planar magnetic main transformer technology and modular magnetic amplifier output stages to provide a fast turn-around, production line built power solution that can be matched to meet your exact requirements for Volts and Amps. Configured units may be shipped within 48 hours to your exact set point requirements complete with CE and UL approval and fully compliant to EN61000-3-2.

Designed as a cost effective solution for single piece or volume production runs, the 3G6C and 3G6D series provide up to 1000 Watts of output power in a 270 x 187 x 65mm rugged extruded aluminium package. Power connections are made using quality screw terminal connections and optional primary and secondary controls enable power channels to be individually margined, enabled, paralleled or stacked to provide literally millions of power solutions to match your needs. Design resources available from the Excelsys web site www.excelsys.com include safety certification, CB reports, CAD profile drawings, handbooks and configuration software tools.


SINGLE OUTPUT MODULES		NOMINAL	RANGE	Imax
Module 1	1 Slot	5V	(3 to 5.6V)	30A
Module 2	1 Slot	12V	(5 to 13V)	20A
Module 3	1 Slot	18V	(8 to 20V)	15A
Module 4	1 Slot	24V	(12 to 28V)	12A
Module 70	2 Slots	5V	(1.45 to 5.6V)	80A
DUAL OUTPUT MODULE		NOMINAL	RANGE	Imax
Module 5	1 Slot	24V 24V	(10 to 28V) (10 to 28V)	3A 3A
Module 6	1 Slot	5V 24V	(3 to 5.6V) (10 to 28V)	10A 3A

CE (LVD)

c UL us



PRINCIPLE OF OPERATION

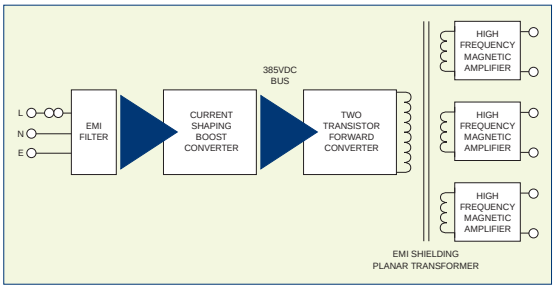

t: +353 (0)1 8900933 f: +353 (0)1 8901358 w: www.excelsys.com

excelsys

SPECIFICATION All specifications are typical at nominal input, full load at 25°C unless otherwise stated

OUTPUT SPECIFICATIONS		
Maximum power	Input module C Input module D (Note 1)	600W 1000W
Output adjustment	(Note 2)	Multi-turn potentiometer
Line regulation		±0.1%
Load regulation	50% load change	±0.2%
Cross regulation		±0.2% typ.
Transient response	(Note 3)	<10%, <0.5ms
Temperature coefficient		±0.02%/°C
Ripple and noise	(Note 4)	1.0% or 100mV pk-pk
Overvoltage protection		Standard on all outputs
Overcurrent protection	(Note 5)	Individual current limit
Thermal protection		Standard
Mains failure signal	Option 03, 05, 06 or 07	5ms warning
Output isolation	(Note 6)	Each single and dual output fully floating
Margin	See AN105 for individual module margin capabilities	
Minimum load	(Note 7)	Zero
Turn-on delay		500ms
Remote sense	Single outputs only	0.5V drop

INPUT SPECIFICATIONS		
Input voltage range	Universal input	88 to 264VAC 125 to 370VDC
Input frequency range	(Note 8)	47Hz to 63Hz
Inrush current	230VAC @ 25°C	50A max.
Harmonic distortion	(Power factor)	EN61000-3-2


EMC CHARACTERISTICS		
Emissions: Conducted	EN55022, FCC	Level B
Immunity: Electrostatic discharge	EN61000-4-2	Level 4
Radiated RFI	EN61000-4-3	Level 3
Fast transients - burst	EN61000-4-4	Level 3
Input line surges	EN61000-4-5	Class 3
Conducted RFI	EN61000-4-6	Level 3
Voltage dips	EN61000-4-11	Compliant

GENERAL SPECIFICATIONS		
Hold-up time	(Note 9)	20ms typ after loss of AC power
Efficiency		80% typ.
Isolation voltage	Input/output Input/chassis	3000VAC 1500VAC
Switching frequency		200kHz
Approvals and standards	(Note 11)	IEC60950, UL1950 CSA22.2 No. 950
Leakage current		1.75mA, 250VAC, 60Hz
Weight		3.5kg
Size	LxWxH	270 x 187 x 65 mm
MTBF	See AN105	400,000 hours


ENVIRONMENTAL SPECIFICATION		
Operating temperature (See derating curve)	See AN105	-20°C to +50°C Derate 2.5% per °C up to +70°C
Storage temperature		-40°C to +85°C
Relative humidity	Non-condensing	5% to 95% RH
Shock		3000 bumps, 10G (16ms) half sine
Vibration		10-200Hz, 1.5G

NOTES

1 1000W peak power for 10s at low line. 800W average power for input voltage less than 180VAC.
2 Outputs are user adjustable or factory set to your requested voltage.
3 25% to 75% load change.
4 Whichever is greater. 20MHz bandwidth. (See AN105 for specification below 0°C).
5 Straight line on all outputs. On Module 70 current limit adjustable from 50% to 110%. Optional foldback on Module 70. See AN105 or contact factory for details.
6 100V isolation between each output and 500V to chassis.
7 All outputs except Module 70, which has 5.0% minimum load for full specification.
8 Contact factory for 400Hz operation.
9 For nominal output voltages and full load.
10 The specifications contained in this data sheet are believed to be correct at time of publication. Specifications are subject to change without notice.
11 This product is not intended for use as a stand alone unit and must be installed by authorised personnel in order to maintain approvals.

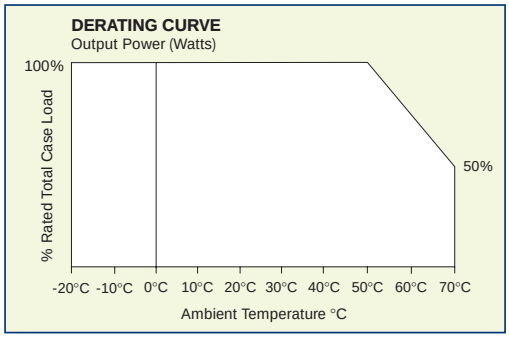


TYPICAL EMISSIONS TO EN55022 LEVEL B

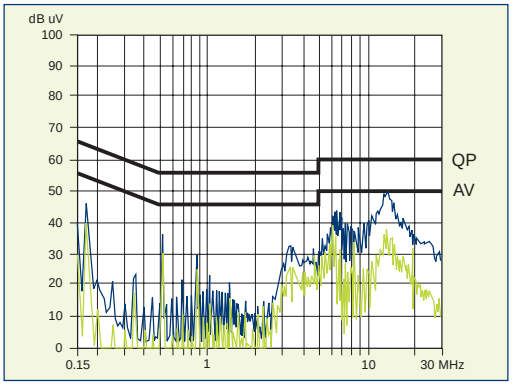

excelsys
e: info@excelsys.com w: www.excelsys.com

MECHANICAL SPECIFICATIONS

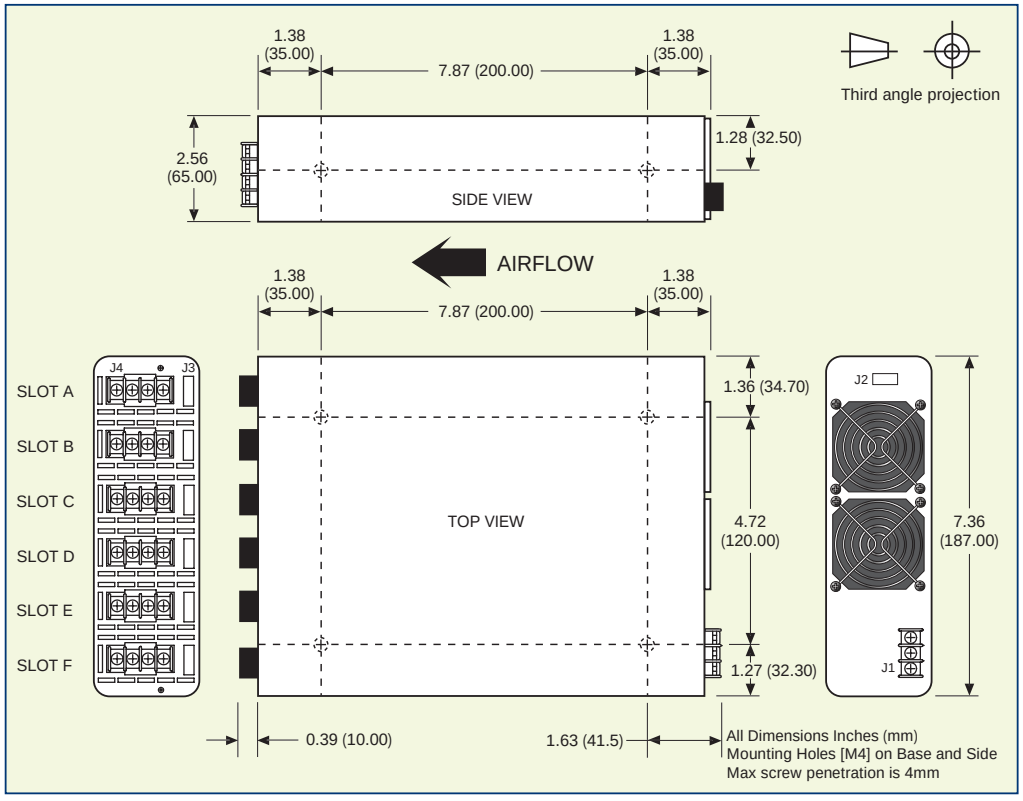

Connectors:

J1 Line Input Connector
J2 Options
See AN105 for Pin-out
J3 Output Signals
See AN105 for Pin-out
J4 Output Connector

Accessories:

61069	Parallel Link
61070	Series Link
362D010	"U" Link
OPCONN4	Mating Connector for options + Module 1-6 signals
OPCONN6	Mating Connector for Module 70 signals

3gen 6 SLOT STANDARD OPTIONS

03 Mains Power Fail + Logic Enable
05 Mains Power Fail + Logic Inhibit
06 Mains Power Fail + Logic Enable + Bias Supply Voltage
07 Mains Power Fail + Logic Inhibit + Bias Supply Voltage

Options: Mutually exclusive

OUTPUT SIGNALS


Output control signals are available on all output modules.

Modules 1 to 6
- Power good signal
- Output inhibit signal
- Remote adjust (margin)

Module 70 Additional Features (See AN105)
- Adjustable Current Limit
- Foldback or Straight Line Current limiting
- Bias Voltage
- Selectable Output Inhibit or Enable

(Dual output modules: output signals available on first [top] output only).

HOW TO ORDER

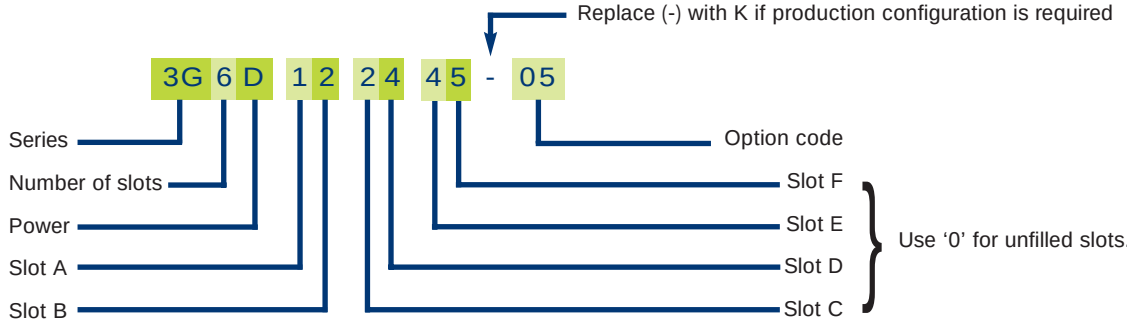

Note: *Calculate power requirements by summing output powers calculated at NOMINAL output voltages.*

Specification of power supply detailed above:


- 6 slot series
- Maximum output power: 1000W
- 5V @ 30A; 12V @ 20A; 12V @ 20A; 24V @ 12A; 24V @ 12A; 24V @ 3A; 24V @ 3A
- Mains Power Fail Signal + Logic Inhibit

Production configuration:

Units are shipped with nominal output voltages unless production configuration is specified. Excelsys can configure to your exact requirements, through use of appropriate parallel and series busbars and through voltage adjustment to specific set points. Please refer to configuration sheet for details (MD-3GCONFIG-05/00) and for part number assignment to our website at www.excelsys.com.


3gen FLEXIBILITY

Using Modules in Parallel

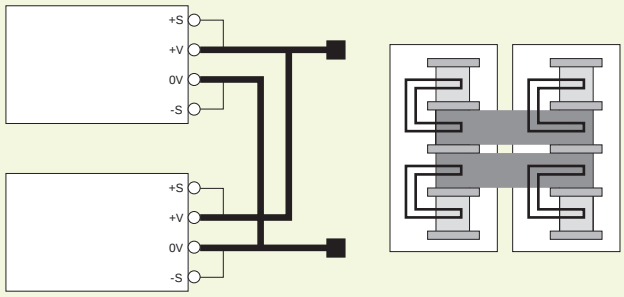


Notes:
Maximum current = (I_1 + I_2) x .9
Use two parallel links (P/N 61069)

Using Modules in Series

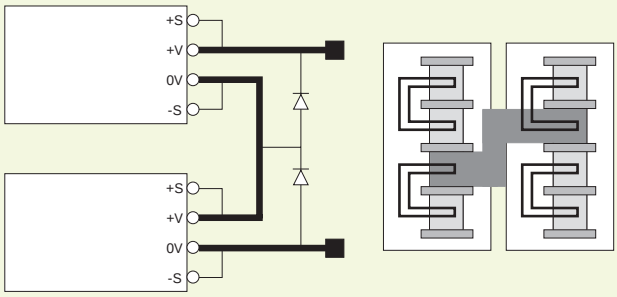


Notes:
Maximum voltage to chassis is 500V
Use series link (P/N 61070)
Reverse bias diodes may be required for certain applications, eg. large capacitive loads

Remote Adjustment




Remote Sensing

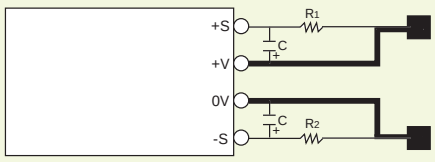


Notes:
Where the sensing point is remote from the output of the power supply, to avoid spurious noise pick-up it may be necessary to:

1 Use twisted pair sense wires.
2 Use R C as shown (R_1 = 100Ω) (R_2 = 10Ω) (C = 22µF).

Mains Power Fail Signal




Output Power Good Signal

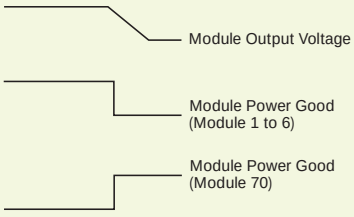


Notes:
See Application Note AN105, or visit excelsys website www.excelsys.com for full details.

Global Inhibit (Reverse Logic for Global Enable)



Module Inhibit



Doc. 40005 rev. 03 07/02

Excelsys Technologies Ltd, Swords Business Park, Swords, Co. Dublin, Ireland
t: +353 (0)1 8900933 f: +353 (0)1 8901358 w: www.excelsys.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP