ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag IntelliPack 822A-0200* at our website: ***Click HERE***

Intelligent Alarms



822A Dual Alarm

Thermocouple and Millivolt Input


Models
822A-0200:
Dual input alarm with two SPDT relays


Input Ranges
TC types: J, K, T, R, S, E, B, N
Millivolt: ±15.625mV to ±1.0V DC

Alarm Outputs
Dual SPDT electro-mechanical 5A relays

Power Requirement
10 to 36V DC

Approvals
CE marked. UL, cUL listed.

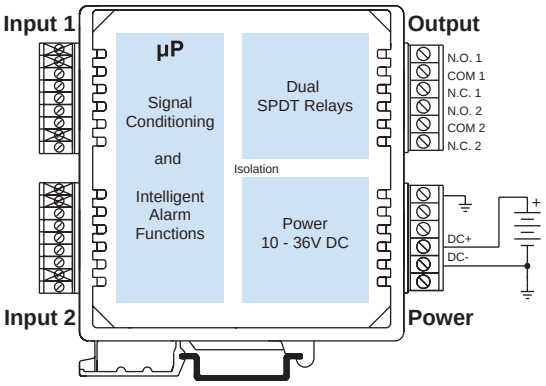

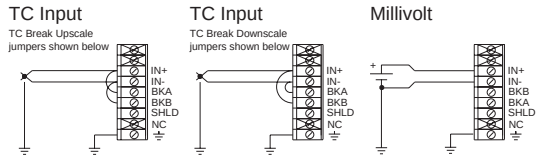

Description

IntelliPack alarms compare inputs against user-defined limit setpoints to control built-in relays.

Each unit offers a selection of input ranges and alarm functions to handle a broad range of applications. As your needs change, you can easily reconfigure the unit for different ranges or functions. Alarm functions available on all models include on/off controller, limit alarm, window alarm, deviation alarm, rate-of-change alarm, and peak/valley detection.

Setup is very easy. IntelliPack alarms are configured through a user-friendly Windows 95/98/ME/NT/XP/2000 program. Field adjustments and recalibration are quickly performed with front-panel push-buttons and status LEDs. Once configured, IntelliPacks operate independent of any host computer.

Special Features

- Integrated microcontroller performs intelligent signal processing for advanced alarm functions.
- Windows 95/98/ME/NT/XP/2000 software configuration speeds setup and replacement.
- Push-button reprogrammability facilitates changes in the field without a host PC.
- Multi-purpose inputs accept numerous ranges to reduce spare stock requirements.
- High-resolution Sigma-Delta A/D converter delivers high accuracy with low noise.
- Input excitation supply on each input provides power for a two-wire transmitter.
- Dual alarm operation lets you perform two alarm functions at the same time.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Performance

General Input

Analog to Digital (A/D) Converter
16-bit Σ–Δ A/D converter.

Resolution
±0.005% of span or 0.1°C/ LSB. ADC typically yields resolutions finer than 0.1°C/LSB.

Ambient Temperature Effect
Better than ±0.005% of input span per °C or ±1µV, whichever is greater.

Noise Rejection
Normal Mode: Better than 40dB @ 60Hz.

Common Mode: Better than 130dB @ 60Hz.

Input Filter
Normal mode filtering, plus digital filtering optimized and fixed per input range within Σ-Δ ADC.

Input Response Time
Less than 500mS to 98% of final value for a step change in the input. A software programmable delay can be implemented for filtering transients.

Relay Time Delay
Adjustable alarm delay of up to 25 seconds.

Input Overvoltage Protection
Bipolar Transient Voltage Suppressors (TVS).

Thermocouple Input

Thermocouple Input Ranges
Thermocouple type user configured. Signal linearization, cold-junction compensation, and open circuit or lead break detection are included.

TC	°C Range (°F Range)	Accuracy
J	-210 to 760°C (-346 to 1400°F)	±0.5°C
K	-200 to 1372°C (-328 to 2502°F)	±0.5°C
T	-260 to 400°C (-436 to 752°F)	±0.5°C
R	-50 to 1768°C (-58 to 3214°F)	±1.0°C
S	-50 to 1768°C (-58 to 3214°F)	±1.0°C
E	-200 to 1000°C (-328 to 1832°F)	±0.5°C
B	260 to 1820°C (500 to 3308°F)	±1.0°C
N	-230 to 1300°C (-382 to 2372°F)	±0.5°C

Thermocouple Break Detection
Upscale or downscale.

DC Millivolt Input

DC Millivolt/Voltage Input Ranges
±1.0V ±125mV ±31.25mV
±500mV ±62.5mV ±15.625mV
±250mV

Millivolt Accuracy
Better than ±0.05% of input span.

Output

Relays
Two independent SPDT electro-mechanical relays. Contact material Silver-Cadmium Oxide (AgCdO).

Relay Ratings (CSA ratings)
25V DC @ 5A.
120/240V AC @ 5A.

Expected Mechanical Life
20 million operations.

Environmental

Ambient Temperature
Operating: -25 to 70°C (-13 to 158°F).
Storage: -40 to 85°C (-40 to 185°F).

Relative Humidity
5 to 95%.

Power Requirements
10 to 36V DC. 60mA @ 24V. 90mA @ 15V.

Isolation
3-way (input/output/power).
1500V AC for 60 seconds or 250V AC continuous.
Inputs are isolated (up to 48V) from each other.

Radiated Field Immunity (RFI)
EN61000-4-3, EN50082-1.

Electromagnetic Field Immunity (EMI)
No relay trips will occur beyond ±0.25% of input span from setpoint under the influence of electromagnetic fields from switching solenoids, commutator motors, and drill motors.

Electrical Fast Transient (EFT)
EN61000-4-4, EN50082-1.

Surge Withstanding Capability (SWC)
EN61000-4-5, EN50082-1.

Electrostatic Discharge (ESD)
EN61000-4-2, EN50082-1.

Radiated Emissions
EN50081-1 for Class B equipment.

Approvals
CE marked, UL, cUL listed (USA, Canada).
UL3121 - general product safety.

Configuration

Software Configuration
Units are fully programmable via the Windows 95/98/ME/2000/NT/XP IntelliPack Configuration Program. Configuration downloads from PC through EIA232 serial port using Acromag 800C-SIP kit.

Field Configuration
Setpoint and deadband are configurable via push-buttons and a standard calibrator.

LED Indicators
LEDs indicate power, status, and alarm.

Physical

Enclosure
Case: Self-extinguishing NYLON type 6.6 polyamide thermoplastic UL94 V-2, color beige; general purpose NEMA Type 1 enclosure.

Connectors (Removable terminal blocks)
Wire Range: AWG #14-22 (AWG #12 stranded only).

Printed Circuit Boards
Military grade FR-4 epoxy glass circuit board.

Dimensions
1.05W x 4.68H x 4.35D inches.
26.7W x 118.9H x 110.5D millimeters.

Shipping Weight
1 pound (0.45 Kg) packed.

Ordering Information

IMPORTANT: All IntelliPacks require initial software configuration (order 800C-SIP). See Note 1 below.

822A-0200
IntelliPack alarm unit.
Two thermocouple/millivolt inputs, two SPDT relays.

800C-SIP
Software Interface Package.
Only one kit is required for all IntelliPack models.
See diagram on Page 73 for included parts.


5034-225
USB-to-RS232 adapter. See page 117 for more info.

PS5R-D24
Power supply (24V DC, 2.1A).
See Power Supplies on page 213.

TBK-B01
Optional terminal block kit, barrier strip style, 2 pcs. (Does not include terminal block for input wiring.)

TBK-S01
Optional terminal block kit, spring clamp style, 2 pcs. (Does not include terminal block for input wiring.)

NOTE 1: To order factory configuration, call Acromag for a configuration form which must accompany your order. Also, append "-C" to model number (example: 822A-0200-C). 800C-SIP kit is still recommended.

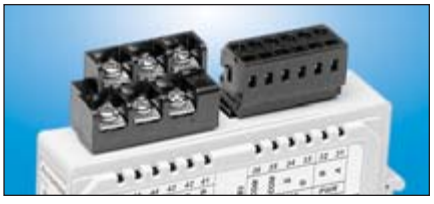

Optional terminal blocks: barrier strip (left) and spring clamp (right). Cage clamp terminal is standard.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Accessories

Terminal Blocks




Barrier strip (left) and spring clamp (right).


Ordering Information

See individual I/O modules for compatibility.

Barrier Strip Terminal Blocks

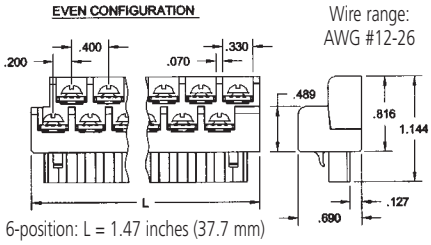

6-position: L = 1.47 inches (37.7 mm)

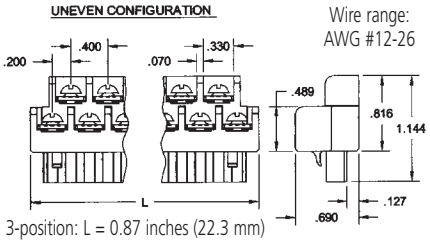


3-position: L = 0.87 inches (22.3 mm)


TBK-B01
Terminal block kit,
two 6-position pieces

TBK-B02
Terminal block kit,
four 6-position pieces

TBK-B03
Terminal block kit,
one 3-position and
three 6-position pieces

Spring Clamp Terminal Blocks





3-position:
L = 0.66 inches (16.9 mm)

6-position:
L = 1.26 inches (32.3 mm)

TBK-S01
Terminal block kit,
two 6-position pieces

TBK-S02
Terminal block kit,
four 6-position pieces

TBK-S03
Terminal block kit,
one 3-position and
three 6-position pieces

Mounting Hardware




DIN-Rail Mounting


For your convenience, Acromag offers several mounting accessories to simplify your system installation. Our 19" rack-mount kit provides a clean solution for mounting your I/O modules and a power supply. Or you can buy precut DIN rail strips for mounting on any flat surface.

Ordering Information

20RM-16-DIN
19" rack-mount kit with DIN rail.

DIN RAIL 3.0
DIN RAIL 16.7
DIN rail strip, Type T, 3 inches (75mm) or
16.7 inches (425mm)

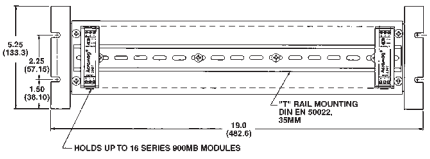



Power Supplies



50W Supply

Input Power Requirement
85 to 264V AC or 105 to 370V DC

Output
24V DC, 2.1A (50W)

Ordering Information

PS5R-D24
Universal 50W power supply

See Power Supplies on page 213 for other models and more information.

USB / RS232 Adapter




Length: 3.15 in (8.0 cm)
Height: 0.80 in (2.03 cm)
Width: 1.75 in (4.44 cm)
Weight: 1.6 oz (45.36 g)

Ordering Information

5034-225
USB-to-RS232 adapter

AC Current Sensor

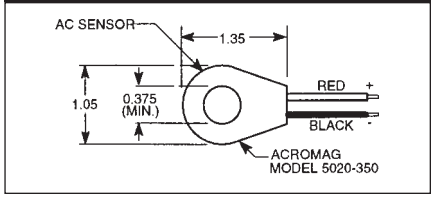


Ordering Information

5020-350
AC current sensor

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dimensions

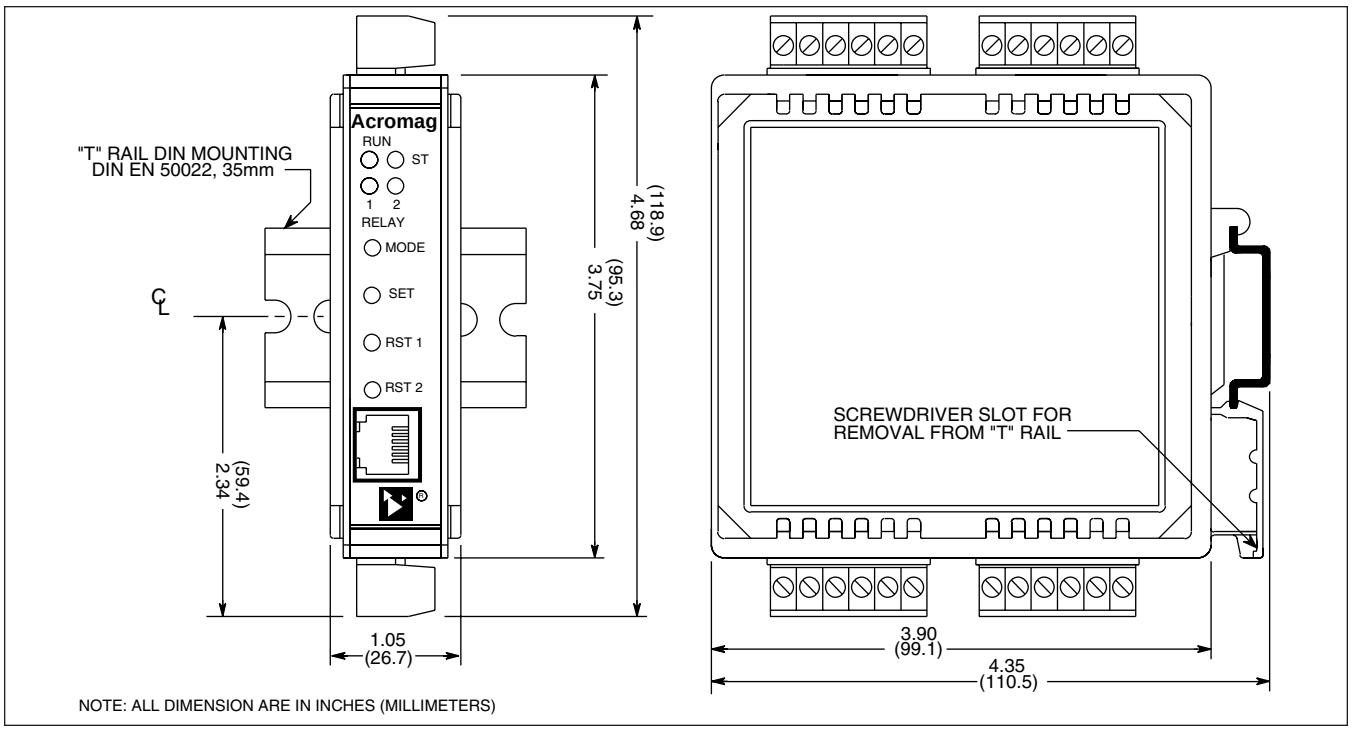

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP