ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Flex-Cable FCBB-44-44* at our website: *Click HERE*


FCBB-15-16 Low Profile Feedback Breakout Board


Ultra 3000/5000 Encoder Breakout Board
List Price: $88.00 USD

The FCBB-15-16 is ideal for feedback cables that need to be run through conduit or seal tight and terminated at the drive. This eliminates additional panel space or wiring terminations, and allows feedback wires to be terminated directly on the CN2 connector. The FCBB-15-16 features protective molding on both sides with screw terminal signal descriptions and pin numbers for the CN2 connector.

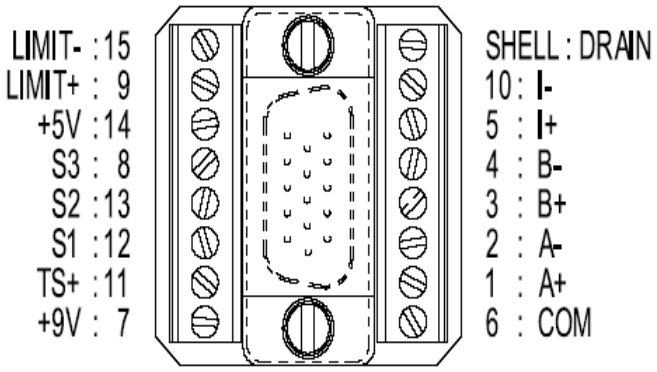



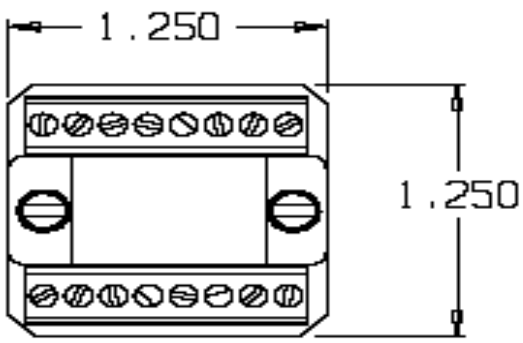



P 800.245.3539 Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com E-Mail: sales@flexcable.com F 231.937.8091

FCBB-15-16 for U3K & U5K Drives

CN2 Pin Number	Terminal Signal Description	Signal
1	Channel A+	A+
2	Channel A-	A-
3	Channel B+	B+
4	Channel B-	B-
5	Channel I+	I+
6	Aux. Common	Com
7	+9V	+9V
8	Commutation Channel 3	S3
9	Positive Overtravel Limit	L+
10	Channel I-	I-
11	Thermostat	TS+
12	Commutation Channel 1	S1
13	Commutation Channel 2	S2
14	Encoder Power (+5V)	+5V
15	Negative Overtravel Limit	L-

TECHNICAL SPECIFICATIONS:


Max. Voltage: 30VDC
Max. Current: 5 Amps
Wire Capacity: (UL) 30-16 AWG
Screw Terminals: (CSA) 28-16 AWG
L x W x H: 1.25” x 1.25” x .75”
Testing: 100% Cirrus Signature 1000


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

FCBB-44-12 Low Profile Breakout Board

Ultra 3000/5000 I/O Breakout Board for use on
Allen Bradley® Type Servo Drives with the SERCOS interface.
List Price: $88.00 USD

The FCBB-44-12 eliminates additional panel space and wiring terminations, allowing field wiring to be terminated directly on the CN1 connector via screw terminals. The FCBB-44-12 features protective molding on both sides along with screw terminal signal descriptions and pin numbers for the CN1 connections.

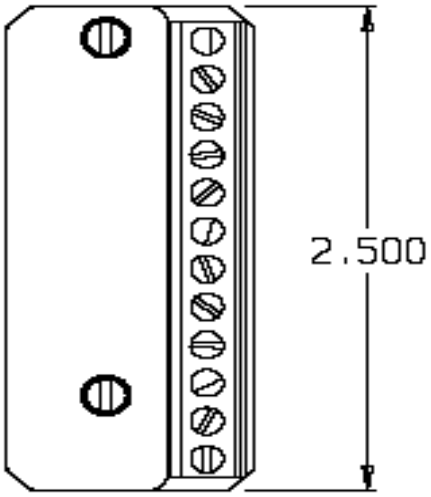


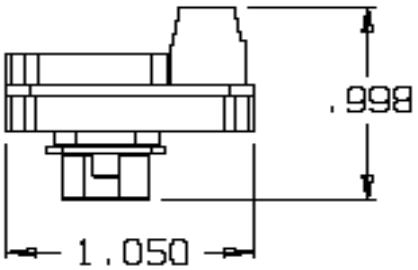



P 800.245.3539 Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com E-mail: sales@flexcable.com F 231.937.8091

CN1 Pin Number	Terminal Signal Description	Signal
1	NC	
2	Common	ECOM
3	Aux. Logic Power In +5V	AUXPWR
4	NC	
5	NC	
6	NC	
7	NC	
8	NC	
9	NC	
10	NC	
11	NC	
12	NC	
13	NC	
14	NC	
15	NC	
16	NC	
17	NC	
18	NC	
19	NC	
20	NC	
21	NC	
22	NC	
23	NC	
24	NC	
25	NC	
26	NC	
27	NC	
28	I/O Common	IOCOM
29	I/O Power	IOPWR
30	NC	
31	Drive Enable Input	ENABLE
32	Home Sensor Input	HOME
33	Registration Input 1	REG1
34	Registration Input 2	REG2
35	NC	
36	NC	
37	Positive Overtravel Limit	OT_POS
38	Negative Overtravel Limit	OT_NEG
39	NC	
40	NC	
41	NC	
42	NC	
43	Drive Ready Relay Output +	N.O.
44	Drive Ready Relay Output -	N.O.

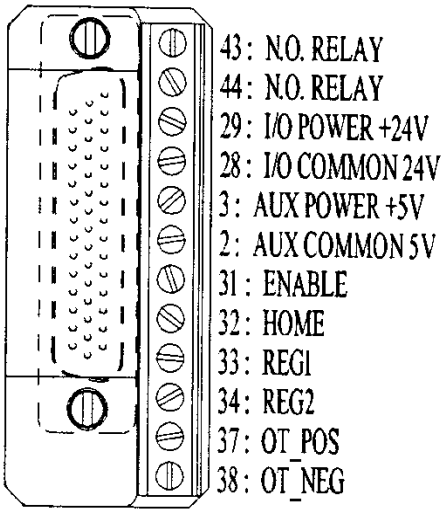

TECHNICAL SPECIFICATIONS:

Max. Voltage:	30VDC
Max. Current:	5 Amps
Wire Capacity:	(UL/CUL) 30-14 AWG
Screw Terminals:	(CSA) 28-14 AWG
L x W x H:	2.5” x 1.06” x .75”
Testing:	100% Cirrus Signature 1000


Allen Bradley® is a registerd trademark of the Rovkwell Corporation

FCBB-44-44 Low Profile Breakout Board

For use on Ultra3000 and Ultra3000i Drives.


LIST PRICE: $96.00 US Dollars

The FCBB-44-44 eliminates additional panel space and wiring terminations, allowing field wiring to be terminated directly on the CN1 connector via screw terminals. The FCBB-44-44 features protective molding on both sides along with screw terminal signal descriptions and pin numbers for the CN1 connections.

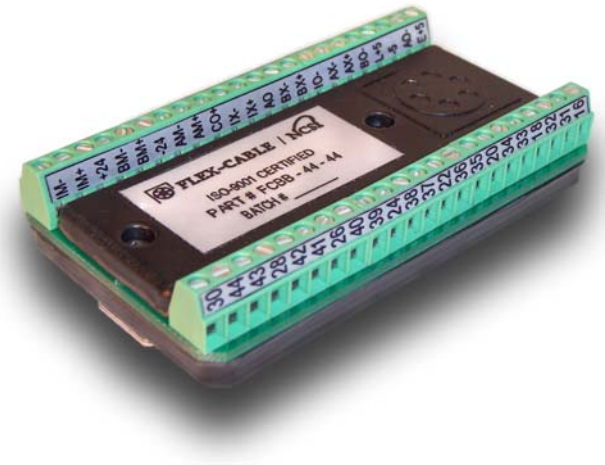


TECHNICAL SPECIFICATIONS

Max. Voltage:	30VDC
Max. Current:	5 Amps
Wire Capacity:	(UL/CUL) 30-16 AWG
Screw Terminals:	(CSA) 28-16 AWG
L x W x H:	3.06" x 1.75" x 1.0"
Testing:	100% Cirrus Signature 1000

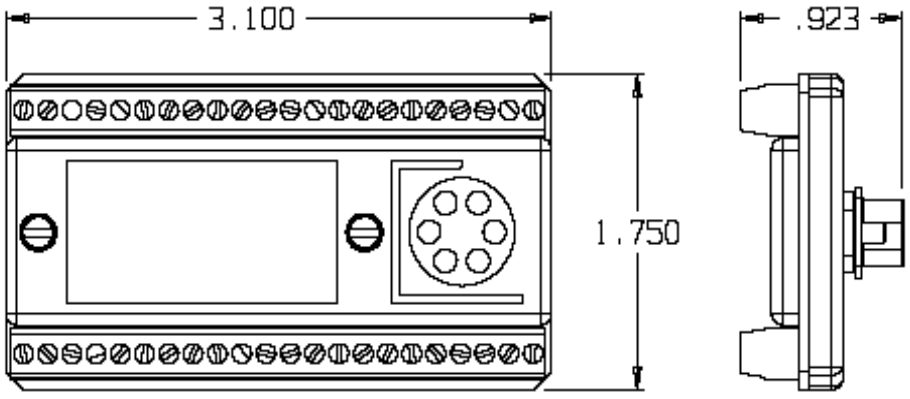

FCBB-44-44 for U3K drives		
CN1 Pin Number	**Terminal Signal Description**	**Signal**
1	Aux. Logic Power Out +5V	E+5
2	Common	-5
3	Aux. Logic Power In +5V	+5
4	Aux. Encoder Ch A+	AX+
5	Aux. Encoder Ch A-	AX-
6	Aux. Encoder Ch B+	BX+
7	Aux. Encoder Ch B-	BX-
8	Aux. Encoder Ch I+	IX+
9	Aux. Encoder Ch I-	IX-
10	No connection	
11	No connection	
12	No connection	
13	No connection	
14	No connection	
15	No connection	
16	Buffered Motor Encoder Ch A+	AO+
17	Buffered Motor Encoder Ch A+	AO-
18	Buffered Motor Encoder Ch B+	BO+
19	Buffered Motor Encoder Ch B-	BO-
20	Buffered Motor Encoder Ch I+	IO+
21	Buffered Motor Encoder Ch I-	IO-
22	Common	CA
23	Programmable Analog Output	AO
24	Analog Current Limit Input	IL
25	Command +	CO+
26	Command -	CO-
27	I/O Common	-24
28	I/O Common	-24
29	I/O Power	+24
30	I/O Power	+24
31	Drive Enable Input	E
32	Home Sensor Input	H
33	Registration Input 1	R1
34	Registration Input 2	R2
35	Digital Input 5	I5
36	Digital Input 6	I6
37	Positive Overtravel Limit	+OT
38	Negative Overtravel Limit	-OT
39	Digital Output 1	O1
40	Digital Output 2	O2
41	Digital Output 3	O3
42	Digital Output 4	O4
43	Drive Ready Relay Output +	N.O.
44	Drive Ready Relay Output -	N.O.

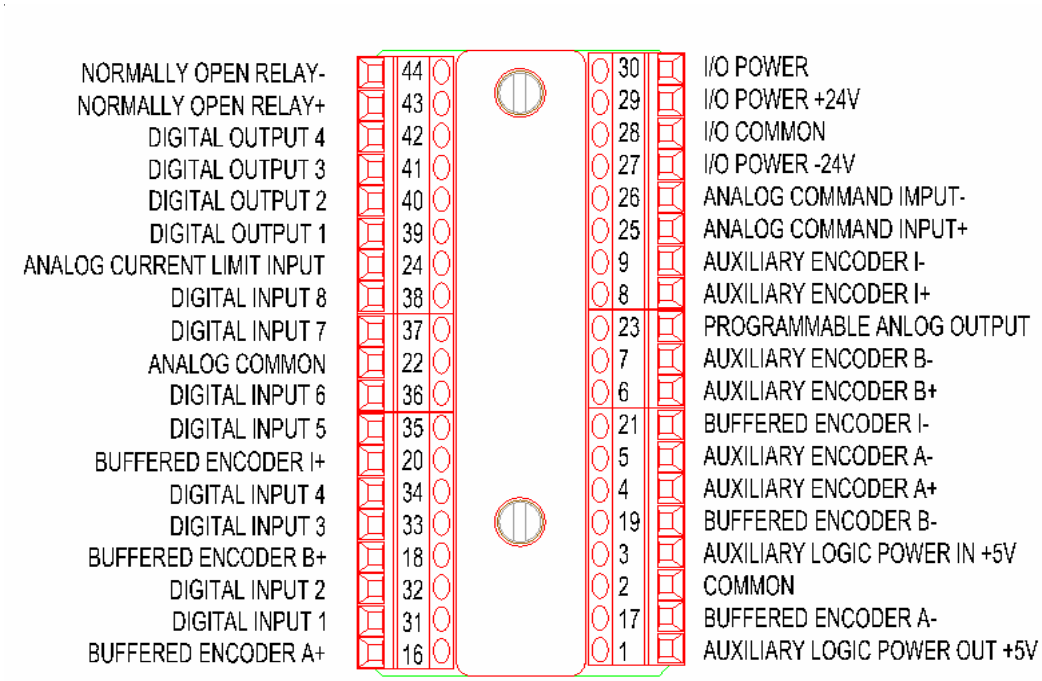

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

FCBB-K6K-2 Break-out Board

For use on Kinetix 6000 drives.


LIST PRICE: $104.00 US Dollars



- Eliminates additional panel space and wiring terminations.
- Connects directly to :
  - I/O (IOD) Connector.
  - Motor Feedback (MF) Connector.
- Shielded housing and protective moldings.
- Pin numbers on each screw terminal.
- High quality Phoenix terminal blocks.
- Manufactured using UL Rated materials.

SIMPLY REMOVE ONE SCREW AND ALL CONNECTIONS ARE ACCESSIBLE FOR EASY TROUBLESHOOTING.



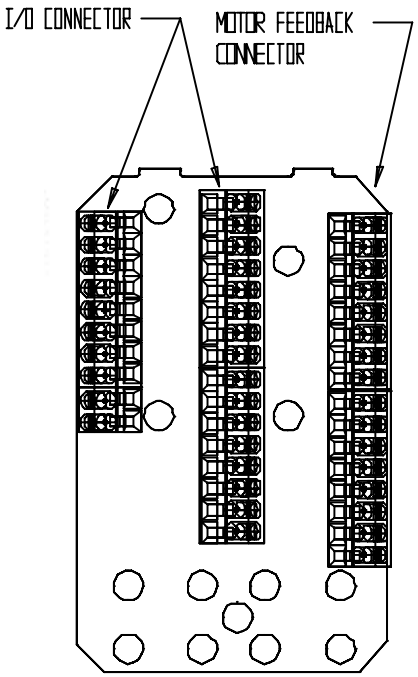

TECHNICAL SPECIFICATIONS:

Max. Voltage:	30VDC
Max. Current:	5 Amps
Wire Capacity:	(UL/CUL) 30-16 AWG
Screw Terminals:	(CSA) 28-16 AWG
L x W x H:	3.25” x 2” x 1.094”
Testing:	100% Cirrus Signature 1000



PIN NUMBERS & SIGNAL DESCRIPTIONS

for the FCBB-K6K-2 and FCBB-K6K-3 Break-Out Boards.

Valid for KINETIX 6000(TM) drives.

NOTE: Terminal blocks are labeled according to connector pin numbers.

IOD — **I/O CONNECTOR PIN-OUT**

Pin Number	Terminal Signal Description		Signal
1	Hardware Enabled 24V DC Power Supply		CUST_24V
2	Hardware Enable Input		ENABLE
3	Common		UST_COM
4	Home Switch 24V DC Power Supply		CUST_24V
5	Home Switch Input	HOME	
6	Common		CUST_COM
7	Positive Overtravel 24V DC Power Supply		CUST_24V
8	Positive Overtravel Limit Switch Input		OT+
9	Common		CUST_COM
10	Negative Overtravel 24V DC Power Supply		CUST_24V
11	Negative Overtravel Limit Switch Input		OT-
12	Common		CUST_COM
13	24V Registration Power		REG_24V
14	High Speed Registration 1 Input	REG1	
15	Common for Registration	REG_COM	
16	24V Registration Power		REG_24V
17	High Speed Registration 2 Input	REG2	
18	Common for Registration	REG_COM	
19	Reserved		-----
20	Reserved		-----
21	Reserved		-----
22	Reserved		-----
23	Analog Output 0		DAC0
24	Analog Output Common		DAC_COM
25	Analog Output 1		DAC1
26	Analog Output Common		DAC_COM

MF — **STEGMANN HIPERFACE PIN-OUT**

Pin Number	Terminal Signal Description		Signal
1	Sine Differential Input+		SINE+
2	Sine Differential Input-		SINE-
3	Cosine Differential Input+	COS+	
4	Cosine Differential Input-		COS-
5	Hiperface data channel		DATA+
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Reserved		-----
9	Reserved		-----
10	Hiperface data channel		DATA-
11	Motor Thermal Switch (normally closed)[1]		TS
12	Reserved		-----
13	Reserved		-----
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

[1] Not applicable unless motor has integrated thermal protection.

MF — **TTL or Sine/Cosine w/Index Pulse and Hall Commutation**

Pin Number	Terminal Signal Description		Signal
1	AM+ / Sine Differential Input+		AM+ / SINE+
2	AM- / Sine Differential Input-		AM- / SINE-
3	BM+ / Cosine Differential Input+	BM+ / COS+	
4	BM- / Cosine Differential Input-		BM- / COS-
5	Index Pulse+		IM+
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Single Ended 5V Hall Effect Commutation		S3
9	Reserved		-----
10	Index Pulse-		IM-
11	Motor Thermal Switch (normally closed)[1]		TS
12	Single Ended 5V Hall Effect Commutation		S1
13	Single Ended 5V Hall Effect Commutation		S2
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

[1] Not applicable unless motor has integrated thermal protection.

MF — **Resolver Transmitter TR = 0.25**

Pin Number	Terminal Signal Description		Signal
1	Sine Differential Input+		SINE+
2	Sine Differential Input-		SINE-
3	Cosine Differential Input+	COS+	
4	Cosine Differential Input-		COS-
5	Resolver Excitation		R1
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Reserved		-----
9	Reserved		-----
10	Resolver Excitation		R2
11	Motor Thermal Switch (normally closed)[1]		TS
12	Reserved		-----
13	Reserved		-----
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

[1] Not applicable unless motor has integrated thermal protection.

AF — **STEGMANN HIPERFACE PIN-OUT**

Pin Number	Terminal Signal Description		Signal
1	Sine Differential Input+		SINE+
2	Sine Differential Input-		SINE-
3	Cosine Differential Input+	COS+	
4	Cosine Differential Input-		COS-
5	Hiperface data channel		DATA+
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Reserved		-----
9	Reserved		-----
10	Hiperface data channel		DATA-
11	Reserved		-----
12	Reserved		-----
13	Reserved		-----
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

AF — **TTL or Sine/Cosine w/Index Pulse**

Pin Number	Terminal Signal Description		Signal
1	AM+ / Sine Differential Input+		AM+ / SINE+
2	AM- / Sine Differential Input-		AM- / SINE-
3	BM+ / Cosine Differential Input+	BM+ / COS+	
4	BM- / Cosine Differential Input-		BM- / COS-
5	Index Pulse+		I+
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Reserved		-----
9	Reserved		-----
10	Index Pulse-		I-
11	Reserved		-----
12	Reserved		-----
13	Reserved		-----
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----


FCBB-K6K-3 Break-out Board

For use on Kinetix 6000 drives.
LIST PRICE: $157.28 US Dollars

- Eliminates additional panel space and wiring terminations.
- Connects directly to :
  - I/O (IOD) Connector.
  - Motor Feedback (MF) Connector.
  - Auxiliary Feedback (AF) Connector.
- Shielded housing and protective moldings.
- Pin numbers on each screw terminal.
- High quality Phoenix terminal blocks.
- Manufactured using UL Rated materials.



SIMPLY REMOVE TWO SCREWS AND ALL CONNECTIONS ARE ACCESSABLE FOR EASY TROUBLESHOOTING

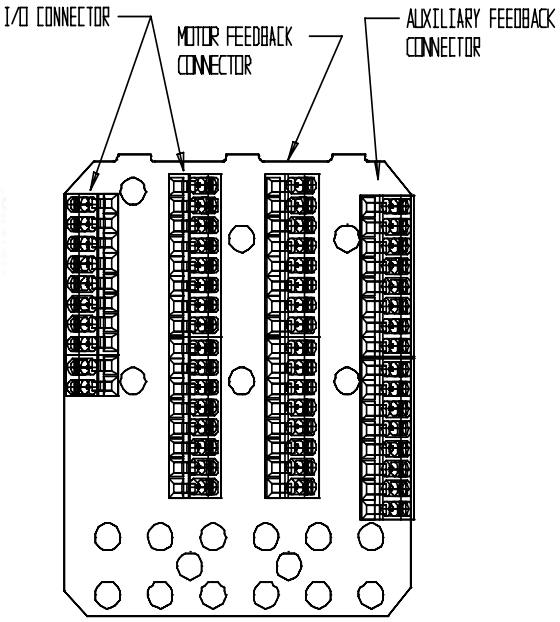



TECHNICAL SPECIFICATIONS:

Max. Voltage:	30VDC
Max. Current:	5 Amps
Wire Capacity:	(UL/CUL) 30-16 AWG
Screw Terminals:	(CSA) 28-16 AWG
L x W x H:	3.25” x 2.75” x 1.094”
Testing:	100% Cirrus Signature 1000



PIN NUMBERS & SIGNAL DESCRIPTIONS

for the FCBB-K6K-2 and FCBB-K6K-3 Break-Out Boards.

Valid for KINETIX 6000(TM) drives.

NOTE: Terminal blocks are labeled according to connector pin numbers.

IOD — **I/O CONNECTOR PIN-OUT**

Pin Number	Terminal Signal Description		Signal
1	Hardware Enabled 24V DC Power Supply		CUST_24V
2	Hardware Enable Input		ENABLE
3	Common		UST_COM
4	Home Switch 24V DC Power Supply		CUST_24V
5	Home Switch Input	HOME	
6	Common		CUST_COM
7	Positive Overtravel 24V DC Power Supply		CUST_24V
8	Positive Overtravel Limit Switch Input		OT+
9	Common		CUST_COM
10	Negative Overtravel 24V DC Power Supply		CUST_24V
11	Negative Overtravel Limit Switch Input		OT-
12	Common		CUST_COM
13	24V Registration Power		REG_24V
14	High Speed Registration 1 Input	REG1	
15	Common for Registration	REG_COM	
16	24V Registration Power		REG_24V
17	High Speed Registration 2 Input	REG2	
18	Common for Registration	REG_COM	
19	Reserved		-----
20	Reserved		-----
21	Reserved		-----
22	Reserved		-----
23	Analog Output 0		DAC0
24	Analog Output Common		DAC_COM
25	Analog Output 1		DAC1
26	Analog Output Common		DAC_COM

MF — **STEGMANN HIPERFACE PIN-OUT**

Pin Number	Terminal Signal Description		Signal
1	Sine Differential Input+		SINE+
2	Sine Differential Input-		SINE-
3	Cosine Differential Input+	COS+	
4	Cosine Differential Input-		COS-
5	Hiperface data channel		DATA+
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Reserved		-----
9	Reserved		-----
10	Hiperface data channel		DATA-
11	Motor Thermal Switch (normally closed)[1]		TS
12	Reserved		-----
13	Reserved		-----
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

[1] Not applicable unless motor has integrated thermal protection.

MF — **TTL or Sine/Cosine w/Index Pulse and Hall Commutation**

Pin Number	Terminal Signal Description		Signal
1	AM+ / Sine Differential Input+		AM+ / SINE+
2	AM- / Sine Differential Input-		AM- / SINE-
3	BM+ / Cosine Differential Input+	BM+ / COS+	
4	BM- / Cosine Differential Input-		BM- / COS-
5	Index Pulse+		IM+
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Single Ended 5V Hall Effect Commutation		S3
9	Reserved		-----
10	Index Pulse-		IM-
11	Motor Thermal Switch (normally closed)[1]		TS
12	Single Ended 5V Hall Effect Commutation		S1
13	Single Ended 5V Hall Effect Commutation		S2
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

[1] Not applicable unless motor has integrated thermal protection.

MF — **Resolver Transmitter TR = 0.25**

Pin Number	Terminal Signal Description		Signal
1	Sine Differential Input+		SINE+
2	Sine Differential Input-		SINE-
3	Cosine Differential Input+	COS+	
4	Cosine Differential Input-		COS-
5	Resolver Excitation		R1
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Reserved		-----
9	Reserved		-----
10	Resolver Excitation		R2
11	Motor Thermal Switch (normally closed)[1]		TS
12	Reserved		-----
13	Reserved		-----
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

[1] Not applicable unless motor has integrated thermal protection.

AF — **STEGMANN HIPERFACE PIN-OUT**

Pin Number	Terminal Signal Description		Signal
1	Sine Differential Input+		SINE+
2	Sine Differential Input-		SINE-
3	Cosine Differential Input+	COS+	
4	Cosine Differential Input-		COS-
5	Hiperface data channel		DATA+
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Reserved		-----
9	Reserved		-----
10	Hiperface data channel		DATA-
11	Reserved		-----
12	Reserved		-----
13	Reserved		-----
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

AF — **TTL or Sine/Cosine w/Index Pulse**

Pin Number	Terminal Signal Description		Signal
1	AM+ / Sine Differential Input+		AM+ / SINE+
2	AM- / Sine Differential Input-		AM- / SINE-
3	BM+ / Cosine Differential Input+	BM+ / COS+	
4	BM- / Cosine Differential Input-		BM- / COS-
5	Index Pulse+		I+
6	Common		ECOMM
7	Encoder Power (+9V)		EPWR_9VM
8	Reserved		-----
9	Reserved		-----
10	Index Pulse-		I-
11	Reserved		-----
12	Reserved		-----
13	Reserved		-----
14	Encoder Power (+5V)		EPWR_5VM
15	Reserved		-----

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP