ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *GE / Bently Nevada 3300/14-01-20-00* at our website: *Click HERE*

Specifications and Ordering Information

3300/14 dc Power Supply

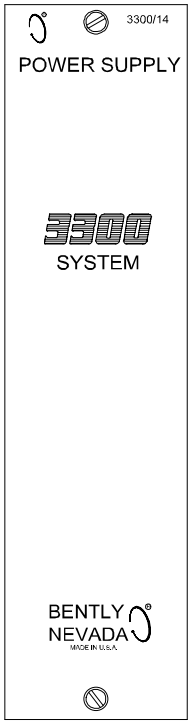

Description

The 3300 dc Power Supply delivers reliable, regulated power for up to 12 monitors and their associated transducers. A second power supply in the same rack is never required.

The Power Supply is installed in the left-most location (position 1) in a 3300 Rack. Primary voltage operation can be ordered for 20 to 34 Vdc or 90 to 140 Vdc inputs, which are converted for use by the monitors installed in the rack.

The 3300 dc Power Supply has over-voltage and under-voltage protection circuitry to shut down the Power Supply should the input supply voltage fall out of the specified range. It will return to normal operation when the input voltage is within the specified range. In addition, the Power Supply is fuse-protected against reverse polarity power hookup and power inputs of greater than 140% of the maximum rated input voltage.

Warning

A transducer field wiring failure, monitor failure, or loss of primary power can cause loss of machinery protection. This could result in property damage and/or bodily injury. Therefore, we strongly recommend connection of an external annunciator to the OK relay terminals.

Specifications

Inputs

Power:	20 to 34 Vdc, 5.5 A max. 90 to 140 Vdc, 1.5 A max.
Fuse Rating:	20 to 34 Vdc, 8 A max. 90 to 140 Vdc, 2 A max.

Outputs

Transducer Power (internal to rack):	User-programmable for -24, +1.3%, -1.7% Vdc; or -18, +1.6%, -2.2 % Vdc. Transducer voltages are overload protected, per channel, on the individual monitor circuit boards.

NRTL/C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

OK Relay

Location:	Behind the Power Supply, in the Power Input Module.
Type:	Single-pole, double-throw (SPDT).
Environmental Sealing:	Hermetically-sealed.
Contact Ratings (resistive load):	5 A at 28 Vdc; 5 A at 120 Vac, 50/60 Hz; 3 A at 220 Vac, 50/60 Hz.
Ratings for systems requiring agency approval:	5 A at 28 Vdc; 5 A at 120 Vac, 50/60 Hz.
Contact Life:	10,000 cycles minimum at rated load.
Operation:	normally energized

Environmental Limits

Operating Temperature:	0°C to +65°C (+32°F to +150°F).
Storage Temperature:	-40°C to +85°C (-40°F to +185°F).
Relative Humidity:	To 95%, noncondensing.

CE Mark Directives

EMC Directive	Certificate of Conformity: 158710
Low Voltage Directive	Certificate of Conformity: 135300

Hazardous Area Approvals

CSA/NRTL/C	Class 1, Division 2 Groups A,B,C,D T4 @ Ta = 65°C

Physical

Space Requirements:	One rack position. Installs only in position one (left-most position, next to the System Monitor).
Weight:	2 kg (4.4 lbs.)

Ordering Information

For spares, order the complete catalog number as described below. This includes a front panel assembly, power supply PWAs with sheet metal, and appropriate input module. This unit is optioned, tested and ready to install in your system. Spare power input modules (PIM) can be ordered separately.

dc Power Supply
3300/14-AXX-BXX-CXX
Option Descriptions

A: Input Voltage Option	**0 1** +26 Vdc (+20 Vdc to +34 Vdc) **0 2** +120 Vdc (+90 Vdc to +140 Vdc)
B: Power Input Module Option	**2 0** Standard **2 2** Internal Safety Barriers **2 3** Spare supply only-No PIM
C: Agency Approval Option	**0 0** Not required **0 1** CSA/NRTL/C

Note: CSA/NRTL/C option is only available when the power supply is ordered in a system.

Spare Parts:

161957-AXX-BXX-00	Input Module Assembly-dash options same as above
01720029	250V, 1.50 A Fuse(A=01,C=00,01)
01702000	250V, 0.75 A Fuse(A=02,C=00,01)
01710510	250V, 2.50 A Fuse(A=01,C=02)
01710511	250V, 1.25 A Fuse(A=02,C=02)

Field-programmable Options

These options are field-programmable via plug-in jumpers. **Bold text** indicates options as shipped from the factory.

Transducer Output Voltage	**-24 Vdc** -18 Vdc


Note: Contact your nearest Bently Nevada Sales Professional if 3000 Series transducers are to be used in a monitoring rack which also uses 3300 and/or 7200 Series transducers.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1999-2003 Bently Nevada LLC
used in this document are registered marks of Bently Nevada LLC

Field wiring diagram

3300/14 dc Power Supply

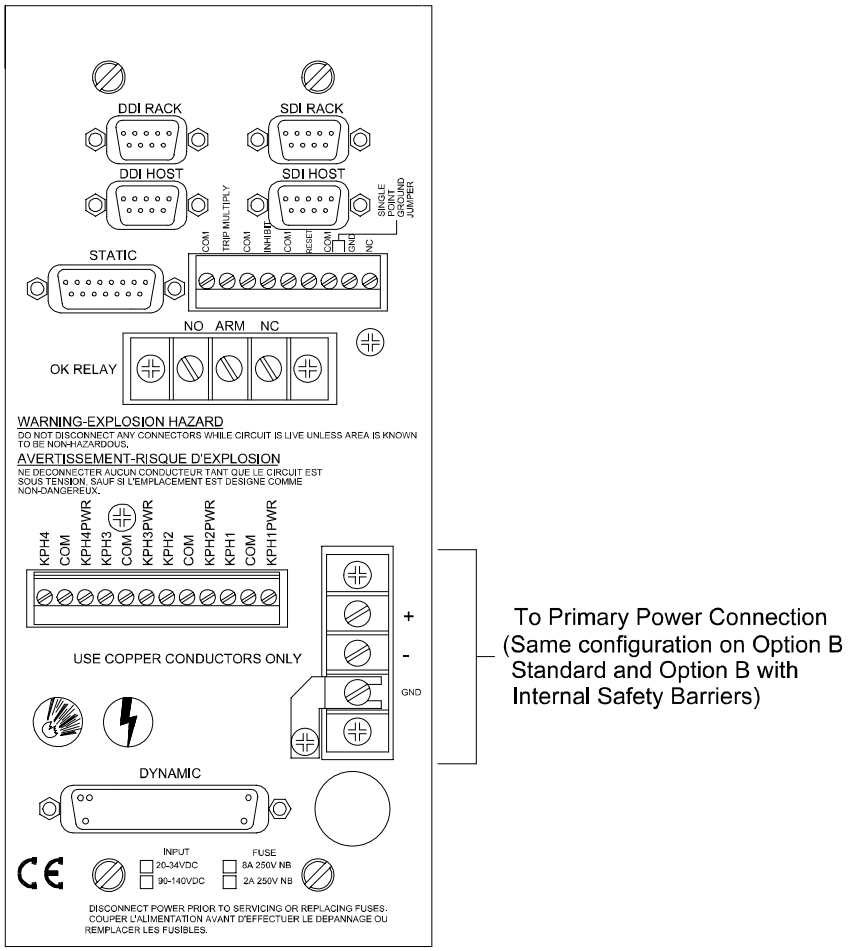

Primary power connections for 3300/14 dc Power Supply (Standard PIM shown)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP