ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag AVME9480* at our website: *Click HERE*

Acromag®

# Series 948x
# Digital I/O Boards

# USER'S MANUAL

**ACROMAG INCORPORATED**
**30765 South Wixom Road**
**P.O. BOX 437**
**Wixom, MI 48393-7037 U.S.A.**
**Tel: (248) 624-1541**
**Fax: (248) 624-9234**

Copyright 1994, Acromag, Inc., Printed in the USA.
Data and specifications are subject to change without notice.

**8500-189-G97C009**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

The information contained in this manual is subject to change without notice. Acromag, Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Further, Acromag, Inc. assumes no responsibility for any errors that may appear in this manual and makes no commitment to update, or keep current, the information contained in this manual. No part of this manual may be copied or reproduced in any form, without the prior written consent of Acromag, Inc.

**Table of Contents** **Page**

**1.0 GENERAL INFORMATION** ..... 2
KEY FEATURES OF MODEL AVME948x I/O BOARDS .. 2
VMEbus INTERFACE FEATURES ..... 3
**2.0 PREPARATION FOR USE** ..... 3
UNPACKING AND INSPECTION ..... 3
CARD CAGE CONSIDERATIONS ..... 3
BOARD CONFIGURATION ..... 3
Default Jumper Configuration ..... 3
ADDRESS ASSIGNMENT ..... 3
PORT JUMPERS AND OPTIONS ..... 3
Input Threshold Adjustment ..... 4
I/O CONNECTIONS ..... 4
BACKPLANE REQUIREMENTS ..... 5
USE WITH SOLID-STATE RELAYS ..... 5
Configuring The AVME948x ..... 5
Configuring The PB16A ..... 6
USE WITH OTHER DEVICES ..... 6
Relays And Other Inductive Loads ..... 6
Contact Closures and Switches ..... 6
**3.0 PROGRAMMING INFORMATION** ..... 6
MEMORY MAPS ..... 6
Board Identification PROM ..... 6
Status/Control Register ..... 7
VME Interrupter ..... 8
Interrupt Pending/Clear Register ..... 8
Interrupt Inputs Register ..... 8
Interrupt Enable Register ..... 8
Interrupt Level Register ..... 8
Interrupt Input Polarity Register ..... 8
Interrupt Vector Registers ..... 8
Digitial I/O Port Registers ..... 8
INTERRUPT BEHAVIOR ..... 9
Interrupt Example ..... 9
Service of Interrupts ..... 9
**4.0 THEORY OF OPERATION** ..... 9
VMEbus INTERFACE ..... 9
The VME Address Logic ..... 9
The VME Control Logic ..... 10
The VME Interrupter ..... 10
DIGITAL I/O PORT REGISTERS ..... 10
Input Comparators/Buffers ..... 10
Output Latches/Drivers ..... 10
**5.0 SERVICE AND REPAIR INFORMATION** ..... 10
SERVICE AND REPAIR ASSISTANCE ..... 10
PRELIMINARY SERVICE PROCEDURE ..... 10
CALIBRATION PROCEDURE ..... 11
REPLACEABLE PARTS ..... 11
**6.0 SPECIFICATIONS** ..... 11

**DRAWINGS** **Page**

4500-981 Jumper Locations ..... 12
4500-788 9921-16 Digital I/O Adapter Card ..... 13
4500-789 9921-32 Digital I/O Adapter Card ..... 14
4500-790 9921-16 Connection Diagram ..... 15
4500-791 9921-32 Connection Diagram ..... 16
4500-786 9920-16 Digital I/O Adapter Card ..... 17
4500-787 9920-32 Digital I/O Adapter Card ..... 18
4500-785 9920-16 Connection Diagram ..... 19
4500-792 9920-32 Connection Diagram ..... 20
4500-743 Relay Driver & Input Configurations ..... 21
4500-740 VME Interrupter Block Diagram ..... 22
4500-741 AVME 9480 Block Diagram ..... 23
4500-742 AVME 9480 Simplified Schematic ..... 24
4500-737 Digital I/O Card ..... 25

**IMPORTANT SAFETY CONSIDERATIONS**

It is very important for the user to consider the possible adverse effects of power, wiring, component, sensor, or software failures in designing any type of control or monitoring system. This is especially important where economic property loss or human life is involved. It is important that the user employ satisfactory overall system design. It is agreed between the Buyer and Acromag, that this is the Buyer's responsibility.

## 1.0 GENERAL INFORMATION

The AVME948x Digital Input/Output Boards provide a means for interfacing various discrete devices to a VMEbus based computer. Interfacing is accomplished via software control of 64 general purpose I/O points which may be individually programmed as inputs or outputs. Additionally, eight of these 64 I/O lines may be configured to generate VMEbus interrupts.

This manual covers two models of Digital I/O Boards. Table 1.1 below lists these model numbers and their major differences.

**Table 1.1 Model Numbers**

| MODEL NO. | INTERFACE POINTS | FRONT PANEL ACCESS | REAR ACCESS |
|---|---|---|---|
| AVME 9480 | 64 I/O | P3, P4 | |
| AVME 9481 | 64 I/O | | P2 |

**KEY FEATURES OF MODEL AVME948x I/O BOARDS**

- **High Channel Count** - Provides up to 64 programmable I/O points (lines) configured as eight 8-bit ports, or four 16-bit ports.
- **Output Readback** - The state of output points can be read.
- **High Sink Capability** - Outputs may sink up to 100mA at voltages up to 30V.
- **Output Protection** - Built in protection diodes for driving inductive loads.
- **Wide Input Range** - Input range of 0 to 30V.
- **Wide Input Hysteresis** - Input hysteresis is included.
- **Adjustable Input Threshold** - Input threshold is adjustable.
- **Termination Panel/Solid-State Relay Interface** - Compatible with industry standard solid-state relays and termination panels, PB16 and PB32.
- **TTL/CMOS** - TTL and CMOS compatible.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

- **Optional Termination Panel** - Optional universal termination panel available for use with contact closures, relays, and incandescent lamps.
- **Byte or Word Interchange** - Byte or word data transfers.
- **Built-in ID PROM** - On board identification PROM included.
- **Port 0 Interrupt Handling** - Port 0 may be used for handshaking mode with both flag and interrupt capability**.**
- **Status Indicators** - Pass/Fail status indicators on front panel.
- **Front or Back I/O Access** - I/O points are accessible through the front panel or out of the back of the card cage.

**VMEbus INTERFACE FEATURES**


- **Slave Module** - Slave Module A16, D16/D08(E0).
- **Release-On-Register Access Interrupts** - D08(0) RORA type Interrupter.
- **Single/Multiple Input Vectors** - Single or Multiple Interrupt Vectors.
- **Short Addressable** - Responds to short address modifier codes 29H, 2DH (a capital H suffix indicates a hexadecimal number).
- **Low Memory Consumption** - Board occupies 1K bytes of memory space (jumper selectable).
- **ID PROM** - Board Identification PROM installed.

## 2.0 PREPARATION FOR USE

**UNPACKING AND INSPECTION**

Upon receipt of this product, inspect the shipping carton for evidence of mishandling during transit. If the shipping carton is badly damaged or water stained, request that the carrier's agent be present when the carton is opened. If the carrier's agent is absent when the carton is opened and the contents of the carton are damaged, keep the carton and packing material for the agent's inspection.

For repairs to a product damaged in shipment, refer to the Acromag Service Policy to obtain return instructions. It is suggested that salvageable shipping cartons and packing material be saved for future use in the event the product must be shipped.




This board is physically protected with packing material and electrically protected with an anti static bag during shipment. It is recommended that the board be visually inspected for evidence of mishandling prior to applying power.

The board utilizes static sensitive components and should only be handled at a static-safe workstation.

**CARD CAGE CONSIDERATIONS**

Refer to the electrical specifications for loading and power requirements. Be sure that the system power supplies are able to accommodate the power requirements of the board, within the voltage tolerances specified.

IMPORTANT: Adequate air circulation must be provided to prevent a temperature rise above the maximum operating temperature.

**BOARD CONFIGURATION**

This Digital I/O Board may be configured in a variety of ways for many different applications. Each possible jumper setting will be discussed in the following sections. The jumper locations are shown in Drawing 4500-981 at the back of this manual.

**Default Jumper Configuration**

A board is shipped from the factory configured as follows:

- VMEbus Short I/O Address of 0000H.
- Set to respond to both address modifiers 2DH and 29H.
- All of the ports have the reference and pullup resistors connected to +5 Volts.
- Board will assert SYSFAIL* after power-up or reset.

**ADDRESS ASSIGNMENT**

Jumpers J17 and J19 are used to establish the base address for the 1Kbyte block of memory that the AVME948x will occupy in the short I/O memory map. J17 selects the base address, while J19 selects the address modifier codes. An open jumper corresponds to a logic 0 state for the base address. For the address modifier code, an open jumper selects the Short Supervisory Access (2DH) code and a jumper short will allow the card to recognize both the Short Supervisory and the Short Non-Supervisory Access (29H) codes.

**Table 2.1 VMEbus Address Decode Jumper (J17 Pins)**

| BASE ADDR (HEX)* | A15 (11&12) | A14 (10&9) | A13 (8&7) | A12 (6&5) | A11 (4&3) | A10 (2&1) |
|---|---|---|---|---|---|---|
| 0000 | OUT | OUT | OUT | OUT | OUT | OUT |
| 0400 | OUT | OUT | OUT | OUT | OUT | IN |
| 0800 | OUT | OUT | OUT | OUT | IN | OUT |
| 0C00 | OUT | OUT | OUT | OUT | IN | IN |
| 1000 | OUT | OUT | OUT | IN | OUT | OUT |
| . . . | . . . | . . . | . . . | . . . | . . . | . . . |
| EC00 | IN | IN | IN | OUT | IN | IN |
| F000 | IN | IN | IN | IN | OUT | OUT |
| F400 | IN | IN | IN | IN | OUT | IN |
| F800 | IN | IN | IN | IN | IN | OUT |
| FC00 | IN | IN | IN | IN | IN | IN |

* Consult your host CPU manual for detailed information about addressing the VMEbus short I/O space (A16, 16-bit). In many cases, CPU's utilizing 24-bit addressing will start the 16-bit addressing at FF0000 (Hex), and 32-bit CPU's at FFFF0000 (Hex).

**PORT JUMPERS AND OPTIONS**

Several jumpers have been included for flexibility in interfacing to external devices. Table 2.2 describes these jumpers and their functions.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Table 2.2 Jumper Descriptions**

| Jumper | Function | As Shipped |
|---|---|---|
| J8 | (Ports N+O & N+1 reference voltage). When in place, sets thresholds for input to +1V and +2.2V (TTL) low and high, respectively. Remove J8 to establish reference off card. | Jumper in place |
| J7 | (Ports N+0 & N+1 pullup voltage jumper). When in place, pulls the I/O lines to +5V through the optional pullup networks. | Jumper in place |
| J6 | (Ports N+2 & N+3 reference voltage). When in place, sets thresholds for input to +1V and +2.2V (TTL) low and high, respectively. Remove J6 to establish reference off card. | Jumper in place |
| J5 | (Ports N+2 & N+3 pullup voltage jumper). When in place, pulls the I/O lines to +5V through the optional pullup networks. | Jumper in place |
| J2 | (Ports N+4 & N+5 reference voltage). When in place, sets thresholds for input to +1V and +2.2V (TTL) low and high, respectively. Remove J2 to establish reference off card. | Jumper in place |
| J1 | (Ports N+4 & N+5 pullup voltage jumper). When in place, pulls the I/O lines to +5V through the optional pullup networks | Jumper in place |
| J4 | (Ports N+6 & N+7 reference voltage). When in place, sets thresholds for input to +1V and +2.2V (TTL) low and high, respectively. Remove J4 to establish reference off card. | Jumper in place |
| J3 | (Ports N+6 & N+7 pullup voltage jumper). When in place, pulls the I/O lines to +5V through the optional pullup networks. | Jumper in place |
| J16 | Port N+0 output driver enable | J9-J16 ** are made with a thin trace on the solder side. Cutting jumper will disable the outputs of that group. |
| J9 | Port N+1 output driver enable | |
| J15 | Port N+2 output driver enable | |
| J10 | Port N+3 output driver enable | |
| J14 | Port N+4 output driver enable | |
| J11 | Port N+5 output driver enable | |
| J13 | Port N+6 output driver enable | |
| J12 | Port N+7 output driver enable | |
| J18 | DTACK* Timer Jumper - This jumper is preset at the factory and should not be reprogrammed by the user. | Factory programmed |
| J20 | SYSFAIL* Jumper - This asserts SYSFAIL* after power up or reset. | Jumper in Place |

** J9-J16 are used only in cases where it is absolutely necessary to have outputs disabled through the hardware. See Programming Considerations (Section 3) for instruction on software enabling/ disabling of outputs.

**Input Threshold Adjustment**

Different input thresholds may be established by connecting REF to a voltage other than +5V. When this is done, the input hysteresis still remains at approximately 1.2 volts. The new high and low thresholds are defined by the following equations:

$V_{LOW}$ = (0.448 x REF)- 1.22;
$V_{HIGH}$ = (0.448 x REF) + 0.025;
$2.75 \leq REF \leq 27.5$ Volts

**I/O CONNECTIONS**

On Model AVME 9481, the 64 I/O points are accessible through a 96-pin DIN 41612 connector labeled P2. I/O adapter card Models 9921-16 or 9921-32 are used to interface between P2 and the ribbon cables (see Drawings 4500-788 & 4500-789). These adapters mount to the back of a VME cage to provide the mating socket for P2. Refer to Table 2.3 and the termination panel connection diagrams 4500-790 and 4500-791.

On Model AVME 9480, two 50-pin ribbon cable connectors on the front panel are used to access the 64 I/O points (P3 and P4). I/O adapter card Models 9920-16 or 9920-32 are used to interface between P3 & P4 and the ribbon cables (see Drawings 4500-786 and 4500-787). Refer to Table 2.3 and the termination panel connection diagrams 4500-785 and 4500-792.

**CAUTION:** DO NOT PLUG P2 INTO ANY BACKPLANES IN A CARD CAGE!

**Table 2.3A: I/O Connectors P2,P3**

| Functions | P2 Pin # | P3 Pin # |
|---|---|---|
| Port N+0, I/O Bit 7 | B25 | 33 |
| Bit 6 | B26 | 35 |
| Bit 5 | B27 | 37 |
| Bit 4 | B28 | 39 |
| Bit 3 | B29 | 41 |
| Bit 2 | B30 | 43 |
| Bit 1 | B31 | 45 |
| Bit 0 | B32 | 47 |
| Port N+1, I/O Bit 7 | B17 | 34 |
| Bit 6 | B18 | 36 |
| Bit 5 | B19 | 38 |
| Bit 4 | B20 | 40 |
| Bit 3 | B21 | 42 |
| Bit 2 | B22 | 44 |
| Bit 1 | B23 | 46 |
| Bit 0 | B24 | 48 |
| +5V | B9 | 1,49 |
| GND | B13,B14 | 9,11 |
| GND | B15,B16 | 13,15 |
| REF Ports 0 & 1 | B12 | 7 |
| Pullup Ports 0 & 1 | B11 | 5 |
| Protect Ports 0 & 1 | B10 | 3 |
| Port N+2, I/O Bit 7 | A25 | 17 |
| Bit 6 | A26 | 19 |
| Bit 5 | A27 | 21 |
| Bit 4 | A28 | 23 |
| Bit 3 | A29 | 25 |
| Bit 2 | A30 | 27 |
| Bit 1 | A31 | 29 |
| Bit 0 | A32 | 31 |
| Port N+3, I/O Bit 7 | A17 | 18 |
| Bit 6 | A18 | 20 |
| Bit 5 | A19 | 22 |
| Bit 4 | A20 | 24 |
| Bit 3 | A21 | 26 |
| Bit 2 | A22 | 28 |
| Bit 1 | A23 | 30 |
| Bit 0 | A24 | 32 |
| +5V | B1 | 2,50 |
| GND | B5,B6 | 10,12 |
| GND | B7,B8 | 14,16 |
| REF Ports 2 & 3 | B4 | 8 |
| Pullup Ports 2 & 3 | B3 | 6 |
| Protect Ports 2 & 3 | B2 | 4 |



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Table 2.3B: I/O Connectors P2 & P4**

| Functions | P2 Pin # | P4 Pin # |
|---|---|---|
| Port N+4, I/O Bit 7 | C25 | 33 |
| Bit 6 | C26 | 35 |
| Bit 5 | C27 | 37 |
| Bit 4 | C28 | 39 |
| Bit 3 | C29 | 41 |
| Bit 2 | C30 | 43 |
| Bit 1 | C31 | 45 |
| Bit 0 | C32 | 47 |
| Port N+5, I/O Bit 7 | C17 | 34 |
| Bit 6 | C18 | 36 |
| Bit 5 | C19 | 38 |
| Bit 4 | C20 | 40 |
| Bit 3 | C21 | 42 |
| Bit 2 | C22 | 44 |
| Bit 1 | C23 | 46 |
| Bit 0 | C24 | 48 |
| +5V | C9 | 1,49 |
| GND | C15,C16 | 9,11 |
| GND | C13,C14 | 13,15 |
| REF PORTS 4 & 5 | C12 | 7 |
| Pullup Ports 4 & 5 | C11 | 5 |
| Protect Ports 4 & 5 | C10 | 3 |
| Port N+6, I/O Bit 7 | A8 | 17 |
| Bit 6 | A7 | 19 |
| Bit 5 | A6 | 21 |
| Bit 4 | A5 | 23 |
| Bit 3 | A4 | 25 |
| Bit 2 | A3 | 27 |
| Bit 1 | A2 | 29 |
| Bit 0 | A1 | 31 |
| Port N+7, I/O Bit 7 | A16 | 18 |
| Bit 6 | A15 | 20 |
| Bit 5 | A14 | 22 |
| Bit 4 | A13 | 24 |
| Bit 3 | A12 | 26 |
| Bit 2 | A11 | 28 |
| Bit 1 | A10 | 30 |
| Bit 0 | A9 | 32 |
| +5V | C1 | 2,50 |
| GND | C5,C6 | 10,12 |
| GND | C7,C8 | 14,16 |
| REF Ports 6 & 7 | C4 | 8 |
| Pullup Ports 6 & 7 | C3 | 6 |
| Protect Ports 6 & 7 | C2 | 4 |

**BACKPLANE REQUIREMENTS**

The AVME9480 is electrically and mechanically compatible with the VMEbus Specification. The backplane connection is made through the 96-pin DIN 41612 connector labeled P1. The signals used are listed in Table 2.4.

**Table 2.4: Backplane Connector P1**

| Pin Number | Row A Signal Mnemonic | Row B Signal Mnemonic | Row C Signal Mnemonic |
|---|---|---|---|
| 1 | D00 | | D08 |
| 2 | D01 | | D09 |
| 3 | D02 | | D10 |
| 4 | D03 | BG 0 IN* | D11 |
| 5 | D04 | BG 0 OUT* | D12 |
| 6 | D05 | BG 1 IN* | D13 |
| 7 | D06 | BG 1 OUT* | D14 |
| 8 | D07 | BG 2 IN* | D15 |
| 9 | GND | BG 2 OUT* | GND |
| 10 | SYSCLK | BG 3 IN* | SYSFAIL* |
| 11 | GND | BG 3 OUT* | BERR* |
| 12 | DS1* | | SYSRESET* |
| 13 | DSO* | | LWORD* |
| 14 | WRITE* | | AM5 |
| 15 | GND | | |
| 16 | DTACK* | AM0 | |
| 17 | GND | AM1 | |
| 18 | AS* | AM2 | |
| 19 | GND | AM3 | |
| 20 | IACK* | GND | |
| 21 | IACKIN* | | |
| 22 | IACKOUT* | | |
| 23 | AM4 | GND | A15 |
| 24 | A07 | IRQ7* | A14 |
| 25 | A06 | IRQ6* | A13 |
| 26 | A05 | IRQ5* | A12 |
| 27 | A04 | IRQ4* | A11 |
| 28 | A03 | IRQ3* | A10 |
| 29 | A02 | IRQ2* | A09 |
| 30 | A01 | IRQ1* | A08 |
| 31 | | | |
| 32 | +5V | +5V | +5V |

**USE WITH SOLID-STATE RELAYS**

The AVME984X Digital I/O Board may interface with industry standard Solid-State relays and termination panels PB16A, PB32, and their equivalents.

**Configuring The AVME948x**

On Model AVME948x, the following jumpers or shorting clips should be in place: J1,J2,J3,J4,J5,J6,J7 and J8. Pullup resistor networks R57, R50, R56, R51, R35, R52, R54, and R53 are optional.

Table 2.5 lists the Module Number Bit Positioning for the I/O port registers.

**Table 2.5 Module Number Bit Positioning**

| I/O Port Number | Module Number 7 6 5 4 3 2 1 0 | PB16A Connected To |
|---|---|---|
| N+0 | 7 6 5 4 3 2 1 0 | P3 |
| N+1 | 15 14 13 12 11 10 9 8 | P3 |
| N+2 | 7 6 5 4 3 2 1 0 | P3 |
| N+3 | 15 14 13 12 11 10 9 8 | P3 |
| N+4 | 7 6 5 4 3 2 1 0 | P4 |
| N+5 | 15 14 13 12 11 10 9 8 | P4 |
| N+6 | 7 6 5 4 3 2 1 0 | P4 |
| N+7 | 15 14 13 12 11 10 9 8 | P4 |



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For bit positions corresponding to output modules, a "1" state will turn the I/O point on and the output latch will draw current. A "0" state will turn the module off. For bit positions corresponding to input modules, a "1" state indicates the presence of a low voltage for the "on" state of the module. A "0" state indicates a high voltage is present.

**Configuring The PB16A**

If the PB16A is to receive power from the AVME9480, install a jumper at pin 1 or pin 49 of the PB16A termination panel. Install appropriate solid-state relay modules. Then connect the 50-pin ribbon cable between the PB16A and the AVME9480 while observing the pin 1 index mark.

**USE WITH OTHER DEVICES**

The AVME9480 Digital I/O Board can interface to a variety of discrete devices, such as relays, switches, contact closures, and indicators. The optional termination panel Model 6980-16U can be used to connect field wiring to the digital I/O card. The following guidelines should be followed to insure proper interfacing.

**Relays And Other Inductive Loads**

When driving relays coils or other inductive loads, the PROTECT line should be tied to the voltage supply of the loads. This puts a suppression diode across each load to limit the voltage spike (reverse emf) generated when an inductive load is switched off quickly. However, since PROTECT is common to all 16 outputs, the supply voltage for all of the loads must be the same. Otherwise, each load must have its own external diode and the pullup resistors should be removed from the digital I/O card. See Drawing 4500-743 for relay driver configurations.

**Contact Closures And Switches**

When sensing contact closures that already are connected to a voltage source, the pullup resistor networks should be removed. The input voltage should be within the range listed in the specifications. For isolated or grounded contacts, the pullups and the +5 volt supply can be used to establish an input voltage. See Drawing 4500-743 for various input configurations.

## 3.0 PROGRAMMING INFORMATION

This section provides the specific information necessary to program the Digital I/O Board.

**MEMORY MAPS**

The memory map for the Industrial Digital I/O board, a non-intelligent I/O architecture, is shown in Table 3.1. The Digital I/O board is addressable on 1Kbyte boundries in the short address space. All Acromag VMEbus non-intelligent slaves have a standard interface configuration which consists of a 32 byte on-board ID PROM and a board status register. The rest of the 1Kbyte address space contains registers or other memory specific to the function of the board. All addresses are in hexadecimal. The letters R and W indicate whether a register may be Read and/or Written to. The areas marked "undefined" in the memory map will read with all bits high (1's). These areas are reserved for future use. For future compatibility, application programs should not use these areas for any reason.

**Table 3.1: AVME948x Digital I/O Board Memory Map**

| Base Addr+ (Hex) | EVEN Byte D15 D08 | ODD Byte D07 D00 | Base Addr+ (Hex) |
|---|---|---|---|
| 00 ↓ 3E | Undefined | R - Module ID PROM | 01 ↓ 3F |
| 40 ↓ 7E | Undefined | Undefined | 41 ↓ 7F |
| 80 | R/W-Interrupt Pending/Clear | R/W - Status/Control | 81 |
| 82 | R - Int. Inputs | R/W-Interrupt Enable | 83 |
| 84 | R/W - Int. Level | R/W-Interrupt Polarity | 85 |
| 86 | Undefined | R/W-Point 0 Vector | 87 |
| 88 | Undefined | R/W-Point 1 Vector | 89 |
| 8A | Undefined | R/W-Point 2 Vector | 8B |
| 8C | Undefined | R/W-Point 3 Vector | 8D |
| 8E | Undefined | R/W-Point 4 Vector | 8F |
| 90 | Undefined | R/W-Point 5 Vector | 91 |
| 92 | Undefined | R/W-Point 6 Vector | 93 |
| 94 | Undefined | R/W-Point 7 Vector | 95 |
| 96 ↓ FE | Undefined | Undefined | 97 ↓ FF |
| 100 | R/W -I/O Port 0 | R/W -I/O Port 1 | 101 |
| 102 | R/W -I/O Port 2 | R/W -I/O Port 3 | 103 |
| 104 | R/W -I/O Port 4 | R/W -I/O Port 5 | 105 |
| 106 | R/W- I/O Port 6 | R/W -I/O Port 7 | 107 |
| 108 ↓ 3FE | Undefined | Undefined | 109 ↓ 3FF |

**Board Identification ID PROM (Read Only, 01-3F)**

The Board Identification PROM occupies the 32 odd bytes beginning at location 01. These bytes contain ASCII character strings that identify various characteristics of the board (See Table 3.2).



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Table 3.2: Digital I/O Board Identification (ID) PROM**

| Hex Offset From Board Base Address | ASCII Character Equivalent | Numeric Value (Hex) | Field Description |
|---|---|---|---|
| 01 | V | 56 | All VME Boards Have "VMEID" |
| 03 | M | 4D | |
| 05 | E | 45 | |
| 07 | I | 49 | |
| 09 | D | 44 | |
| | | | |
| 0B | A | 41 | Manufacturer ID - "ACR" for Acromag |
| 0D | C | 43 | |
| 0F | R | 52 | |
| | | | |
| 11 | 9 | 39 | Board Model No. Unique for Each Model (4 Char + 3 Trailing Blanks) |
| 13 | 4 | 34 | |
| 15 | 8 | 38 | |
| 17 | 0 | 30 | |
| 19 | | 20 | |
| 1B | | 20 | |
| 1D | | 20 | |
| | | | |
| 1F | 1 | 31 | Number of Kbytes of Address Space Used. If equal "0", then Address Space is indicated at byte 29H. |
| | | | |
| 21 | | 20 | |
| 23 | | 20 | |
| 25 | | 20 | |
| 27 | | 20 | |
| | | | |
| 29 ↓ 3F | Undefined | | Reserved |

**Status/Control Register (Read/Write, 81)**

The Status/Control Register reflects and controls functions globally on the card.

| MSB 7 | 6 | 5 | 4 | 3 | 2 | 1 | LSB 0 |
|---|---|---|---|---|---|---|---|
| RSV | RSV | RSV | SW Rst | Global Int Enable | Global Int Pending | Grn LED | Red LED |

The bits of the Status Control Register have the following function:

| BIT | NAME | DESCRIPTION |
|---|---|---|
| Bit 7 | | Reserved for future use - equals "0" if read |
| Bit 6 | | Reserved for future use - equals "0" if read |
| Bit 5 | | Reserved for future use - equals "0" if read |
| Bit 4 | Software Reset (W) | Software Reset (W) - Writing a "1" to this bit causes a software reset. Writing "0" or reading the bit has no effect. A software reset turns all of the ports off, which effectively programs the ports for inputs. The effect of a software reset on the various registers is determined in the discussion of each of the registers. NOTE: If a reset is performed when interrupts are enabled, then in order to completely reset the AVME948x, it is necessary to perform two software resets with a delay of at least 2 microseconds between them. This is to prevent a spurious interrupt being caused by the latency of the actual field output being read back at a later time by the input circuit. |
| Bit 3 | Global Interrupt Enable (R/W) | Global Interrupt Enable (R/W) - writing a "1" to this bit enables interrupts to occur from the AVME9480 card. A "0" prevents interrupts. Reset Condition: Set to "0", all interrupts disabled. |
| Bit 2 | Global Interrupt Pending (R) | Global Interrupt Pending (R) - this bit will be a "1" when there is an interrupt pending from any of the interrupt inputs. This bit will be "0" when there are no interrupts pending. Reset condition: Set to "0", no interrupts pending. |
| Bit 1 | Green LED (R/W) | Green LED (R/W) - when written this bit will control the state of the green LED on the front panel. A "1" will turn it on, a "0" will turn it off. Reading it will reflect its current state. Reset Condition: Set to "0", LED off. |
| Bit 0 | Red LED (R/W) | Red LED (R/W) - when written this bit will control the state of the red LED on the front panel. A 1 will turn it off, a 0 will turn it on. Reading it will reflect its current state. Reset Condition: Will read a "0", LED lit, and SYSFAIL* is set low. |

The status register bits 1 and 0, along with the Green and Red LED's, provide the user with a means of keeping track of a card's functionality in the system. Since there is no intelligence on the board, the host computer controls these bits. The following is one possible use of these bits in the status register and the LED's on the front panel.

On power-up, the bits in the status register will read low, with the Green LED OFF, the Red LED ON, and SYSFAIL* LOW. This indicates that the board has failed or that it hasn't been tested yet.

The Status Register Bit 1 reads LOW and Bit 0 reads HIGH. The LED's will both be OFF and SYSFAIL* HIGH. This indicates an inactive board.

The Status Register Bit 1 reads HIGH and Bit 0 reads LOW. The LED's will both be ON and SYSFAIL* LOW. This indicates that the board is undergoing a diagnostic checkout.

The Status Register Bits 1 and 0 read HIGH. The Green LED will be ON with the Red LED OFF and SYSFAIL* HIGH. This indicates that the board is fully functional.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**VME Interrupter**

The VME Interrupter is made up of a series of registers that control the eight I/O interrupt points and the interrupt mode. Refer to the Interrupter Block Diagram (Drawing 4500-740) and the memory map (Table 3.1) for items referenced in the following discussion.

The VME interrupter on the Digital I/O card is a Release On Register Access (RORA) type interrupter and will return an eight bit vector during the interrupt acknowledge cycle. The RORA type interrupter will release the interrupt request line (IRQx*) after the interrupt has been cleared. The interrupter logic contains a programmable interrupt level accessible through the Interrupt Level Register.

The eight I/O interrupt points are level sensitive and prioritized. Interrupt point 7 has the highest priority and interrupt point 0 has the lowest priority. Each I/O interrupting point may be programmed with its own interrupt vector. Further, each I/O interrupt point may be individually masked and the interrupt polarity selected. Refer to the following paragraphs for further discussion of the interrupt registers.

**Interrupt Pending/Clear Register (Read/Write, 80)**

The Interrupt Pending Register reflects the status of the eight I/O interrupt points from I/O Port 0. A "1" in a bit position indicates an interrupt is pending for the corresponding point. Each bit is the logical AND of its associated "Interrupt Enable" and "Interrupt Input" bits. Hence, an input that is not enabled will never have its interrupt pending bit set to a "1".

An individual interrupt can be cleared by writing a "1" to its bit position if the input level has been negated. If the input level has not been negated, then the individual point must be masked or the interrupt level must be changed in the "Interrupt Input Polarity Register", and then a 1 written to its bit position in the "Interrupt Pending/Clear Register". This is the only way to clear interrupts from the board. This is known as the "Release on Register Access" (RORA) method as defined in the VME System Architecture.

**Interrupt Pending/Clear Register for I/O Port 0 Inputs**

| MSB 7 | 6 | 5 | 4 | 3 | 2 | 1 | LSB 0 |
|---|---|---|---|---|---|---|---|
| Point 7 | Point 6 | Point 5 | Point 4 | Point 3 | Point 2 | Point 1 | Point 0 |

Reset Condition: All interrupts cleared.

**Interrupt Inputs Register (Read, 82)**

The Interrupt Inputs Register provides the status of the eight I/O interrupt points prior to the point where they are masked by the "Interrupt Enable" register. This allows the level detecting circuitry for some inputs to be used in a polled or non-interrupt mode, while others operate in an interrupt mode. A "1" in a bit position indicates the input went through the transition defined by the "Interrupt Input Polarity Register". A write to the corresponding "Interrupt Clear Register" bit will clear the interrupt input flag if the input level has been negated. If the input level has not been negated, then the interrupt input flag will remain set.

**Interrupt Inputs Register for I/O Port 0 Inputs**

| MSB 7 | 6 | 5 | 4 | 3 | 2 | 1 | LSB 0 |
|---|---|---|---|---|---|---|---|
| Point 7 | Point 6 | Point 5 | Point 4 | Point 3 | Point 2 | Point 1 | Point 0 |

Reset Condition: All interrupt inputs cleared unless the interrupt condition is still present.

**Interrupt Enable Register (Read/Write, 83)**

The Interrupt Enable Register provides a mask bit for each of the eight I/O interrupt points. A "0" in a bit position will prevent the corresponding I/O interrupt point from causing an interrupt. A "1" will allow the input to cause an interrupt (providing the global interrupt enable bit is set).

**Interrupt Enable Register for I/O Port 0 Inputs**

| MSB 7 | 6 | 5 | 4 | 3 | 2 | 1 | LSB 0 |
|---|---|---|---|---|---|---|---|
| Point 7 | Point 6 | Point 5 | Point 4 | Point 3 | Point 2 | Point 1 | Point 0 |

Reset Condition: All interrupt points masked.

**Interrupt Level Register (Read/Write, 84)**

The Interrupt Level Register maintains the interrupt level (1-7) that the board responds with when it issues an interrupt request to the VMEbus.

Reset Condition: Register unaffected.

**Interrupt Input Polarity Register (Read/Write, 85)**

The Interrupt Input Polarity Register determines the level that will cause an interrupt for each of the eight I/O interrupt points. A "1" in a bit position means that an interrupt will occur when the I/O interrupt point is high. A "0" in a bit position means that an interrupt will occur when the I/O interrupt point is low.

**Interrupt Input Polarity Register for I/O Port 0 Inputs**

| MSB 7 | 6 | 5 | 4 | 3 | 2 | 1 | LSB 0 |
|---|---|---|---|---|---|---|---|
| Point 7 | Point 6 | Point 5 | Point 4 | Point 3 | Point 2 | Point 1 | Point 0 |

Reset Condition: All inputs will cause interrupts when I/O Interrupt Point is low.

**Interrupt Vector Registers (Read/Write, Odd-Bytes from 86-95)**

The Interrupt Vector Registers maintain the interrupt vectors for each of the eight I/O interrupt lines. This allows each I/O interrupt line to be serviced by its own software handler. A single software handler can be used by simply making all of the vectors the same. In this case, the handler will have to determine the interrupting point by examining the "Interrupt Pending Register".

Reset Condition: Registers unaffected.

**Digital I/O Port Registers (Read/Write, 100-107)**

The I/O Port Registers reflect and/or control the state of the bidirectional I/O points. Points are grouped 8 to a port. To use a point as an input, first write a 0 to it to cause the output driver to go into an OFF (high impedance) state. That lets the point be pulled to a high voltage level by an onboard pull-up resistor. The point may then be driven by an external device. Reading the point will reflect the INVERTED level at the I/O connector. To use a point as an output, write the desired "1" or "0" to the point. If the point is read, it will reflect the state of the output as well.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Note that because inverted logic is used, a high level at the I/O connector is read as a "0" in the Port Registers and a low level is read as a "1". This is consistent with the use of open-collector outputs to drive relays and switches. A logic "1" in the computer produces a low level at the output driver to "pull in" a relay and turn something "ON".

Reset Conditions: All of the I/O points are set to "0" which causes the output drivers to go into an OFF (high impedance) state. The result is that all I/O points are configured as inputs.

**INTERRUPT BEHAVOIR**

Several interrupt schemes are possible with the board's register architecture. Some of the possibilities are:

- Each point serviced by a separate software interrupt handler routine.
- A single software handler for the entire board.
- A mix of some points causing interrupts, some polled.

Two different interrupt release methods are described in the VME System Architecture. They are Release On Register Access (RORA), and Release On Acknowledge (ROAK). The architecture of this board follows the RORA method. This means that an interrupt request is removed from the bus when the associated interrupt point has been cleared. This method is necessary to allow several interrupts to be serviced with a single handler, if so desired.

**Interrupt Example**

The following example outlines the steps taken to initialize the board to cause interrupts.

1. Clear the global interrupt enable bit in the "Status/Control Resister".
2. Write the interrupt level into the "Interrupt Level Register".
3. Write vector(s) into the "Vector Registers".
4. Write proper patterns to establish the interrupt level into the Interrupt Input Polarity Register".
5. Write all 1's into the "Interrupt Clear Register " to reset interrupt inputs.
6. Write 1's into the "Interrupt Enable Register" to enable individual interrupts.
7. Write a 1 into the global interrupt enable bit of the "Status/Control Register".

Interrupts may now occur from the board.

When the board asserts an interrupt, the following action takes place:

1. The host processor asserts IACK* and a level of the interrupt it is seeking, and if the level matches the board's, the board puts a vector out on the data bus lines D0-D7. The original interrupt request from the board remains asserted.
2. The host processor uses the vector to determine the software interrupt handler to execute, and then executes it. For a single handler per point scheme, the handler writes to the proper bit in the "Interrupt Clear" register to remove the interrupt request. This also clears its interrupt pending flag and interrupt input flag. If other points have interrupts pending, another interrupt request is asserted (or just remains) and upon returning from the handler, another interrupt cycle is started.
3. If a software handler is used to handle several points, it could service them at the same time that it services the original interrupt by examining the "Interrupt Pending Register" to determine what other interrupts need servicing.

**Service of Interrupts**

The following examples outline the steps necessary to service an interrupt from the AVME948x.

**Example A:**
1. Disable the interrupt point(s) by writing a "zero" to the individual bit(s) in the Interrupt Enable Register.
2. Clear the interrupt point(s) by writing a "one" to the individual bit(s) in the Interrupt Pending/Clear Register.
3. Then reenable the interrupt point(s) by writing a "one" to the individual bit(s) in the Interrupt Enable Register.

**Example B:**
1. Clear the Global Interrupt Enable bit in the Status Register.
2. Clear the Interrupt point(s) by writing a "one" to the individual bit(s) in the Interrupt Pending/Clear Register.
3. Then reenable the Global Interrupt Enable bit in the Status Register.

The interrupt input stimulus must be removed before the interrupt can be cleared.

## 4.0 THEORY OF OPERATION

This section provides a functional description of the AVME948x Digital I/O Board which consists of the following functional blocks:

- VME address decode
- VME control logic
- Digital I/O map decode logic
- Identification PROM
- Status register
- VME interrupter
- Input comparators/buffers
- Output latches/drivers

A block diagram is shown in Drawing 4500-741. Refer to the Schematic and Parts Location Drawing 4500-737 for the items referenced in the following information.

**VMEbus INTERFACE**

The VMEbus Interface logic contains the logic necessary to interface the Digital I/O points to the VMEbus. This logic includes VME address decode logic, the VME Control logic and the VME Interrupter logic.

**The VME Address Logic**

The Digital I/O Board interfaces with the VMEbus as a non-intelligent slave in the short I/O address space. The card will recognize two of the Address Modifer Codes, the Short Supervisory Access (2DH), and the Short Non-Supervisory Access (29H) codes. Jumper J19 selects the Address Modifer Code that the card will recognize. The starting address of the Digital I/O Board is determined by jumpers on pins 1-12 of J17. This allows the Digital I/O Board to reside in any one of the 64, 1K blocks of the short I/O address space.

Integrated circuit U55 compares the VME address lines (A10 - A15) and the Address Modifier line (AM2) to Jumpers J17 and J19. If the two are equal, then the EQ* line is asserted. U57 checks the remaining Address Modifier Lines and AS*, and then asserts the CDEN* (card enable) line.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**The VME Control Logic**

The VME control logic takes care of the Data Transfer Acknowledge (DTACK*) timing and the Bus Error (BERR*) logic. The Digital I/O Board will assert the VME BERR* signal if the host CPU tries to access the card using a long-word read or write data transfer. U57 and U43 control the DTACK* timing. The transfer ackowledge delay signal (DDLAY) is asserted when the card has been properly decoded and either of the data strobes (DS1*, DS0*) are asserted. This allows U43 to start shifting a logical "1" across its outputs. The delay time is programmed by the factory through jumper J18. When DTACK is asserted, it is inverted through U42 and the VME DTACK* signal is asserted.

**The VME Interrupter**

The VME interrupter block diagram is shown in Drawing 4500-740. Refer to the schematic and parts location Drawing 4500-737 for the items referenced in the following paragraphs.

The VME interrupter on the Digital I/O card is a Release on Register Access (RORA) type interrupter and will return an eight bit vector during the interrupt acknowledge cycle. The RORA type interrupter will release the interrupt request line (IRQx*) after the interrupt has been cleared. The interrupter logic contains a programmable interrupt level accessible through the Interrupt Level Register.

The eight I/O interrupt points are level sensitive and work on a first come, first serve basis, unless the interrupts occur at the same time. If two or more interrupts occur at the same time, then I/O interrupt point 7 has the highest priority with I/O interrupt point 0 having the lowest priority. Each I/O interrupting point may be programmed with its own interrupt vector. Also, each I/O interrupt point may be individually masked, and the polarity may be selected. The Interrupt Vector Register is contained in U30. U15 is the Interrupt Enable Register. The Enable Register is read through U9 and U10. U28 is the Interrupt Polarity Register.

When the I/O interrupt inputs sense the proper level on one of the I/O interrupt points of Port 0 the interrupter logic will assert the pre-programmed interrupt request level (IRQ7* - IRQ1*) and then monitor the Interrupt Acknowledge Input (IACKIN*) line. When the IACKIN* is asserted, the logic compares the VME address lines A1, A2, and A3 to the pre-programmed interrupt level. If the lines are not equal, it will pass the signal along by asserting IACKOUT*. If the lines are equal, it will then drive the data bus with the vector associated with the I/O interrupting point and assert the DTACK* signal. U53 controls the interrupt request level decoding. U61 contains the Interrupt Level Register and controls all VME interrupt interface signals. U25 senses an incoming interrupt request from the I/O interrupt point(s), enables U53, selects the proper address for the interrupt vector RAM, and will give priority to simultaneous interrupt requests. The Interrupt Pending Register is U11 and U12. The Interrupt Inputs Register is contained in U26 and U27. Both the Interrupt Pending and Interrupt Inputs Register are read through U13 and U14.

**DIGITAL I/O PORT REGISTERS (READ/WRITE)**

The I/O Port Registers reflect and/or control the state of the bidirectional I/O points. Points are grouped eight to a port. To use a point as an input, first write a "0" to it to cause the open-collector output driver to go into an OFF (high impedance) state. That lets the point be pulled to a high voltage level by an onboard pull-up resistor. The point may then be driven by an external device. Reading the point will reflect the INVERTED level at the I/O connector.

To use a point as an output, write "1" or "0" to the point as desired. If the point is read, it will reflect the state of the output as well. Note that because inverted logic is used, a high level at the I/O connector is read as "0" in the port register, and a low level is read as a "1". This is consistent with the use of open-collector outputs to drive relays and switches. A logic "1" in the computer produces a low level at the output driver to "pull in" a relay or turn something "on".

**Input Comparators/Buffers**

Analog voltage comparators are used as input devices to allow the inputs to withstand up to 30V (see Drawing 4500-742). During normal operation, REF is held at +5V which establishes a reference voltage of approximately 1.8 volts from voltage divider R23 & R24, which appears at the inverting inputs of all the comparators for that group. Resistors R21 and R22 along with comparator U8 form a hysteresis switch with a lower threshold of 1V and an upper threshold of 2.2V. Buffer U38 is used to put the comparator outputs for the port on the data bus during read operations.

**Output Latches/Drivers**
(Refer to Drawing 4500-742 for the following discussion)

Output latch/driver U52 contains 8 CMOS latches and 8 open-collector darlington transistors. Removable resistor network R57 provides pullup for the I/O lines and is usually pulled up to +5V on the card through jumper J7. Each output has a protection diode, Dp which is usually tied to the relay supply voltage when driving relay coils. This diode clamps the high voltage spike (reverse emf) that can occur when a relay coil is turned off quickly.

## 5.0 SERVICE AND REPAIR INFORMATION

This section provides calibration procedures, service diagrams and instructions on how to obtain service and repair assistance.

**SERVICE AND REPAIR ASSISTANCE**

It is highly recommended that a non-functioning board be returned to Acromag for repair. Acromag uses tested and burned-in parts, and in some cases, parts that have been selected for characteristics beyond that specified by the manufacturer. Further, Acromag has automated test equipment that thoroughly checks the performance of each board. When a board is first produced and when any repair is made, it is fully tested, placed in a burn-in room at elevated temperature, and then retested before shipment. Please refer to Acromag's Service Policy Bulletin or contact Acromag for complete details on how to obtain parts and repair.

**PRELIMINARY SERVICE PROCEDURE**

Before attempting calibration or repair, be sure that all of the procedures in Section 2 (Preparation For Use) have been followed. These procedures are necessary since the board has jumpers that must be properly configured.

**Note:** It has been observed that on occassion, a "boot" program for a disk operating system will "hang" waiting for the VMEbus SYSFAIL* signal to be released by an intelligent disk controller board. Acromag's non-intelligent slave boards assert the SYSFAIL* signal as described to the VMEbus Specification, and therefore, the disk operating system will remain "hung". The best solution to this problem is to correct the boot program so that it is no longer dependent upon the SYSFAIL* signal. When this solution is not practical, it is possible to disconnect the SYSFAIL* from the circuitry on the Acromag board by removing the jumper for J20.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**CALIBRATION PROCEDURE**

Due to the digital nature of the AVME948x, no maintenance is required during normal operation of the board.

**REPLACEABLE PARTS**

The Replaceable Parts List (Table 5.1) is provided as an aid to the user in troubleshooting the board. Replacement parts and repair services are available from Acromag. If repair is deemed necessary for this circuitry, it is highly recommended that the board be returned to Acromag for repair and recalibration. Information on ordering replacement parts is shown below:

**Table 5.1: AVME 948x Replacement Parts**

| REFERENCE | ACROMAG PART NO. | DESCRIPTION |
|---|---|---|
| U1-8,16-23 | 1033-152 | IC LM339 |
| U9,10,13,14,40 | 1033-278 | IC SN74LS257AND |
| U11,12 | 1033-256 | IC SN74LS08ND |
| U15,28 | 1033-275 | IC SN74LS273ND |
| U24,29 | 1033-273 | IC SN74LS244ND |
| U25 | 5016-073 | IC PA7024 |
| U26 | 5016-074 | IC PLS153N |
| U27 | 5016-075 | IC PLS153N |
| U30 | 1033-415 | IC LH5116-15 |
| U31-38 | 1033-272 | IC SN74LS240ND |
| U39 | 5016-076 | IC PLS153N |
| U41 | 1033-621 | IC N74F04N |
| U42 | 1033-623 | IC N74F38N |
| U43 | 1033-658 | IC 74LS164N |
| U44, (9480) | 5016-078 | IC TBP18S030N3 |
| U44, (9481) | 5016-079 | IC TBP18S030N3 |
| U45-52 | 1033-515 | IC UCN5801ABU |
| U53 | 1033-048 | IC 7445 |
| U54 | 5016-082 | IC PLS173N |
| U55 | 1033-626 | IC AM25LS2521PCB |
| U56 | 1033-283 | IC SN74LS373ND |
| U57 | 5016-083 | IC PLS173N |
| U58 | 5016-077 | IC PLS153N |
| U59,60 | 1033-627 | IC SN74LS645-1ND |
| U61 | 5016-084 | IC PAL22V10 |

## 6.0 SPECIFICATIONS

The following specifications apply at 25°C ambient temperature and nominal power supply values, unless otherwise noted.

**AMBIENT TEMPERATURE RANGES**

Operating Temperature..... 0 to +70°C
Storage Temperature..... -25 to +85°C

**PHYSICAL DIMENSIONS**

Length..... 233mm
Width..... 160mm
Board Thickness..... 1.6mm
Maximum Component Height..... 13.9mm

**CONNECTORS**

P1, P2..... IEC Type 603-2-C096MX-XXX or equivalent.
P3, P4..... 50-Pin Header Connector, Right Angle Amp 1-499919-0 or equivalent.

**POWER REQUIREMENTS**

+5 Volts DC..... 4.875 to 5.25V DC at 1.6A, Typical (Board Logic only). Does not include additional current for output loads.

| VMEbus Loading Current | Input LOW | Input HIGH |
|---|---|---|
| AM2, AS*, IACK* | -0.6 mA | 20 uA |
| A15 - A10 | -0.4 mA | 20 uA |
| AM5 - AM3, AM1, AM0, LWORD*, A9 - A6, IACKIN* | -0.25 mA | 25 uA |
| A5 - A1, DS1*, DS0*, WRITE* | -0.2 mA | 20 uA |
| D15 - D0 | -0.1 mA | 20 uA |
| SYSRESET* | -100 uA | 40 uA |

| VMEbus Drive Current | Output LOW | Output HIGH |
|---|---|---|
| IRQ7* - IRQ1* | 80mA | 250uA |
| DTACK*, BERR*, SYSFAIL* | 64mA | -3.0mA |
| D15-D0 | 48mA | -15mA |
| IACKOUT* | 24mA | -3.2mA |
| | | |
| Typical VMEbus Access Time[1] | < 590nS[1] typical | |

**Note 1:** Measured from the falling edge of DSx*, to the falling edge of DTACK*, during a normal data transfer cycle.

**MAXIMUM INPUT FREQUENCY**

Minimum positive pulse width.... 1.4 uS
Minimum negative pulse width... 2.0 uS
Maximum input frequency (w/ minimum pulse widths)..... 295 KHz
Maximum input frequency (with 50% duty cycle)..... 250 KHz

**DIGITAL INPUT/OUTPUT NON-ISOLATED**


Input Voltage Range..... 0.0 to 30V DC
Input Threshold (L to H)..... 2.2V DC Nominal (Adjustable)
Input Threshold (H to L)..... 1.0V DC Nominal (Adjustable)
Input Hysteresis..... 1.2 V DC Nominal
Input Current (pull-up resistors removed)..... 61uA at 30VDC
Points per Board..... 64 I/O points (Each point can be configured as an input or output. Up to eight points can interrupt the VME bus)
Output Type..... Open collector with optional pull-up resistor.
Output Voltage Range..... 0 to 30 V DC.
Output Current Sink..... 100mA Max.
Output Saturation Voltage..... 1.1V Max @100mA., 0.9V Typ
Logic Compatibility..... TTL, LSTTL, CMOS, & Others
Minimum interrupt point pulse width to guarantee recognition... >2uS

**VME COMPLIANCE**

Meets or exceeds all written VME Specifications per revision C.1 dated October, 1985, and IEC 821-1987
Data transfer bus..... A16: D16/D08 (EO) DTB slave
Address modifier codes..... 29H, 2DH
Interrupt request levels..... IRQ(1) - IRQ(7), eight programmable vectors
Memory map..... Short I/O space user or supervisor & occupying 1Kbyte consecutive locations, base address jumper-configurable within 64K short I/O space
Board Size..... Double Eurocard (NEXP) (233mm X 160mm)



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

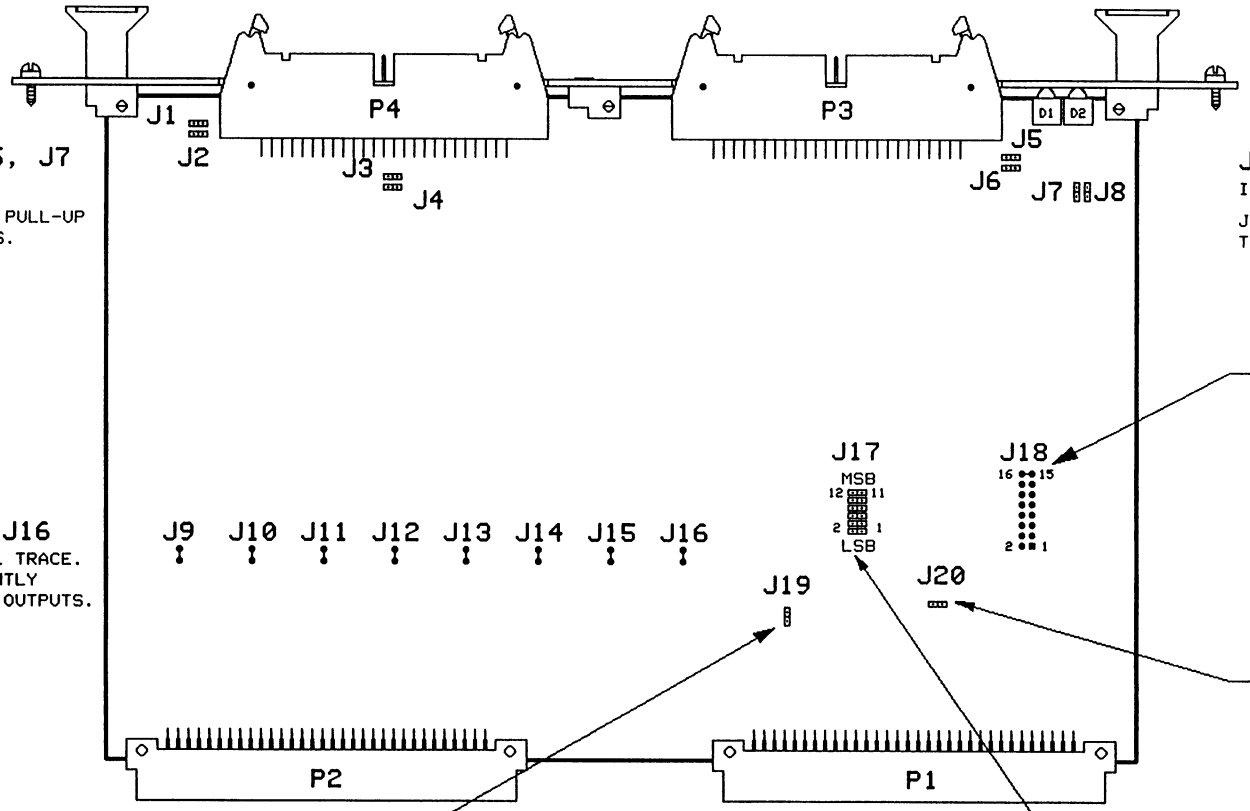


## JUMPERS J1, J3, J5, J7

RESISTOR PULLUP JUMPER

JUMPER INSTALLED CONNECTS PULL-UP RESISTOR PACKS TO +5 VOLTS.

## JUMPERS J2, J4, J6, J8

INPUT REFERENCE JUMPER

JUMPER INSTALLED CONNECTS REFERENCE TO +5 VOLTS.

## J18

FACTORY INSTALLED.
DO NOT CHANGE,
POSITION CAN VARY.

## JUMPERS J9 THRU J16

FACTORY INSTALLED BY FOIL TRACE.
CUTTING A JUMPER PERMANENTLY
DISABLES THAT GROUP OF 8 OUTPUTS.

## VME BUS SYSFAIL JUMPER

J20 SYSFAIL JUMPER
FACTORY INSTALLED
BOARD WILL ASSERT SYSFAIL AFTER
POWER UP OR RESET.

## J19

JUMPER INSTALLED - BOARD WILL RECOGNIZE BOTH SUPERVISORY AND NON-PRIVELEDGED

NO JUMPER INSTALLED - BOARD WILL RECOGNIZE SUPERVISORY ONLY

## J17 VME BUS ADDRESS DECODING JUMPER


| BASE ADDRESS | PINS ON J17 | | | | | |
|---|---|---|---|---|---|---|
| | 11 & 12 | 10 & 9 | 8 & 7 | 6 & 5 | 4 & 3 | 2 & 1 |
| 0000H | OUT | OUT | OUT | OUT | OUT | OUT |
| 0400H | OUT | OUT | OUT | OUT | OUT | IN |
| 0800H | OUT | OUT | OUT | OUT | IN | OUT |
| F400H | IN | IN | IN | IN | OUT | IN |
| F800H | IN | IN | IN | IN | IN | OUT |
| FC00H | IN | IN | IN | IN | IN | IN |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Acromag WIXOM, MICH. | 26 MAR 97 | B | 97C089 | TAV | GRL | GRL |
| | 22 AUG 89 | A | 9436 | TAV | DK | RD |
| | 11 JULY 89 | – | —— | SK | DK | — |
| | DATE | REV | ECO | DR | ENG | ELP |

TITLE: JUMPER LOCATION


| SIZE | SERIES | SHEET | DRAWING | REV |
|---|---|---|---|---|
| D DWG | AVME 948X | 1 OF 1 | 4500-981 | B |

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

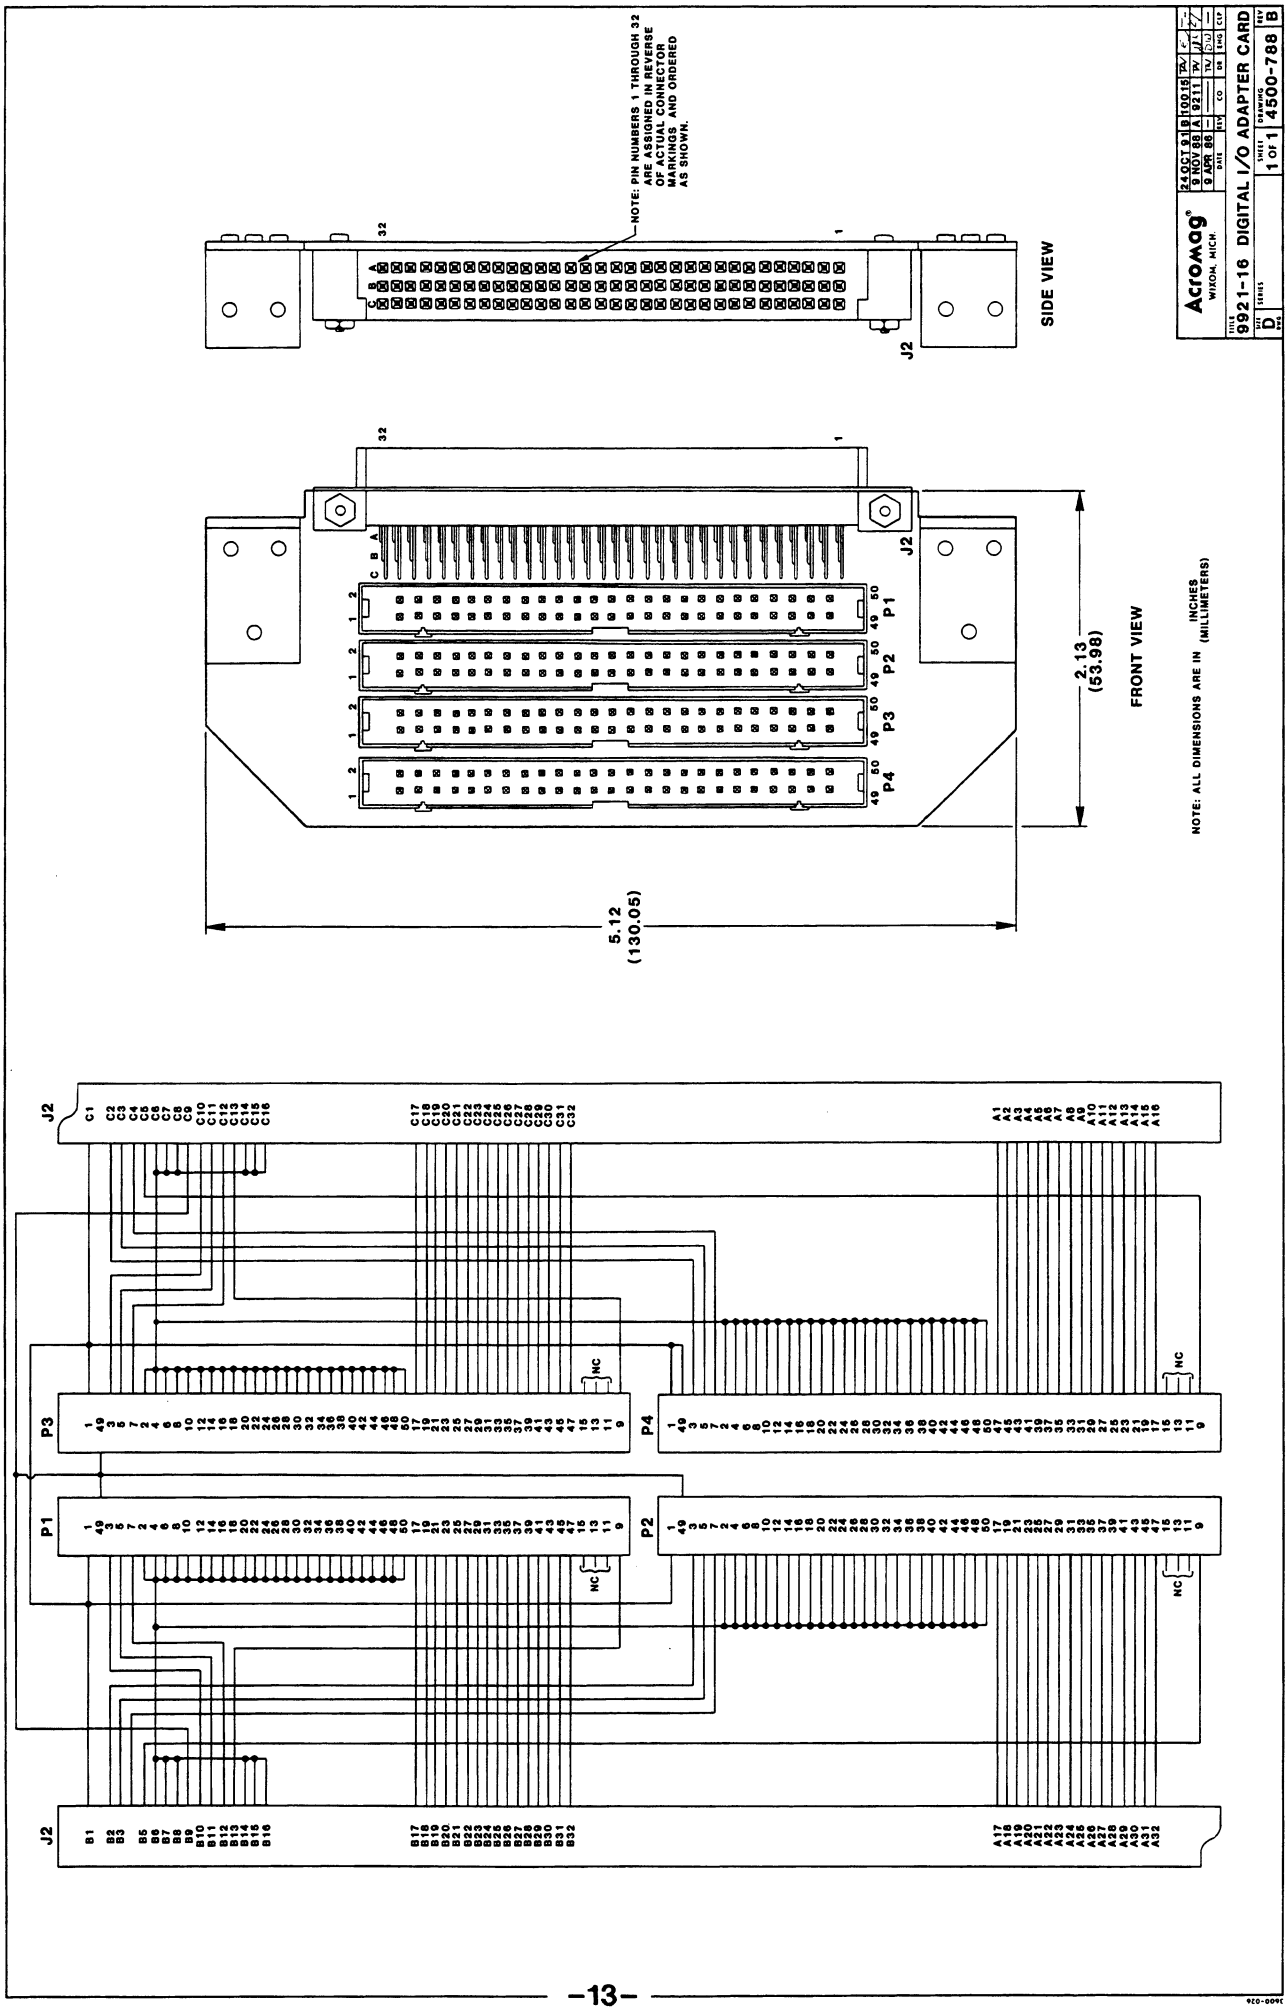





Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

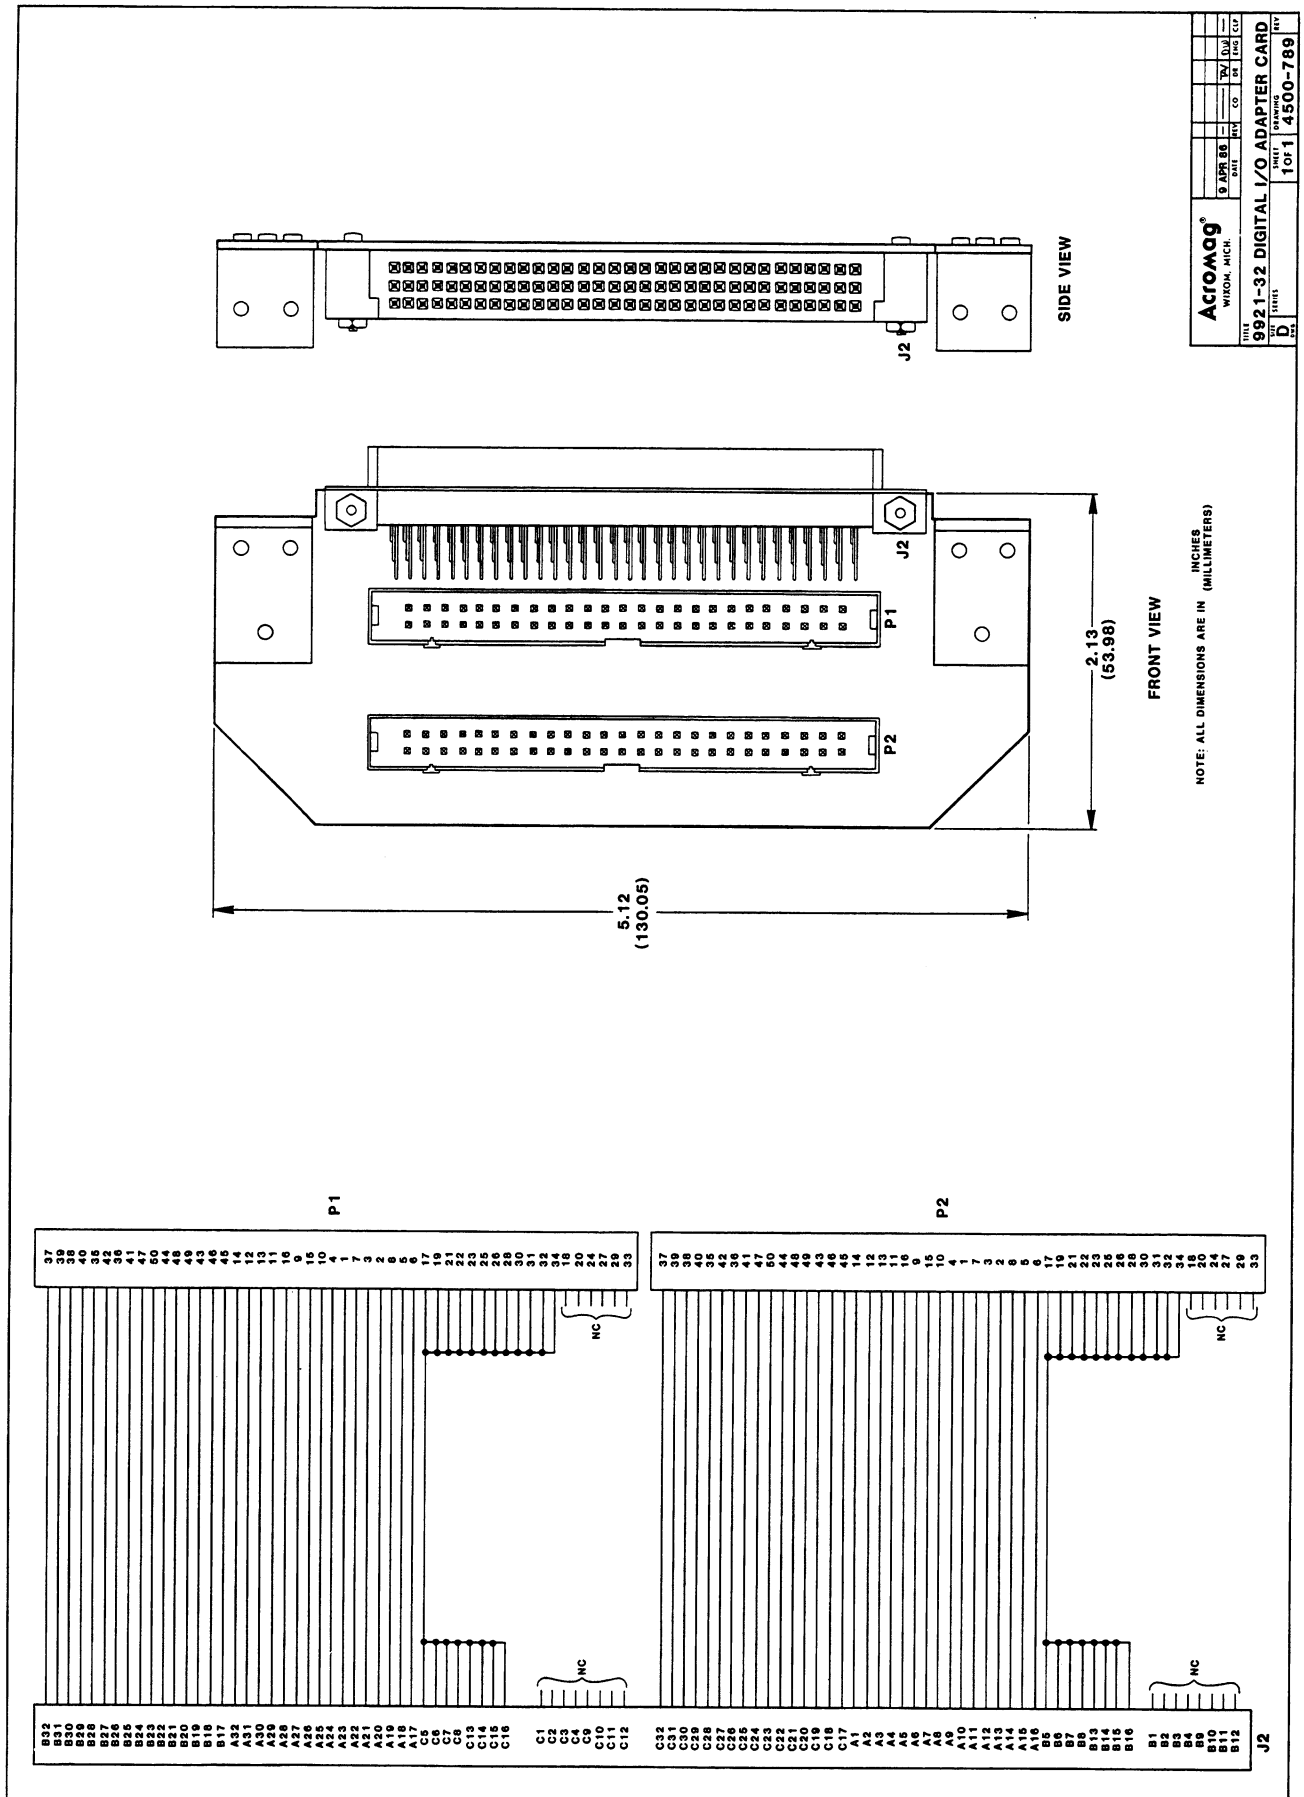





Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

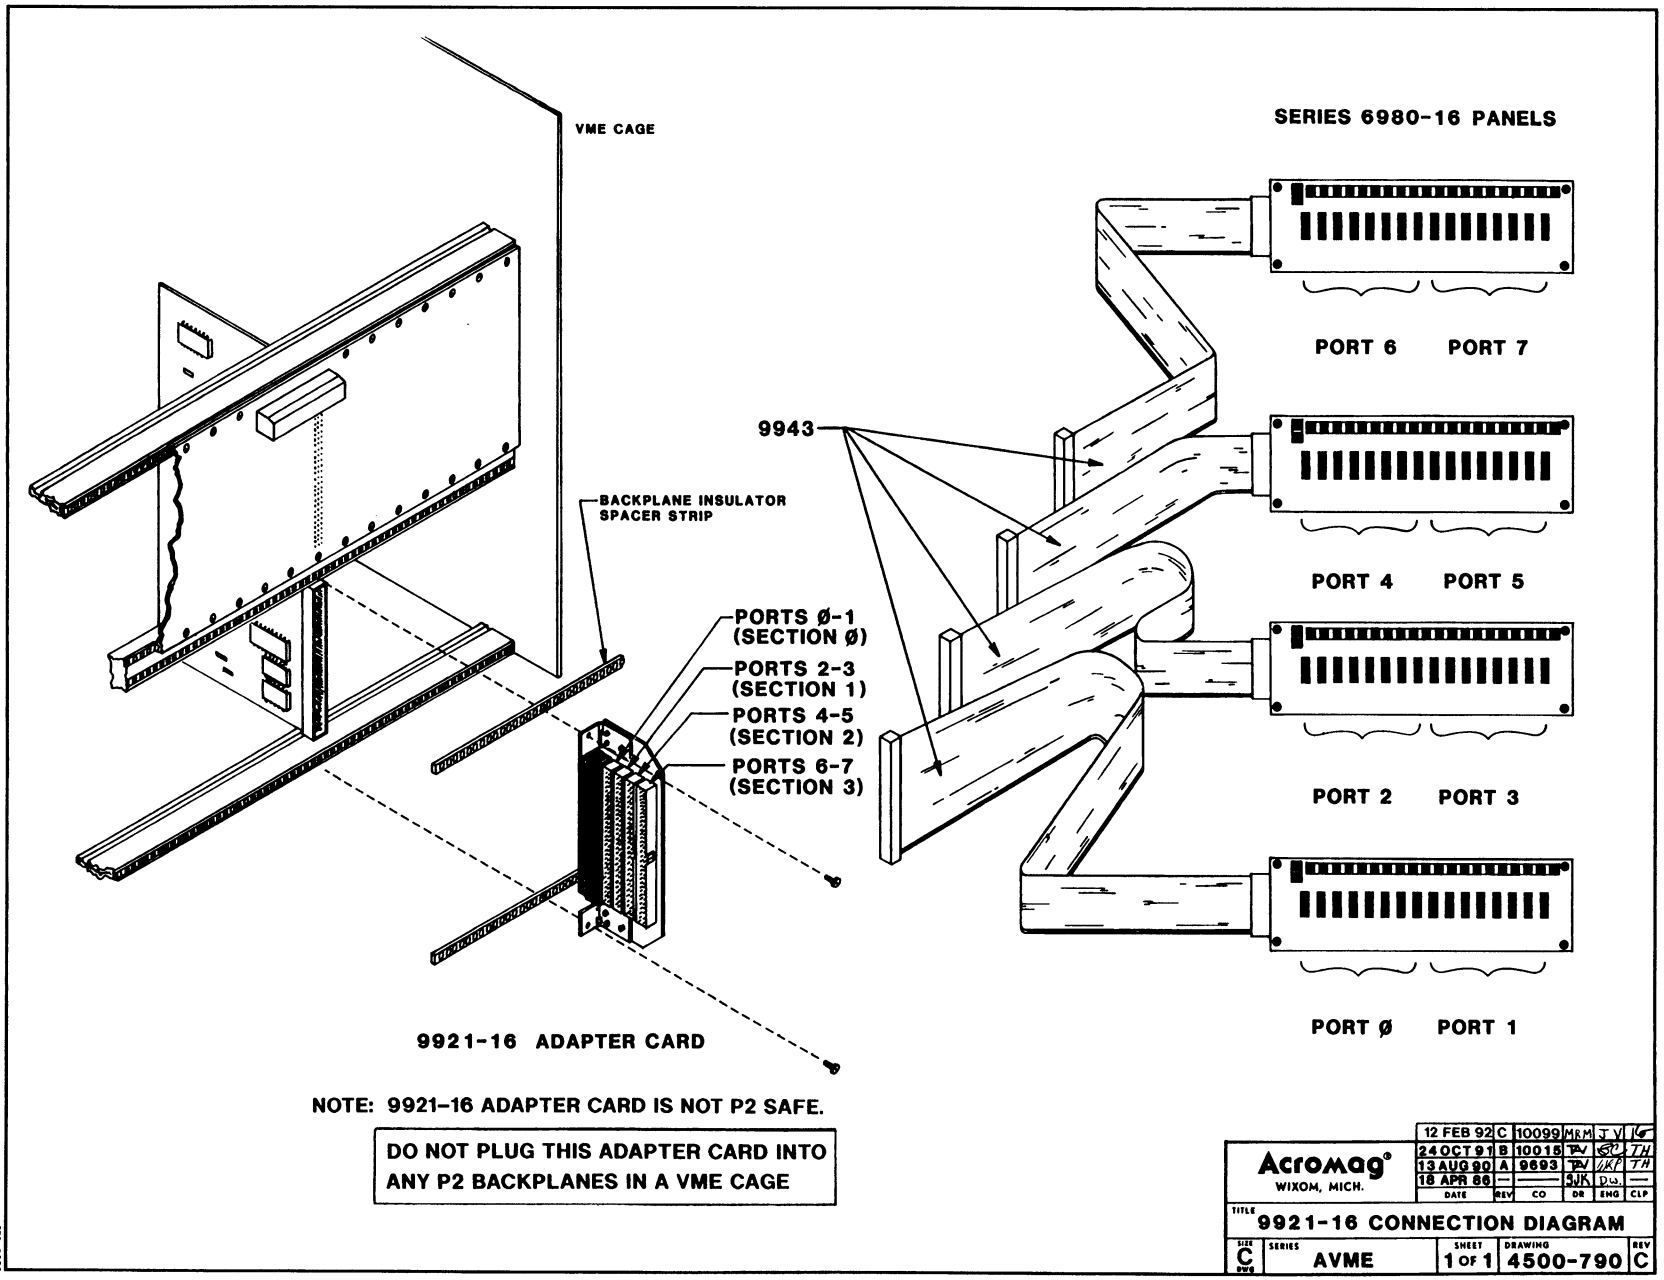






Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

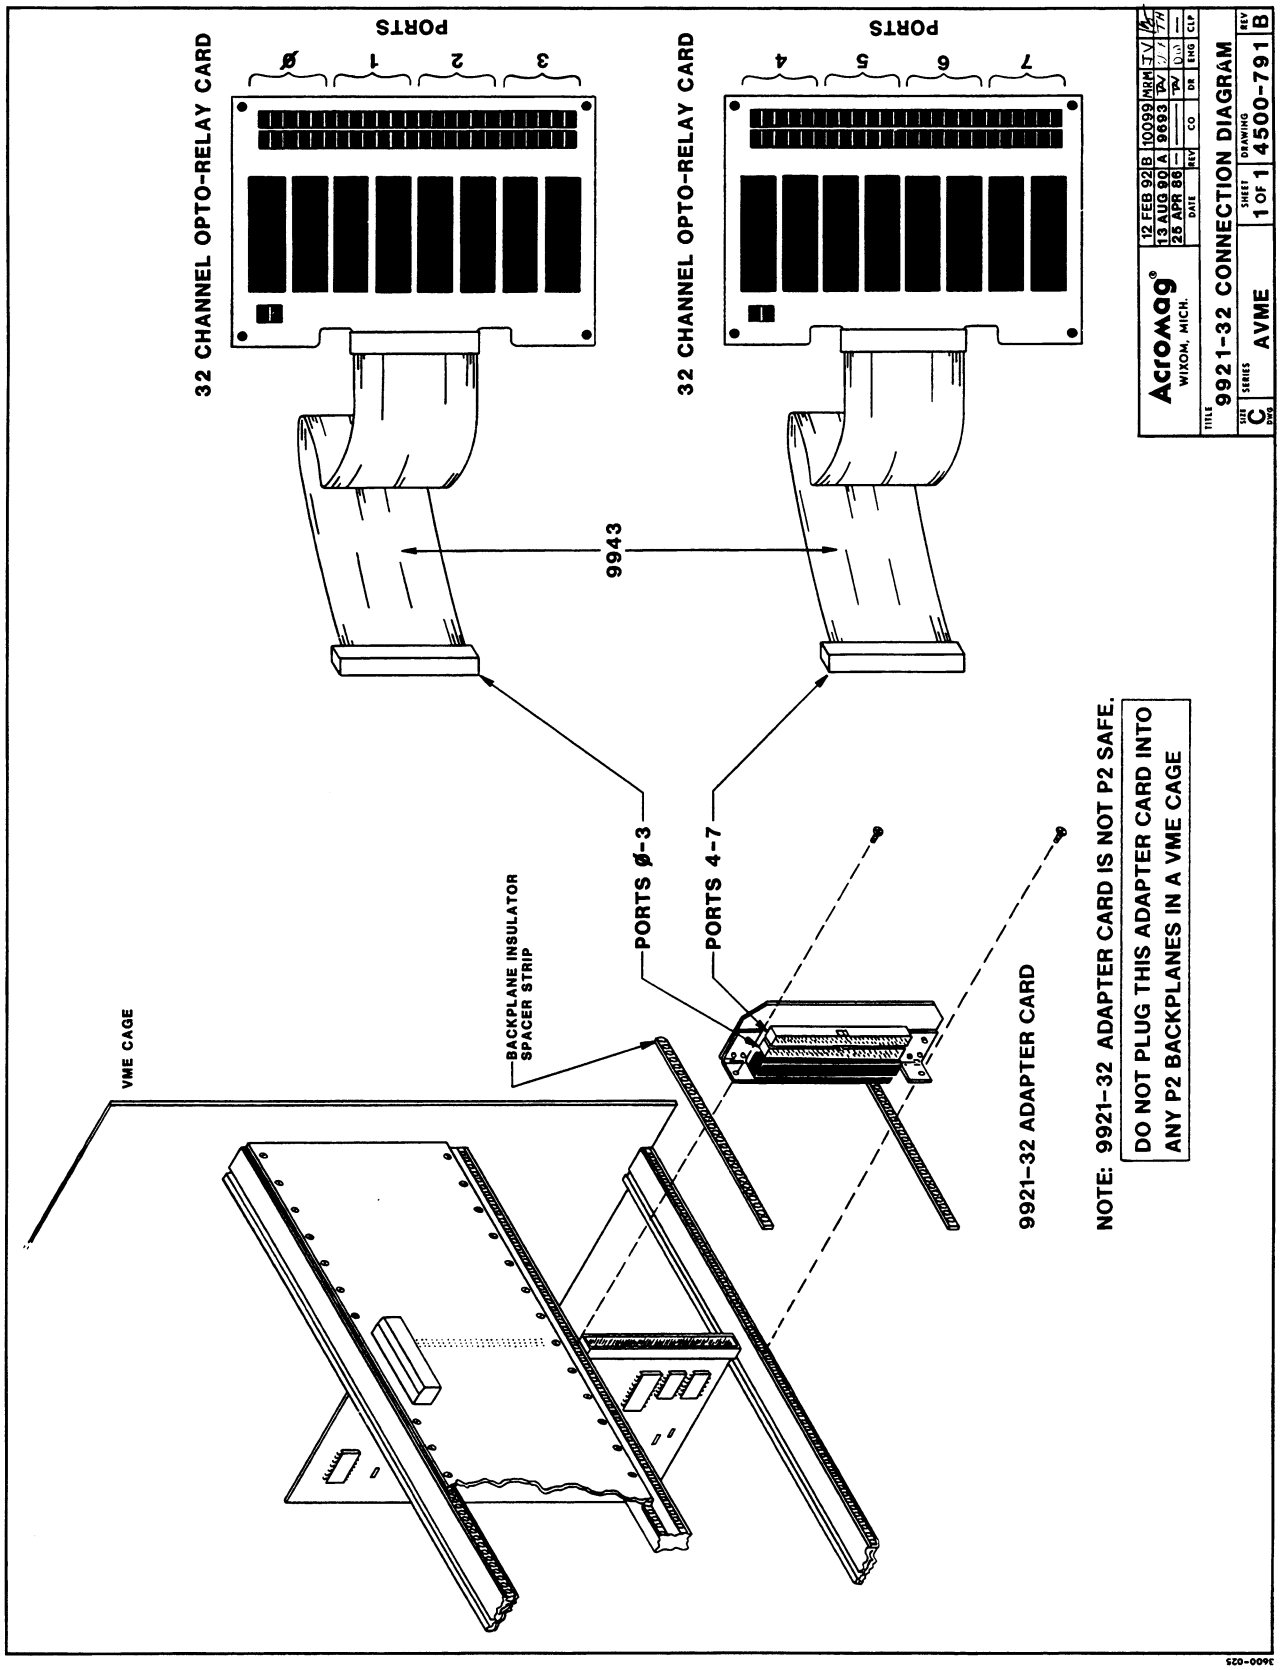





Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

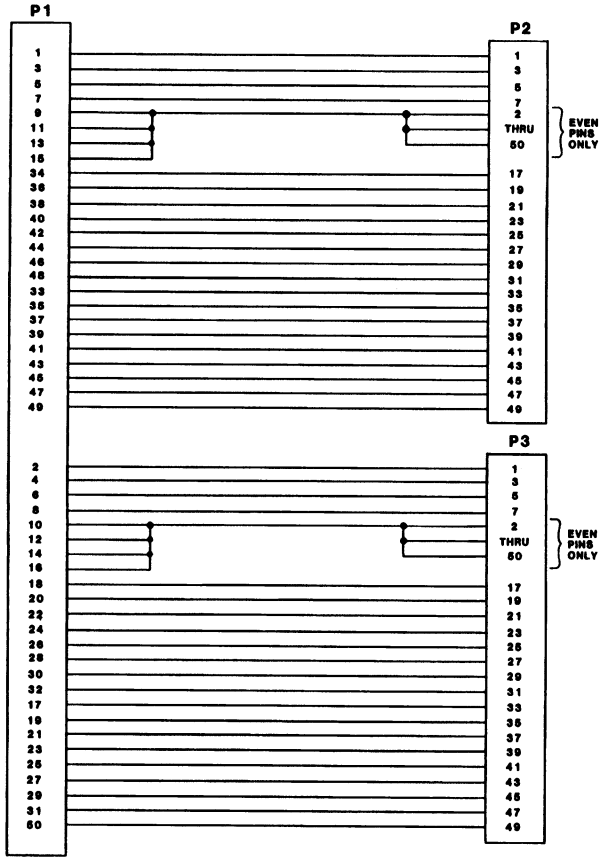

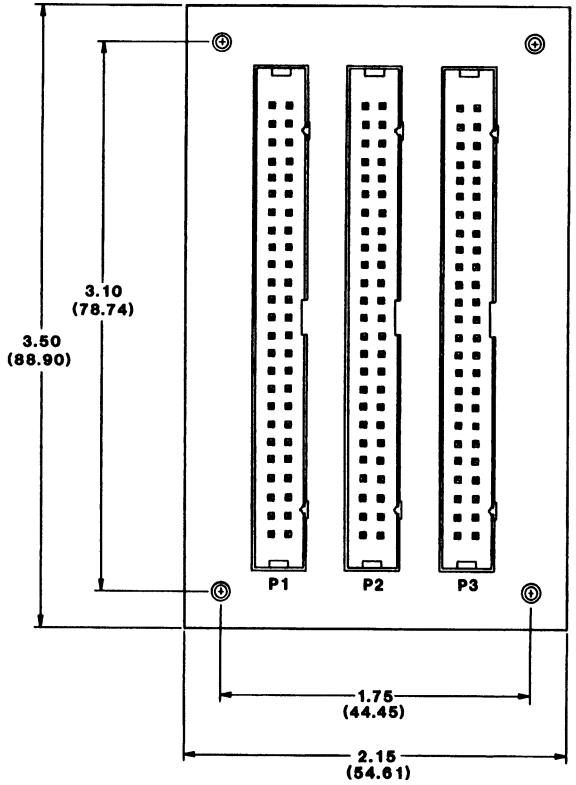
FRONT VIEW

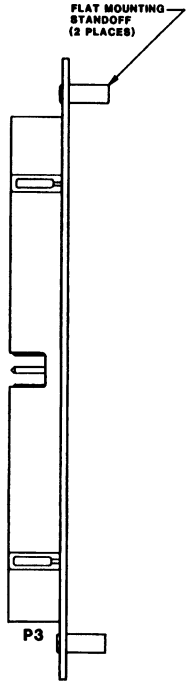


SIDE VIEW

NOTE:
DIMENSIONS ARE IN INCHES (MILLIMETERS)

Acromag
WIXOM, MICH.


| DATE | REV | CO | DR | ENG | CLK |
|---|---|---|---|---|---|
| 9 APR 86 | -- | | DV | DW | -- |

TITLE
9920-16 DIGITAL I/O ADAPTER CARD

| SIZE | SERIES | SHEET | DRAWING | REV |
|---|---|---|---|---|
| D | | 1 OF 1 | 4500-786 | |



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

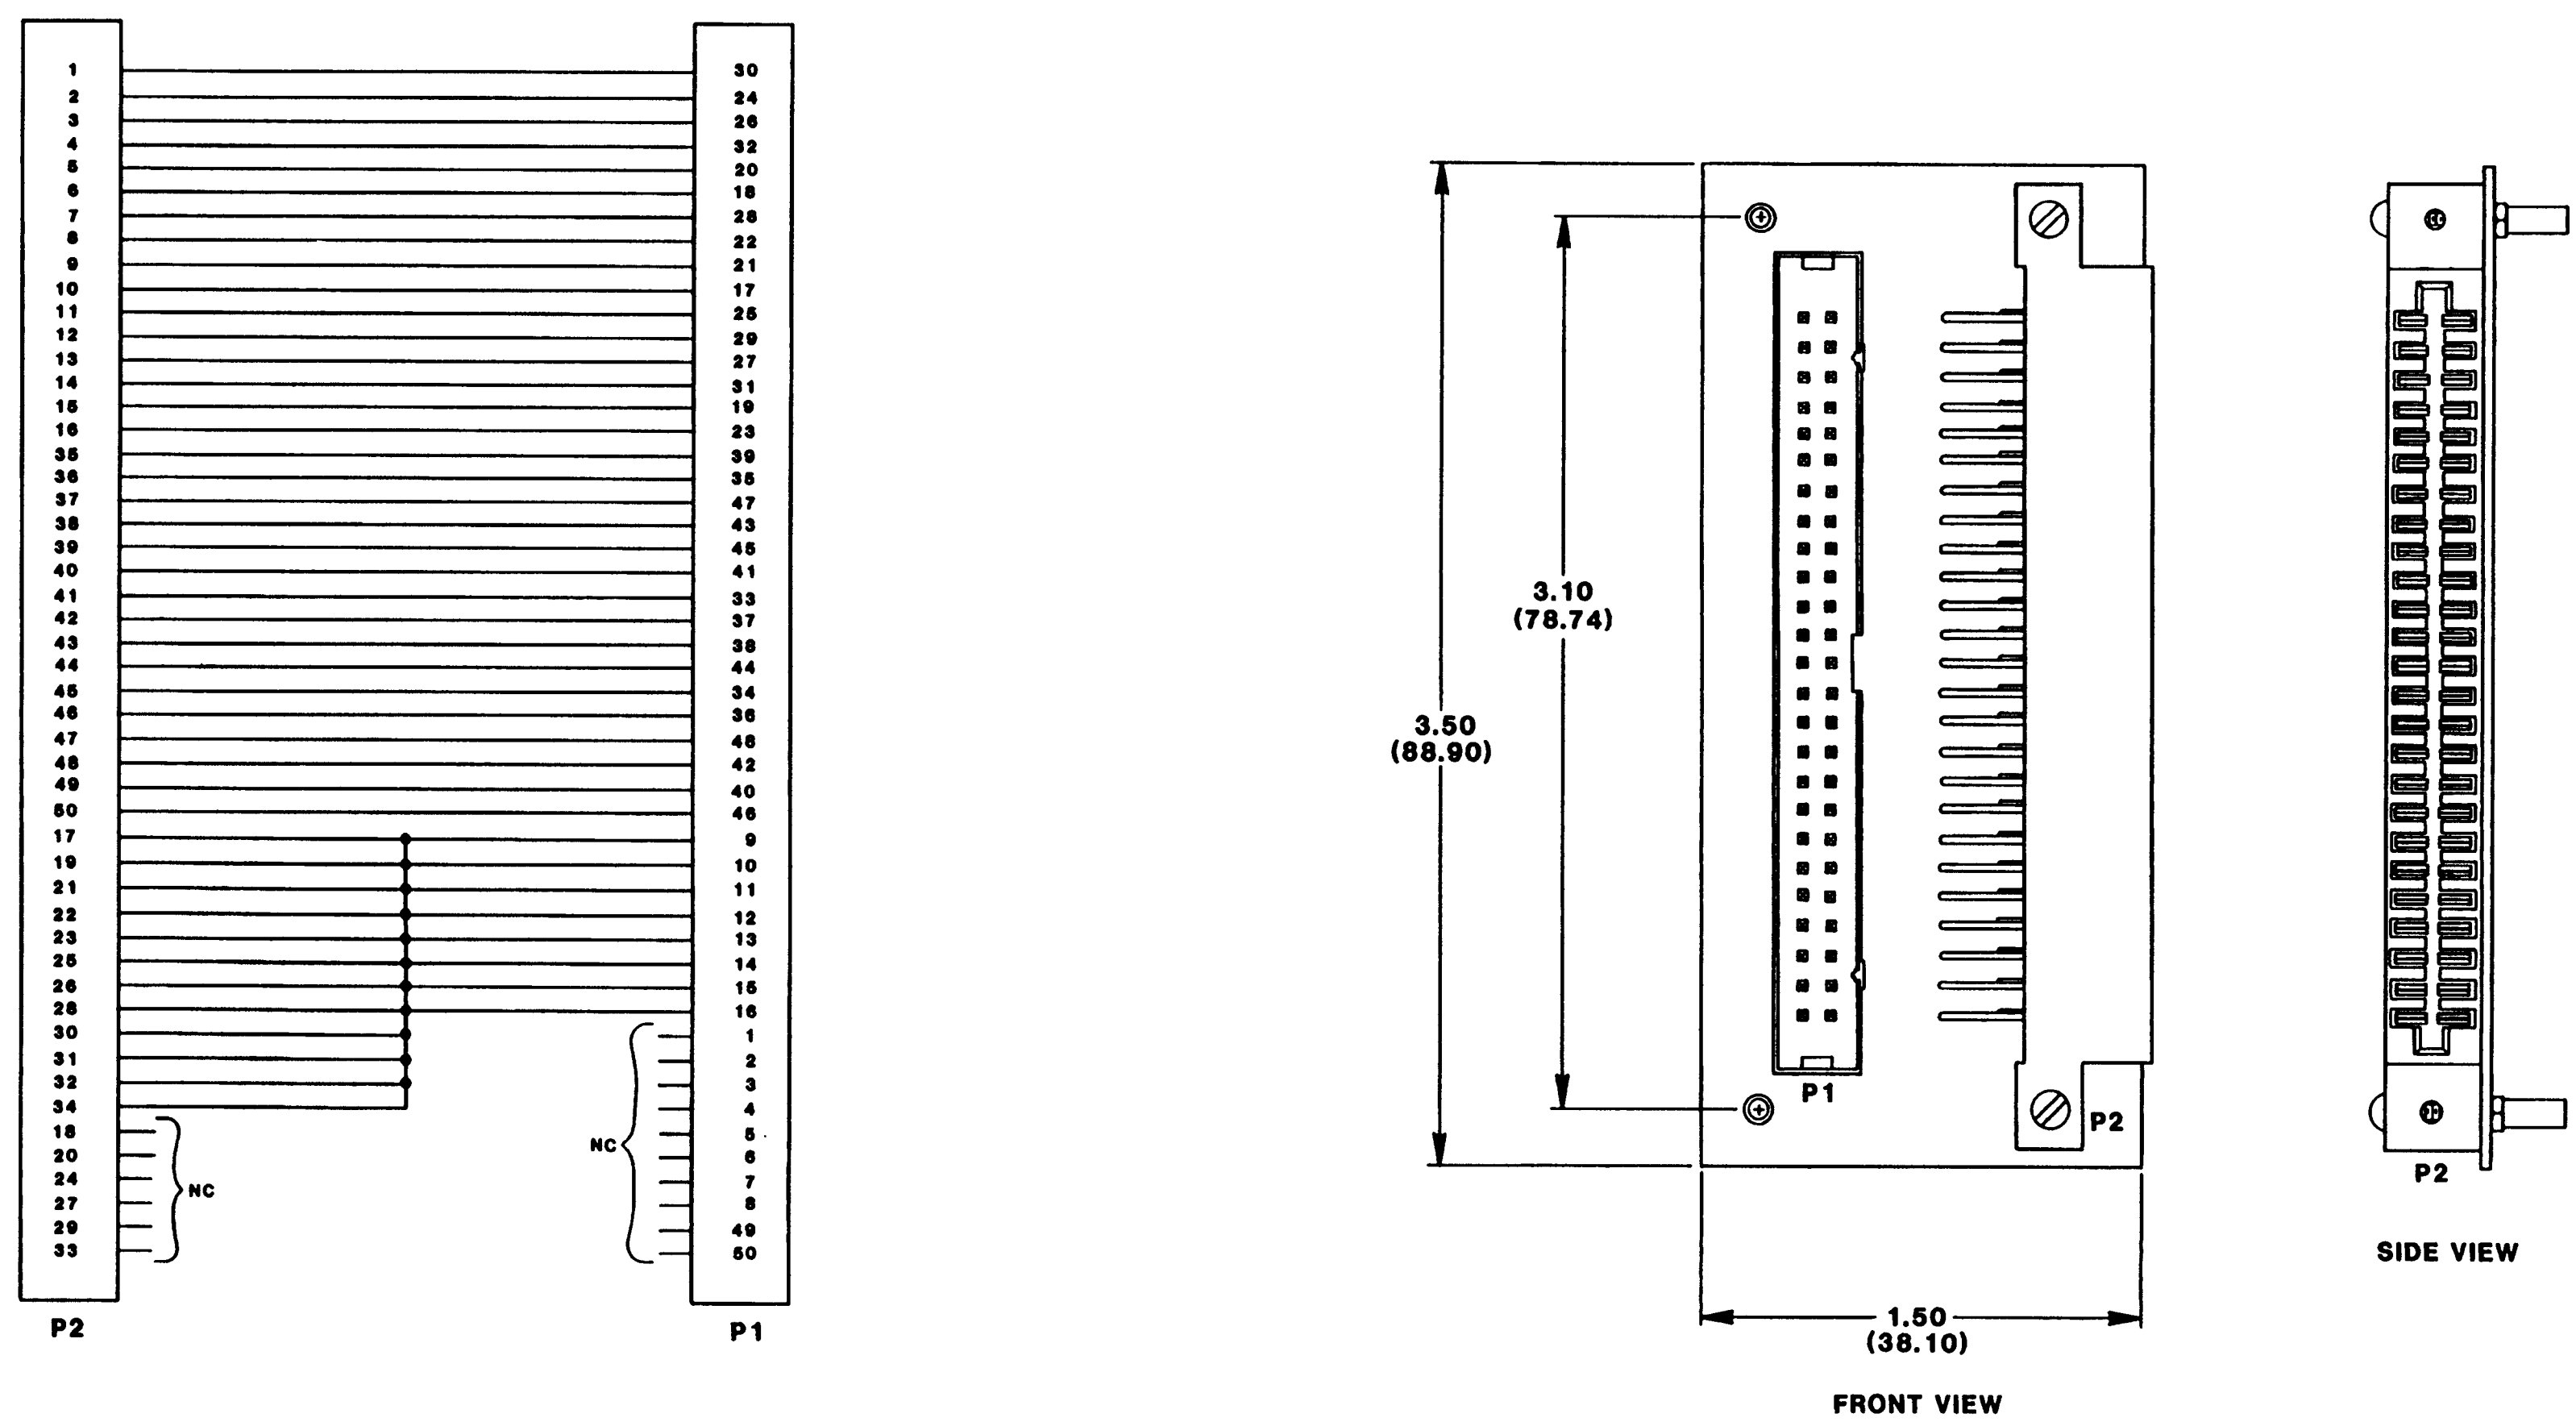



NOTE: DIMENSIONS ARE IN INCHES (MILLIMETERS)

| | | | | | |
|---|---|---|---|---|---|
| **Acromag®** WIXOM, MICH. | 9 APR 86 DATE | — REV | —— CO | TV DR | DW ENG / CLP |
| TITLE **9920-32 DIGITAL I/O ADAPTER CARD** | | | | | |
| SIZE D DWG | SERIES | SHEET 1 OF 1 | DRAWING 4500-787 | REV | |




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

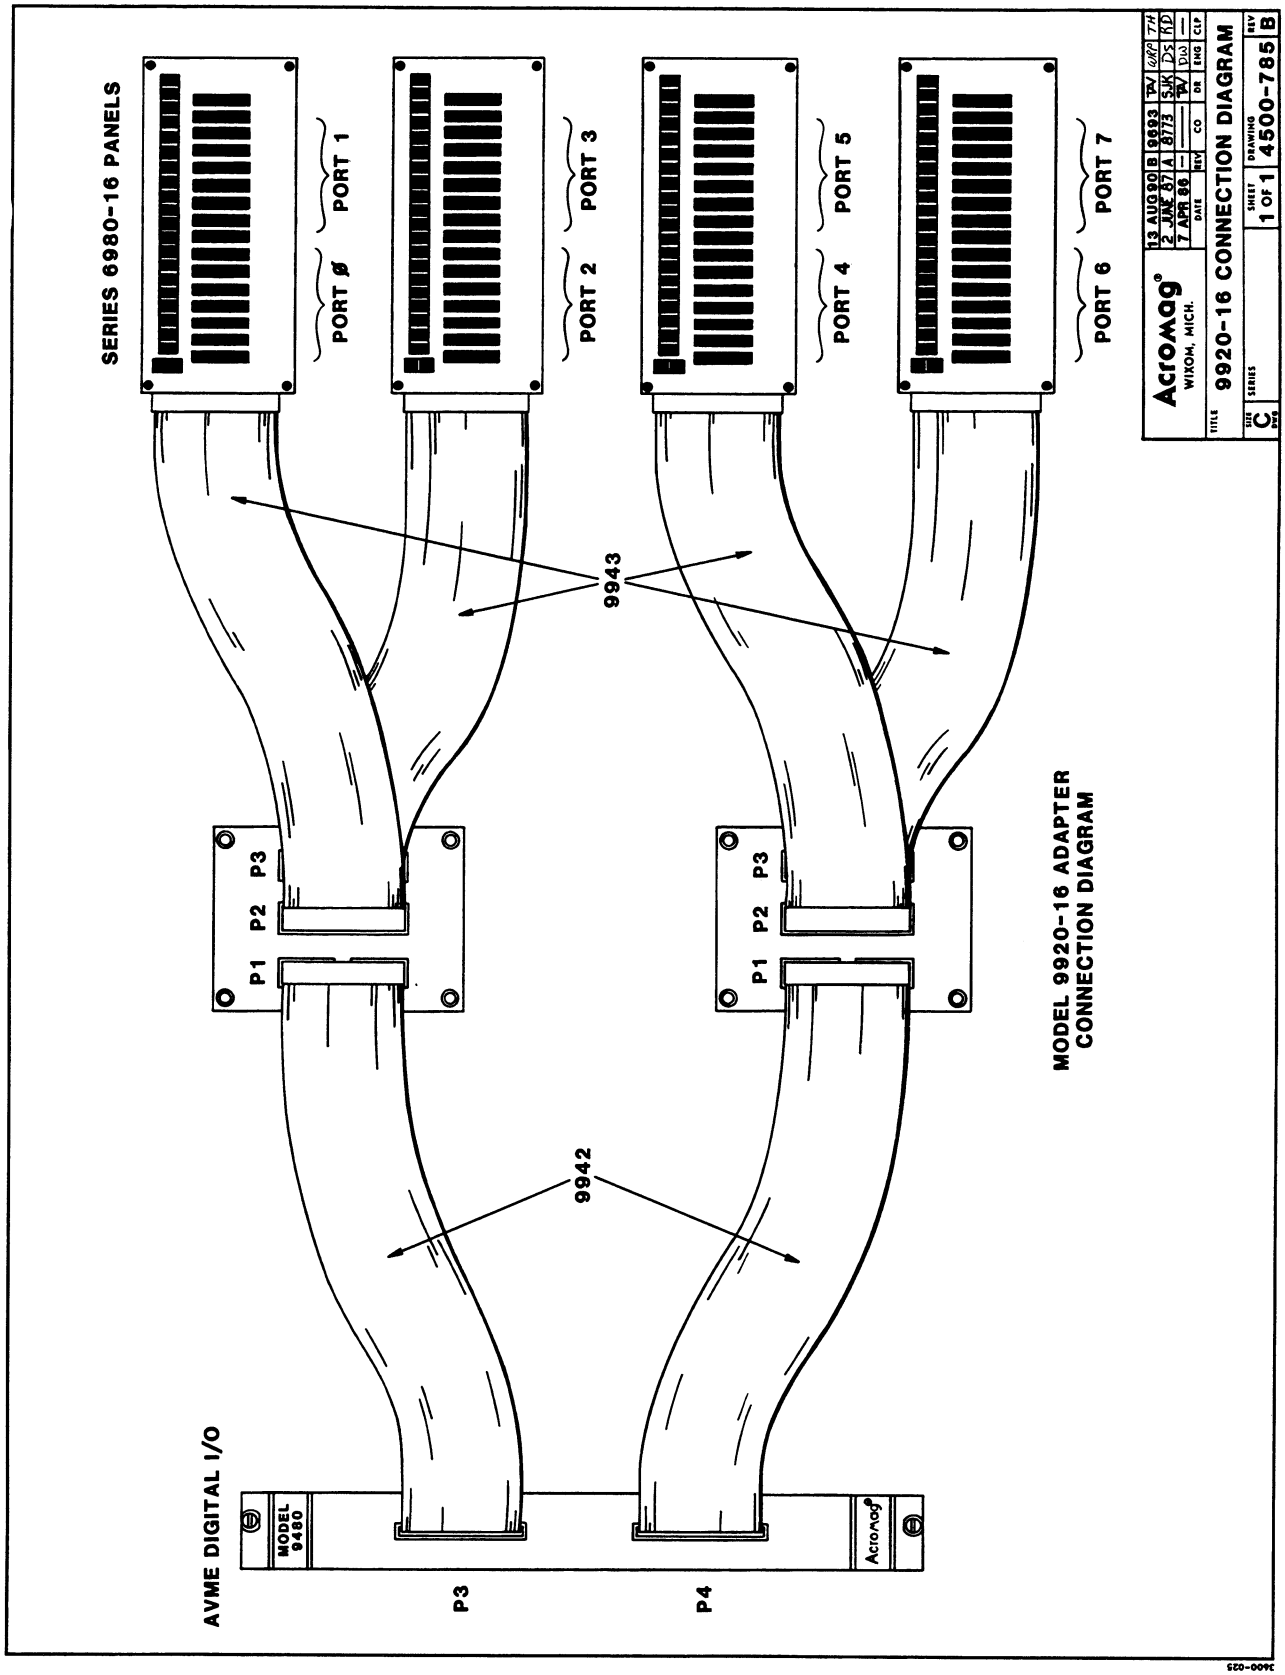






Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

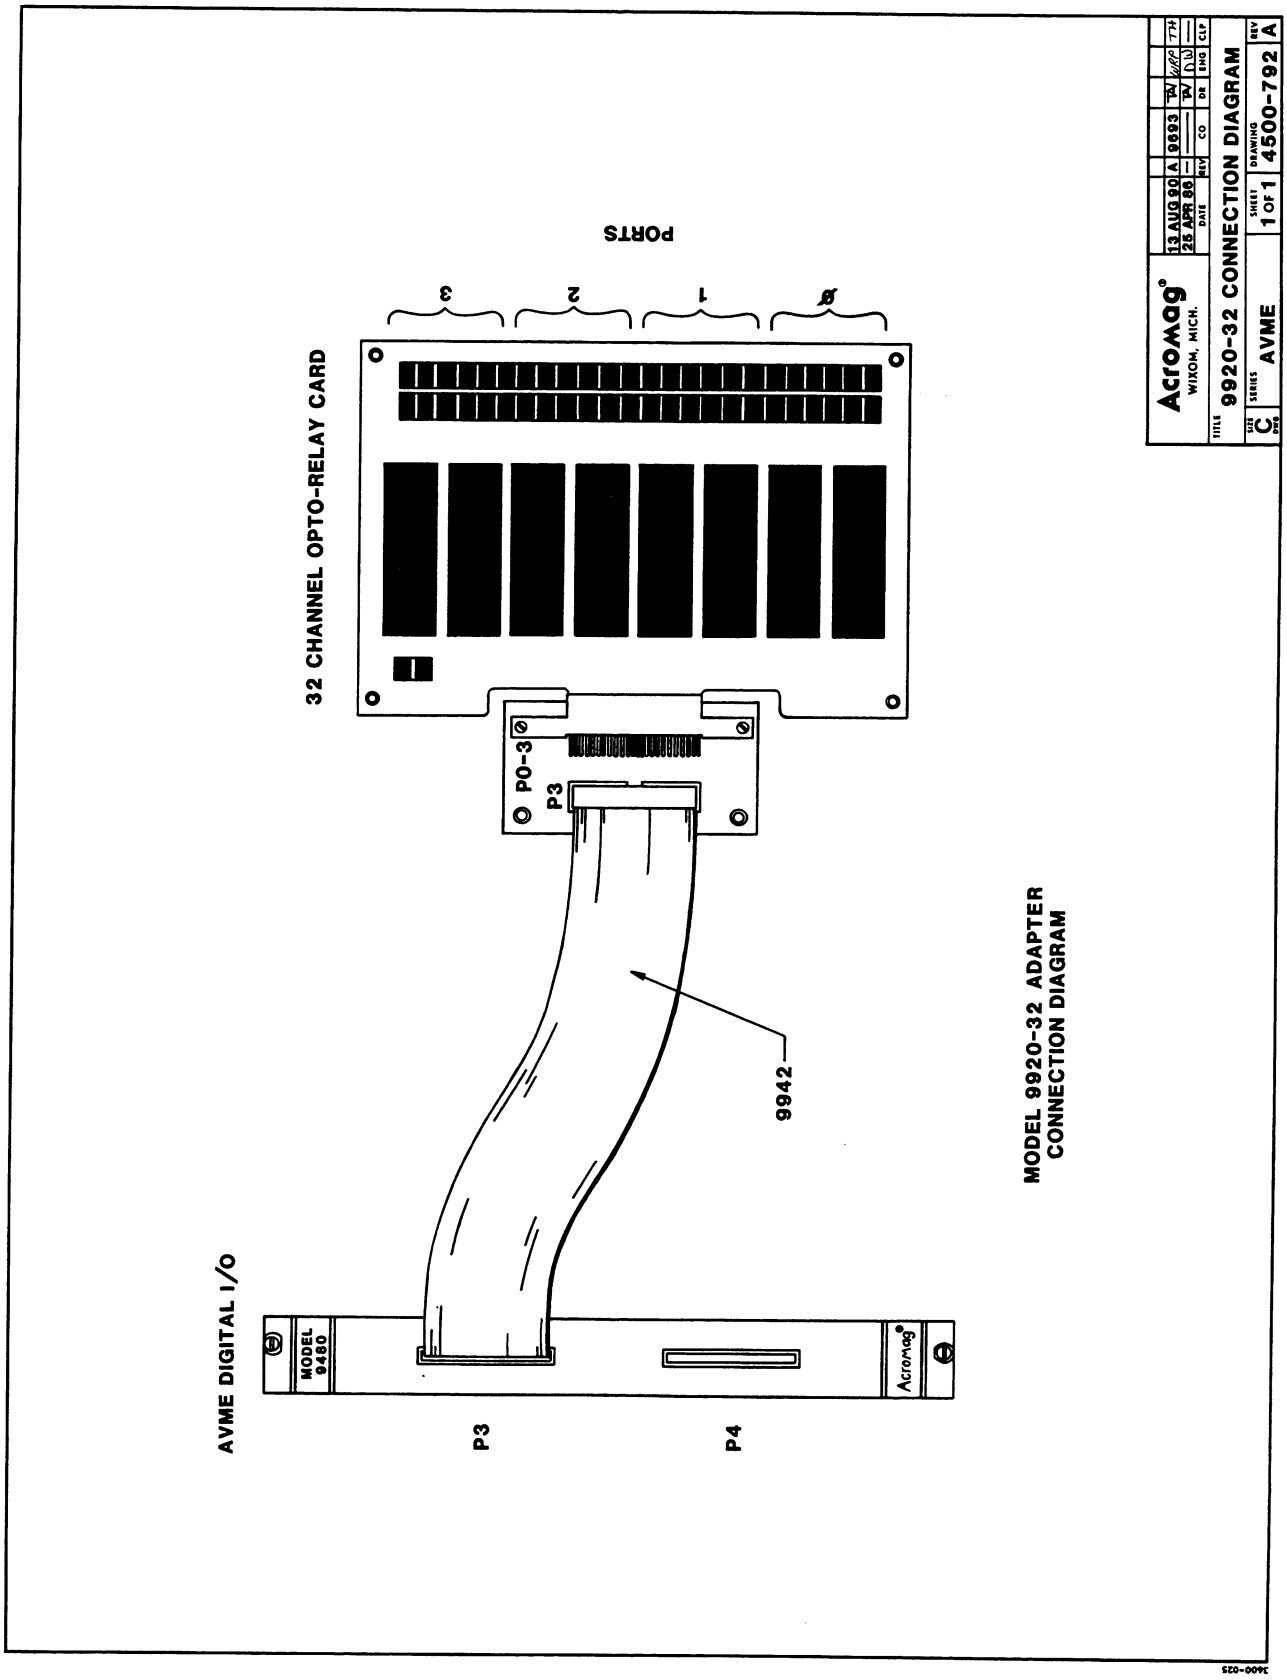





Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



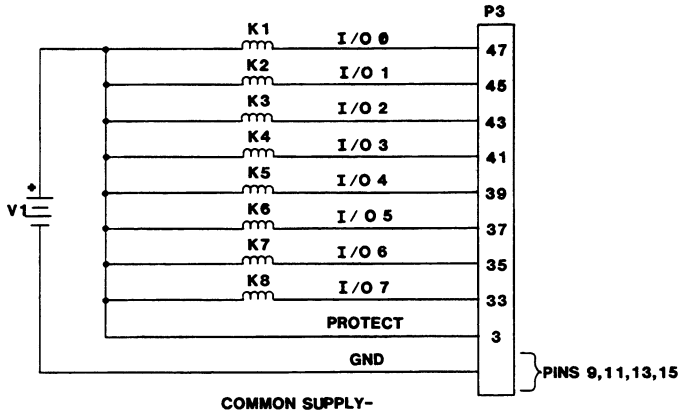

COMMON SUPPLY-
PROTECT LINE TIED TO V1, PUTS A PROTECTION DIODE ACROSS EACH RELAY.

NOTE: PULL-UPS ON AVME-9480 SHOULD BE REMOVED.

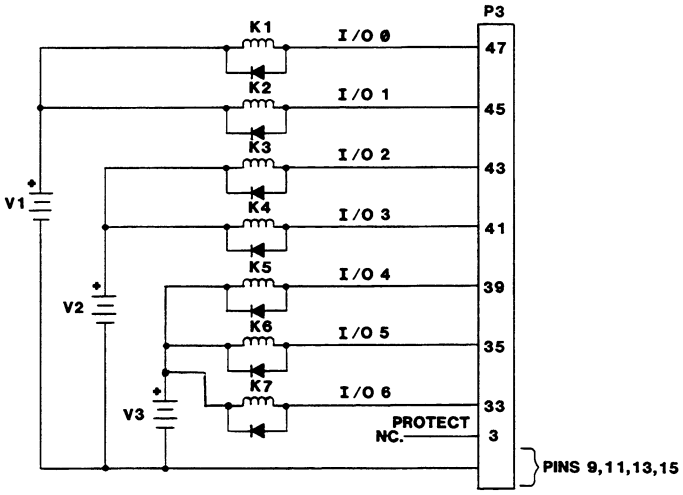



SEPARATE SUPPLIES-
EACH RELAY NEEDS ITS OWN EXTERNAL DIODE.

## RELAY DRIVER CONFIGURATIONS
(SHOWN FOR PORTS N & 0)

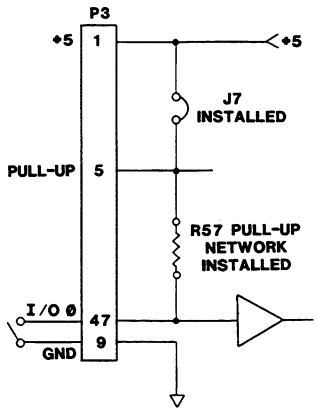


SIMPLE CONTACT CLOSURE SENSING.

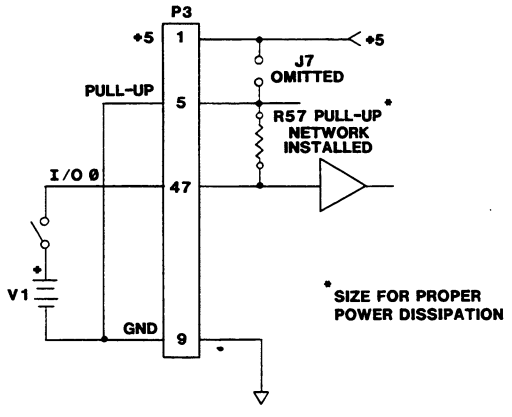



CONTACTS SWITCHING A VOLTAGE.

## INPUT CONFIGURATIONS
(SHOWN FOR PORTS N & 0, I/O POINT 0)



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

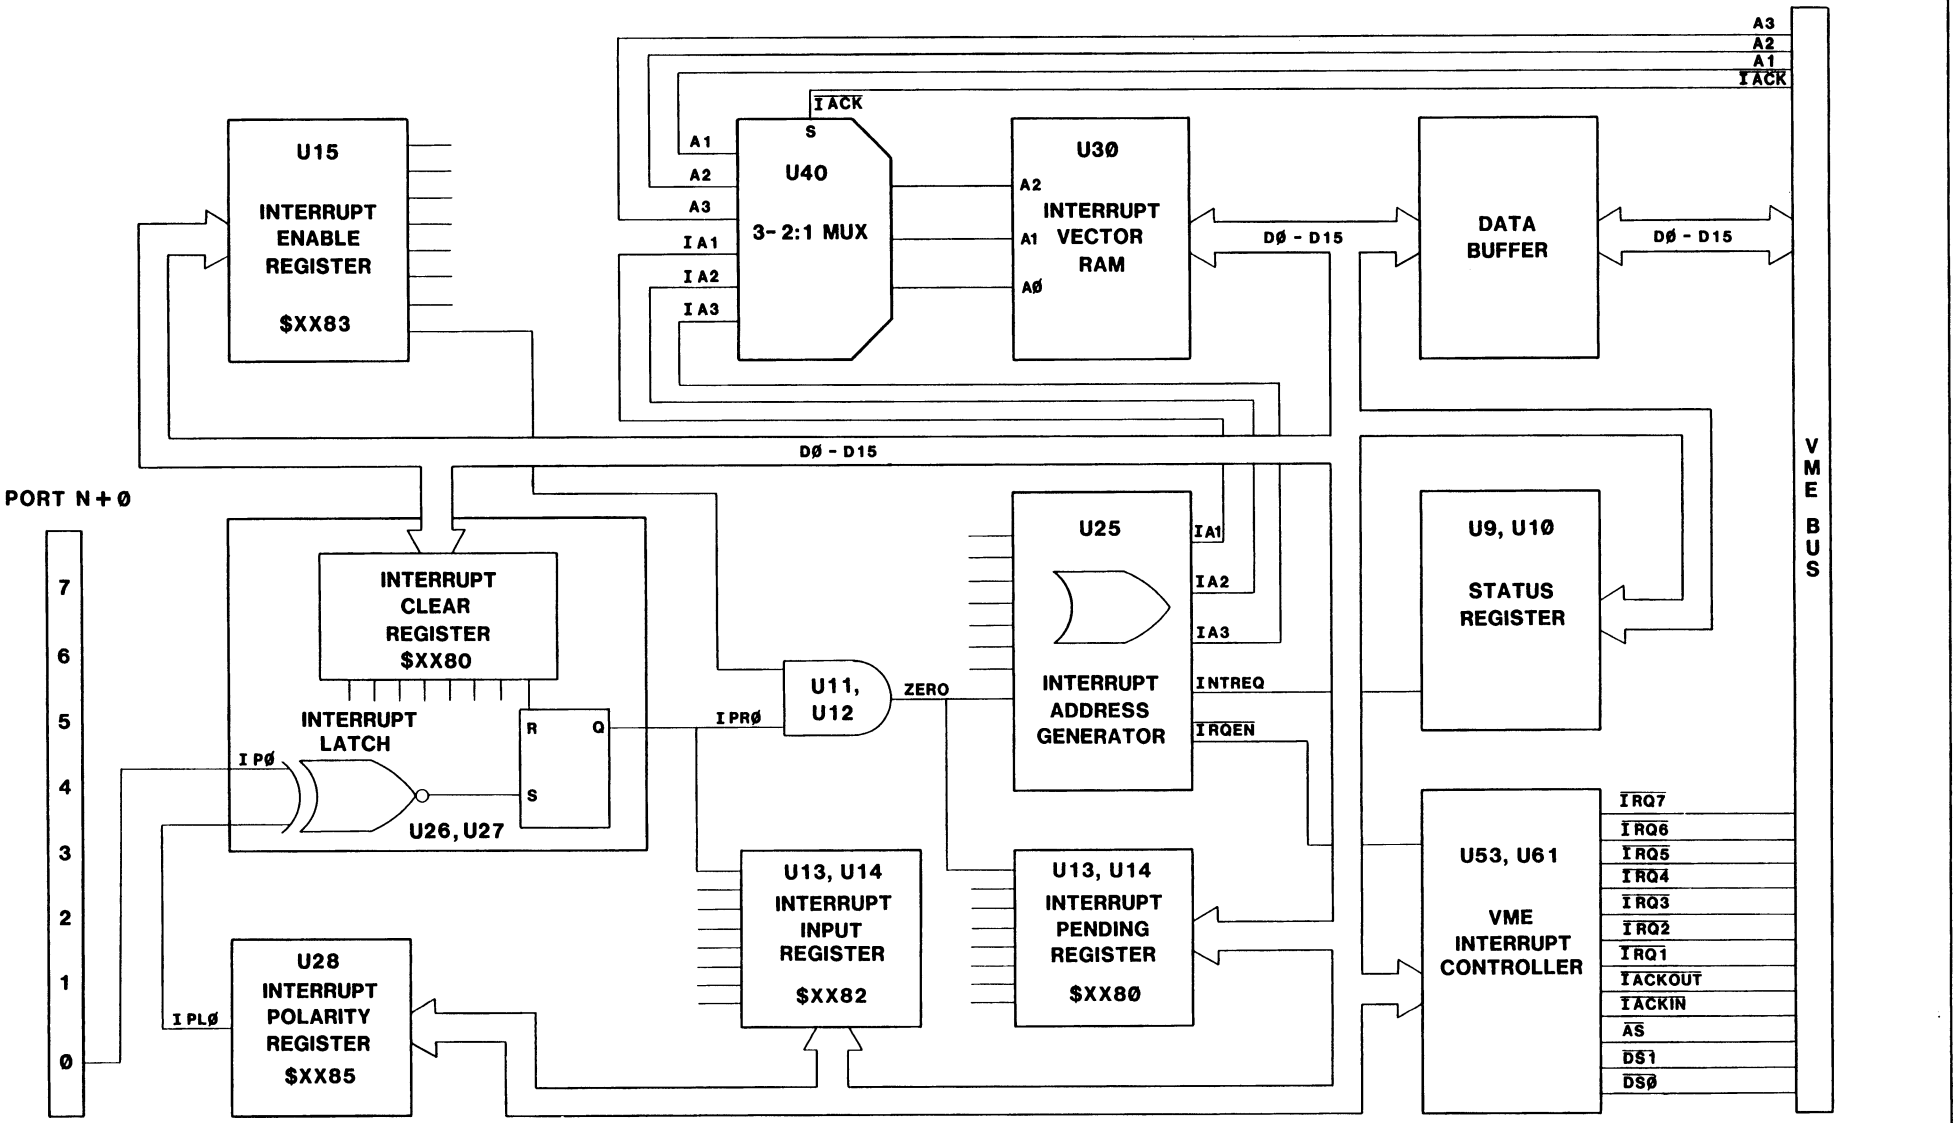


## AVME 948Ø VME INTERRUPTER BLOCK DIAGRAM

Acromag WIXOM, MICH.

| DATE | REV | CO | DR | ENG | CLP |
|---|---|---|---|---|---|
| 5 FEB 87 | B | 8622 | SJK | | RD |
| 23 APR 86 | A | 8178 | | | |
| 17 MAR 86 | — | — | | | |


TITLE: VME INTERRUPTER BLOCK DIAGRAM

SIZE D | SERIES AVME 948X | SHEET 1 OF 1 | DRAWING 4500-740 | REV B

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



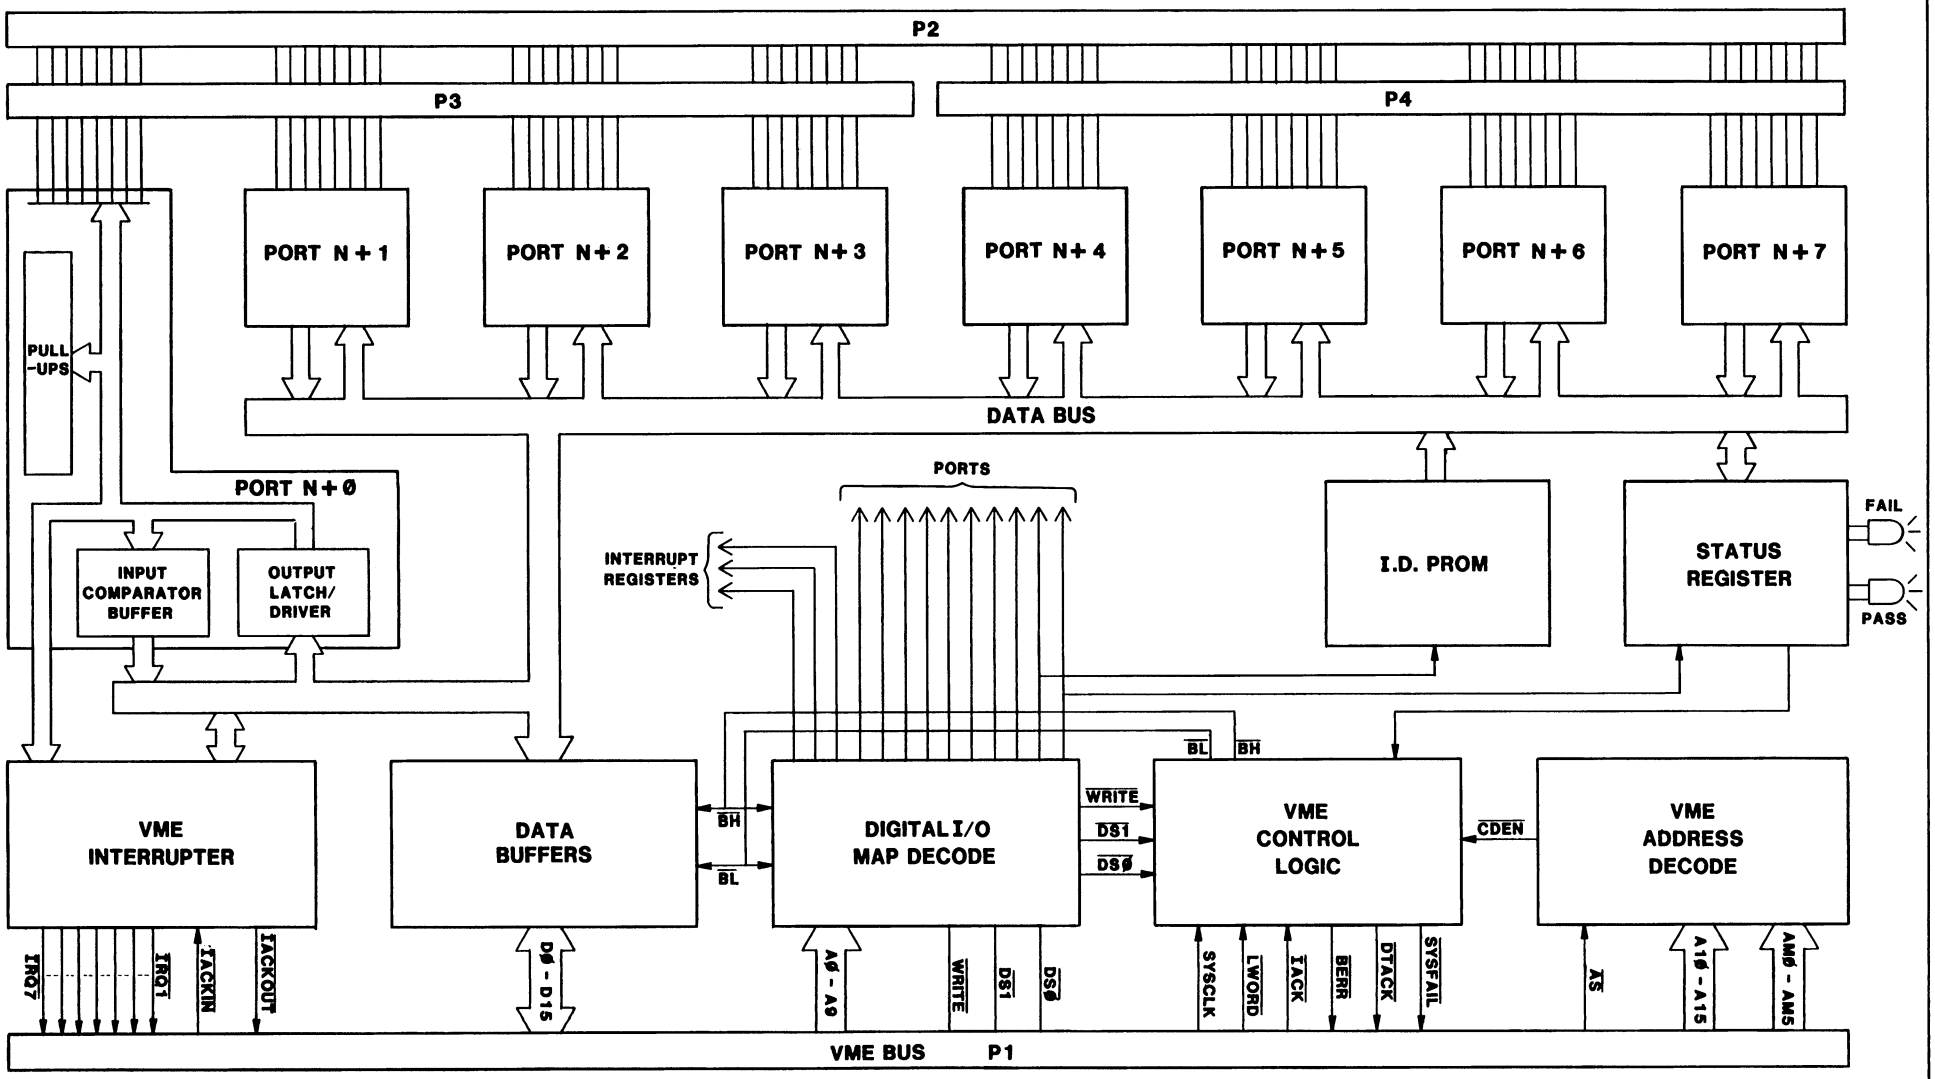



## AVME 9480 BLOCK DIAGRAM

| | | | |
|---|---|---|---|
| Acromag WIXOM, MICH. | 23 APR 86 / 14 MAR 86 | A | Bill |
| TITLE: AVME 9480 BLOCK DIAGRAM | | | |
| SIZE D | SERIES 948X | SHEET 1 of 1 | DRAWING 4500-741 |
| | | | REV A |

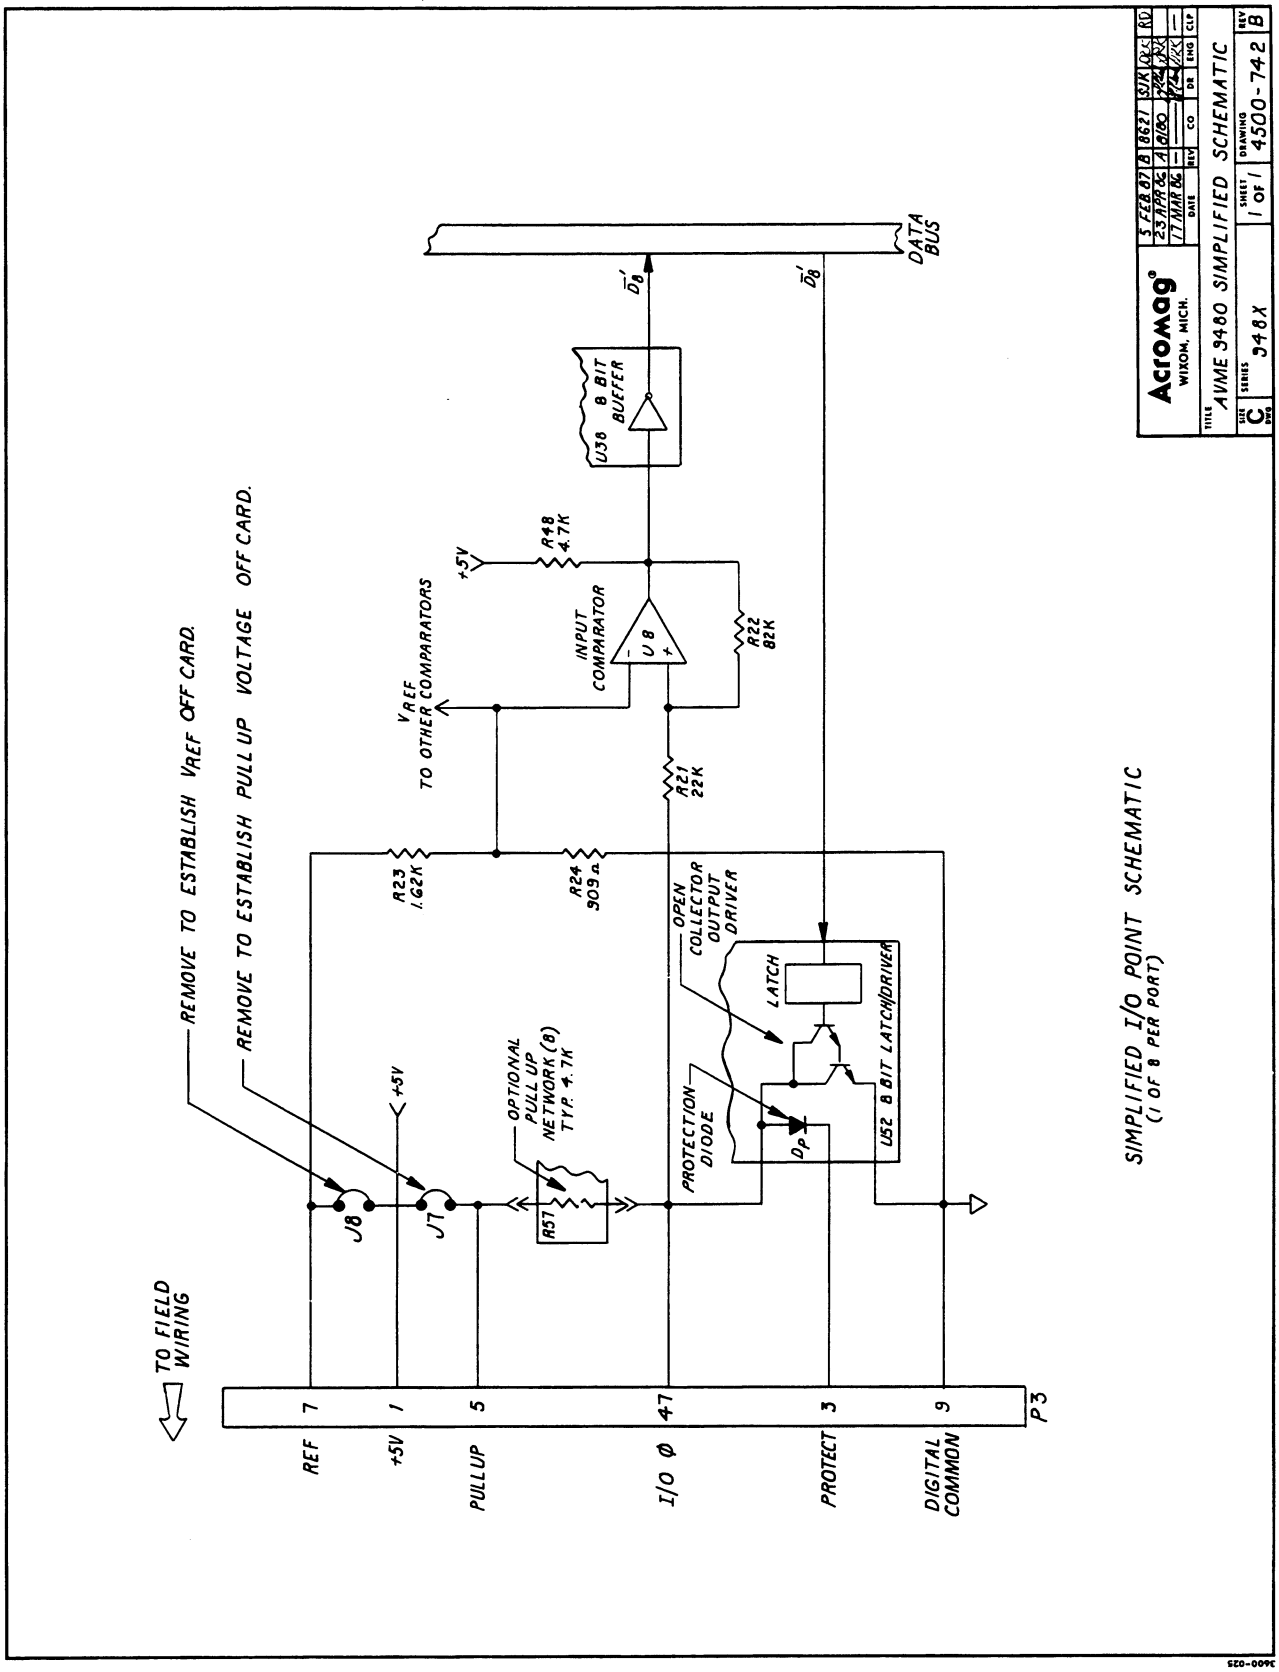




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

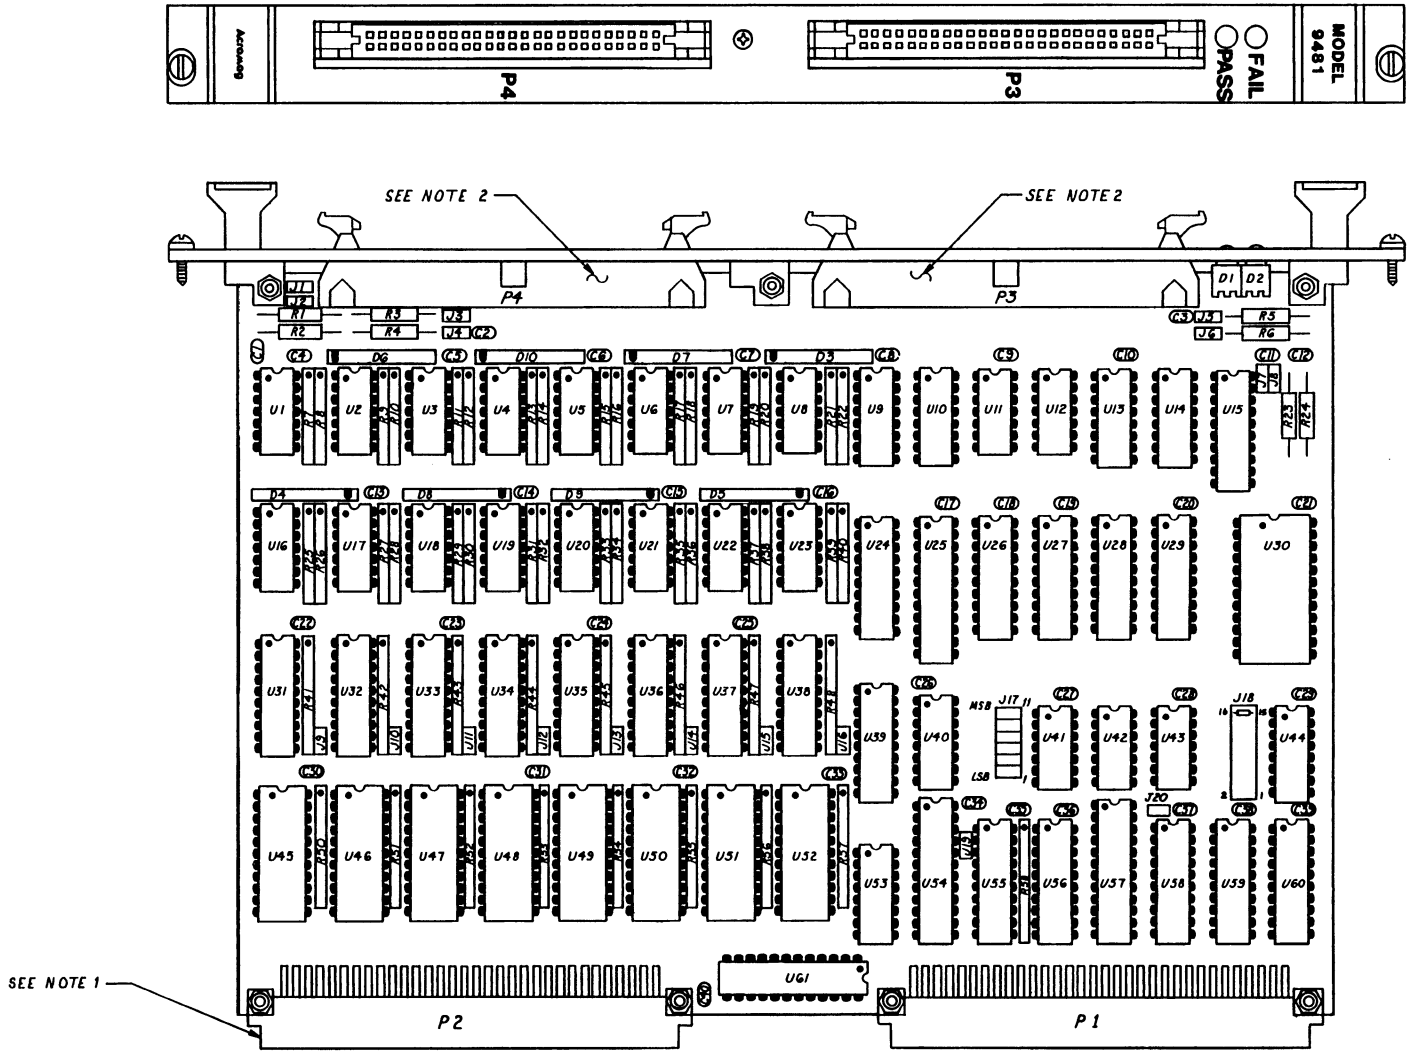


NOTES:

1. WHEN P2 (MODEL 9481) IS USED P3 & P4 ARE DELETED.
2. WHEN P3 & P4 (MODEL 9480) ARE USED P2 IS DELETED.

| DATE | REV | CO | DR | ENG | CK |
|---|---|---|---|---|---|
| 5 DEC 95 | M | 95003 | KLK | CMC | GL |
| 1 APR 93 | L | 93000 | TV | TT | TM |
| 13 AUG 90 | K | 9698 | TV | MR | TM |
| 24 AUG 89 | J | 9490 | SIK | MR | MS |
| 23 OCT 89 | H | 8970 | SIK | MR | MT |
| 26 AUG 88 | G | 8948 | SIK | MR | MW |
| 22 JULY 88 | F | 8772 | SIK | MR | MT |
| 1 APR 87 | E | 8705 | SIK | MR | MC |
| 2 AUG 86 | D | 8630 | SIK | MR | — |
| 23 SEPT 85 | C | 8574 | SIK | MR | MD |
| 20 JUNE 85 | B | 8518 | MR | MR | MD |
| 2 APR 85 | A | 8455 | MR | MR | MD |
| 18 JAN 85 | — | — | — | MR | — |

Acromag WIXOM, MICH.

TITLE: DIGITAL I/O CARD

SIZE D | SERIES AVME 94XX | SHEET 1 OF 4 | DRAWING 4500-737 | REV M



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP