ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Hamamatsu R2658* at our website: ***Click HERE***

HAMAMATSU

PHOTOMULTIPLIER TUBES
R2658
R2658P (For Photon Counting)

High QE in Near IR Region Due to InGaAs (Cs) Photocathode For Spectrophotometers with 185 to 1010 nm range, Fluorescence and Laser Applications and Photon Counting (R2658P) in the Near Infrared Region, etc.

FEATURES

- **High QE in Near IR Region ..... QE 0.13% at 1 μm**
- **Wide Wavelength Range ..... 185 to 1010 nm**
- **Low Dark Current ..... 1 nA at 1250 V (Typ.)**




The R2658 and the R2658P are 28 mm (1-1/8 inch) diameter side-on photomultiplier tubes using a newly developed InGaAs semiconductor photocathode.
The InGaAs photocathode is sensitive from UV to near IR radiations (as long as over 1010 nm) longer than wavelength limit of GaAs photocathode, and yet offers low dark current. The dark current is 2 orders lower than the commercial S-1 photocathode. Therefore, they are well suited for low light detection in the near IR region including fluorescence lifetime measurements. Time response, gain, and dimensions are identical with the conventional 28 mm (1-1/8 inch) diameter side-on tubes with a GaAs photocathode.
The R2658P is a photon counting version of the R2658 with low dark counts.

GENERAL

Parameter		Description/Value	Unit
Spectral Response		185 to 1010	nm
Wavelength of Maximum Response		400	nm
Photocathode	Material	InGaAs (Cs)	—
	Minimum Effective Area	3 × 12	mm
Window Material		UV glass	—
Dynode	Secondary Emitting Surface	Cu-BeO	—
	Structure	Circular-cage	—
	Number of Stages	9	—
Direct Interelectrode Capacitances	Anode to Last Dynode	Approx. 4	pF
	Anode to All Other Electrodes	Approx. 6	pF
Base		11-pin base JEDEC No. B11-88	—
Weight		Approx. 45	g
Suitable Socket (Option)		E678-11A	—
Suitable Socket Assembly (Option)		E717-63	—

Figure 1: Typical Spectral Response

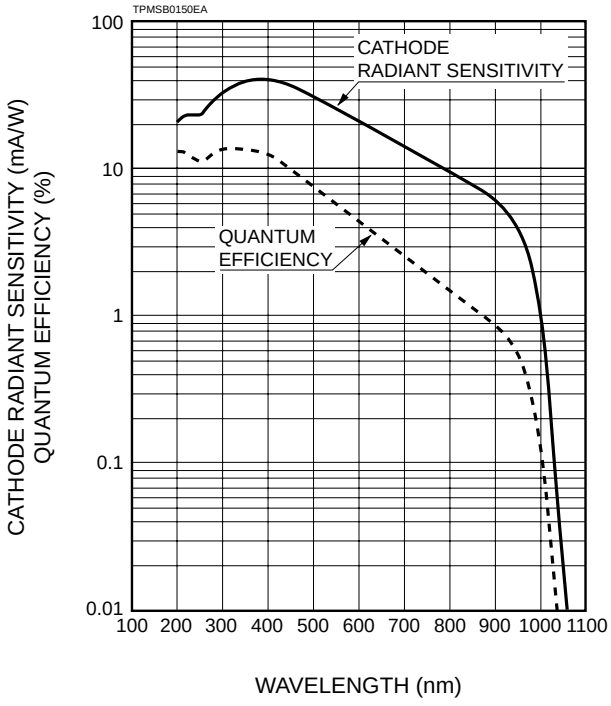

Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.
Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. © 2000 Hamamatsu Photonics K.K.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

PHOTOMULTIPLIER TUBES R2658, R2658P

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	1500	Vdc
	Between Anode and Last Dynode	250	Vdc
Average Anode Current [A]		1	µA
Ambient Temperature		-80 to +50	°C

CHARACTERISTICS (at 25°C)

Parameter			Min.	Typ.	Max.	Unit
Cathode Sensitivity	Quantum Efficiency	at 330 nm	—	14	—	%
		at 1000 nm	0.02	0.13	—	%
	Luminous [B]		50	100	—	µA/lm
	Radiant	at 194 nm	—	20	—	mA/W
		at 254 nm	—	23	—	mA/W
		at 400 nm	—	40	—	mA/W
		at 633 nm	—	19	—	mA/W
		at 852 nm	—	7.6	—	mA/W
		at 1000 nm	0.16	1	—	mA/W
	Red/White Ratio [C]		0.25	0.4	—	—
Anode Sensitivity	Luminous [D]		5	16	—	A/lm
	Radiant	at 194 nm	—	3.2×10^3	—	A/W
		at 254 nm	—	3.7×10^3	—	A/W
		at 400 nm	—	6.4×10^3	—	A/W
		at 633 nm	—	3.0×10^3	—	A/W
		at 852 nm	—	1.2×10^3	—	A/W
		at 1000 nm	—	1.6×10^2	—	A/W
Gain [D]			—	1.6×10^5	—	—
Anode Dark Current [E] After 30 minute storage in the darkness			—	1	10	nA
Anode Dark Count (for the R2658P) [F]			—	50	300	s^{-1}(cps)
ENI (Equivalent Noise Input) [G]			—	1.1×10^{-15}	—	W
Time Response [D]	Anode Pulse Rise Time [H]		—	2.0	—	ns
	Electron Transit Time [J]		—	20	—	ns
Anode Current Stability [K]	Current Hysteresis		—	2	—	%
	Voltage Hysteresis		—	2	—	%

NOTES

A: Averaged over any interval of 30 seconds maximum.

B: The light source is a tungsten filament lamp operated at a distribution temperature of 2856 K. Supply voltage is 100 volts between the cathode and all other electrodes connected together as anode.

C: Red/white ratio is the quotient of the cathode current measured using a red filter (Toshiba R-68) interposed between the light source and the tube by the cathode current measured with the filter removed under the same condition as Note B.

D: Measured with the same light source as Note B and with the voltage distribution ratio shown in Table 1 below.

E: Measured with the same supply voltage and the voltage distribution ratio as Note D after 30 minute storage in the darkness.

F: Measured at the voltage producing the gain of 1×10^6 and the voltage distribution ratio shown in table 1 below. The photocathode is cooled at -20 °C.

G: ENI is an indication of the photo-limited signal-to-noise ratio. It refers to the amount of light in watts to produce a signal-to-noise ratio of unity in the output of a photomultiplier tube.

$$ENI = \frac{\sqrt{2q \bullet Idb \bullet G \bullet \Delta f}}{S}$$

where q = Electronic charge (1.60×10^{-19} coulomb)
Idb = Anode dark current (after 30 minute storage) in amperes
G = Gain
Δf = Bandwidth of the system in hertz. 1 hertz is used.
S = Anode radiant sensitivity in amperes per watt at the wavelength of peak response.

H: The rise time is the time for the output pulse to rise from 10 % to 90 % of the peak amplitude when the entire photocathode is illuminated by a delta function light pulse.

J: The electron transit time is the interval between the arrival of delta function light pulse at the entrance window of the tube and the time when the anode output reaches the peak amplitude. In measurement, the whole photocathode is illuminated.

K. Hysteresis is temporary instability in anode current after light and voltage are applied.

Table 1: Voltage Distribution Ratio

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	P
Distribution Ratio	1	1	1	1	1	1	1	1	1	1	

Supply Voltage= 1250 Vdc
K: Cathode, Dy: Dynode, P: Anode

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 2: Anode Luminous Sensitivity and Gain Characteristics

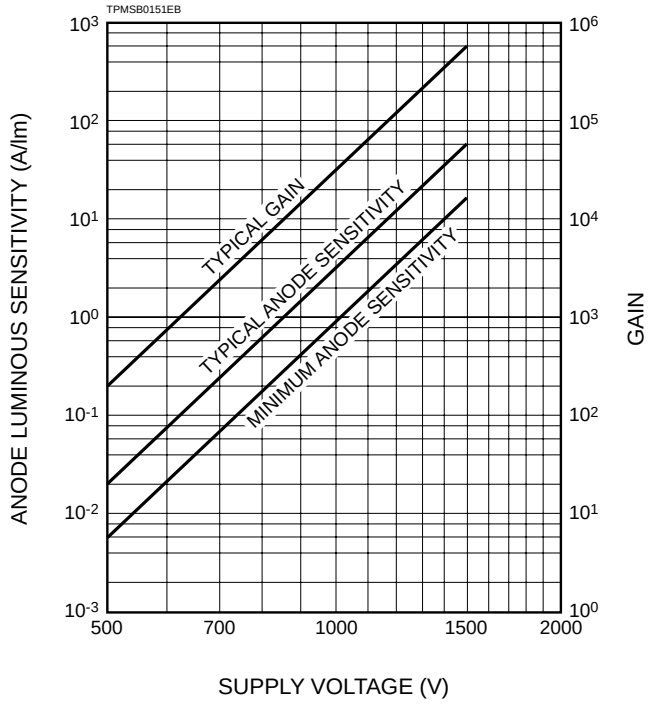


Figure 3: Typical Time Response

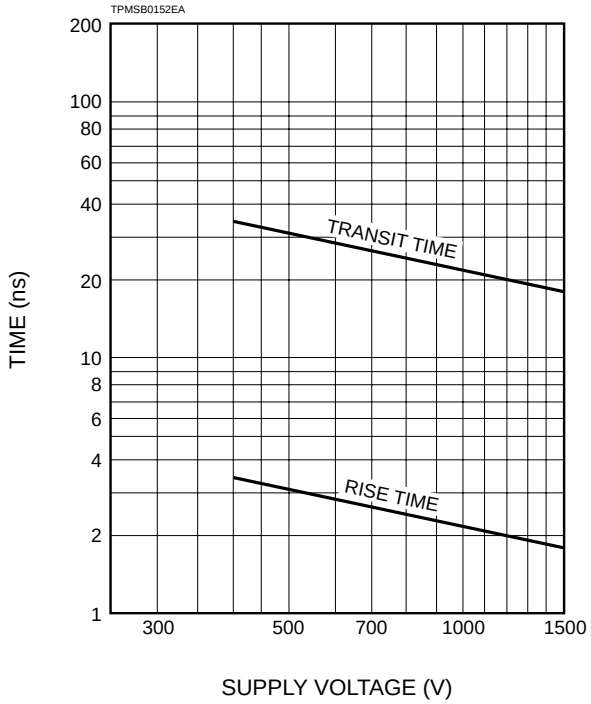


Figure 4: Temperature Coefficient



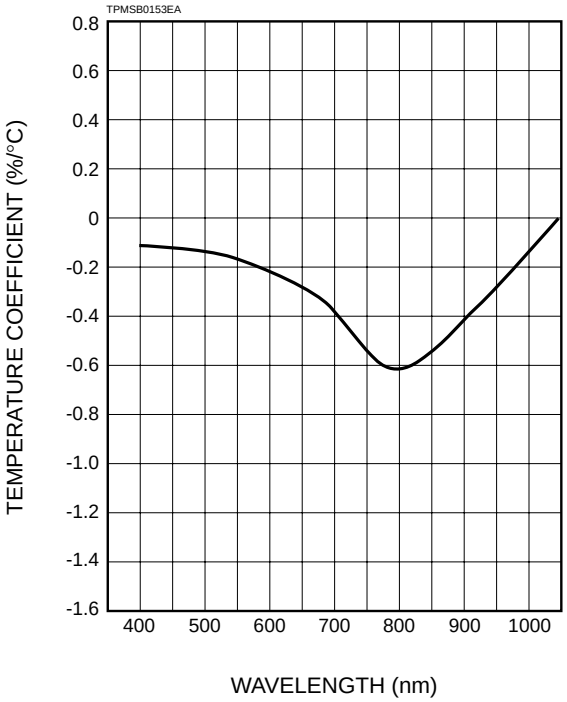


Figure 5: Typical Temperature Characteristic of Dark Current and Dark Count (R2658P)

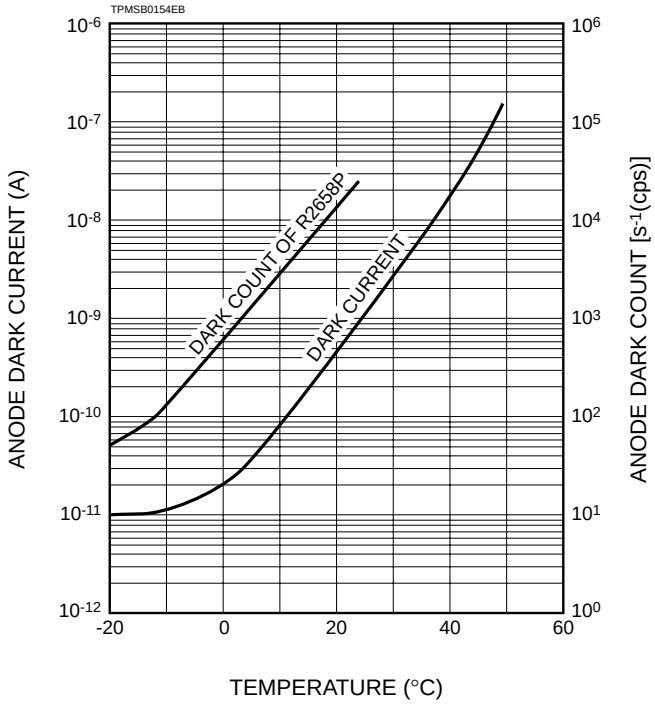

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 6: Dimensional Outline and Basing Diagram (Unit: mm)

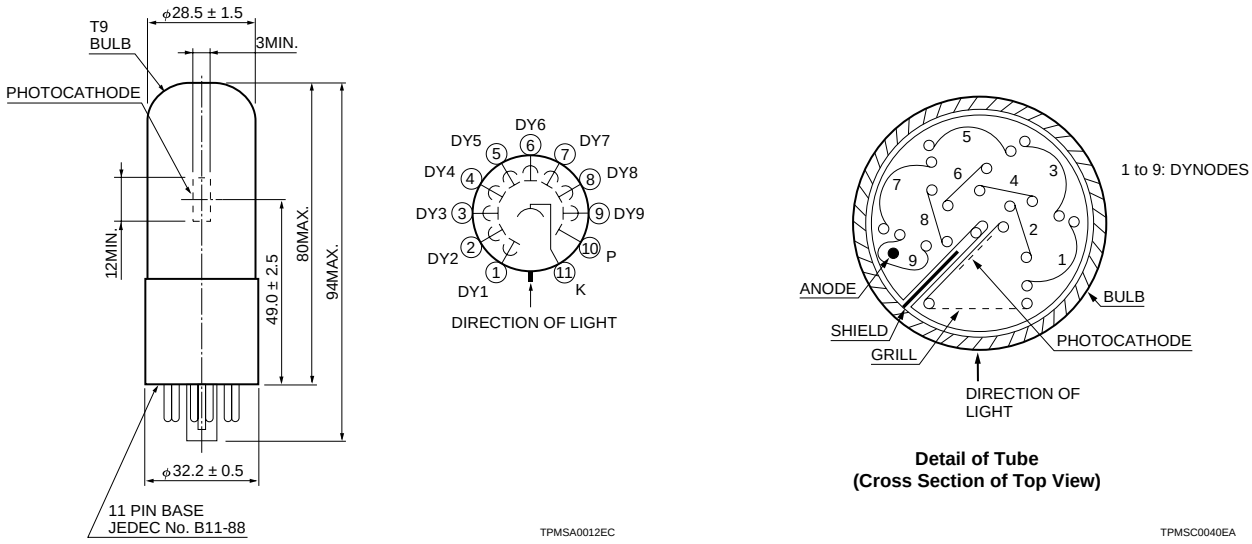


TPMSA0012EC

TPMSC0040EA

Detail of Tube
(Cross Section of Top View)


Figure 7: Optional Accessories (Unit: mm)

(a) E678-11A (Socket)

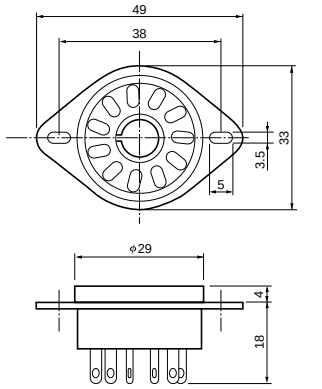

TACCA0064EA

(a) E717-63 (Socket Assembly)

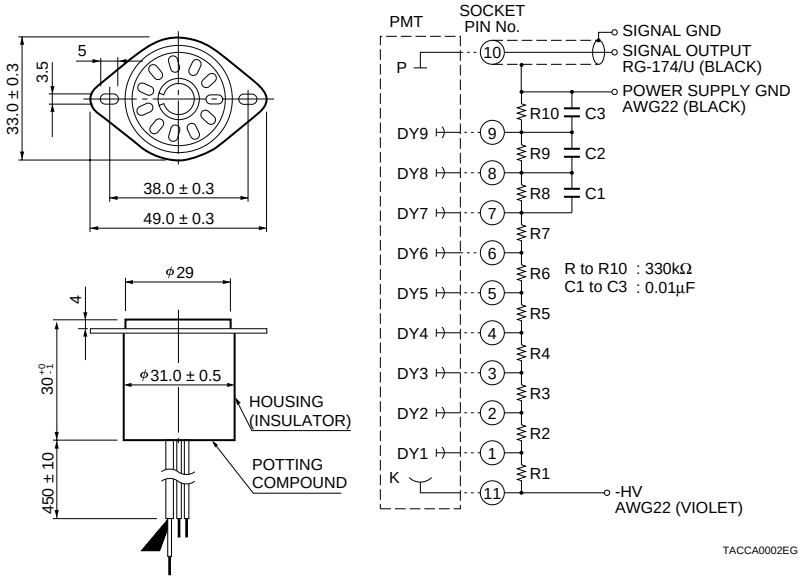

TACCA0002EG

Warning-Personal Safety Hazards
Electrical Shock — Operating voltage applied to this device presents shock hazard.

HAMAMATSU

HOMEPAGE URL http://www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Electron Tube Center
314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205
U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater. N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218
Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658
France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10
United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone: 44(20)8-367-3560, Fax: 44(20)8-367-6384
North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01
Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741

TPMS1044E02
MAR. 2000

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP