ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Acromag BusWorks XT1531-000* at our website: ***Click HERE***

Ethernet I/O: BusWorks® XT Series

XT1530 Ethernet Analog Output & Digital I/O Modules



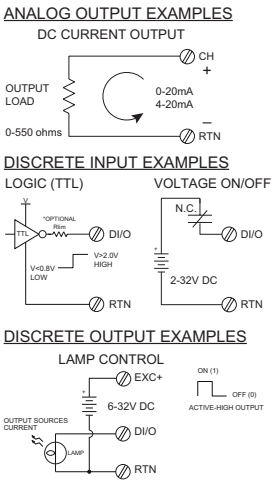

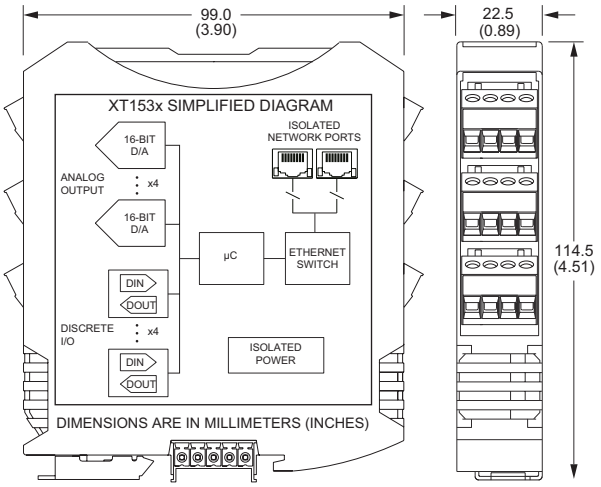

4 analog current outputs, 4 discrete I/O channels ◆ Modbus TCP/IP, Ethernet/IP, Profinet, or i2o communication

Description

The XT1530 interfaces analog output and discrete I/O signals between measurement and control devices over Ethernet. Discrete I/O are individually configurable for input or high-side switched output operation.


Rugged construction, high density design, and easy USB-to-PC/Windows setup combine for a very effective I/O solution. These units are ideal for remote monitoring, distributed control, or SCADA applications.

Analog Output Ranges
0-20mA DC, 4-20mA DC

Discrete Input/Output Ranges
Input: 0-32V DC, TTL thresholds
Output: 0-32V DC, open-source, up to 250mA

Ethernet Communication
Modbus TCP/IP, Ethernet/IP, Profinet, i2o® peer-to-peer, 10/100Base-T(X)
PriorityChannel™ device determinism

Power Requirement
12 to 32V DC (2.8W)

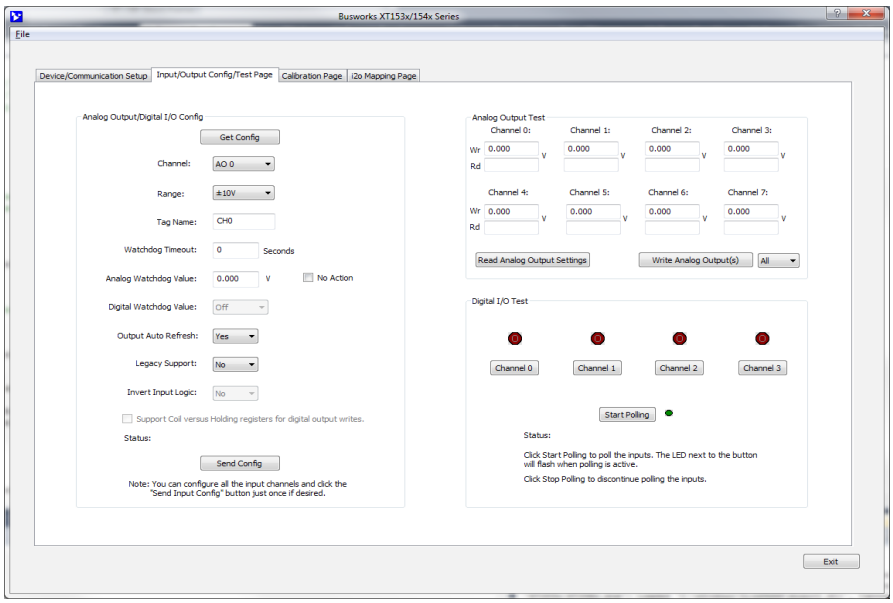

BusWorks XT software (download free from www.acromag.com) allows you to configure I/O modules offline with USB, save the file, and download settings into units later, at your convenience.

Key Features & Benefits

- Multi-function, multi-channel stand alone module is very economical
- Easy setup with Windows software via USB
- Dual Ethernet 10/100 ports with built-in switch enables daisy-chain networking to reduce costs
- i2o technology for peer-to-peer communication without a network controller
- Four analog output channels (16-bit DACs) to drive remote instruments, controllers, recorders
- Four discrete input/output channels support loopback monitoring of output levels
- Built-in 10K ohm pull-down resistors for use with 2/3-wire sensors (contacts, proximity, TTL)
- Configurable normal/reverse input logic
- Various diagnostics validate module operation
- 1500V AC isolation (between I/O, power, and network ports) and surge/transient protection
- Slim 22.5mm housing with pluggable terminals
- Supports bussed/rail and redundant power
- -40°C to +60°C wide temperature operation
- CE and UL/cUL Class 1 Div 2 Zone 2 approvals. ATEX Certified.

Acromag® THE LEADER IN INDUSTRIAL I/O

Tel 248-295-0880 ■ sales@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA

Bulletin #8400-810g

Ethernet I/O: BusWorks® XT Series

XT1530 Ethernet Multi-Function Analog Output & Digital I/O Modules

Performance Specifications

IMPORTANT: To prevent damage or errors from grounded PCs and surges, Acromag strongly recommends use of the USB-ISOLATOR when configuring an XT1000 I/O module.

USB Interface

USB Connector
Type: USB Mini-B type socket, 5-pin
Data rate: 12Mbps. USB v1.1 and 2.0 compatible
Maximum cable length: 5.0 meters

USB Transient Protection
Transient voltage suppression on power and data lines

Driver
Not required. Uses Windows HID drivers

Analog Output

Configuration
4 output channels, each with a 16-bit D/A converter

Output Type
0-20mA DC or 4-20mA DC, configurable by channel

Accuracy
Better than ±0.1% of span

Output Excitation
Separate inputs for 12V (10-15V) and 24V (20-28V) power sources. Diode-coupled to support redundancy.

Discrete Input

Input Type
4 active-high, buffered inputs, with a common connection. Inputs are tied in tandem to output drains for optional loopback monitoring of output state.

Input Signal Voltage Range
0 to 32V DC

Input Current
280µA, typical at 32V DC

Input Signal Threshold
1.7V DC typical with100mV of hysteresis

Input Resistance
10K ohms, typical

Input Response Time
10ms, nominal

Discrete Output

Output Type
4 open-source, smart, p-channel mosfet switches with a common drain connection. Provides high-side (sourcing) switching between the load and return.

Output Signal Voltage Range
0 to 32V DC. 6-32V excitation source required.

ISO9001
AS9100
MADE IN USA

Output "ON" Resistance
0.5 ohms typical, 1.0 ohms maximum

Output "ON" Current Range
0 to 250mA DC, continuous (up to 1A total for all 4 channels combined)

Output Response Time
10ms, nominal

Ethernet Communication

Protocols
Modbus TCP/IP, i2o peer-to-peer, Ethernet/IP, or Profinet depending on model number.

Ethernet Communication Controller
Innovasic RapID™ Platform with PriorityChannel™ for determinism at the device regardless of network load.

Modbus TCP/IP (slave)
Port 502 reserved. Supports up to 10 sockets

i2o Peer-to-Peer (master/slave)
Can map 4-channel input groups to output groups at two destination IP addresses. Timed or change-of-state updates. Supports GPRS/GSM systems.

Ethernet/IP (adapter)
Supports 16 connections. EDS file on website

Profinet (server)
Supports 1 connection. GSDML file on website

Connectors
Two shielded 8-pin RJ-45 sockets, 10BaseT/100BaseTX

Wiring
Auto-crossover for MDI or MDI-X

IP Address
User-configurable. 192.168.1.100 default static IP address.

Data Rate
Auto-negotiated, 10Mbps or 100Mbps

Compliance
IEEE 802.3, 802.3u, 802.3x

Environmental

Operating and Storage Temperature
Operating: -40 to 60°C (-40 to 140°F)
Storage: -40 to 85°C (-40 to 185°F)

Relative Humidity
5 to 95% non-condensing

Power Requirement
12 to 32V DC (110mA maximum @ 24V)

Isolation
I/O channels (as a group), network (each port), and power circuits isolated from each other.
Peak: 1500V AC, ANSI/ISA-82.01-1988
Continuous: 250V AC, 354V DC

Electromagnetic Compatibility (EMC) Compliance
Radiated Emissions: BS EN 61000-6-4, CISPR 16
RFI: BS EN 61000-6-2, IEC 61000-4-3
Conducted RFI: BS EN 61000-6-2, IEC 61000-4-6
ESD: BS EN 61000-6-2, IEC 61000-4-2
EFT: BS EN 61000-6-2, IEC 61000-4-4
Surge Immunity: BS EN 61000-6-2, IEC 61000-4-5

MTBF: 445,034 hrs. at 25°C
335,836 hrs. at 40°C

Shock and Vibration Immunity
Vibration: 4g, per IEC 60068-2-64
Shock: 25g, per IEC 60068-2-27

Approvals
CE compliant. UL/cUL listings. ATEX Certified.
Designed for Class I; Division 2; Groups ABCD; Zone 2.
⟨Ex⟩ II 3 G Ex nA IIC T4 Gc -40°C ≤ Ta ≤ +80°C

Physical

General
General purpose plastic enclosure for mounting on 35mm "T-type" DIN rail

Case Material
Self-extinguishing polyamide, UL94 V-0 rated, color light gray. General purpose NEMA Type 1 enclosure.

Circuit Board
Military grade fire-retardant epoxy glass (IPC-4101/98)

I/O Connectors
Removable plug-in type terminal blocks rated for 12A/250V; AWG #26-12, stranded/solid copper wire.

Dimensions
Width = 22.5mm (0.9 inches), Length = 114.5mm (4.51 inches), Depth = 99.0mm (3.90 inches)

Shipping Weight
0.5 pounds (0.22 Kg) packed

Ordering Information

Models

XT1531-000
Multi-function 4-ch analog current output, 4-ch digital I/O module, Modbus/TCP and i2o protocol

XT1532-000
Multi-function 4-ch analog current output, 4-ch digital I/O module, Ethernet/IP protocol

XT1533-000
Multi-function 4-ch analog current output, 4-ch digital I/O module, Profinet protocol

Software

XT-SIP (recommend one kit per customer)
Software Interface Package. Includes software (XT-CONFIG), isolator (USB-ISOLATOR), two USB cables (4001-112, 4001-113), Ethernet cable (5035-360).

Accessories

XT BUS-KIT
DIN rail bus power/excitation connector kit. Includes one DIN rail bus connector (1005-070), one left-side female connector terminal block (1005-220) and one right side male connector terminal block (1005-221).

USB-ISOLATOR
USB-to-USB isolator, includes USB cable (4001-112)

Acromag®
THE LEADER IN INDUSTRIAL I/O

Tel 248-295-0880 ■ sales@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA

All trademarks are property of their respective owners. Copyright © Acromag, Inc. 2019. Data subject to change without notice. Printed in USA 10/2019.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP