



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

86100B Family Plug-In Module Matrix

The 86100B has a large family of plug-in modules designed for a broad range of data rates for optical and electrical waveforms. The 86100B can hold up to 2 modules for a total of 4 measurement channels.

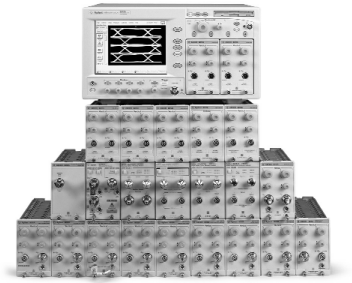

		Module	Option	No. of optical channels	No. of electrical channels	Wavelength range (nm)	Unfiltered optical bandwidth (nm)	Electrical bandwidth (GHz)	Fiber input (μm)	Mask test sensitivity (dBm)	Filtered data rates																		
											155 Mb/s	622 Mb/s	10Gb/s	1250 Mb/s	2125 Mb/s	2488 / 2500 Mb/s	2.666 Gb/s	2.72 Gb/s	3.125 Gb/s	3.1875 Gb/s	3.32 Gb/s	9.953 Gb/s	10.3125 Gb/s	10.51875 Gb/s	10.664 Gb/s	10.709 Gb/s			
Optical/ Electrical	↑	86101A	201	1	1	750-860	2.85	20	62.5	-17	■	■																	
			202	1	1	750-860	2.85	20	62.5	-17			■	■															
	86102A	201	1	1	750-860	10	20	62.5	-13.5					■							■								
		202	1	1	750-860	10	20	62.5	-13.5						■							■							
		203	1	1	750-860	10	20	62.5	-13.5													■							
	86102U	201	1	1	750-860	15	20	62.5	-7.5				■																
		202	1	1	750-860	15	20	62.5	-7.5						■														
		203	1	1	750-860	15	20	62.5	-7.5																	■			
	86103A	201	1	1	1000-1600	2.85	20	62.5	-20		■	■																	
		202	1	1	1000-1600	2.85	20	62.5	-20					■	■														
203		1	1	1000-1600	10	20	62.5	-15			■																		
86103B	↑	202	1	1	1000-1600	10	20	62.5	-15				■	■															
			203	1	1	1000-1600	10	20	62.5	-15						■	■												
	↓	86105A	101	1	1	1000-1600	20	20	9	-8	■																		
			102	1	1	1000-1600	20	20	9	-8		■																	
		86105B	101	1	1	1000-1600	15	20	9	-12																■	■	■	■
			102	1	1	1000-1600	15	20	9	-12	■	■					■	■							■	■	■	■	■
86106B	410	1	1	1000-1600	28	40	9	-7					■	■												■	■		
	86109A		1	1	1000-1600	30	40	9	N/A																				
Dual Optical	↑	86111A	201	2	0	750-860	2.85	N/A	62.5	-17	■	■																	
			202	2	0	750-860	2.85	N/A	62.5	-17					■	■													
	↓	86111U	201	2	0	750-860	15	N/A	62.5	-7.5				■															
202			2	0	750-860	15	N/A	62.5	-7.5						■														
86113A		201	2	0	1000-1600	2.85	N/A	62.5	-20	■	■																		
Dual Electrical	↑	86115B	101	2	0	1000-1600	28	N/A	9	-7																	■		
			410	2	0	1000-1600	28	N/A	9	-7																	■		
Dual Electrical	↓	86118A	54754A		0	2		N/A	18																				
			83484A		0	2		N/A	50																				
			86112A		0	2		N/A	20																				
			86118A		0	2		N/A	70																				

Optical/Electrical Module Specifications

Multi Mode and Single Mode	86101A	86102A	86102U
----------------------------	--------	--------	--------

OPTICAL CHANNEL SPECIFICATIONS

Optical Channel Unfiltered Bandwidth	2.85 GHz (3 GHz typical)	10 GHz	15 GHz
Wavelength Range	750–860 nm		
Calibrated Wavelengths	850 nm		
Sensitivity (smallest avg. power for mask test)	–17 dBm	–13.5 dBm	–7.5 dBm
Transition Time (10% to 90% calculated from TR = 0.48/BW optical)			
Unfiltered	<160 ps	<48 ps	<32 ps
RMS Noise			
Characteristic	1.5 μ W	3.4 μ W	14 μ W
Maximum	2.5 μ W	5.5 μ W	20 μ W
Scale Factor (per division)			
Minimum	5 μ W		20 μ W
Maximum	100 μ W		500 μ W
CW Accuracy (single marker, referenced to average power monitor, <50 μ W/division)	\pm 6 μ W \pm 0.4% of full scale \pm 3% of (reading-channel offset)		\pm 25 μ W \pm 2% of (reading-channel offset), 15 GHz
CW Difference (two markers, referenced to average power monitor, 50 μ W/division)	\pm 0.8% of full scale \pm 3% of (reading-channel offset)		\pm 2% of (reading-channel offset), 15 GHz
CW Offset (referenced two divisions from screen bottom)	+0.2 mW to –0.6 mW		+1 mW to –3 mW
Average Power Monitor (specified operating range)	–30 dBm to –2.2 dBm	–30 dBm to –2.2 dBm	–27 dBm to +3 dBm
Factory Calibrated Accuracy	\pm 5% \pm 100 nW \pm connector uncertainty, 20°C to 30°C		
User Calibrated Accuracy	\pm 2% \pm 100 nW \pm power meter uncertainty, <5°C change		
Maximum Input Power			
Maximum non-destruct average	0.4 mW (–4 dBm)	0.8 mW (–1 dBm)	2 mW (+3 dBm)
Maximum non-destruct peak	10 mW (+10 dBm)		
Fiber Input	62.5/125 μ m, user selectable connector		
Input Return Loss (HMS-10 connector fully filled fiber)	20 dB		

ELECTRICAL CHANNEL SPECIFICATIONS

Electrical Channel Bandwidth	12.4 and 20 GHz		
Transition Time (10% to 90%, calculated from TR = 0.35/BW)	28.2 ps, 12.4 GHz 17.5 ps, 20 GHz		
RMS Noise	0.25 mV, 12.4 GHz		
Characteristic	0.5 mV, 20 GHz		
Maximum	0.5 mV, 12.4 GHz 1 mV, 20 GHz		
Scale Factor			
Minimum	1 mV/division		
Maximum	100 mV/division		
dc Accuracy (single marker)	\pm 0.4% of full scale \pm 2 mV \pm 1.5% of (reading-channel offset), 12.4 GHz \pm 0.4% of full scale \pm 2 mV \pm 3% of (reading-channel offset), 20 GHz		
dc Difference (two markers)	\pm 0.8% of full scale \pm 1.5% of delta, 12.4 GHz \pm 0.8% of full scale \pm 3% of delta, 20 GHz		
dc Offset	\pm 500 mV		
Input Dynamic Range (relative to channel offset)	\pm 400 mV		
Maximum Input Signal	\pm 2 V		
Nominal Impedance	50 ohm		
Reflections (for 30ps rise time)	5%		
Electrical Input	3.5 mm (male)		

Optical/Electrical Module Specifications

Multi Mode and Single Mode Optical/Electrical Modules	86103A	86103B	86105A	86105B
OPTICAL CHANNEL SPECIFICATIONS				
Optical Channel Unfiltered Bandwidth	2.85 GHz (3 GHz typical)	10 GHz	20 GHz	15 GHz
Wavelength Range	1000–1600 nm			
Calibrated Wavelengths	1310 nm/1550 nm			
Sensitivity (smallest avg. power for mask test)	-20 dBm	-15 dBm	-8 dBm	-12dBm
Transition Time (10% to 90% calculated from TR = 0.48/BW optical)	<160 ps	<48ps	<24 ps	<32ps
RMS Noise				
Characteristic	1 μ W	2.2 μ W	8 μ W, 12.4 GHz 15 μ W, 20 GHz	5 μ W, 10GHz 10 μ W, 15GHz
Maximum	1.5 μ W	3.7 μ W	12 μ W, 12.4 GHz 25 μ W, 20 GHz	8 μ W, 10 GHz 15 μ W, 15 GHz
Scale Factor (per division)				
Minimum	5 μ W		20 μ W	
Maximum	100 μ W		500 μ W	
CW Accuracy (single marker, referenced to average power monitor, <50 μ W/division)	$\pm 6 \mu$ W $\pm 0.4\%$ of full scale $\pm 3\%$ of (reading-channel offset)		$\pm 25 \mu$ W $\pm 2\%$ of (reading-channel offset), 12.4 GHz $\pm 25 \mu$ W $\pm 4\%$ of (reading-channel offset), 20 GHz	
CW Difference (two markers, referenced to average power monitor, 50 μ W/division)	$\pm 0.8\%$ of full scale $\pm 3\%$ of (reading-channel offset)		$\pm 2\%$ of (reading-channel offset), 12.4 GHz $\pm 4\%$ of (reading-channel offset), 20 GHz	
CW Offset (referenced two divisions from screen bottom)	+0.2 mW to -0.6 mW		+1 mW to -3 mW	
Average Power Monitor (specified operating range)	-30 dBm to 0 dBm		-30 dBm to +3 dBm	
Factory Calibrated Accuracy				
Single mode	$\pm 5\% \pm 100$ nW \pm connector uncertainty (20°C to 30°C)			
Multi mode	$\pm 10\% \pm 100$ nW \pm connector uncertainty (20°C to 30°C)		N/A	
User Calibrated Accuracy	$\pm 2\% \pm 100$ nW \pm power meter uncertainty, <5°C change			
Maximum Input Power				
Maximum non-destruct average	0.4 mW (-4 dBm)	0.8 mW (-1dBm)	2 mW (+3 dBm)	
Maximum non-destruct peak	10 mW (+10 dBm)			
Fiber Input	62.5/125 μ m, user selectable connector		9/125 μ m single-mode	
Input Return Loss (HMS-10 connector fully filled fiber)	20 dB		33 dB	

ELECTRICAL CHANNEL SPECIFICATIONS

Electrical Channel Bandwidth	12.4 and 20 GHz
Transition Time (10% to 90%, calculated from TR = 0.35/BW)	28.2 ps, 12.4 GHz 17.5 ps, 20 GHz
RMS Noise	
Characteristic	0.25 mV, 12.4 GHz 0.5 mV, 20 GHz
Maximum	0.5 mv, 12.4 GHz 1 mV, 20 GHz
Scale Factor	
Minimum	1 mV/division
Maximum	100 mV/division
dc Accuracy (single marker)	$\pm 0.4\%$ of full scale ± 2 mV $\pm 1.5\%$ of (reading-channel offset), 12.4 GHz $\pm 0.4\%$ of full scale ± 2 mV $\pm 3\%$ of (reading-channel offset), 20 GHz
dc Difference (two markers)	$\pm 0.8\%$ of full scale $\pm 1.5\%$ of delta, 12.4 GHz $\pm 0.8\%$ of full scale $\pm 3\%$ of delta, 20 GHz
dc Offset	± 500 mV
Input Dynamic Range (relative to channel offset)	± 400 mV
Maximum Input Signal	± 2 V
Nominal Impedance	50 ohm
Reflections (for 30ps rise time)	5%
Electrical Input	3.5 mm (male)

Module Specifications (continued)

High Bandwidth, Single Mode Optical/Electrical Modules	86106B	86109A	86109B	86116A ¹
OPTICAL CHANNEL SPECIFICATIONS				
Optical Channel Unfiltered Bandwidth	28 GHz	30 GHz	40 GHz ²	53 GHz
Wavelength Range	1000–1600 nm			
Calibrated Wavelengths	1310/1550 nm			
Sensitivity (smallest average power for mask test)	-7 dBm	N/A		
Transition Time (10% to 90%, calculated from TR = 0.48/BW optical)	18 ps	16 ps	12 ps (FWHM) ³	9.0 ps (FWHM) ³
RMS Noise				
Characteristic	10 μ W (Filtered) 18 μ W (Unfiltered)	15 μ W	15 μ W (30 GHz) 50 μ W (40 GHz)	60 μ W (50 GHz) 160 μ W (53 GHz)
Maximum	15 μ W (Filtered) 30 μ W (Unfiltered)	30 μ W	30 μ W (30 GHz) 70 μ W (40 GHz)	90 μ W (50 GHz) 260 μ W (53 GHz)
Scale Factor				
Minimum	20 μ W/division			200 μ W/division
Maximum	500 μ W/division		1.0 mW/division	2.5 mW/division
CW Accuracy (single marker, referenced to average power monitor, 50 μ W/division)	$\pm 50 \mu$ W $\pm 4\%$ of (reading-channel offset)			$\pm 150 \mu$ W $\pm 4\%$ of (reading-channel offset)
CW Difference (two markers, referenced to average power monitor, 50 μ W/division)	$\pm 4\%$ of delta			
CW Offset (referenced two divisions from screen bottom)	+1 mW to -3 mW		+6 mW to -2 mW	+5 mW to -15mW
Average Power Monitor (specified operating range)	-27 dBm to +3 dBm		-23 dBm to +9 dBm	
Factory Calibrated Accuracy	$\pm 5\% \pm 100$ nW \pm connector uncertainty, 20°C to 30°C			
User Calibrated Accuracy	$\pm 2\% \pm 100$ nW \pm power meter uncertainty, <5°C change			
Maximum Input Power				
Maximum non-destruct average	2 mW (+3 dBm)		10 mW (+10 dBm)	
Maximum non-destruct peak	10 mW (+10 dBm)		50 mW (+17 dBm)	
Fiber Input	9/125 μ m, user selectable connector			
Input Return Loss (HMS-10 connector fully filled fiber)	30 dB			

¹ 86116A requires the 86100A/B software revision A.3.0 or above.

² Specified with 8 point moving average in frequency response.

³ FWHM (Full Width Half Max) as measured from optical pulse with 700 fs FWHM, 5 MHz repetition rate and 10 mW peak power.

ELECTRICAL CHANNEL SPECIFICATIONS

Electrical Channel Bandwidth	18 and 40 GHz	26 and 50 GHz	43 and 63 GHz
Transition Time (10% to 90%, calculated from TR = 0.35/BW)	19.5 ps, 18 GHz 9 ps, 40 GHz	<13.2 ps, 26 GHz 7 ps, 50 GHz	8.1 ps (43 GHz) 5.6 ps (63 GHz)
RMS Noise			
Characteristic	0.25 mV, 18 GHz 0.5 mV, 40 GHz	0.25 mV, 26 GHz 0.60 mV, 50 GHz	0.6 mV (43 GHz) 1.7 mV (63 GHz)
Maximum	0.5m V, 18 GHz 1.0 mV, 40 GHz	0.50 mV, 26 GHz 1 mV, 50 GHz	0.9 mV, (43 GHz) 2.5 mV (63 GHz)
Scale Factor			
Minimum	1 mV/division		2 mV/division
Maximum	100 mV/division		100 mV/division
dc Accuracy (single marker)	$\pm 0.4\%$ of full scale ± 2 mV $\pm 1.5\%$ of (reading-channel offset), 18 GHz $\pm 0.4\%$ of full scale ± 2 mV $\pm 3\%$ of (reading-channel offset), 40 GHz	$\pm 0.4\%$ of full scale ± 2 mV $\pm 1.5\%$ of (reading-channel offset), 26 GHz $\pm 0.4\%$ of full scale ± 2 mV $\pm 2\%$ of (reading-channel offset), 50 GHz/65 GHz	$\pm 0.8\%$ of full scale ± 2 mV $\pm 1.5\%$ of (reading-channel offset), 43 GHz $\pm 2.5\%$ of full scale ± 2 mV $\pm 2\%$ of (reading-channel offset), 63 GHz
dc Difference (two markers)	$\pm 0.8\%$ of full scale $\pm 1.5\%$ of delta, 18 GHz $\pm 0.8\%$ of full scale $\pm 3\%$ of delta, 40 GHz	$\pm 0.8\%$ of full scale $\pm 1.5\%$ of delta, 26 GHz $\pm 0.8\%$ of full scale $\pm 2\%$ of delta, 50 GHz/65 GHz	
dc Offset	± 500 mV		
Input Dynamic Range (relative to channel offset)	± 400 mV		
Maximum Input Signal	± 2 V		
Nominal Impedance	50 ohm		
Reflections (for 20 ps rise time)	5%		
Electrical Input	2.4 mm (male)		1.85 mm (male)

Module Specifications (continued)

Dual Optical Modules ¹	86111A	86111U	86113A	86115B
OPTICAL CHANNEL SPECIFICATIONS				
Optical Channel Unfiltered Bandwidth	2.85 GHz	15 GHz	2.85 GHz	28 GHz
Wavelength Range	750-860 nm		1000-1600 nm	
Calibrated Wavelengths	850 nm		1310/1550 nm	
Sensitivity (smallest average power for mask test)	-17 dBm	-7.5 dBm	-20 dBm	-7 dBm
Transition Time (10% to 90%,calculated from TR = 0.48/BW optical)				
Unfiltered	<160 ps	<32ps	<160 ps	18 ps
RMS Noise				
Characteristic	1.5 μ W	14 μ W	1.5 μ W	10 μ W (Filtered) 18 μ W (Unfiltered)
Maximum	2.5 μ W	20 μ W	2.5 μ W	15 μ W (Filtered) 30 μ W (Unfiltered)
Scale Factor				
Minimum	5 μ W	20 μ W	5 μ W	20 μ W
Maximum	100 μ W	500 μ W	100 μ W	500 μ W
CW Accuracy (single marker, referenced to average power monitor, 50 μ W/division)	$\pm 6 \mu\text{W} \pm 0.4\%$ of full scale $\pm 3\%$ of (reading-channel offset)	$\pm 2\%$ of (reading-channel offset), 15 GHz	$\pm 6 \mu\text{W} \pm 0.4\%$ of full scale $\pm 3\%$ of (reading-channel offset)	$\pm 50 \mu\text{W} \pm 4\%$ of (reading-channel offset)
CW Difference (two markers, referenced to average power monitor, 50 μ W/division)	$\pm 0.8\%$ of full scale $\pm 3\%$ of (reading-channel offset)	$\pm 2\%$ of (reading-channel offset)15 GHz	$\pm 0.8\%$ of full scale $\pm 3\%$ of (reading-channel offset)	$\pm 4\%$ of delta
CW Offset (referenced two divisions from screen bottom)	+0.2 mW to -0.6 mW	+1 mW to -3 mW	+0.2 mW to -0.6 mW	+1 mW to -3 mW
Average Power Monitor (specified operating range)	-30 dBm to -2.2 dBm	-27 dBm to +3 dBm	-30 dBm to 0 dBm	-27 dBm to +3 dBm
Factory Calibrated Accuracy				
Single mode	$\pm 5\% \pm 100 \text{ nW} \pm \text{connector uncertainty, (20}^\circ\text{C to 30}^\circ\text{C)}$			
Multi mode	$\pm 10\% \pm 100 \text{ nW} \pm \text{connector uncertainty, (20}^\circ\text{C to 30}^\circ\text{C)}$			N/A
User Calibrated Accuracy $\pm 2\% \pm 100 \text{ nW} \pm \text{power meter uncertainty, } < 5^\circ\text{C change}$				
Maximum Input Power				
Maximum non-destruct average	0.4 mW (-4 dBm)	2 mW (+3 dBm)	0.4 mW (-4 dBm)	2 mW (+3 dBm)
Maximum non-destruct peak	10 mW (+10 dBm)			
Fiber Input				
	62.5/125 μm , user selectable connector			9/125 μm , user selectable connector
Input Return Loss (HMS-10 connector fully filled fiber)				
	20dB			30 dB

¹ Requires the 86100A/B software revision 3.0 or above.

Module Specifications (continued)

Dual Electrical Channel Modules	86112A	83484A	54754A
Electrical Channel Bandwidth	12.4 and 20 GHz	26.5 and 50 GHz	12.4 and 18 GHz
Transition Time (10% to 90%, calculated from TR = 0.35/BW)	28.2 ps, 12.4 GHz; 17.5 ps, 20 GHz	13.2 ps, 26.5 GHz; 7 ps, 50 GHz	28.2 ps, 12.4 GHz; 19.4 ps, 18 GHz
RMS Noise			
Characteristic	0.25 mV, 12.4 GHz; 0.5 mV, 20 GHz	0.46 mV, 26.5 GHz; 0.92 mV, 50 GHz	0.25 mV, 12.4 GHz; 0.5 mV, 18 GHz
Maximum	0.5 mV, 12.4 GHz; 1 mV, 20 GHz	0.75 mV, 26.5 GHz 1.5 mV, 50 GHz	0.5 mV, 12.4 GHz; 1 mV, 18 GHz
Scale Factor			
Minimum	1 mV/division		
Maximum	100 mV/division		
dc Accuracy (single marker)	±0.4% of full scale ±2mV ±1.5% of (reading-channel offset), 12.4 GHz ±0.4% of full scale ±2 mV ±3% of (reading-channel offset), 20 GHz	±0.4% of full scale ±2 mV ±1.2% of (reading-channel offset), 26.5 GHz ±0.4% of full scale ±2 mV ±2% of (reading-channel offset), 50 GHz	±0.4% of full scale or marker reading (whichever is greater) ±2 mV ±1.2% of (reading-channel offset)
dc Difference (two markers)	±0.8% of full scale ±1.5% of delta, 12.4 GHz ±0.8% of full scale ±3% of delta, 20 GHz	±0.8% of full scale ±1.2% of delta, 26.5 GHz ±0.8% of full scale ±2% of delta, 50 GHz	±0.8% of full scale or delta marker reading (whichever is greater) ±2 mV ±1.2% of (reading-channel offset)
dc Offset	±500 mV	±500 mV	±500 mV
Input Dynamic Range (relative to channel offset)	±400 mV	±400 mV	±400 mV
Maximum Input Signal	±2 V	±2 V	±2 V
Nominal Impedance	50 ohm	50 ohm	50 ohm
Reflections (for 30 ps rise time)	5%	5%	5%
Electrical Input	3.5 mm (male)	2.4 mm (male)	3.5 mm (male)

TDR System	Oscilloscope/TDR Performance	Normalized Characteristics
Rise Time	40 ps nominal	Adjustable from larger of 10 ps or 0.08 x time/div Maximum: 5 x time/div
TDR Step Flatness	≤ ±1% after 1 ns from edge ≤ ±5%, -3% 1 ns from edge	≤ 0.1%
Low Level	0.00 V ± 2 mV	0.00 V ± 2 mV
High Level	±200 mV ± 2 mV	±200 mV ± 2 mV

Clock Recovery Single Mode, Multimode and Electrical Modules	83491A	83492A	83493A	83494A
Channel Type	Electrical	Multimode Optical	Single-Mode Optical	Single Mode Optical
Clock Recovery Phase Locked Loop Bandwidth				
Internal Path Triggering	50 to 70 kHz			90 kHz
External Output	4 MHz ± 10%			
Data Rates (Mb/s)	155, 622, 1063, 1250, 2125, 2488, 2500	155, 622, 1063, 1250, 2125, 2488, 2500	155, 622, 1250, 2488, 2500	155, 622, 2488, 9953
Tracking/Acquisition Range	±0.1%			155, 622, 2488: ±0.1%; 9953: ±0.03%
Internal Splitter Ratio	50/50	50/50	10/90	10/90
Output Jitter	<0.0125 UI RMS			155, 622, 2488: 0.02 UI RMS 9953 0.03 UI RMS
Input Power for Clock Recovery	-10 dBm to +3 dBm	750 to 860 nm, -10 to +3 dBm 1000 to 1600 nm, -13 to +3 dBm	-20 dBm to +3 dBm	-12 dBm to +3 dBm (155, 622, 2488 Mb/s) -8 dBm to +3 dBm (9953 Mb/s)
Input/Output Connectors	APC 3.5 mm, 50 ohm	FC/PC, 62.5/125 µm multimode, user selectable connector	FC/PC, 9 /125 µm single mode, user selectable connector	
Auxiliary Recovered Clock and Regenerated Data Outputs				
Input Return Loss	Type N with SMA adapters			
	DC-1250 MHz, 20 dB 1250-2500 MHz, 15 dB	20 dB	28 dB	28 dB
Input Insertion Loss	DC-1250 MHz, 7 dB 1250-2500 MHz, 15 dB	5 dB Maximum	1.5 dB Maximum	

Ordering Information

86100B Infiniium DCA mainframe, wide bandwidth digital oscilloscope
 86100B-001 12 GHz trigger bandwidth
 86100B-AX4 Rack mount flange kit
 86100B-AXE Rack mount flange kit with handles
 86100B-UK6 Commercial cal certificate with test data

Optical/Electrical Modules

86101A 3 GHz optical channel; multimode, amplified (750-860 nm)
 20 GHz electrical channel
 86101A-201 155, 622 Mb/s
 86101A-202 1.063, 1.25 Gb/s

86102A 10 GHz optical channel; multimode, amplified (750-860 nm)
 20 GHz electrical channel
 86102A-201 2.125, 3.187 Gb/s
 86102A-202 2.488, 3.125 Gb/s
 86102A-203 2.72, 3.32 Gb/s

86102U 15 GHz optical channel; multimode, unamplified (750-860 nm)
 20 GHz electrical channel
 86102U-201 1.25, 2.488 Gb/s
 86102U-202 2.488, 3.125 Gb/s
 86102U-203 3.125, 10.3125 Gb/s

86103A 3 GHz optical channel; multimode, amplified (1000-1600 nm)
 20 GHz electrical channel
 86103A-201 155, 622 Mb/s
 86103A-202 1.063, 1.25 Gb/s

86103B 10 GHz optical channel; multimode, amplified (1000-1600 nm)
 20 GHz electrical channel
 86103B-201 622 Mb/s, 2.488 Gb/s
 86103B-202 1.063, 1.25 Gb/s
 86103B-203 2.125, 2.488 Gb/s

86105A 20 GHz optical channel; single-mode, unamplified (1000-1600 nm)
 20 GHz electrical channel
 86105A-101 155 Mb/s
 86105A-102 622 Mb/s
 86105A-103 2.488 Gb/s
 86105A-201 622 Mb/s, 2.488 Gb/s
 86105A-202 2.488, 9.953 Gb/s

86105B 15 GHz optical channel; single-mode, unamplified (1000-1600 nm)
 20 GHz electrical channel
 86105B-101 9.953, 10.3125, 10.51875, 10.664, 10.709 Gb/s
 86105B-102 155, 622 Mb/s
 2.488, 2.666, 9.953, 10.3125, 10.51875, 10.664, 10.709 Gb/s
 86105B-103 1.063, 1.250, 2.125, 2.488, 2.666, 9.953, 10.3125, 10.51875, 10.664, 10.709 Gb/s

86106B 28 GHz optical channel; single-mode, unamplified (1000-1600 nm)
 40 GHz electrical channel
 86106B-410 9.953, 10.3125, 10.664, 10.709 Gb/s

86109A 30 GHz optical channel; single-mode, unamplified (1000-1600 nm)
 40 GHz electrical channel

86109B 40 GHz optical channel; single-mode, unamplified (1000-1600 nm)
 50 GHz electrical channel

86116A 53 GHz optical channel; single-mode, unamplified (1000-1600 nm)
 63 GHz electrical channel

Dual Optical Channel Modules

86111A Dual 3 GHz optical channels; multimode, amplified (750-860 nm)
 86111A-201 155, 622 Mb/s
 86111A-202 1.063, 1.25 Gb/s

86111U Dual 15 GHz optical channels; multimode, unamplified (750-860 nm)
 86111U-201 1.25, 2.488 Gb/s
 86111U-202 2.488, 3.125 Gb/s
 86111U-203 3.125, 10.3125 Gb/s

86113A Dual 3 GHz optical channels; multimode, amplified (1000-1600 nm)
 86113A-201 155, 622 Mb/s
 86113A-202 1.063, 1.25 Gb/s
 86113A-301 155 Mb/s, 622 Mb/s, 2.488 Gb/s

86115B Dual 28 GHz optical channels; single-mode, unamplified (1000-1600 nm)
 86115B-101 9.953 Gb/s
 86115B-410 9.953, 10.3125, 10.664, 10.709 Gb/s

Dual Electrical Channel Modules

86112A Dual 20 GHz electrical channels

83484A Dual 50 GHz electrical channels

86118A Dual 70 GHz electrical remote sampling channels

TDR/TDT Modules

Included with each of these TDR modules is a TDR demo board, programmers guide, 2 50 Ω terminations, APC-3.5 (m), and one short, APC-3.5 (m).

54754A Differential TDR module with dual 18 GHz TDR/electrical channels

Trigger Module

86107A Precision timebase reference module
 86107A-020 10 and 20 GHz clock input capability
 86107A-040 10, 20 and 40 GHz clock input capability

Clock Recovery Modules

The following modules provide a recovered clock from the data signal for triggering at standard telecommunications and enterprise data rates:

83491A	Electrical signals. Data rates 155, 622, 1063, 1250, 2125, 2488, 2500 Mb/s
83492A	Multimode optical. Data rates 155, 622, 1063, 1250, 2125, 2488, 2500 Mb/s
83493A	Single-mode signals. Data rates 155, 622, 1250, 2488, 2500 Mb/s
83494A	Single-mode signals. Data rates 155, 622, 2488 Mb/s and 9.953 Gb/s
83494A-103	Single-mode signals. Data rates 155, 622, 2488 Mb/s and 10.3125 Gb/s
83494A-106	Single-mode signals. Data rates 155, 622, 2488, 2666 Mb/s and 10.664 Gb/s
83494A-107	Single-mode signals. Data rates 155, 622, 2488, 2666 Mb/s and 10.709 Gb/s

Warranty Options (for all products)

R1280A	Customer return repair service
R1282A	Customer return calibration service

Connector Options**(for All Optical Modules)**

81000 AI	Diamond HMS-10 connector
81000 FI	FC/PC connector adapter
81000 SI	DIN connector adapter
81000 VI	ST connector adapter
81000 KI	SC Connector Adapter

Accessories

10086A	ECL terminator
11667B	Power splitter, DC to 26.5 GHz, APC 3.5 mm
11667C	Power splitter, DC to 50 GHz, 2.4mm
11742A-K01	50 GHz DC blocking capacitor
11898A	1.5 meter remote extender module
54006A	6 GHz passive probe
54007A	3.5 mm RF accessory kit
54008B	24 ns delay line
54121-68701	RF accessories kit
54701A	2.5 GHz active probe
83430A	2.5 Gb/s lightwave transmitter
83433A	10 Gb/s lightwave transmitter
83434A	10 Gb/s lightwave receiver
83440B/C/D	Optical-to-electrical converters (6/20/32 GHz)
83446A	2.5 Gb/s lightwave receiver
8490D-020	2.4 mm 20dB attenuator
86101-60005	Filler panel
C3751-60201	Mouse
E2610-68700	Keyboard
N1020A	6 GHz TDR probe kit
N1025A	1 GHz active differential probe

Adapters for Electrical Modules***Need 1.85mm adapter and cable information***

11900B	2.4mm (f-f) adapter
11901B	2.4mm (f) to 3.5mm (f) adapter
11901C	2.4mm (m) to 3.5mm (f) adapter
54124-24101	2.4mm termination
5061-5311	3.5mm (f-f) adapter
1250-1158	SMA (f-f) adapter
1810-0118	3.5mm termination

Firmware and software

Firmware and software upgrades are available through the Web or your local sales office. www.agilent.com/comms/dcaupgrade



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com