



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation


Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

SIGNAL ANALYZERS


Spectrum Analyzers, Low-cost Portable
HP 8590B, 8592B

- Low price
- Easy to use

- Sturdy and lightweight
- Measurement personalities

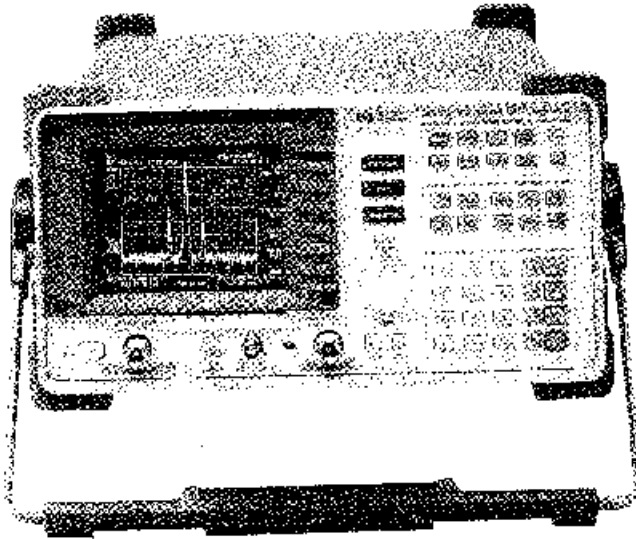

HP 8590B

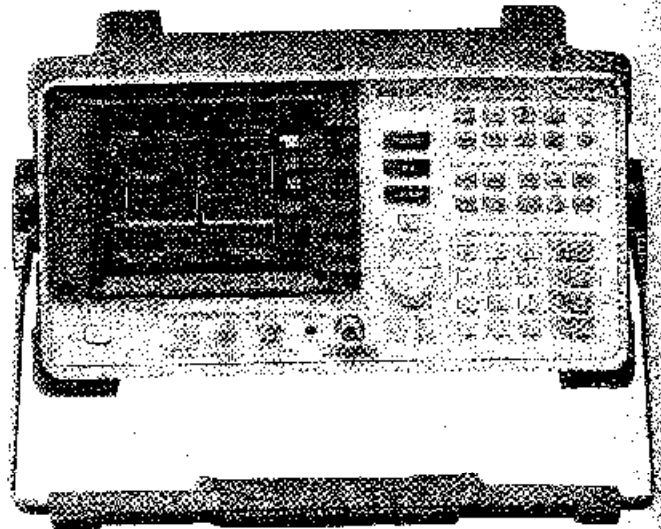

HP 8592B



HP 8590B and 8592B Spectrum Analyzers

These models offer basic RF and microwave measurement performance at a low cost. The HP 8590B has a frequency range of 9 kHz to 1.8 GHz, a 50- or optional 75-ohm input, and a weight of only 13.6 kg (30 pounds). Amplitude range is a wide -115 to +30 dBm. The HP 8592B has a frequency range of 9 kHz to 22 GHz (or 25 GHz with option 1125), an internal preselector, and a weight of (35 pounds) 15.9 kg. Amplitude range extends from -114 to +30 dBm. (For special applications or general export, the HP 8592B option 1B1 does not tune above 18 GHz nor span greater than 2.3 GHz.) If ac power is not available, both spectrum analyzers can be operated using the HP 85901A portable ac power source.

One Spectrum Analyzer for Many Applications

You can change the test capabilities of these spectrum analyzers to fit specific measurement needs. An optional memory card reader enables you to load specific measurement personalities for cable television, electromagnetic compatibility, or digital radio applications. Complex measurement routines and test limits are available at a key-stroke. An optional built-in tracking generator provides the HP 8590B RF analyzer with a synchronously swept signal source for stimulus-response measurements. Operating these analyzers requires only minimal training.

Easy-to-Use Features

Numerous features make it easier to control your measurements and to analyze the results. Both portable spectrum analyzers have built-in, automatic calibration to ensure measurement consistency. Frequency panning lets you quickly reposition signals without repeated sweeps. The internal memory allows 50 traces to be stored, and 24 more can be stored on a RAM card with addition of the optional memory-card reader. Time-and-date stamping come standard. Direct output to printer or plotter are available with either the HP-IB or RS-232 interface option.

HP 8590B Specifications

General

Temperature range

Operating: 0° to +55° C

Storage: -40° to +75° C

EMI compatibility: CISPR Pub. 11 and FR 7.526/527/79

Audible noise: <37.5 dBA, pressure and <5.0 Bels power (ISODP7779)

Power requirements: 86 to 127 or 195 to 250 Vrms, 47 to 66 Hz, 100- to 126 Vrms, 400 Hz ±10%

Frequency

Range: 9 kHz to 1.8 GHz; 1 MHz to 1.8 GHz option 001

Readout accuracy: ±(5 MHz + 1% of frequency span)

Span

Range: 0 Hz (zero span), 50 kHz to 1.8 GHz

Accuracy: ±3% of indicated span

Sweep time

Range: 20 ms to 100 s

Accuracy: ±3% of indicated sweep time

Sweep trigger: free run, single, line, video, external

Stability

Drift: <75 kHz/5 minutes after 2-hour warmup and 5 minutes after setting center frequency

Noise sidebands: <-95 dBc/11z at >30 kHz offset from CW signal

System related sidebands: <-65 dBc at >30 kHz offset from CW signal

HP 8590B Specifications (continued)

Amplitude
Amplitude range: -115 to +30 dBm (50 ohm); -63 to -75 dBmV (75 ohm, option 001)
Maximum safe input level: 50 ohm 75 ohm (option 001)
 Average cont. power +30 dBm: 1 watt 75 dBmV (0.4 watts)
 Peak pulse power +30 dBm: 1 watt 75 dBmV (0.4 watts)
 DC 25 Vdc 100 Vdc

Gain compression > 10 MHz: ≤0.5 dB (total power at input mixer = -10 dBm)

Displayed average noise level: <-115 dBm to <-113 dBm

Spurious responses
Second harmonic distortion > 0 MHz: <-70 dBc for -45 dBm tone at input mixer

Third-order intermodulation
Distortion > 5 MHz: <-70 dBc for two -30 dBm tones at input mixer and > 50 kHz separation

Other input-related: <-65 dBc for ≥30 kHz offset from CW signal

Residual responses (input terminated and 0 dB attenuation)
 50 ohm 75 ohm (option 001)
 150 kHz to 1 MHz <-90 dBm N/A
 1 MHz to 1.8 GHz <-90 dBm <-45 dBmV

Display range
Log scale: 0 to -70 dB from reference level is calibrated; 1 to 20 dB/division in 1 dB steps; 8 divisions displayed
Linear scale: 8 divisions
Scale units: dBm, dBmV, dBmicroV, volts, watts
Marker readout resolution: 0.05 dB for log scale; 0.05% of reference level for linear

Reference level
Range: -115 to +30 dBm (50 ohm); -63 to +75 dBmV (75 ohm)
Resolution: 0.01 dB for log scale; 0.12% of ref lev for linear
Accuracy (referred to -20 dBm reference level)
 0 to -59.9 dBm: ±(0.5 dB + input attenuator accuracy at 50 MHz)
 -60 to -115 dBm: ±(1.25 dB + input attenuator accuracy at 50 MHz)

Frequency response, 10 dB input attenuation
Absolute: ±1.5 dB, referred to 300 MHz CAL OUT
Relative flatness: ±1.0 dB, referred to midpoint between highest and lowest frequency response deviations

Calibrator output
Frequency: 300 MHz ±30 kHz
Amplitude: -20 dBm ±0.4 dB (50 ohm), -28.75 dBmV ±0.4 dB (75 ohm, option 001)

Input attenuator
Range: 0 to 60 dB, 10 dB steps
Accuracy: ±0.5 dB at 50 MHz, ref 10 dB attenuation, 0 to 50 dB; ±0.75 dB at 50 MHz, ref 10 dB attenuation, 60 dB
Resolution bandwidth: 1 kHz to 3 MHz, -3 dB nominal
Switching uncertainty, referred to 3 kHz RBW: ±0.4 dB for 3 kHz to 5 MHz RBW; ±0.5 dB for 1 kHz

Video bandwidth range: 30 Hz to 1 MHz
Log to linear switching: ±0.25 at reference level
Display scale fidelity
Log incremental accuracy: ±0.2 dB/2 dB, 0 to -70 dB from ref lev
Log maximum cumulative: ±0.75 dB, 0 to -60 from ref level; ±1.0 dB, 0 to -70 dB from ref level
Linear accuracy: ±3% of reference level

HP 8592B Specifications

Frequency
Range: 9 kHz to 22 GHz; 9 kHz to 25 GHz (option H25)
Readout accuracy: ±[(5 x N) MHz + 0.01% of center frequency + 2% of frequency span]
Span
Range: 0 Hz (zero span), (50 x N) kHz to 19.25 GHz
Accuracy: ±2% of span, span > 10 MHz; ±5% of span, span < 10 MHz
Sweep time
Range: 20 ms to 100 s

Accuracy: ±3% of indicated sweep time
Sweep trigger: free run, single, line, video, external
Stability
Noise sidebands: <(-95 - 20 log N) dBc/Hz >30 kHz offset from CW
System-related sidebands: <-65 dBc + 20 log N at >30 kHz offset from CW signal
Comb generator frequency accuracy: 100 MHz fundamental freq ±0.007%

Amplitude
Range: -114 to +30 dBm
Maximum safe input: +30 dBm (1 watt, 7.1 Vrms), 0 Vdc
Gain compression: ≤0.5 dB (total power at input mixer = -10 dBm)
Displayed average noise level: ≤-114 to ≤-92 dBm
Spurious responses
Second harmonic distortion
10 MHz to 2.9 GHz: <-70 dBc for -40 dBm tone at input mixer
> 2.75 GHz: <-100 dBc for -10 dBm tone at input mixer (or below displayed average noise level)
Third-order intermodulation
Distortion > 10 MHz: <-65 dBc for two -30 dBm at input mixer and > 50 kHz separation
Other input related: <-70 dBc for applied freq ≤18 GHz; <-60 dBc for applied freq ≤22 GHz

Display range
Log scale: 0 to -70 dB from reference level is calibrated; 1 to 20 dB/division in 1 dB steps; 8 divisions displayed
Linear scale: 8 divisions
Scale units: dBm, dBmV, dBμV, volts, watts
Reference level
Range: -114 to +30 dBm
Resolution: 0.01 dB for log scale; 0.12% of ref lev for linear
Accuracy referred to -20 dBm reference level
 0 to -59.9 dBm: ±(0.5 dB + input atten acc @ 50 MHz)
 -60 to -114 dBm: ±(1.25 dB + input atten acc @ 50 MHz)
Frequency response, referred to 300 MHz CAL OUT, preselector peaked
Absolute: ±2.0 to +3.0 dB
Relative flatness: ±1.5 to +2.0 dB

Calibrator output
Frequency: 300 MHz ±30 kHz
Amplitude: -20 dBm ±0.4 dB

Input attenuator
Range: 0 to 70 dB in 10 dB steps
Accuracy
 0 to 60 dB: 0.5 dB at 50 MHz, ref to 10 dB atten
 70 dB: 1.2 dB at 50 MHz, ref to 10 dB atten
Resolution bandwidth (-3 dB nominal): 1 kHz to 3 MHz
Switching uncertainty: ±0.4 dB, 3 kHz to 3 MHz RBW; ±0.5 dB, 1 kHz
Video bandwidth range: 30 Hz to 1 MHz
Log to linear switching: ±0.25 dB at reference level
Display scale fidelity: ±0.2 dB/2 dB, 0 to -70 dB from ref lev, incremental; ±0.75 dB, 0 to -60 dB from ref lev ±1.0 dB; 0 to -70 dB from ref lev, maximum cumulative
Linear accuracy: ±3% of reference level

Ordering information
 HP 8590B spectrum analyzer (9 kHz to 1.8 GHz)
 HP 8592B spectrum analyzer: (9 kHz to 22 GHz)
 Opt 001 75 Ω input impedance (HP 8590B only)
 Opt 003 card reader
 Opt 010 tracking generator 50Ω (HP 8590B only)
 Opt 011 tracking generator 75Ω (HP 8590B only)
 Opt 021 HP-IB interface
 Opt 023 RS-232 interface
 Opt H25 frequency extension to 25 GHz (HP 8592B only)
 Opt 1B1 general export version



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com