

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Acromag
THE LEADER IN INDUSTRIAL I/O

IP330
16-Bit A/D
Analog Input

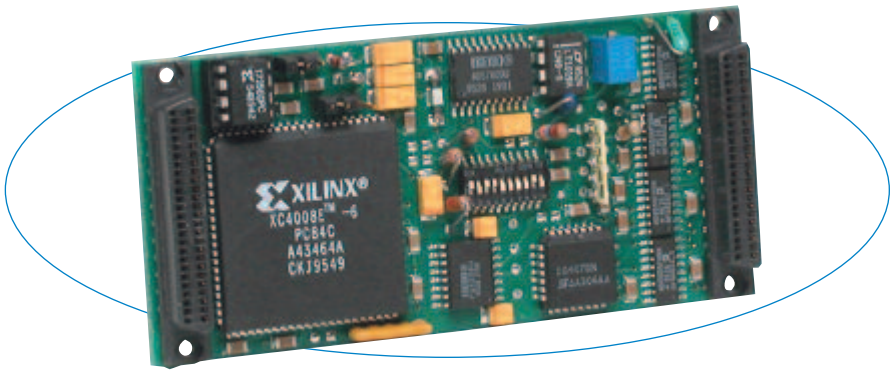

Advanced memory management techniques allow the IP330 to operate with minimal interruption of the A/D converter.

IP330 Industry Pack (IP) modules provide fast, high resolution A/D conversion.

The IP330 has many features to improve your overall system throughput rate. You can scan all channels or define a subset for more frequent sampling. Burst mode scans selected channels at the maximum conversion rate. Uniform mode performs conversions at user-defined intervals. Both modes can scan continuously, or execute a single cycle upon receiving a trigger.

"Mail box" memory allows the CPU to read the latest data in 32 storage buffer registers without interrupting the A/D converter.

Features

- 16-bit A/D converter (ADC)
- 8µS conversion time (125KHz)
- 16 differential or 32 single-ended inputs (±5V, ±10V, 0-5V, and 0-10V input ranges)
- Individual channel mailbox with one or two storage buffer registers per channel
- Programmable scan control
- Four scanning modes
- User-programmable interval timer
- External trigger input and output
- Programmable gain for individual channels
- Post-conversion interrupts

Benefits

- "Mailbox" memory eliminates scanning interruptions for optimum throughput.
- Data register indicates new and missed (overwritten) data values in the mail box.
- Programmable interrupts simplify data acquisition by providing greater control.

Specifications

Analog Inputs

Input configuration: 16 differential or 32 single-ended.

A/D resolution: 16 bits.

Input ranges: ±5V, ±10V*, 0-5V, and 0-10V*.
* Requires ±15V external supplies.

Data sample memory: Individual channel mailbox with one or two storage buffer registers per channel.

Maximum throughput rate:
Only one channel can be updated at a time.
One channel: 125KHz maximum (8µS/conversion)
[66KHz (15µS/conversion) recommended]
16 channels (differential): 4.2KHz (240µS/16 ch)
32 channels (single-ended): 2.1KHz (480µS/32 ch).

Programmable gains: 1x, 2x, 4x, 8x.

A/D triggers: External and software.

System accuracy: 2 LSB (0.0030%) typical
(SW calib., gain=1, 25°C).

Data format: Straight binary or two's compliment.

Input overvoltage protection: Vss -20V to Vdd 40V with power on, -35V to 55V power off.

Common mode rejection ratio (60Hz): 96dB typical.

Channel-to-channel rejection ratio (60Hz): 96dB typical.

IP Compliance (ANSI/VITA 4)

Meets IP specifications per ANSI/VITA 4-1995.

IP data transfer cycle types supported: Input/output (IOSel*), ID read (IDSel*), Interrupt select (INTSel*).

Access times (8MHz clock):
ID PROM read: 1 wait state (375ns cycle).
Channel port/register read/write: 0 wait states.
Interrupt select cycle read: 1 wait state.
Mail box I/O read: 1 wait state. 6 wait states if ongoing internal mail box write.

Environmental

Operating temperature: 0 to 70°C (IP330) or -40 to 85°C (IP330E model).

Storage temperature: -55 to 100°C.

Relative humidity: 5 to 95% non-condensing.

MTBF: 798,625 hrs at 25°C, MIL-HDBK-217F, Notice 2.

Power:
+5V: 40mA.
+12V from P1: 20mA.
-12V from P1 or ±15V through P2: 15mA.

Ordering Information

Industry Pack Modules

IP330
32 single-ended or 16 differential inputs.

IP330E
Same as IP330 plus extended temperature range

Acromag offers a wide selection of Industry Pack Carrier Cards.

Software *(see software documentation for details)*

IPSW-API-VXW
VxWorks® software support package

IPSW-API-QNX
QNX® software support package

IPSW-API-WIN
Windows® DLL driver software support package

IPSW-LINUX
Linux™ support (website download only)

See accessories documentation for additional information.

All trademarks are the property of their respective owners.

8400-416 Printed in USA 6/05 Copyright © 2005 Acromag, Inc. Data subject to change without notice

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP