ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag IP408* at our website: ***Click HERE***

Acromag
THE LEADER IN INDUSTRIAL I/O

IP408
High Voltage
Digital Input/Output

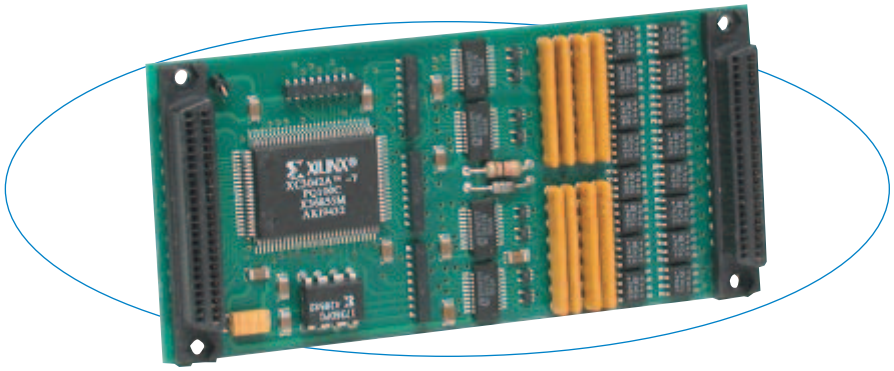

The IP408 provides an easy method to perform loop-back monitoring of your critical control signals.

The IP408 monitors or controls the on/off (high/low) status of up to 32 devices. Each channel can be used as an input or output.

Input channels can be configured with interrupts for a change of state or level detection of any bit on up to 8 channels. The TTL input threshold includes hysteresis for increasing noise immunity.

In order to ensure safe, reliable control under all conditions, output operation is "fail-safe." That is, the outputs are always off upon power-up and are automatically cleared following a software reset.

Loopback monitoring of critical control signals is easy since the input and output circuitry are connected in tandem to each channel.

Features

- 32 digital input and/or output channels
- 0 to 60V DC input range, 60V DC low-side switch outputs
- Outputs sink up to 1A per channel
- TTL-compatible input threshold with hysteresis
- Change-of-state/level interrupts (up to 8)

Benefits

- Buffered inputs include hysteresis to increase noise immunity.
- Interrupts are software-programmable for a change of state or level detection.
- Loopback monitoring enables self-test and fault diagnostics to detect open output switches or shorts.
- High impedance inputs prevent loading of the input source and minimize current.
- Individual outputs sink up to 1A DC continuous. No deration of output current required at elevated temperatures.

Specifications

Digital Inputs

Input channel configuration: 32 noninverting buffered inputs with a common connection. Input signal voltage range: 0 to 60V DC, maximum.

Input signal threshold: TTL compatible. 1.5V DC with 200mV of hysteresis, typ. Limited to TTL levels of 0.8V DC (max. low level) and 2.0V DC (minimum high level).

Input response time: 250nS minimum to 375nS max.

Interrupts: Change-of-state and level on channels 0-7.

Digital Outputs

Channel configuration: 32 open-drain DMOS MOSFETs with common source connection.

Output ON current range: 0 to 1A DC, continuous per channel (10A total for all channels combined). No deration required at elevated ambients.

Turn on time: 320nS typical (varies with load).

Turn off time: 500nS typical (varies with load).

IP Compliance (ANSI/VITA 4)

Meets IP specifications per ANSI/VITA 4-1995.

IP data transfer cycle types supported: Input/output (IOSel*), ID read (IDSel*).

Access Times (8MHz clock): 1 wait state (375nS cycle).

Interrupt handling format: An 8-bit vector is provided during interrupt acknowledge cycles on D0 - D7.

Updates: Two 16-bit read/writes to update all channels.

Environmental

Operating temperature: 0 to 70°C (IP408) or -40 to 85°C (IP408E).

Storage: -55 to 125°C (all models).

Relative Humidity: 5 to 95% non-condensing

MTBF: 1,317,013 hrs at 25°C, MIL-HDBK-217F, Notice 2.

Power: +5V (±5%): 50mA max. +12V (±5%) from P1: 8.5mA max. -12V (±5%) from P1: 0mA (not used).

Ordering Information

Industry Pack Modules

IP408
32 bidirectional input/output channels

IP408E
Same as IP408 plus extended temperature range

Acromag offers a wide selection of Industry Pack Carrier Cards.

Software *(see software documentation for details)*

IPSW-API-VXW
VxWorks® software support package

IPSW-API-QNX
QNX® software support package

IPSW-API-WIN
Windows® DLL driver software support package

IPSW-LINUX
Linux™ support (website download only)

See accessories documentation for additional information.

All trademarks are the property of their respective owners.

Acromag, Inc. • PO Box 437, Wixom, MI 48393 • Phone: 248-295-0310 • Fax: 248-624-9234 • solutions@acromag.com • www.acromag.com

8400-419 Printed in USA 6/05 Copyright © 2005 Acromag, Inc. Data subject to change without notice

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP