



Artisan Scientific

QUALITY INSTRUMENTATION ... GUARANTEED

Looking for more information?

Visit us on the web at <http://www.artisan-scientific.com> for more information:

- Price Quotations
- Drivers
- Technical Specifications, Manuals and Documentation

Artisan Scientific is Your Source for Quality New and Certified-Used/Pre-owned Equipment

- Tens of Thousands of In-Stock Items
- Hundreds of Manufacturers Supported
- Fast Shipping and Delivery
- Leasing / Monthly Rentals
- Equipment Demos
- Consignment

Service Center Repairs

Experienced Engineers and Technicians on staff in our State-of-the-art Full-Service In-House Service Center Facility

InstraView™ Remote Inspection


Remotely inspect equipment before purchasing with our Innovative InstraView™ website at <http://www.instraview.com>

We buy used equipment! We also offer credit for Buy-Backs and Trade-Ins

Sell your excess, underutilized, and idle used equipment. Contact one of our Customer Service Representatives today!

Talk to a live person: 888-88-SOURCE (888-887-6872) | Contact us by email: sales@artisan-scientific.com | Visit our website: <http://www.artisan-scientific.com>

IP408 High Voltage Digital Input/Output

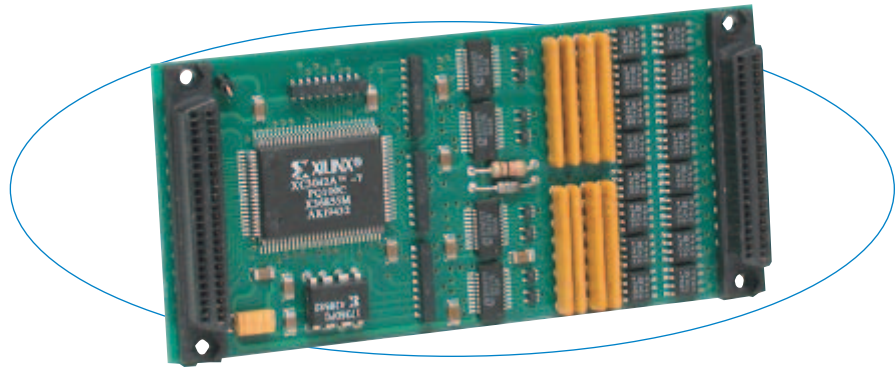

The IP408 provides an easy method to perform loop-back monitoring of your critical control signals.

The IP408 monitors or controls the on/off (high/low) status of up to 32 devices. Each channel can be used as an input or output.

Input channels can be configured with interrupts for a change of state or level detection of any bit on up to 8 channels. The TTL input threshold includes hysteresis for increasing noise immunity.

In order to ensure safe, reliable control under all conditions, output operation is "fail-safe." That is, the outputs are always off upon power-up and are automatically cleared following a software reset.

Loopback monitoring of critical control signals is easy since the input and output circuitry are connected in tandem to each channel.

Features

- 32 digital input and/or output channels
- 0 to 60V DC input range, 60V DC low-side switch outputs
- Outputs sink up to 1A per channel
- TTL-compatible input threshold with hysteresis
- Change-of-state/level interrupts (up to 8)

Benefits

- Buffered inputs include hysteresis to increase noise immunity.
- Interrupts are software-programmable for a change of state or level detection.
- Loopback monitoring enables self-test and fault diagnostics to detect open output switches or shorts.
- High impedance inputs prevent loading of the input source and minimize current.
- Individual outputs sink up to 1A DC continuous. No deration of output current required at elevated temperatures.

All trademarks are the property of their respective owners.

Specifications

Digital Inputs

Input channel configuration: 32 noninverting buffered inputs with a common connection. Input signal voltage range: 0 to 60V DC, maximum.

Input signal threshold: TTL compatible. 1.5V DC with 200mV of hysteresis, typ. Limited to TTL levels of 0.8V DC (max. low level) and 2.0V DC (minimum high level).

Input response time: 250nS minimum to 375nS max.

Interrupts: Change-of-state and level on channels 0-7.

Digital Outputs

Channel configuration: 32 open-drain DMOS MOSFETs with common source connection.

Output ON current range: 0 to 1A DC, continuous per channel (10A total for all channels combined). No deration required at elevated ambients.

Turn on time: 320nS typical (varies with load).

Turn off time: 500nS typical (varies with load).

IP Compliance (ANSI/VITA 4)

Meets IP specifications per ANSI/VITA 4-1995.

IP data transfer cycle types supported:
Input/output (IOSel*), ID read (IDSel*).

Access Times (8MHz clock): 1 wait state (375nS cycle).

Interrupt handling format: An 8-bit vector is provided during interrupt acknowledge cycles on D0 - D7.

Updates: Two 16-bit read/writes to update all channels.

Environmental

Operating temperature: 0 to 70°C (IP408)
or -40 to 85°C (IP408E).

Storage: -55 to 125°C (all models).

Relative Humidity: 5 to 95% non-condensing

MTBF: 1,317,013 hrs at 25°C, MIL-HDBK-217F, Notice 2.

Power: +5V (±5%): 50mA max. +12V (±5%) from P1:
8.5mA max. -12V (±5%) from P1: 0mA (not used).

Ordering Information

Industry Pack Modules

IP408

32 bidirectional input/output channels

IP408E

Same as IP408 plus extended temperature range

Acromag offers a wide selection of [Industry Pack Carrier Cards](#).

Software (see [software documentation](#) for details)

IPSW-API-VXW

VxWorks® software support package

IPSW-API-QNX

QNX® software support package

IPSW-API-WIN

Windows® DLL driver software support package

IPSW-LINUX

Linux™ support (website download only)

See [accessories documentation](#) for additional information.



Artisan Scientific

QUALITY INSTRUMENTATION ... GUARANTEED

Looking for more information?

Visit us on the web at <http://www.artisan-scientific.com> for more information:

- Price Quotations
- Drivers
- Technical Specifications, Manuals and Documentation

Artisan Scientific is Your Source for Quality New and Certified-Used/Pre-owned Equipment

- Tens of Thousands of In-Stock Items
- Hundreds of Manufacturers Supported
- Fast Shipping and Delivery
- Leasing / Monthly Rentals
- Equipment Demos
- Consignment

Service Center Repairs

Experienced Engineers and Technicians on staff in our State-of-the-art Full-Service In-House Service Center Facility

InstraView™ Remote Inspection

Remotely inspect equipment before purchasing with our Innovative InstraView™ website at <http://www.instraview.com>

We buy used equipment! We also offer credit for Buy-Backs and Trade-Ins

Sell your excess, underutilized, and idle used equipment. Contact one of our Customer Service Representatives today!

Talk to a live person: 888-88-SOURCE (888-887-6872) | Contact us by email: sales@artisan-scientific.com | Visit our website: <http://www.artisan-scientific.com>