ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent E1413C* at our website: ***Click HERE***

HEWLETT PACKARD

64-Channel Scanning A/D Converter

Technical Data Sheet*
HP E1413B

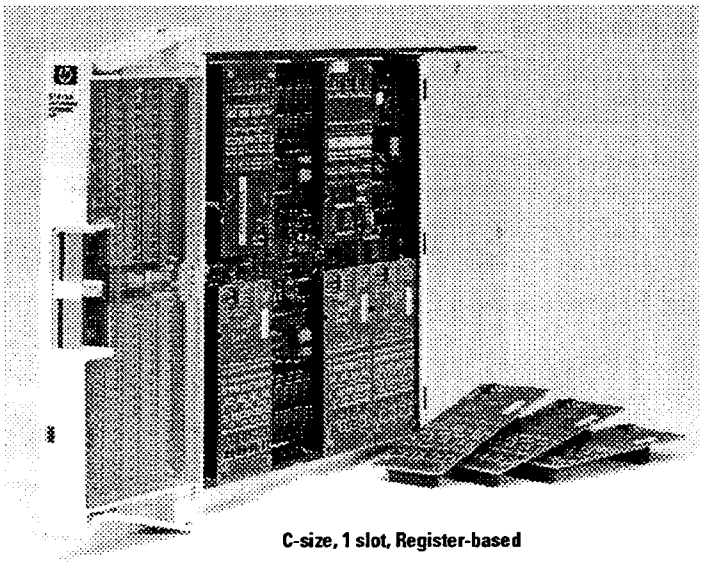

C-size, 1 slot, Register-based

- **Multi-function measurement capability**
  DC Voltage Temperature Resistance Strain
- **Optional modular signal conditioning plug-on cards**
- **100 kHz measurement rate with mixed functions**
- **Auto-sequenced scan lists**
- **Engineering units conversion at full speed**
- **On-board averaging and hi/lo limit checking**
- **Automatic self-calibration**
- **Built-in self test—*TST**

The E1413B scanning A/D is designed for high performance data acquisition and computer aided test applications where the key requirements are:

- –High speed scanning
- –16-bit resolution
- –High accuracy: .01% of reading
- –4 mV to 16 V full scale voltage input
- –64 Ksample FIFO buffer for block transfers
- –Current value buffer for on-line monitoring

The unique design of this analog sub-system provides a new level of density by combining a 16-bit A/D with a 64 channel differential FET multiplexer in a single C-size slot. Up to eight different Signal Conditioning Plug-ons (SCP's) with eight channels each can be added to the E1413B to provide such capabilities as:

- –Direct input (>100 KHz bandwidth)
- –10 Hz low pass filtering
- –Fixed gain and filter per channel
- –Programmable gain/filter per channel
- –Current sources for resistance, temp
- –Bridge completion and excitation for strain
- –Breadboard card for custom circuits

Channel scans can be made in any order using any function on any channel - all at full speed, including autoranging. Up to four unique scan lists, each with a different sample rate, can be stored in RAM and selected on-the-fly with a single software command. In addition, these scan lists can be automatically sequenced in any order with a unique auto-sequence scan list.

Data transfer speed has been greatly improved because multiple E1413B's can scan in parallel at full speed and then sequentially transfer data over the VXI backplane in D16 or D32 format at rates which match even the fastest embedded VXI computer.

The FIFO RAM is a high speed buffer which stores up to 64 K samples until the controller is ready for efficient block data transfer. For on-line monitoring, the Current Value Table RAM always contains the most recent measured value of each channel in the scan list. This RAM and the FIFO RAM can be accessed asynchronously.

**Data subject to change without notice.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Averaging can be enabled on a scan basis to provide averaging for each channel over 2 to 256 samples in binary steps. The averaged data goes to both the CVT and the FIFO buffer. The maximum sample rate is >1 KSa/s per channel for 64 channels, although higher rates are possible with fewer channels.

No multiple channels in a scan list and no scan list switching is allowed in order to maintain data identification in the FIFO buffer

Individual high and low limits per channel can be downloaded to the E1413B in engineering units format. If a limit is exceeded, an interrupt or trigger line can be pulled and the limit register can be read to determine the out-of-limit channel. A cumulative mode can be selected which holds the channel number of any out-of-limit reading since the last INIT command. The FIFO buffer can be then read to determine the actual out-of-limit readings.

Specifications

The following specifications include the SCP and scanning A/D performance together as a unit. Accuracy is stated for a single sample, averaging multiple samples will improve accuracy by reducing noise.

The basic E1413B scanning A/D has a full scale range of ±16 V and five manual or autoranging gains of X1, X4, X16, X64, and X256. An SCP must be used with each eight channel input block to provide input protection and signal conditioning.

Measurement resolution:
16 bits (including sign)

Maximum reading rate:
100 K samples/sec divided by the number of channels in the scan—for example:

100 K/64 = 1.56 K samples/sec/ch
100 K/16 = 6.25 K samples/sec/ch

Maximum input voltage:
normal mode plus common mode

Operating: <±16 V peak
Damage level: >±42 V peak

Maximum common mode voltage:
Operating: <±16 V peak
Damage level: >±42 V peak

Crosstalk:
referred to X1, 350 Ω source

10 Hz	>135 dB
100 Hz	>115 dB
1 kHz	>95 dB
10 kHz	>75 dB

Input impedance:
Opt 011, 012, 013, 018 and 019
>100 MΩ differential

Maximum tare cal offset:
62.5 mV range ±100% of full scale
other ranges ±25% of full scale

Measurement accuracy:
90 days, 23 ±1 °C (with *CAL done after 1 hr warm-up and CALZERO done within 5 min.)

Voltage Measurements
Opt 011 Direct Input SCP

Accuracy:

Range ± FS	Linearity % of rdg	Offset error	Noise 3 sigma	Noise* 3 sigma
62.5 mV	0.01%	5.3 µV	18 µV	8 µV
256 mV	0.01%	10.3 µV	45 µV	24 µV
1.0 V	0.01%	31 µV	110 µV	90 µV
4.0 V	0.01%	122 µV	450 µV	366 µV
16.0 V	0.01%	488 µV	1.8 mV	1.5 mV

*A/D filter ON (max scan rate—100 samples/sec/ch)

Temperature coefficients
Gain: 10ppm/°C
Offset: (0–40 °C) .14 µV/°C
(40–55 °C) .38 µV/°C + .8 µV

Normal mode rejection: 0 dB

Input capacitance: 80 pF typical

Common mode rejection: 0–60 Hz >105 dB

Voltage Measurements
Opt 012 10 Hz Lowpass Filter Input SCP

Accuracy:

Range ± FS	Linearity % of rdg	Offset error	Noise 3 sigma	Noise* 3 sigma
62.5 mV	0.01%	7.2 µV	34 µV	15 µV
256 mV	0.01%	12.2 µV	60 µV	28 µV
1.0 V	0.01%	33 µV	110 µV	92 µV
4.0 V	0.01%	122 µV	450 µV	366 µV
16.0 V	0.01%	488 µV	1.8 mV	1.5 mV

*A/D filter ON (max sample rate—>145 µsec–fixed range)

Temperature coefficients
Gain: 10ppm/°C
Offset: (0–30 °C) no additional error
(30–40 °C) .1 µV/°C
(40–55 °C) .27 µV/°C +2.4 µV

Normal mode rejection:
10 Hz lowpass filter (2 pole)
10 Hz -6 dB
50 Hz >23 dB
60 Hz >25 dB

Common mode rejection: 0–60 Hz >100 dB

Voltage Measurements
Opt 018/019 Fixed Gain/Filter Input SCP

Accuracy: Opt 018 Fixed gain X16

Range ± FS	Linearity % of rdg	Offset error	Noise 3 sigma	Noise* 3 sigma
3.906 mV	0.01%	3.8 µV	3.4 µV	2.9 µV
15.63 mV	0.01%	4.2 µV	4.1 µV	3.5 µV
on 15.63 mV range at ≥40C			4.4 µV	3.8 µV
62.5 mV	0.01%	4.9 µV	7.5 µV	6.3 µV
256 mV	0.01%	8.0 µV	28 µV	23 µV
1.0 V	0.01%	31 µV	113 µV	94 µV

*A/D filter ON (max sample rate—>145 µsec–fixed range)

Accuracy: Opt 019 Fixed gain X64

Range ± FS	Linearity % of rdg	Offset error	Noise 3 sigma	Noise* 3 sigma
3.906 mV	0.01%	2.3 µV	1.7 µV	1.4 µV
15.63 mV	0.01%	2.4 µV	2.2 µV	1.9 µV
on 15.63 mV range at ≥40C			2.5 µV	2.2 µV
62.5 mV	0.01%	3.0 µV	7.0 µV	5.7 µV
256 mV	0.01%	8.0 µV	28 µV	23 µV

*A/D filter ON (max sample rate—>145 µsec–fixed range)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Temperature coefficients

Gain: 15ppm/°C

Offset: (0–40 °C) .16 µV/°C

(30–40 °C) .18 µV/°C

(40–55 °C) .39 µV/°C + .8 µV

Normal mode rejection:

10 Hz lowpass filter (2 pole)

10 Hz -6 dB

50 Hz >23 dB

60 Hz >25 dB

Common mode rejection (0-60Hz):

Opt 018 >124 dB

Opt 019 >136 dB

Voltage Measurements

Opt 013 Programmable Gain/Filter Input SCP

Accuracy: Gain of X1

Range	Linearity	Offset error				Noise	Noise*
± FS	% of rdg	2 Hz	10 Hz	100 Hz	Filt Off	3 sigma	3 sigma
62.5 mV	0.01%	12 µV	8.8 µV	6.8 µV	6.3 µV	45 µV	26 µV
256 mV	0.01%	15 µV	12.5 µV	11.2 µV	10.8 µV	63 µV	31 µV
1.0 V	0.01%	33 µV	31.8 µV	31.3 µV	31.2 µV	112 µV	93 µV
4.0 V	0.01%	123 µV	122 µV	122 µV	122 µV	450 µV	366 µV
16.0 V	0.01%	488 µV	488 µV	488 µV	488 µV	1.8 mV	1.5 mV

*A/D filter ON (max sample rate—>145 µsec–fixed range)

Temperature coefficients

Gain: 15ppm/°C (after *CAL)

Offset: add tempco error plus fixed offset to above table

Temp	Tempco	2 Hz	10 Hz	100 Hz	Filt Off
(0–30)	.16 µV/°C	0 µV	0 µV	0 µV	0 µV
(30–40)	.18 µV/°C	13 µV	9 µV	1.1 µV	.2 µV
(40–55)	.39 µV/°C	31 µV	22 µV	6.4 µV	1.1 µV

Gain of X8

Range	Linearity	Offset error				Noise	Noise*
± FS	% of rdg	2 Hz	10 Hz	100 Hz	Filt Off	3 sigma	3 sigma
7.8 mV	0.01%	4.6 µV	3.6 µV	3.2 µV	3.6 µV	5.3 µV	4.5 µV
31.3 mV	0.01%	4.7 µV	3.8 µV	3.3 µV	5 µV	6.9 µV**	5.9 µV**
125 mV	0.01%	6.0 µV	5.3 µV	5.0 µV	14 µV	14 µV	12 µV
0.50 V	0.01%	16 µV	16 µV	16 µV	56 µV	56 µV	46 µV
2.0 V	0.01%	61 µV	61 µV	61 µV	225 µV	225 µV	188 µV

*A/D filter ON (max sample rate—>145 µsec–fixed range)

**7.4 µV and 6.3 µV when temp ≥40 °C

Temperature coefficients

Gain: 15ppm/°C (after *CAL)

Offset: add tempco error plus fixed offset to above table

Temp	Tempco	2 Hz	10 Hz	100 Hz	Filt Off
(0–30)	.16 µV/°C	0 µV	0 µV	0 µV	0 µV
(30–40)	.18 µV/°C	4.3 µV	2.7 µV	1.0 µV	0.2 µV
(40–55)	.39 µV/°C	13 µV	22 µV	6.2 µV	0.8 µV

Gain of X64

Range	Linearity	Offset error				Noise	Noise*
± FS	% of rdg	2 Hz	10 Hz	100 Hz	Filt Off	3 sigma	3 sigma
3.9 mV	0.01%	2.9 µV	2.3 µV	2.1 µV	2.1 µV	1.6 µV**	1.3 µV**
15 mV	0.01%	3.0 µV	2.4 µV	2.2 µV	2.2 µV	2.2 µV***	1.9 µV***
62 mV	0.01%	3.5 µV	3.0 µV	2.9 µV	2.9 µV	7.0 µV	5.7 µV
256 mV	0.01%	8.2 µV	8.0 µV	8.0 µV	8.0 µV	28 µV	23 µV

*A/D filter ON (max sample rate—>145 µsec–fixed range)

**1.9 µV and 1.7 µV for 100 Hz filter

***2.5 µV and 1.9 µV when temp ≥40 °C

Temperature coefficients

Gain: 15 ppm/°C (after *CAL)

Offset: add tempco error plus fixed offset to above table

Temp	Tempco	2 Hz	10 Hz	100 Hz	Filt Off
(0-30)	.16 µV/°C	0 µV	0 µV	0 µV	0 µV
(30-40)	.18 µV/°C	1.1 µV	0.2 µV	0.1 µV	0.1 µV
(40-55)	.39 µV/°C	6 µV	1.4 µV	0.6 µV	0.6 µV

Normal mode rejection:

2 Hz lowpass filter (2 pole)

2 Hz -3 dB

50Hz >44 dB

60 Hz >45 dB

10 Hz lowpass filter (2 pole)

10 Hz -3 dB

50 Hz >23 dB

60 Hz >25 dB

100 Hz lowpass filter (2 pole)

100 Hz -3 dB

400 Hz >15 dB

Bandwith:

Filter Off Mode (2 pole)

Maximum bandwidth

X1 gain (1600/input voltage) Hz

X8 gain (200/input voltage) Hz

X64 gain (25/input voltage) Hz

Common mode rejection (0 to 60 Hz):

X1 gain >100 dB

X8 gain >118 dB

X64 gain >136 dB

Temperature Measurements:

Any of the input SCP's can be used to make temperature measurements with thermocouples, but Options 013, 018, and 019 provide highest accuracy. One 122 µα internal current source is supplied to excite the thermistor reference on the terminal block or an external thermistor or RTD reference.

One of the 64 channels must be used to measure the reference.

Thermistors and RTD's require an input SCP and Option 015 Current Source SCP for excitation.

Engineering units conversion to degrees C are made on-card at full speed.

Transducer types:

Thermocouples: E, E extended, J, K, N, R, S, T (linearized to ITS90 per NIST Monograph 175)

Thermistors: 2252, 5 KΩ, and 10 KΩ


RTD's: 100 Ω type 85 and 92


Measurement range: -200 to +1500 °C depending on transducer type


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Temperature accuracy:


(All measurements for the following specs are made with the A/D filter off.)

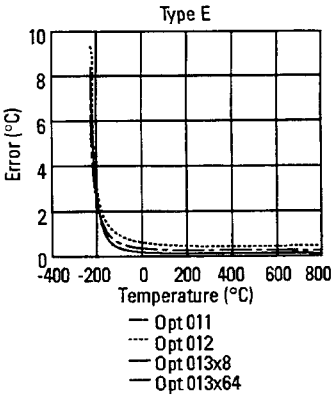





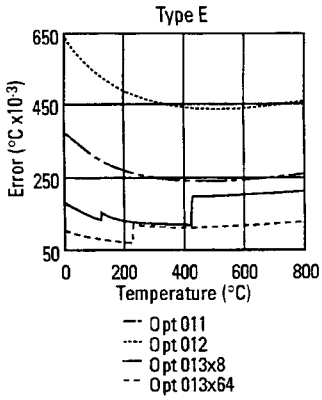





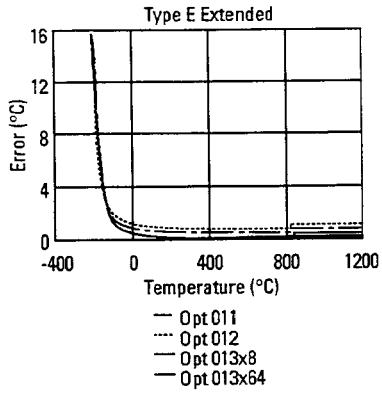





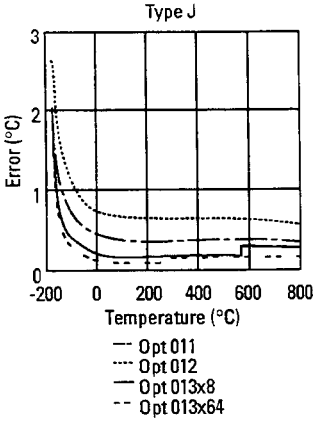





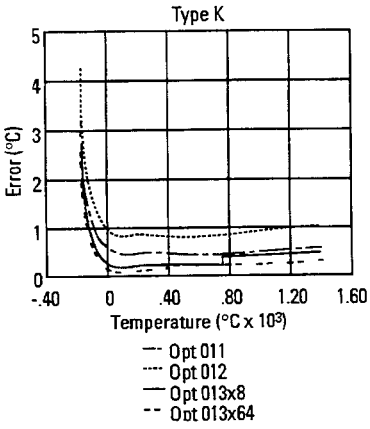




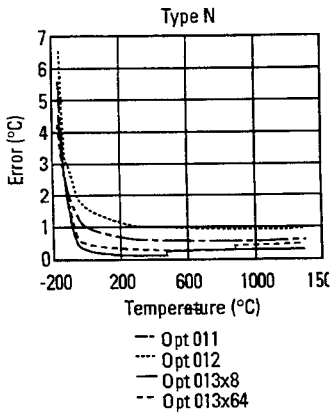


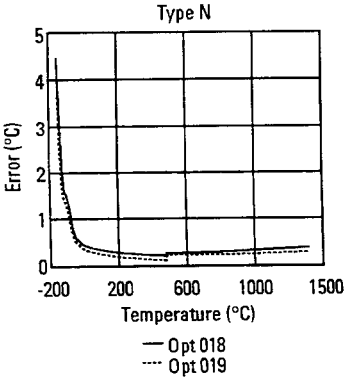


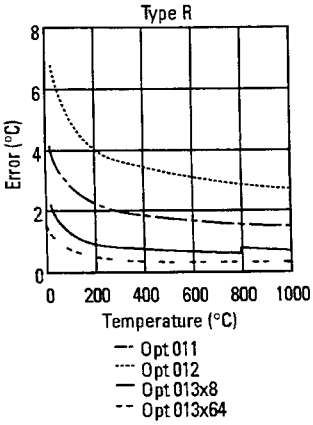






Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

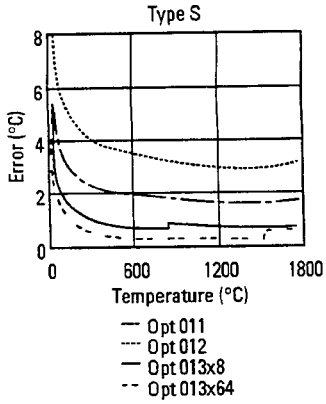





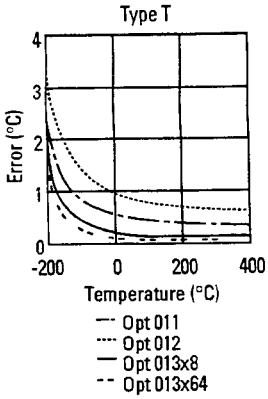





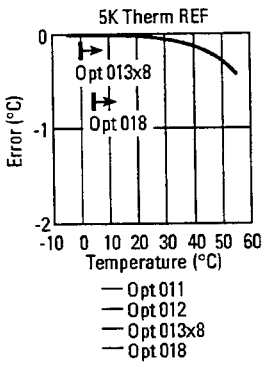


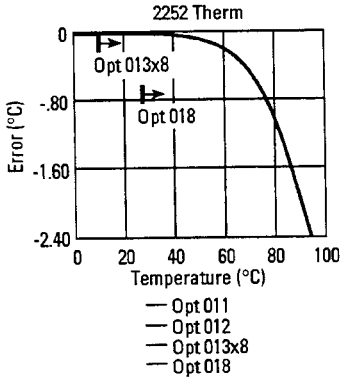


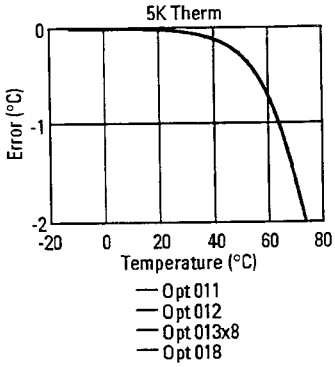


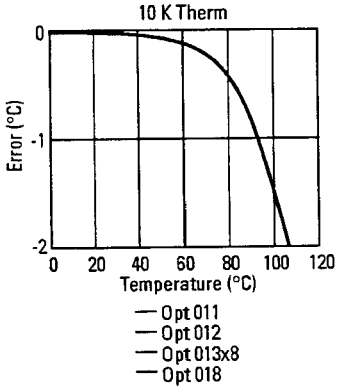

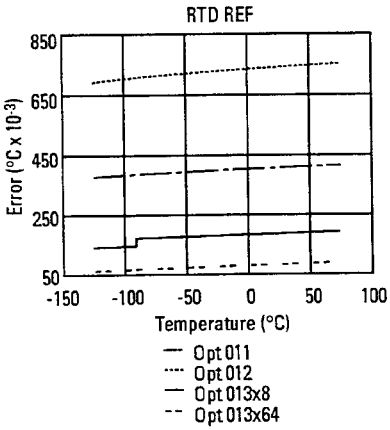



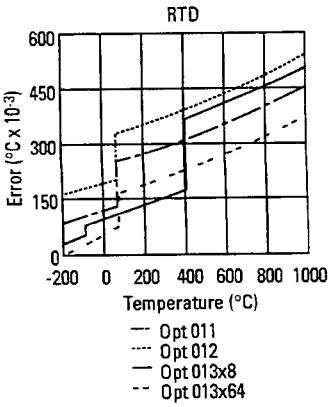



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Strain Measurements


Opt 016/017 Strain Bridge SCP
Internal excitation voltage source: 3.9 V ±0.5 mV
Externally supplied voltages are supported


Completion resistors:


Opt 016 120 Ω ±0.05%
Opt 017 350 Ω ±0.05%


Measurement accuracy:


With any input SCP when most sensitive available range is used. (All measurements for the following specs are made with the A/D filter off.)

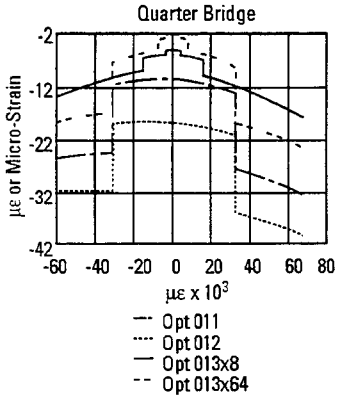





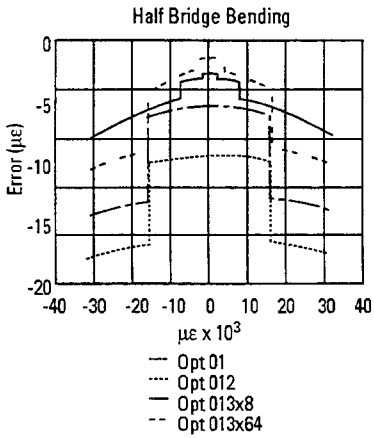




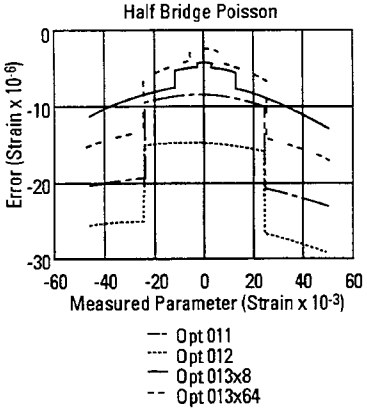





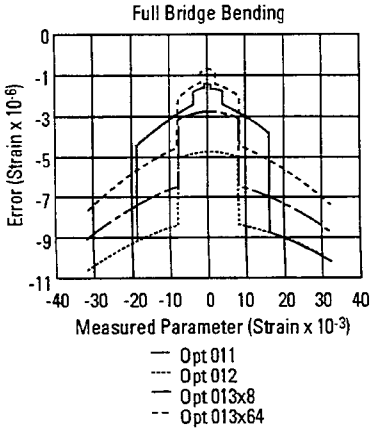





Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

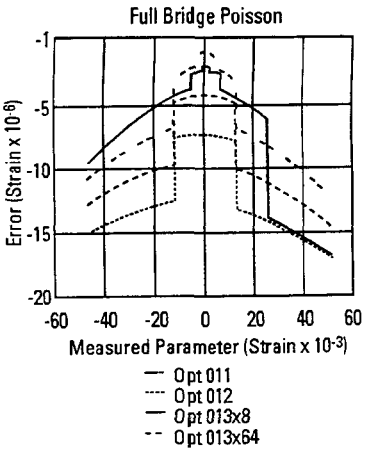



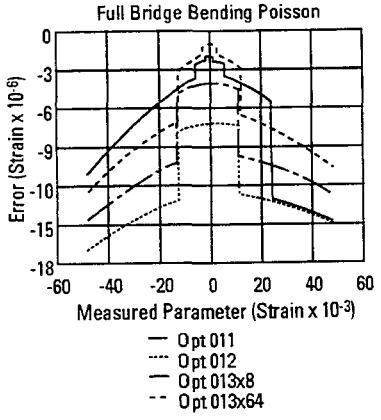



Resistance Measurements

Opt 015 Current Source SCP

MIN current source:
30.5 µA ±9 µA

MAX current source:
488.3 µA ±60 µA

Measurement accuracy with any input SCP when most sensitive available range is used:

MIN current source:

$$\pm(0.035\% \text{ of rdg} + 0.015\% \text{ of FS} + \frac{\text{rdg} \times 10^8}{\text{rdg} + 10^8})$$

MAX current source:

$$\pm(0.02\% \text{ of rdg} + 0.015\% \text{ of FS} + \frac{\text{rdg} \times 10^8}{\text{rdg} + 10^8})$$

Other Signal Conditioning

Option 014 Breadboard SCP

Provides six square inches of board space for user-supplied custom circuitry. Up to eight FET mux channels can be accessed. Includes +5 V and ±19 V supplies and overvoltage protection.

Timing Signals

Scan-to-scan timing and sample-to-sample timing can be set independently.

Scan triggers can be derived from a software command or a TTL level from other VXI modules, internal timer or external hardware.

Multiple E1413B modules can be synchronized at the same rate.using the TTL trigger output from one E1413B to trigger the others.

Multiple E1413B modules can be synchronized at different integer-related rates using the scan timer/N mode.and the TTL trigger output from one E1413B to trigger the others.

Power Requirements

See the Module Power and Cooling Information Table in the *1994 HP VXI Catalog*.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

HEWLETT PACKARD

For more information, call your local HP sales office listed in your telephone directory or an HP regional office listed below for the location of your nearest sales office.

United States of America:
Rockville, MD
(301) 670 4300

Rolling Meadows, IL
(708) 255 9800

Fullerton, CA
(714) 999 6700

Atlanta, GA
(404) 955 1500

Canada:
(416) 678 9430

Japan:
(8113) 3335 8192

Latin America:
Miami, Florida
(305) 267 4245/4220

Australia/New Zealand:
(03) 895 2895

Far East:
Hong Kong
(852) 848 7070

Korea
(2) 769 0800

Taiwan
(2) 717 9524

Singapore
(65) 291 8554

India
(11) 690 355

PRC
(1) 505 3888

In Europe, Africa, and the Middle East, please call your local HP sales office or representative:

Austria/EastCentral Europe:
(0222) 2500-0

Belgium and Luxembourg:
(02) 778 31 11

Denmark:
45 99 10 00

Finland:
(90) 88 721

France:
(1) 69 82 65 00

Germany:
(06172) 16 0

Greece:
(01) 68 96 411

Ireland:
(01) 284 4633

Israel:
(03) 5380 333

Italy:
(02) 92 122 241

Netherlands:
(020) 547 6669

Norway:
(67) 159 700

Portugal:
(11) 301 73 30

South Africa:
(011) 806 1000

Spain:
900 123 123

Sweden:
(08) 750 20 00

Switzerland:
(057) 31 21 11

Turkey:
(04) 125 83 13

United Kingdom:
(0344) 362 867

For countries not listed, contact:
Hewlett-Packard
International Sales Branch
Geneva, Switzerland
Telephone: 41 22 780 7111
Fax: 41 22 780 4770

Copyright © 1994
Hewlett-Packard Company
Printed in USA January 1994
5962-8638E

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP