ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag PMC520* at our website: ***Click HERE***

Acromag
THE LEADER IN INDUSTRIAL I/O

PMC520
Octal Serial 232 Communication

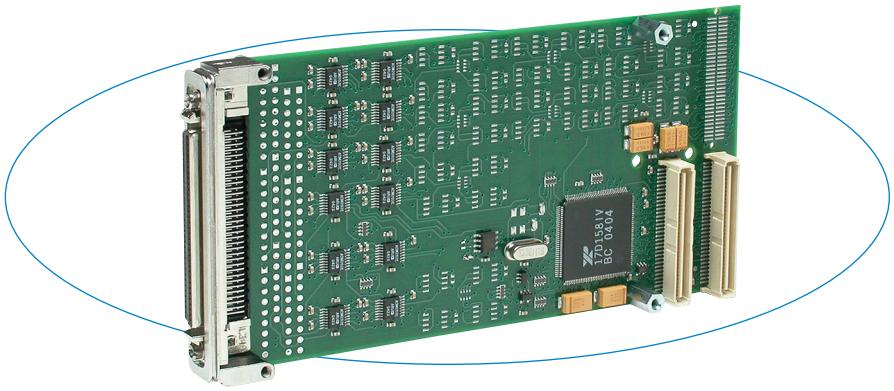

With eight serial ports per module, the PMC520 provides a high-density solution to reduce costs and use fewer card slots.

These modules provide eight asynchronous serial communication ports from a single PMC carrier slot. Software-configuration helps you quickly set baud rates, character-sizes, stop bits, and parity. Signal support for RTS/CTS handshaking is also included.

For more efficient data processing, each serial port is equipped with 64-character FIFO buffers on the transmit and receive lines.

The data ports generate individually controlled transmit, receive, line status, and data set interrupts. A global interrupt source register provides interrupt status indication for all eight channels to speed up interrupt parsing.

Features

- Eight RS232E ports
- 64-byte transmit FIFO buffers
  64-byte receive FIFO buffers
- Programmable baud rate (up to 120Kbps)
- Individual handshake lines (RTS, CTS) on each channel
- Line-break and false start-bit detection
- Industry-standard software-compatible 16C550 configuration registers

Benefits

- High-density design lowers per-port costs and saves PMC carrier card slots for other functions.
- 64-byte FIFO buffers minimize CPU interaction for improved system performance.
- Each serial channel provides handshake support to simplify interfacing with modems.

Specifications

RS232E Serial Ports

Configuration: Independent, non-isolated serial ports with a common single return connection and configured as a DTE device.

Data rate: Programmable up to 120K bits/second using internal baud rate generator.

Max. cable length: 15 meters (50 feet) typical, limited to a cable capacitive load of 2500pF.

Character size: 5 to 8 bits, software-programmable.

Parity: Odd, even, or no parity; software-programmable.

Stop bits: 1, 1-1/2, or 2 bits; software-programmable.

Data register buffers: Double buffered or 64-byte FIFO buffered, mode selectable.

Interrupts: Receiver line status (overrun, parity, framing error, or break interrupt); received data available (FIFO level reached) or character time-out; transmitter (FIFO level reached); or modem status (CTS).

Environmental

Operating temperature: 0 to 70°C (PMC520-64) or -40 to 85°C (PMC520-64E).

Storage temperature: -55 to 125°C.

Relative humidity: 5 to 95% non-condensing.

Power: +5V (±5%), consult factory for current specifications.

MTBF: 2,848,670 hrs at 25°C, MIL-HDBK-217F, notice 2.

PMC Compliance

Conforms to PCI Local Bus Specification, Revision 2.3 and CMC/PMC Specification, P1386.1.

4K Memory Space Required: One Base Address Register.

Signaling: 3.3V and 5V compliant.

Ordering Information

PMC Modules

PMC520
Eight RS232E serial ports, front I/O connector

PMC520E
Same as PMC520 plus extended temperature range.

PMC520R
Same as PMC520 except with rear I/O connector

PMC520RE
Same as PMC520R plus extended temperature range

Customized PMC Modules

† 5085-x
Modified PMC520 with user-specified crystal/baud rate.

† Specify x = crystal frequency when ordering.
Minimum quantity per order is two units.

Software (see software documentation for details)

PMCSW-API-VXW
VxWorks® software support package

PCISW-API-WIN
Windows® DLL software support

PCISW-API-LNX
Linux® support (website download only)

Accessories (see accessories documentation for details)

5025-288
Termination panel, SCSI-3 connector, 68 screw terminals

5028-432
Cable, shielded, SCSI-3 connector both ends

All trademarks are the property of their respective owners.

8400-386d Printed in USA 10/19 Copyright © 2005/2019 Acromag, Inc. Data subject to change without notice

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP