ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag PMC730* at our website: ***Click HERE***

Acromag
THE LEADER IN INDUSTRIAL I/O

PMC730
Multi-function I/O

- **Analog Input**
- **Analog Output**
- **Digital I/O**
- **Counter/Timer**

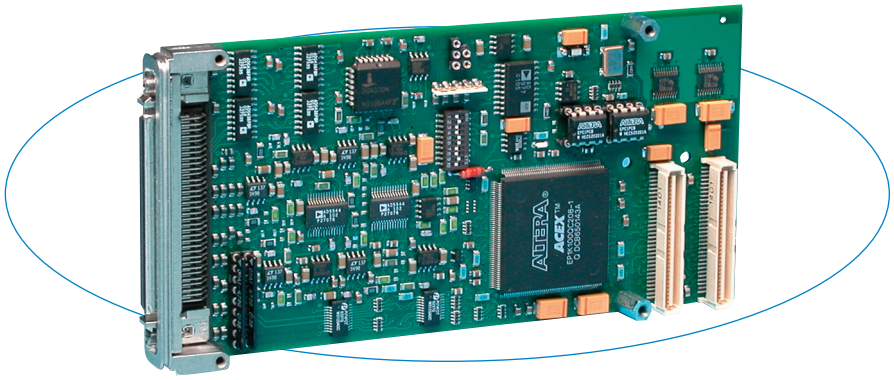

The PMC730 combines analog I/O, digital I/O, and counter/timer functions on a single high-density module to save PMC slots.

PMC730 mezzanine modules provide a variety of I/O functions on a single plug-in card. These new high-density modules perform both high-speed and high-resolution A/D and D/A conversion and also handle digital I/O and counter/timer functions.

Now you can conserve your precious PMC slots and still get all the I/O functionality you need. The PMC730 is designed for extreme versatility with many deluxe features to meet most applications. However, the PMC730 is still very budget-friendly. A conduction-cooled version is also available.

Features

Analog Inputs

- 16 differential or 32 single-ended inputs (±3.3V, ±5V, ±10V, 0-5V, and 0-10V ranges)
- 16-bit ADC with 512 sample RAM
- 10µS conversion time (100KHz)
- Interrupt upon ADC memory threshold condition (user-programmable data sample threshold)
- User-programmable interval timer

Analog Outputs


- Eight analog output channels (±10V range)
- Individual 16-bit DACs per channel
- 1024 sample FIFO for waveform generation
- 12.375µS settling time (80.8KHz throughput)
- Interrupt on user-programmable FIFO threshold

Digital I/O

- 16 TTL bidirectional input/outputs

Counter/Timer

- One 32-bit counter/timer

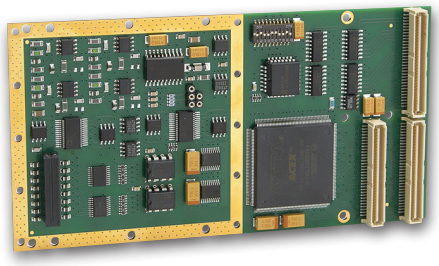

PMC730CC for conduction cooling.

Specifications

Analog Input

Input configuration: 16 differential or 32 single-ended channels multiplexed to a single A/D converter.

A/D resolution: 16 bits.

Input ranges: ±3.3V, ±5V, ±10V, 0-5V, and 0-10V.

Maximum throughput rate:
One channel updated at a time.
1 channel (maximum): 10µS
16 channels (maximum): 160µS
32 channels (maximum): 320µS

Data sample memory: 512 samples shared by all channels.

A/D trigger: Internal timer, external source, software.

On-board timer: One user-programmable timer for analog input acquisition control.

System accuracy: ±3 LSB typ. (SW calib., gain=1, 25°C).

Data format: Straight binary or binary two's compliment.

Input overvoltage protection: -40 to 55V power off.

Common mode rejection ratio (60Hz): 96dB typical.

Channel-to-channel rejection ratio (60Hz): 96dB typical.

Analog Output

Output configuration: 8 single-ended channels, each controlled by its own independent D/A converter.

D/A resolution: 16 bits.

Output range: ±10V.

Maximum throughput rate:
Outputs updated simultaneously or individually.
1 channel: 12.375µS
8 different channels: 12.375µS

DAC programming: Via independent channel registers or through shared FIFO.

Data sample memory: 1024 sample FIFO shared by all channels.

D/A trigger: Internal timer, external source, software.

On-board timer: One user-programmable timer for analog output control.

System accuracy: 0.0076% of 20V span max. error corrected (i.e. calibrated) at 25°C with output unloaded.

Data format: Straight binary.

Output at reset: 0V.

Output current: -10 to 10mA (maximum).

Short circuit protection: Indefinite at 25°C.

Digital I/O

I/O channel configuration: 16 TTL transceivers, input/ output direction selectable on an 8-channel basis.

Digital Input

Input voltage range: 0 to 5V DC.

Input signal threshold:
Low to high: 2.0V typical.
High to low: 0.8V typical.

Input response time: 250 nanoseconds.

Interrupts: 16 channels of interrupts for high-to-low, low-to-high, or any change-of-state event types.

Debounce: Individual debounce selectable on each channel. User-selectable (4µS, 64µS, 1mS, or 8mS).

Digital Output

Output voltage range: 0 to 5V DC.

Output ON current range: -15 to 64mA.

Output pullups: 4.7K ohm socketed resistors.

Counter/Timers

Counter/timer configuration: one 32-bit counter (requires use of channels 2 through 5 of digital I/O section).

Functions:
Watchdog timer, event counting, pulse measurement, period measurement, output waveform generation (pulse width modulation, continuous pulse, single pulse, continuous waveform).


Continued on the next page.

All trademarks are the property of their respective owners.

8400-326e Printed in USA 10/19 Copyright © 2005/2019 Acromag, Inc. Data subject to change without notice

PMC Modules

Block Diagram

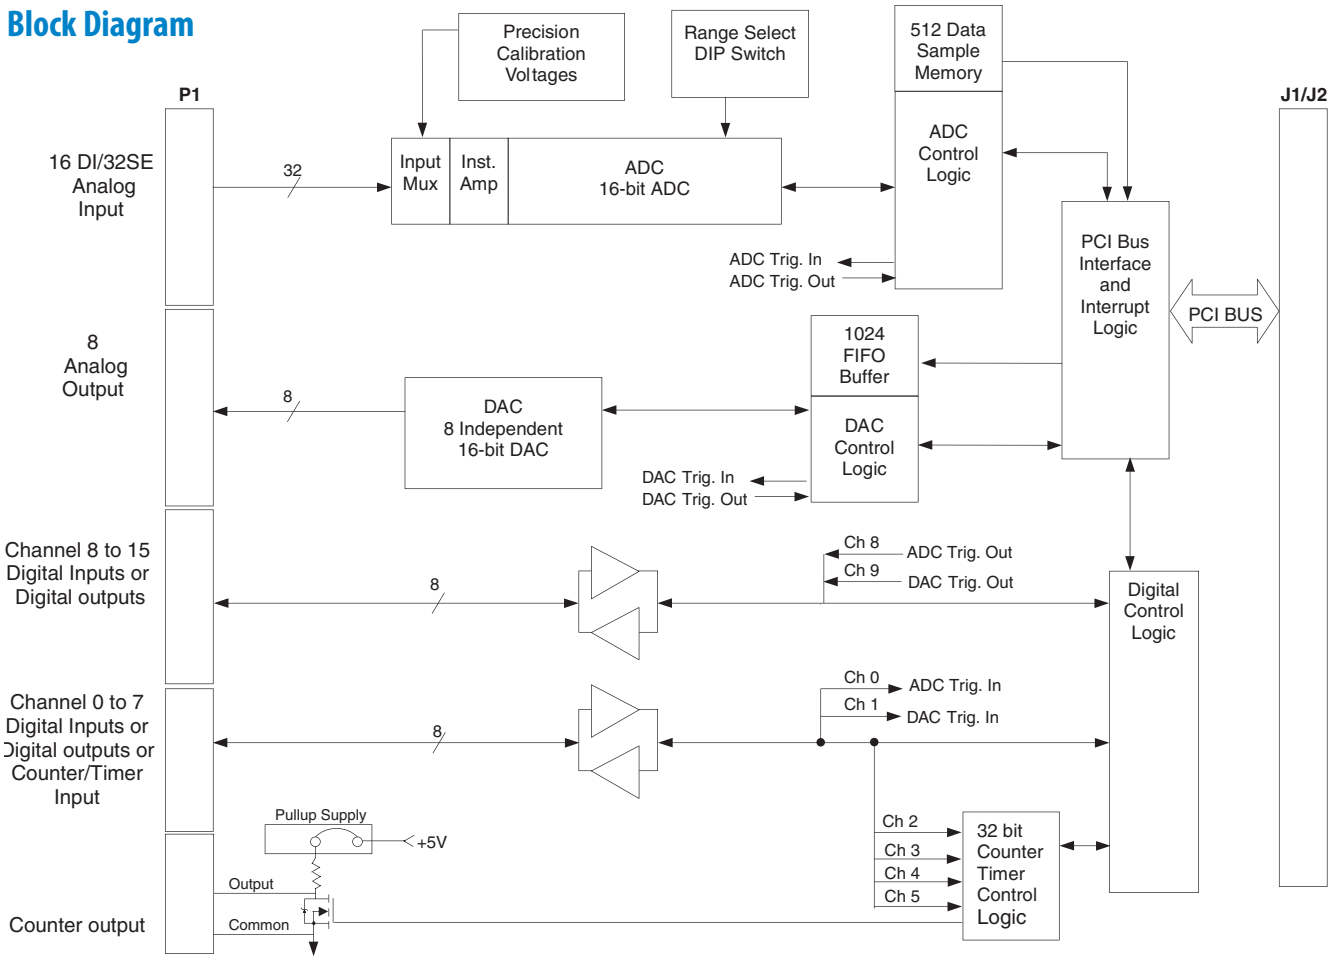

Specifications (continued)

Counter/Timers

Continued from the previous page.

Internal clock: Programmable 1, 4, 8MHz.

External clock: 3.4MHz.

Input voltage range: 0 to 5V DC.

Output voltage range: 0 to 5V with 4.7 ohm pull-up. Maximum of 0 to 35V with external supply.

PMC Compliance

Conforms to PCI Local Bus Specification, Revision 2.2 and CMC/PMC Specification, P1386.1.

4K Memory Space Required: One Base Address Register.

Signaling: 5V Compliant, 3.3V Tolerant.

Interrupts (INTA#): Interrupt A is used to request an interrupt.

Environmental

Operating temperature: 0 to 70°C (PMC730 / R) or -40 to 85°C (PMC730E / CC)

Storage temperature: -55 to 100°C.

Relative humidity: 5 to 95% non-condensing.

Power: 120mA at +5V. 95mA at +12V. 70mA at -12V.

MTBF: 929,541 hrs. at 25°C, MIL-HDBK-217F, notice 2.

Ordering Information

PMC Modules

PMC730
Multi-function I/O module with front I/O connector

PMC730E
Same as PMC730 plus extended temperature range

PMC730R
Multi-function I/O module with rear I/O connector

PMC730CC
Multi-function I/O module, plus extended temperature range and onduction-cooled with rear I/O connector

Software (see software documentation for details)

PMCSW-API-VXW
VxWorks® software support package

PCISW-API-WIN
Windows® DLL Driver software package

PCISW-API-LNX
Linux™ support (website download only)

Accessories (see accessories documentation for details)

5025-288
Termination panel, SCSI-3 connector, 68 screw terminals.

5028-432
Cable, shielded, SCSI-3 connector both ends.

All trademarks are the property of their respective owners.

8400-326e Printed in USA 10/19 Copyright © 2005/2019 Acromag, Inc. Data subject to change without notice

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP