ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *VIAVI Solutions / JDSU SB1C10081+27XF000FP* at our website: *Click HERE*

datasheet

1XN and MXN Benchtop/Rackmount Programmable Switches







SB/SC/SCG Series

The JDS Uniphase SB, SC, and SCG series of fiberoptic switches are programmable benchtop/rack-mount switches that can be controlled using the front panel keys and a numeric pad or via GPIB and serial RS232 interface. The SCG series ganged input switches allow a single switch instrument to replace multiple switch elements while maintaining low loss. In this series of switches, the inputs are ganged together in a particular sequence and are thus able to offer three different modes of operation (D, E, and F configurations).

The SB and SC series switches are available in four basic configurations, namely C, D, E, and F. The C configuration is a single common input model. The D configuration provides simultaneous connection of a bank of input fibers to output fibers. The E configuration allows any input to be connected to any output while other inputs/outputs are aligned to subsequent/adjacent channels. The switch is non-blocking in this mode and other inputs/outputs are aligned. The F configuration enables one of the inputs to be aligned with an output in a blocking sense, with a result in reduction of available output channels. A low-loss MxN blocking switch is the result.

Operation of these switches is based upon JDS Uniphase's proven expanded beam lens technology, which utilizes a precision stepper motor to align optical channels. The use of collimating lenses minimizes insertion loss and improves repeatability and performance. Internal temperature control of the switching mechanism ensures excellent operational stability.

Both single-mode and multimode versions of the SB, SC, and SCG series switches are available. The series features the high level of performance required for multiunit testing in research and development and in manufacturing environments. The compact, portable SB switch and the standard rack-mount enclosure SC and SCG switches are highly suited for applications in telecommunications, manufacturing, and test environments.

JDS Uniphase's SB and SC switches are known in the fiberoptic industry for their low insertion loss and excellent repeatability. In addition to the many standard options available, we also customize switches in this series to meet your specific application need.

Key Features & Benefits

SB and SC Switches

SB switches can accommodate up to 48 channels

SC switches can accommodate up to 180 channels

SB and SC series switches offer up to four input channels

Low insertion loss, 0.4 dB typical

Excellent repeatability, 0.003 dB typical

High return loss, > 65 dB typical

GPIB and RS232 remote control

CE and cCSAus compliant

SCG Switches

Offer up to 45 input channels and 90 output channels

Mass input reconfiguration possible

Low insertion loss, 0.5 dB typical for D configuration

High return loss, > 65 dB typical

Excellent repeatability, 0.005 dB typical

Replaces multiple switch elements with one switch instrument

CE and cCSAus compliant

Applications

Fiberoptic component testing and measurement

System testing


Research and development

Mass reconfiguration of large numbers of inputs/outputs with SCG series (D configuration)

Connection of multiple wavelength sources to any one of a number of devices with SCG series (F configuration)


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Configurations

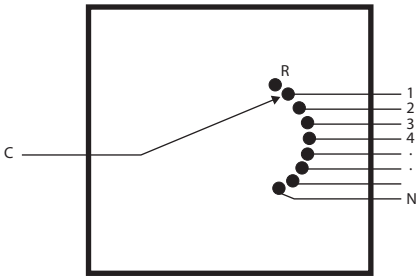


C Configuration
(SB and SC)

The 1xN configuration allows a single common input to be switched to any of the outputs.

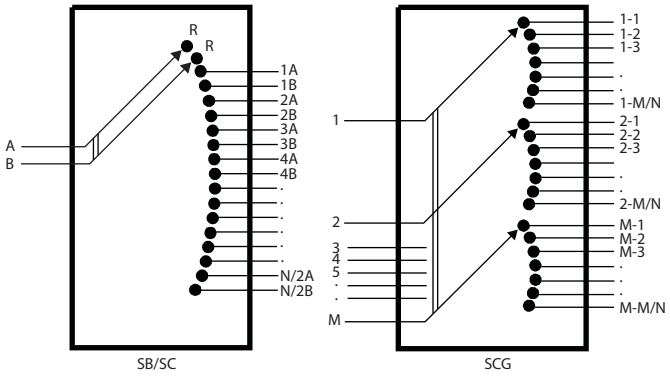


D Configuration
(SB/SC/SCG)

The MxN configuration allows for mass reconfiguration of optical paths. It provides simultaneous connections of a bank of inputs to outputs.

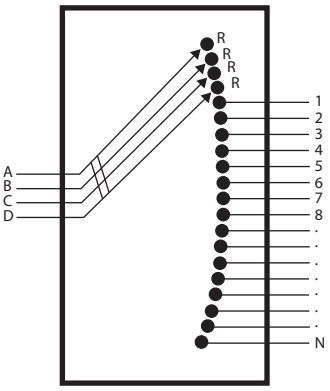

E Configuration
(SB/SC/SCG)

The MxN configuration aligns any input with any output, while other inputs are aligned to adjacent outputs.

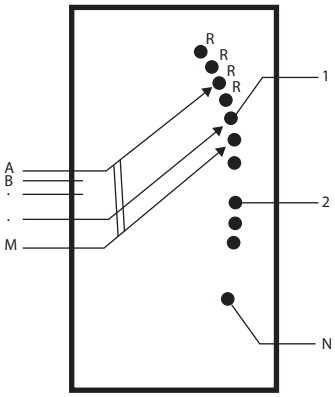

F Configuration
(SB/SC/SCG)

The MxN configuration allows any one of a bank of inputs to connect with any output with no other connections occurring.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Technical Specifications

PARAMETER[1] (SB SWITCHES)	SINGLE COMMON		MULTIPLE COMMON			
	C Configuration		D Configuration		E and F Configurations	
	Typical	**Maximum**	**Typical**	**Maximum**	**Typical**	**Maximum**
Insertion loss						
SM (3 and 4 input models)	0.4 dB	0.7 dB	0.4 dB (0.5 dB)	0.7 dB (1.0 dB)	0.5 dB (0.7 dB)	1.0 dB (1.5 dB)
MM (3 and 4 input models)	0.4 dB	0.7 dB	0.4 dB (0.5 dB)	0.7 dB (1.0 dB)	0.5 dB (0.7 dB)	1.0 dB (1.5 dB)
Return loss[2] SM standard/analog	≥ 65 dB	60/65 dB	≥ 65 dB	60/65 dB[3]	≥ 65 dB	60 dB
MM[4] standard/analog	25/35 dB	20/30 dB	25/35 dB[3]	20/30 dB[3]	> 25 dB	20 dB
Polarization dependent loss SM	0.02 dB	0.05 dB	0.02 dB	0.05 dB	0.03 dB	0.07 dB
Insertion loss stability[5]	± 0.03 dB	± 0.05 dB	± 0.03 dB	± 0.05 dB	± 0.03 dB	± 0.05 dB
Repeatability sequential switching	± 0.003 dB	± 0.005 dB	± 0.005 dB	± 0.01 dB	± 0.005 dB	± 0.01 dB
random switching	± 0.01 dB	± 0.025 dB	± 0.02 dB	± 0.04 dB	± 0.02 dB	± 0.04 dB
Crosstalk (maximum) SM	- 80 dB					
Maximum input power (optical)	300 mW					
Switching time one channel	300 ms					
each additional channel	12 ms					
Power supply	100-240 V, 50-60 Hz					
Power consumption	100 VA maximum					
Control	local and remote via GPIB and serial RS232 interfaces					
Drivers for external switch modules	four open collector drivers with maximum 100 mA sink current					
Dimensions W x H x D	21.2 x 8.9 x 35.5 cm					
with rack-mount kit (optional)[6]	48.3 x 8.9 x 35.5 cm					
Weight	3.75 kg					
Operation temperature	0 to 55 °C					
Storage temperature	- 40 to 70 °C					
Humidity	maximum 95 % RH from 0 to 55 °C non-condensing					

1. Excluding connectors. All optical measurements taken after temperature has been stabilized for one hour.
2. Return loss specification based on 1 m pigtail length.
3. Analog version available on one and two input SB model switches (C and D configurations).
4. Values shown for 62.5 µm diameter maximum fiber core.
5. Drift of any channel relative to reference channel at ± 3 °C deviation of ambient temperature over a seven-day period.
6. ED000899-A-00 standard rack-mount kit, ED000899-A-01 Japan rack-mount kit. Requires two kits to mount two units side-by-side.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Technical Specifications

PARAMETER[1] (SC AND SCG SWITCHES)	SINGLE COMMON		MULTIPLE COMMON			
	C Configuration (SC model only)		D Configuration		E and F Configurations	
	Typical	**Maximum**	**Typical**	**Maximum**	**Typical**	**Maximum**
Insertion loss						
SM (SC with 3 & 4 inputs & SCG models)	0.4 dB	0.7 dB	0.4 dB (0.5 dB)	0.7 dB (1.0 dB)	0.5 dB (0.7 dB)	1.0 dB (1.5 dB)
MM (SC with 3 & 4 inputs & SCG models)	0.4 dB	0.7 dB	0.4 dB (0.5 dB)	0.7 dB (1.0 dB)	0.5 dB (0.7 dB)	1.0 dB (1.5 dB)
Return loss[2] SM standard/analog	≥ 65 dB	60/65 dB	≥ 65 dB	60/65 dB[3]	≥ 65 dB	60 dB
MM[4] standard/analog	25/35 dB	20/30 dB	25/35 dB[3]	20/30 dB[3]	> 25 dB	20 dB
Polarization dependent loss SM	0.02 dB	0.05 dB	0.02 dB	0.05 dB	0.03 dB	0.07 dB
Insertion loss stability[5]	± 0.03 dB	± 0.05 dB	± 0.03 dB	± 0.05 dB	± 0.03 dB	± 0.05 dB
Repeatability sequential switching	± 0.003 dB	± 0.005 dB	± 0.005 dB	± 0.01 dB	± 0.005 dB	± 0.01 dB
random switching	± 0.01 dB	± 0.025 dB	± 0.02 dB	± 0.04 dB	± 0.02 dB	± 0.04 dB
Crosstalk (maximum) SM	- 80 dB					
Maximum input power (optical)	300 mW					
Switching time						
one channel (SCG model)	300 ms (420 ms)					
each additional channel (SCG model)	12 ms (20 ms)					
Power supply	100-240 V, 50-60 Hz					
Power consumption	100 VA maximum					
Control	local and remote via GPIB and serial RS232 interfaces					
Drivers for external switch modules	four open collector drivers with maximum 100 mA sink current					
Dimensions W x H x D						
single (double height[6])	48 x 13 x 37 cm (48 x 26.6 x 37 cm) excluding handles					
Weight single (double height[6])	9 kg (14 kg)					
Operation temperature	0 to 55 °C					
Storage temperature	- 40 to 70 °C					
Humidity	maximum 95 % RH from 0 to 55 °C non-condensing					

1. Excluding connectors. All optical measurements taken after temperature has been stabilized for one hour.
2. Return loss specification based on 1 m pigtail length.
3. Analog version available on one and two input SC model switches (C and D configurations).
4. Values shown for 62.5 µm diameter maximum fiber core.
5. Drift of any channel relative to reference channel at ± 3 °C deviation of ambient temperature over a seven-day period.
6. Applies to SC model only.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Technical Specifications

The following table lists the current configurations that are supported for the SC switch. The configurations available for the SB switch are shaded in gray. For information regarding other configurations, contact your JDS Uniphase representative.

SB/SC Switch Configuration

C	D			E			F			
1xN	2xN	3xN	4xN	2xN	3xN	4xN	2xN	3xN	4xN	
4	4	6	8	4	4	4	4	4	4	
6	6	12	16	6	6	6	6	6	6	
8	8	18	24	8	8	8	8	8	8	
12	12	24	32	12	12	12	12	12	10	2U BENCHTOP
16	16	36	40	16	16	16	16	14	12	
20	20	42	64	20	20	20	20	20	16	
26	26	60	80	26	26	26	26	26	20	3U CHASSIS
32	32	72	104	32	32	32	32	32	26	6U CHASSIS
38	38	84	128	38	38	38	38	38	32	
44	44	108	152	44	44	44	44	44	36	
48	52	126	180	52	52	52	52	52	40	
52	60	144		60	60	60	60			
60	68	168		68	68	68	68			
68	76	180		76	76	76	74			
76	84			84	84	84	80			
84	90			90	90	90				
90	100			100	100	100				
100	110			110	110	110				
110	120			120	120	120				
120	140									
130	160									
142	180									
154										
166										
180										

SB switch configurations

The following table lists configurations on the SCG switch. For information regarding other configurations, contact your JDS Uniphase representative.

SCG Switch Configuration

D Configuration							E Configuration	F Configuration			
6xN	10xN	16xN	20xN	26xN	34xN	45xN	Up to 45x45, or 6x84	6xN	8xN	11xN	13xN
6	10	16	20	26	34	45	Contact JDSU for	6	6	6	6
12	20	32	40	52	68	90	testing requirements	8	8	7	
24	30	48	60	78				10	10		
36	50	64	80					12			
48	70	80						14			
60	90										
72											
90											

D: Up to 45x90 such that 'number of outputs' [N] is divisible by 'number of inputs' [M]

E: Up to 45 inputs [M] and up to 84 outputs [N], such that M + N is not more than 90

F: Up to 13 inputs [M] and up to 14 outputs [N], such that M x (N+1) is not more than 93

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ordering Information

Sample Order: SB2E10141+27XF000SP

SB ☐ ☐ ☐ ☐ ☐ ☐ ☐ +2 ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

code	input port type[1]
1	Bulkheads on front
3	Pigtails on front
4	Pigtails on back

code	output port type[1]
1	Bulkheads on front
3	Pigtails on front
4	Pigtails on back

code	return loss
X	Standard
A	Analog

code	connector type
FP	FC/HPC (bulkhead maximum 20)
FA	FC/APC (bulkhead maximum 20)
SC	SC/HPC (bulkhead maximum 24)
SU	SC/APC (bulkhead maximum 24)
SP	ST/HPC (bulkhead maximum 20)
NC	No connector

code	number of input channels
1C	1 input channel, C config.
2D	2 input channels, D config.
2E	2 input channels, E config.
2F	2 input channels, F config.
3D	3 input channels, D config.
3E	3 input channels, E config.
3F	3 input channels, F config.
4D	4 input channels, D config.
4E	4 input channels, E config.
4F	4 input channels, F config.

code	number of output channels
001	1 output channel
.	.
020	20 output channels
.	.
024	24 output channels
.	.
048	48 output channels

code	fiber type (µm)
7	9/125
1	50/125
2	62.5/125
4	100/140

code	cable length (3mm diameter)
001	1 m
003	3 m
005	5 m
009	9 m
000	Not applicable (bulkheads only)

code	wavelength range (nm)
F	1270-1670
Q	850-1350 (MM only)
B	750-940 (MM only)

1. Bulkheads and pigtails can not be mixed in the same panel unless custom ordered.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ordering Information

Sample Order: SC2D30043+22XB009FP

SC ☐☐☐☐☐☐☐+2☐☐☐☐☐☐☐☐

code	input port type[1]
1	Bulkheads on front
2	Bulkheads on back
3	Pigtails on front
4	Pigtails on back

code	output port type[1]
1	Bulkheads on front
2	Bulkheads on back
3	Pigtails on front
4	Pigtails on back

code	return loss
X	Standard
A	Analog

code	cable length (3 mm diameter)
001	1 m
003	3 m
005	5 m
009	9 m
000	Not applicable (bulkheads only)

code	number of input channels
1C	1 input channel, C config.
2D	2 input channels, D config.
2E	2 input channels, E config.
2F	2 input channels, F config.
3D	3 input channels, D config.
3E	3 input channels, E config.
3F	3 input channels, F config.
4D	4 input channels, D config.
4E	4 input channels, E config.
4F	4 input channels, F config.

code	number of output channels[2]
001	1 output channel
.	.
084	84 output channels
.	.
180	180 output channels

code	wavelength range (nm)
F	1270-1670
Q	850-1350 (MM only)
B	750-940 (MM only)

code	fiber type (µm)
7	9/125
1	50/125
2	62.5/125
4	100/140

code	connector type (3u/6u)
FP	FC/HPC (bulkheads maximum 60/120)
FA	FC/APC (bulkheads maximum 60/120)
SC	SC/HPC (bulkheads maximum 60/120)
SU	SC/APC (bulkheads maximum 60/120)
SP	ST/HPC (bulkheads maximum 60/120)
NC	No connector

1. Bulkheads and pigtails can not be mixed in the same panel unless custom ordered.
2. Single height: 84 output channel maximum. Double height: 180 output channel maximum.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ordering Information

Sample Order: SCG06D20241+27XF000FP

SCG ☐☐☐☐☐☐☐☐ +2 ☐☐☐☐☐☐☐☐

code	configuration
D	D configuration
E	E configuration
F	F configuration

code	number of input channels
05	5 input channels
.	.
08	8 input channels
.	.
16	16 input channels
.	.
45	45 input channels

code	input port type[1]
1	Bulkheads on front[2]
2	Bulkheads on back[2]
3	Pigtails on front
4	Pigtails on back

code	output port type[1]
1	Bulkheads on front[2]
2	Bulkheads on back[2]
3	Pigtails on front
4	Pigtails on back

code	number of output channels
005	5 output channels
.	.
048	48 output channels
.	.
072	72 output channels
.	.
090	90 output channels

code	fiber type (µm)
7	9/125
1	50/125
2	62.5/125
4	100/140

code	return loss
X	Standard

code	wavelength range (nm)
F	1270-1670
Q	850-1350 (MM only)
B	750-940 (MM only)

code	cable length (3mm diameter)
001	1 m
003	3 m
005	5 m
009	9 m
000	Not applicable (bulkheads only)

code	connector type (bulkhead maximum)
FP	FC/HPC (maximum 60)
FA	FC/APC (maximum 60)
SC	SC/HPC (maximum 60)
SU	SC/APC (maximum 60)
SP	ST/HPC (maximum 60)
NC	No connector

1. The inputs and outputs must exit on opposite sides. (For example, if inputs exit from the front, then the outputs must exit from the rear.)
2. For exact layout of bulkheads and labeling, contact JDS Uniphase.

UL is a registered trademark of Underwriters Laboratories Inc.
LabVIEW is a registered trademark of National Instruments Corporation.
ST is a registered trademark of Lucent Technologies.

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDS Uniphase reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDS Uniphase makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDS Uniphase for more information. JDS Uniphase, the JDS Uniphase logo and the JDS Uniphase Instrumentation logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. 2002 © JDS Uniphase Corporation. All rights reserved. Printed in Canada.
10109644 Rev. 000 03/02 Preliminary

Indicate your requirements by selecting one option from each configuration table. Print the corresponding codes in the available boxes to form your part number.

CORPORATE HEAD OFFICES

8:00 am - 5:00 pm ET
3000 Merivale Rd
Ottawa, Ontario
Canada K2G 6N7

TEL: (613) 727.1304
FAX: (613) 727.8284

GLOBAL SALES AND CUSTOMER SERVICE

North America:
8:00 am - 8:00 pm ET
TEL: 800-871-8537 (Toll Free in North America)

Outside North America:
8:00 am - 8:00 pm ET
TEL: 800-8735-5378 (Toll Free International)
FAX: 800-7777-5378

INSTRUMENTATION GROUP
E-MAIL: instruments@jdsu.com
WEB: www.jdsu.com/instruments
CORPORATE WEB: www.jdsu.com

JDS Uniphase
Instrumentation

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP