ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag / Xembedded / Xycom PMC-DX502* at our website: *Click HERE*

Acromag
THE LEADER IN INDUSTRIAL I/O

PMC-DX502/2002 Reconfigurable FPGA with Differential I/O

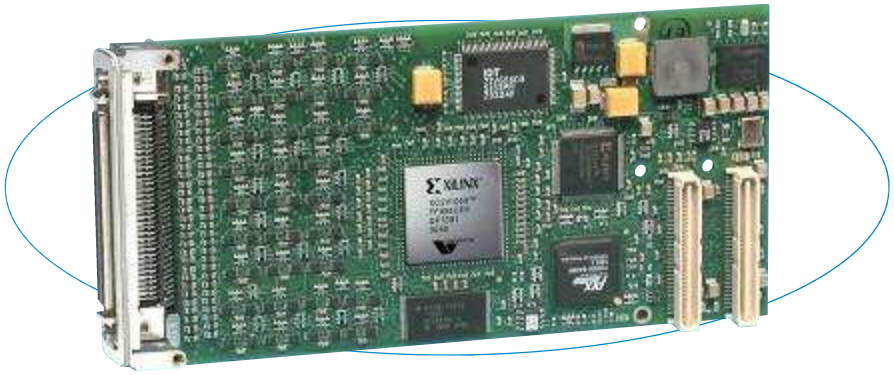

Download your own logic programs and algorithms into the on-board user-configured FPGA to quickly create a custom digital I/O module.

- PMC-DX502: 32 differential I/O, 500K gates
- PMC-DX2002: 32 differential I/O, 2M gates

(NOTE: Rear I/O models have 31 channels)

PMC-DX502 and PMC-DX2002 modules provide users with the capability to implement complex, customized digital I/O board solutions. Application-specific logic routines and algorithms can be downloaded into the on-board reconfigurable FPGA to control operation of the I/O channels.

These modules are ideal for advanced differential RS422/485 I/O functions. Typical uses include hardware simulation, in-circuit diagnostics, and communication processing. Modules are able to generate recipe-based responses to input stimulus and to translate communication protocols.

Powerful and versatile, these PMC modules are designed around a reconfigurable FPGA, the Xilinx® Virtex®-II. The PMC-DX502 has the 500K-gate package, while the PMC-DX2002 uses the 2M-gate version. Both DSP-capable FPGAs feature versatile logic resources, large on-chip memories, and a high-speed interface.

The PCI bus interface is handled by a PLX® PCI 9056 device which provides 32-bit 66MHz bus mastering with dual-channel DMA support.

Features

- 32 bi-directional RS422/485 differential I/O lines
- Front or rear I/O connection
- Customizable FPGA with 500,000 or 2,000,000 gates (Xilinx Virtex-II XC2V500 or XC2V2000)
- FPGA code loads from PCI bus or flash memory
- 256K x 36-bit SRAM memory
- Supports dual DMA channel data transfer to CPU
- Supports both 5V and 3.3V signalling
- Extended temperature option (-40 to 85°C)

Specifications

FPGA

FPGA: Xilinx Virtex-II FPGA
PMC-DX502: XC2V500 FPGA with 500K system gates
PMC-DX2002: XC2V2000 FPGA with 2M system gates

FPGA configuration: Downloadable via PCI bus or from flash memory.

Input/output signals: 32 differential lines.

Example FPGA program: VHDL provided implements interface to PCI bus IC, interface to SRAM, PLL control, and digital I/O control. Program requires user proficiency with Xilinx software tools. See Engineering Design Kit.

Digital I/O

I/O channel configuration: 32 bi-directional differential signals (rear I/O models have 31 channels). Direction is controlled independently.

Differential driver output voltage with 50 ohm load: 2V minimum, 5V maximum.

Common mode output voltage: 3V maximum:

Minimum input resistance: 12K ohms.

Termination resistors: 120 ohm termination resistor networks are installed in sockets.

Engineering Design Kit

Provides user with basic information required to develop a custom FPGA program. Kit must be ordered with the first purchase of a PMC-DX module. *(see Design Kit for details)*

PMC Compliance

Conforms to PCI Local Bus Specification, Revision 2.2 and CMC/PMC Specification, P1386.1.

Electrical/Mechanical Interface: Single-Width Module.

32-bit PCI Master: Implemented by PLX PCI 9056 device.

PCI bus clock frequency: 66MHz.

Signaling: 5V and 3.3V compliant.

Interrupts (INTA#): Interrupt A is used to request an interrupt.

Environmental

Operating temperature: 0 to 70°C or -40 to 85°C (E versions)

Storage temperature: -55 to 105°C.

Relative humidity: 5 to 95% non-condensing.

Power: Consult factory. Operates from 3.3V supply.

MTBF: 1,225,502 hrs. at 25°C, MIL-HDBK-217F, Notice 2.

Ordering Information

PMC Modules

PMC-DX502: Differential I/O with 500K-gate FPGA

PMC-DX502R: Same as PMC-DX502 except with rear I/O connector and 31 channels

PMC-DX502E: PMC-DX502 with extended temp. range

PMC-DX502RE: Same as PMC-DX502E except with rear I/O connector and 31 channels

PMC-DX2002: Differential I/O with 2M-gate FPGA

PMC-DX2002R: Same as PMC-DX2002 except with rear I/O connector and 31 channels

PMC-DX2002E: PMC-DX2002 with extended temp. range

PMC-DX2002RE: Same as PMC-DX2002E except with rear I/O connector and 31 channels

PMC-DX-EDK: Engineering Design Kit (one kit required)

Software *(see software documentation for details)*

PMCSW-API-VXW: VxWorks® software support package

PCISW-API-QNX: QNX® software support package

PCISW-API-WIN: Windows® DLL software support

PCISW-LINUX: Linux™ support (website download only)

Accessories *(see accessories documentation for details)*

5025-288: Termination panel, SCSI-3 connector, 68 screw terminals

5028-432: Cable, shielded, SCSI-3 connector both ends

All trademarks are the property of their respective owners.

Acromag, Inc. • PO Box 437, Wixom, MI 48393 • Phone: 248-295-0310 • Fax: 248-624-9234 • solutions@acromag.com • www.acromag.com

8400-367 Printed in USA 6/05 Copyright © 2005 Acromag, Inc. Data subject to change without notice

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP