

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag / Xembedded / Xycom AcPC330* at our website: *Click HERE*

Acromag
THE LEADER IN INDUSTRIAL I/O

AcPC330 16-bit A/D Analog Input

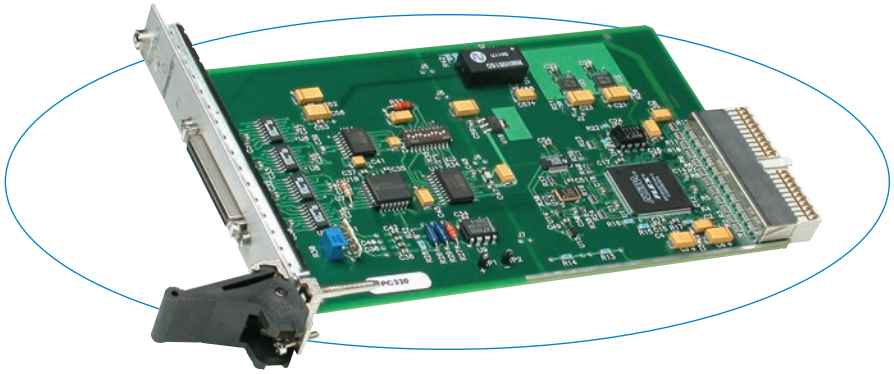

Advanced memory management techniques allow the AcPC330 to operate with minimal interruption of the A/D converter.

AcPC330 boards provide fast, high resolution A/D conversion.

The AcPC330 has many features to improve your overall system throughput rate. You can scan all channels or define a subset for more frequent sampling. Burst mode scans selected channels at the maximum conversion rate. Uniform mode performs conversions at user-defined intervals. Both modes can scan continuously, or execute a single cycle upon receiving a trigger.

"Mail box" memory allows the CPU to read the latest data in 32 storage buffer registers without interrupting the A/D converter.

Features

- 16-bit A/D converter (ADC)
- 8µS conversion time (125KHz)
- 16 differential or 32 single-ended inputs (±5V, ±10V, 0-5V, and 0-10V input ranges)
- Individual channel mailbox with one or two storage buffer registers per channel
- Programmable scan control
- Four scanning modes
- User-programmable interval timer
- External trigger input and output
- Programmable gain for individual channels
- Post-conversion interrupts

Benefits

- "Mailbox" memory eliminates scanning interruptions for optimum throughput.
- Data register indicates new and missed (overwritten) data values in the mail box.
- Programmable interrupts simplify data acquisition by providing greater control.

Specifications

Analog Input

Input configuration: 16 differential or 32 single-ended channels.

A/D resolution: 16 bits.

Input ranges: ±5V, ±10V, 0-5V, and 0-10V.

Programmable gains: 1x, 2x, 4x, 8x.

Maximum throughput rate:
Only one channel can be updated at a time.
One channel: 125KHz (8µS/conversion)
[66KHz (15µS/conversion) recommended]
16 channels (differential): 4.2KHz (240µS/16 ch)
32 channels (single-ended): 2.1KHz (480µS/32 ch).

Data sample memory: Individual channel mailbox with one or two storage buffer registers per channel

A/D triggers: External and software.

Internal timer: One user programmable timer for analog input acquisition control.

System accuracy: ±3 LSB (0.005%) typical (SW calib., gain=1, 25°C).

Data format: Straight binary or two's compliment.

Input overvoltage protection: Vss -20V to Vdd 40V with power on, -35V to 55V power off.

Common mode rejection ratio (60Hz): 96dB typical.

Channel-to-channel rejection ratio (60Hz): 96dB typical.

Environmental

Operating temperature: 0 to 70°C (E version -40 to 85°C).

Storage temperature: -55 to 100°C.

Relative humidity: 5 to 95% non-condensing.

MTBF: Consult factory.

Power: 290mA at +5V (350mA maximum).

CompactPCI bus Compliance

Meets PCI spec. V2.2 and PICMG 2.0, R3.0.

Data transfer bus: Slave with 32-bit, 16-bit, and 8-bit data transfer operation..

Interrupts (INTA#): Interrupt A is used to request an interrupt.

Plug-and-Play: The system maps the base address into the PCI bus 32-bit memory space.

Ordering Information

I/O Boards

AcPC330
Analog input board

AcPC330E
Same as AcPC330 plus extended temperature range

Software

PMCSW-API-VXW
VxWorks® software support package

PCISW-API-WIN32
32-bit Windows® DLL Driver software package

PCISW-API-WIN64
64-bit Windows® DLL Driver software package

PCISW-API-LNX
Linux™ support (website download only)

Accessories

5028-378
Termination panel, SCSI-2 connector, 50 screw terminals

5028-438
Cable, shielded, SCSI-2 connector at both ends

Visit web page for more information

All trademarks are the property of their respective owners.

Acromag, Inc. • PO Box 437, Wixom, MI 48393 • Phone: 248-295-0310 • Fax: 248-624-9234 • solutions@acromag.com • www.acromag.com

8400-330f Printed in USA 09/19 Copyright © 2010/2019 Acromag, Inc. Data subject to change without notice

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP