

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keithley 7058* at our website: ***Click HERE***

SWITCHING & CONTROL

Use with 7001 and 7002 Switch Mainframes

7057A

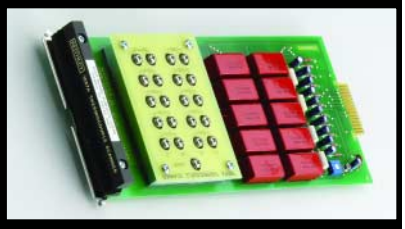

- Cold junction compensated
- 2-pole Form A
- <1µV of switch contact potential

Ordering Information

7057A Thermocouple Scanner Card

Thermocouple Scanner Card

9-Channel

These cards permit monitoring of up to nine thermocouples or other transducers. The nine signal channels use a guarded 2-pole configuration. An isothermal block provides electrical isolation up to 42V while assuring excellent thermal conductivity between cold junction terminations. A sensing device mounted in the isothermal block monitors the cold junction and outputs a calibrated reference voltage that is linearly related to the temperature. The Model 7057A provides a higher change in reference output for improved cold junction sensitivity. Formulae for converting the voltage outputs of all of the most popular thermocouple types are included in the manual. The contact potential of <1μV per channel translates to <0.025°C error for precision measurements on type K thermocouples.

CHANNELS PER CARD: 9 plus temperature reference.

CONTACT CONFIGURATION: 2-pole Form A, with common guard.

CONNECTOR TYPE: Screw terminals in isothermal block, #18AWG maximum wire size.

RELAY DRIVE CURRENT: 12mA per relay typical.

TEMPERATURE REFERENCE: Thermistor in a linearized bridge.

TEMPERATURE OFFSET: ±0.05°C maximum from HI to LO of any channel or between any two adjacent channels in one column on the isothermal block. ±0.1°C maximum between any two terminals on the isothermal block. Maximum additional dynamic offset due to 10°C step change in environment: ±0.1°C after one hour settling.

REFERENCE OUTPUT: −1mV/°C (0mV at +30°C).

REFERENCE ACCURACY (1 Year): ±0.25°C (10°C to 35°C); ±0.5°C (0°C to 10°C and 35°C to 50°C).

WARM-UP: 1 hour to rated accuracy in mainframe.

MAX. SIGNAL LEVEL: 42V, 100mA, 2VA (resistive load only).

CONTACT POTENTIAL: <1μV.

CONTACT LIFE: >10^8 closures cold switching; >10^6 closures at maximum signal levels.

CONTACT RESISTANCE: <2Ω to rated life.

CHANNEL ISOLATION: >10^8Ω, <10pF.

INPUT ISOLATION: >10^7Ω, <150pF.

COMMON MODE VOLTAGE: 200V peak.

SPECIFIED ENVIRONMENT: 10° to 35°C, up to 70% RH.

ACCESSORIES AVAILABLE

7401	Type K Thermocouple Wire Kit, 100ft.

7058



- Sub-pA offset current
- 10-channel scanner
- Maintains current path for unselected channel
- Triax connectors

Ordering Information


7058 Low Current Scanner Card

Accessories Supplied

7024-3 Low Noise Triax Cable, 0.9m (3 ft.)

Low Current Scanner Card

For optimum low-level current switching up to 10 channels, the Model 7058 is designed to introduce minimal offset current error (under 1pA), while guarding ensures that high isolation (10^{15}Ω) is maintained between input HI to input HI. Removable jumpers allow channels to be configured as voltage switches. Triaxial input connectors provide better shielding and permit direct connection to Keithley electrometers.

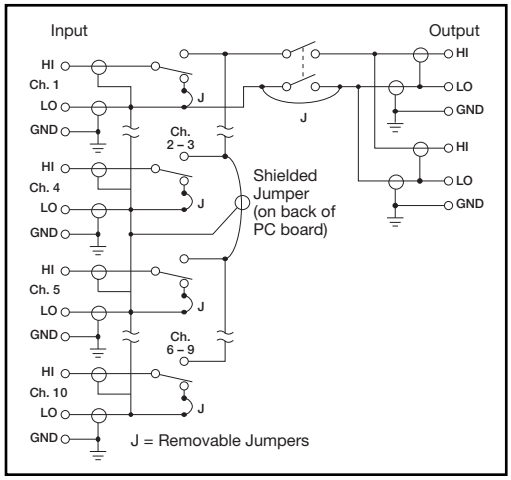

CHANNELS PER CARD: 10.

CONTACT CONFIGURATION: Single pole, break-before-make for signal HI input. Signal LO is common for all 10 channels. When a channel is off, signal HI is connected to signal LO through an internal removable jumper.

CONNECTOR TYPE: Two-lug triaxial.

RELAY DRIVE CURRENT: 24mA per relay typical.

MAXIMUM SIGNAL LEVEL: 200V, 100mA (resistive load only).

CONTACT LIFE: >10^7 closures cold switching; >10^6 closures at maximum signal levels.

CONTACT RESISTANCE: <1Ω to rated life.

CONTACT POTENTIAL: <250μV.

ACTUATION TIME: <15ms, exclusive of mainframe.

CHANNEL ISOLATION: >10^{15}Ω, <0.1pF with internal jumper removed.

INPUT ISOLATION: >10^{10}Ω, <50pF (Input HI to Input LO).

OFFSET CURRENT: <10^{-12}A (<10^{-13}A typical).

COMMON MODE VOLTAGE: <100V peak.

ACCESSORIES AVAILABLE

7024-3	Low Noise Triax Cable, 3 ft.
7024-10	Low Noise Triax Cable, 10 ft.
7025-10	Low Noise Triax Cable with one end unterminated, 10 ft.
6146	2-Slot Triax Tee Adapter
6147	2-Slot Triax to BNC Adapter
6172	2-Sllot to 3-Slot Triax Adapter

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP