

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag / Xembedded / Xycom AcPC424* at our website: *Click HERE*

Acromag
THE LEADER IN INDUSTRIAL I/O

AcPC424 Digital I/O (Differential & TTL) and Counter/Timers

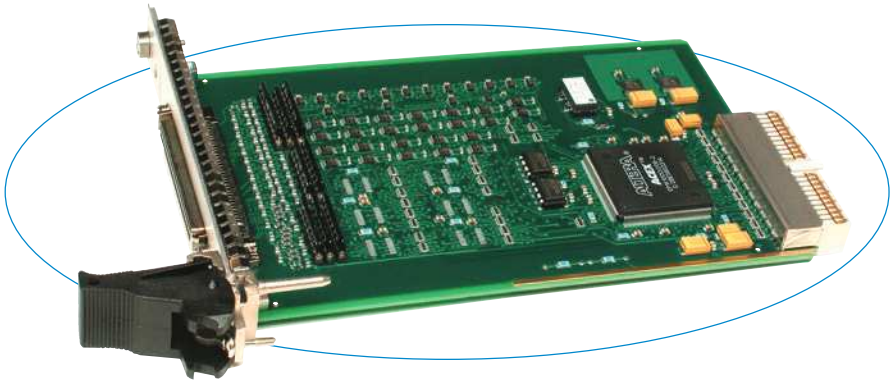

This module saves money and CompactPCI slots by combining differential I/O, TTL I/O, and counter/timer functions on one card.

The AcPC424 provides 24 differential input/outputs, 16 TTL input/output channels, and four 16-bit multi-function counter/timers.

The 16 TTL input/output channels can be programmed as inputs or as outputs on an individual channel basis. The 24 differential input/output channels are programmed as inputs or outputs on an 4-channel port basis. All input channels can be enabled for change of state, low, or high level transition interrupts.

Four 16-bit multifunction counters/timers can be configured for pulse width modulated output, watch-dog timer, event counter, frequency measurement, pulse width measurement, period measurement, or one shot pulse output. The four 16-bit counters can also be configured into two 32-bit counter/timers.

Features

Digital I/O

- 40 digital input/output channels:
  - 24 differential input/outputs
  - 16 TTL input/output channels
- Programmable change of state/level interrupts
- Input signal filtering debounce logic

Counter/Timer

- Four 16-bit or two 32-bit counter/timer channels (control lines shared with 16 TTL I/O channels)
- Six operating modes:
  - Pulse width modulation
  - Watchdog timer
  - Event counter
  - Frequency measurement
  - Pulse width or period measurement
  - One-shot and repetitive one-shot
- TTL-compatible thresholds
- Power-up and system reset are failsafe

Specifications

Differential Digital I/O

I/O channel configuration: 24 bidirectional differential signals. Direction is controlled as a 4-channel group.

Differential driver output voltage with 50 ohm load: 2V minimum, 5V maximum.

Common mode output voltage: 3V maximum:

Minimum input resistance: 12K ohms.

Termination resistors: 120 ohm termination resistor networks are installed in sockets.

TTL Digital I/O

I/O channel configuration: 16 bidirectional TTL transceivers with direction controlled independently (shared as counter/timer control signals).

Reset/power-up condition: All channels default to input.

Digital Input

Input voltage range: 0 to 5V DC.

Input signal threshold, low to high: 3.5V typical.

Input signal threshold, high to low: 1.5V typical.

Digital Output

Output voltage range: 0 to 5V DC.

Output ON current range: -32 to 32mA.

Output pullups: 4.7K ohm socketed resistors.

Input Interrupts

40 channels of interrupts are available for high-to-low, low-to-high, or any change-of-state event type.

Debounce: Selectable for each channel. User-selectable (5.6µS, 50.4µS, 408.8µS, or 3.276mS).

Counter/Timers

Counter/timer configuration: Four 16-bit counters can be configured into two 32-bit counters.

Counter input: Each counter has an IN_A, IN_B, and IN_C port. These TTL input signals control start/stop, reload, event input, external clock, trigger, and up/down operations.

Counter output: Each counter has one output signal. The TTL output is used for waveform output, watchdog active indicator, or 1.6µS pulse upon counter function completion. Programmable as active high or low.

Counter clock frequencies: Selectable for 20MHz, 10MHz, 5MHz, 2.5MHz, 1.25MHz or external up to 8MHz.

Minimum I/P event: 100nS (debounce disabled).

Minimum pulse measurement: 100nS (debounce disabled).

Minimum period measurement: 200nS (debounce disabled).

Minimum gate/trigger pulse: 100nS (debounce disabled).

CompactPCI bus Compliance

Meets PCI spec. V2.2 and PICMG 2.0, R3.0.

Data transfer bus: Slave with 32-bit, 16-bit, and 8-bit data transfer operation.

Interrupts (INTA#): Interrupts requested on Interrupt A.

Plug-and-Play: The system maps the base address into the PCI bus 32-bit memory space.

Environmental

Operating temperature: 0 to 70°C (AcPC424) or -40 to 85°C (AcPC424E)

Storage temperature: -55 to 125°C.

Relative humidity: 5 to 95% non-condensing.

MTBF: Consult factory.

Power: 216mA at +5V, typical.

Ordering Information

CompactPCI Boards

AcPC424: Digital I/O and counter/timer module

AcPC424E: Same as AcPC424 plus extended temp. range

Software

PMCSW-API-VXW: VxWorks® software support pkg.

PCISW-API-WIN32: 32-bit Windows® DLL Driver software package

PCISW-API-WIN64: 64-bit Windows® DLL Driver software package

PCISW-API-LNX: Linux™ support (website download only)

Accessories

5025-288: Termination panel, SCSI-3 connector, 68 screw terminals

5028-432: Cable, shielded, SCSI-3 connector both ends

Visit web page for more information

All trademarks are the property of their respective owners.

Acromag, Inc. • PO Box 437, Wixom, MI 48393 • Phone: 248-295-0310 • Fax: 248-624-9234 • solutions@acromag.com • www.acromag.com

8400-361e Printed in USA 4/19 Copyright © 2005/2019 Acromag, Inc. Data subject to change without notice

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP