

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Agilent
N6030A Arbitrary Waveform Generator
1.25 GS/s, 15 Bit

Technical Overview



- 1.25 Gigasamples per second (GS/s) and 15 bits of vertical resolution per channel provides exceptionally realistic wideband waveforms
- Dual output channels drive both single-ended and balanced designs without the need for baluns or hybrids
- Extended waveform memory and advanced sequencing engine offers long scenario simulations
- Multiple module synchronization provides multi-emitter simulations
- Multiple programmatic interfaces enable easy integration into existing test environments

Agilent Technologies

Generate Wide Bandwidth *AND* Wide Dynamic Range Signals, Simultaneously

The N6030A is a wideband arbitrary waveform generator (AWG) capable of creating high-resolution waveforms for radar, satellite and frequency agile communication systems. Each channel of the N6030A operates at 1.25 GS/s and features 15 bits of vertical resolution giving designers the most realistic, wideband waveforms available from a commercial AWG. This 4 slot 3U CompactPCI module offers dual differential output channels to drive both single-ended and balanced designs. The AWG also supports advanced sequencing and triggering modes to create event-based signal simulations. Multiple N6030A modules can be synchronized for the generation of phase-coherent, multi-emitter scenarios. Waveform development tasks are simplified using the AWG's numerous programmatic interfaces including complete instrument control from the MATLAB® command line. When the N6030A is combined with a wideband I/Q upconverter, modulation bandwidths of 1 GHz can be realized at microwave frequencies for authentic signal simulations for IF and RF subsystem test.[1]

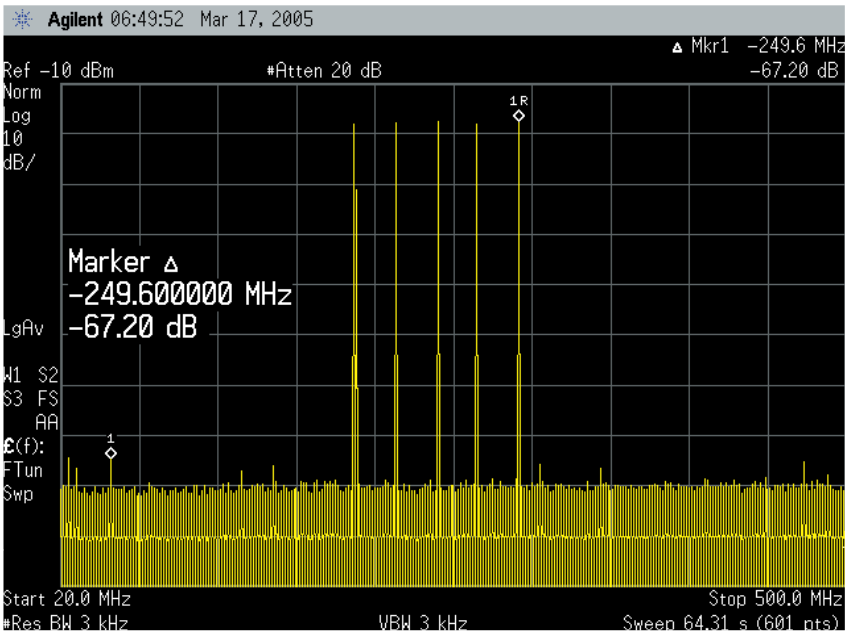


Figure 1. Generate wideband waveforms with unprecedented signal fidelity.

Unprecedented performance

The N6030A gives designers access to the most advanced Digital-to-Analog (DAC) technology available in a commercial AWG. Each module incorporates two high-speed DACs to create 500 MHz of signal bandwidth and ≤-65 dBc SFDR across each channel. Users have the choice of driving their designs differentially from the DAC outputs or single-ended through multiple signal-conditioning paths. Although some AWGs require users to make a trade-off between the number of output channels and differential outputs, the N6030A provides both – allowing you to drive your designs and eliminating the need for baluns or hybrids in the test path. In addition, each channel can output waveforms as an IF or as a baseband signal for I/Q upconversion.

[1] Agilent E8267D PSG signal generator with option 015 wideband I/Q inputs.

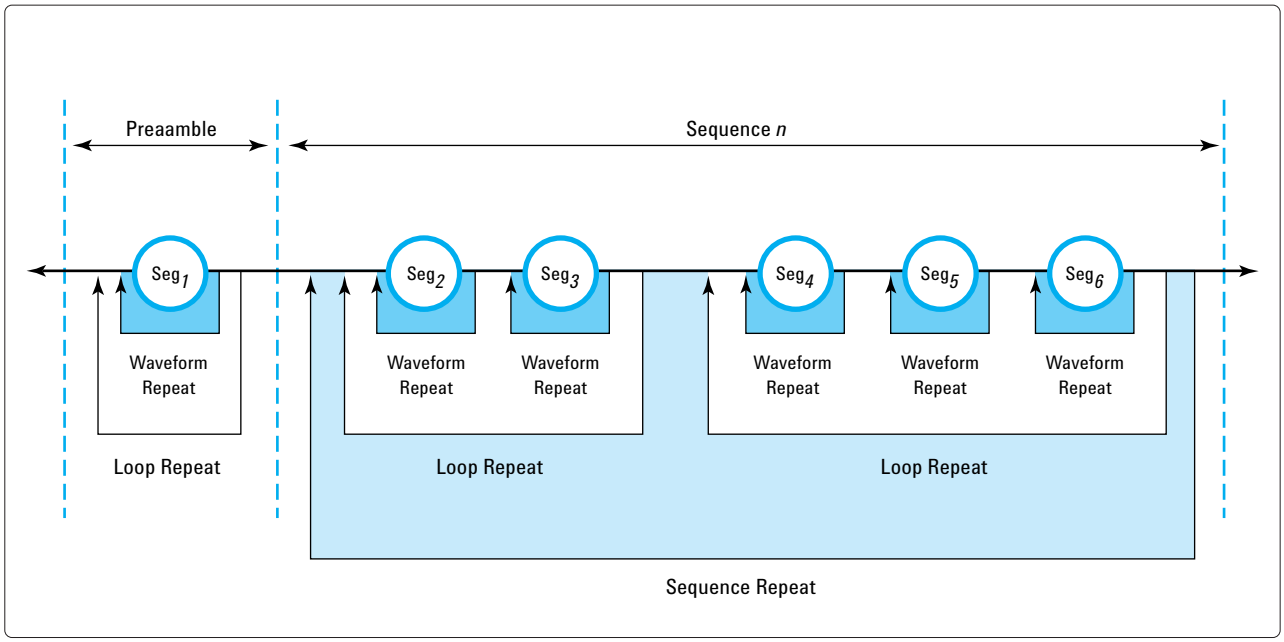


Figure 2. Create sophisticated signal scenarios by looping and nesting waveforms.

Create long scenario simulations

Multiply the effective size of on-board memory through the use of the N6030A's advanced sequencing engine. Uniquely define how waveform segments are played through looping and nesting of stored waveforms. This capability also gives users the ability to create new signals from existing waveforms by playing only subsegments of waveform memory. For users developing a large number of waveform scenarios the CompactPCI backplane substantially reduces waveform download times compared to traditional LAN and GPIB. The N6030A's complete waveform and sequencer memories can be typically reloaded in less than 1 second.

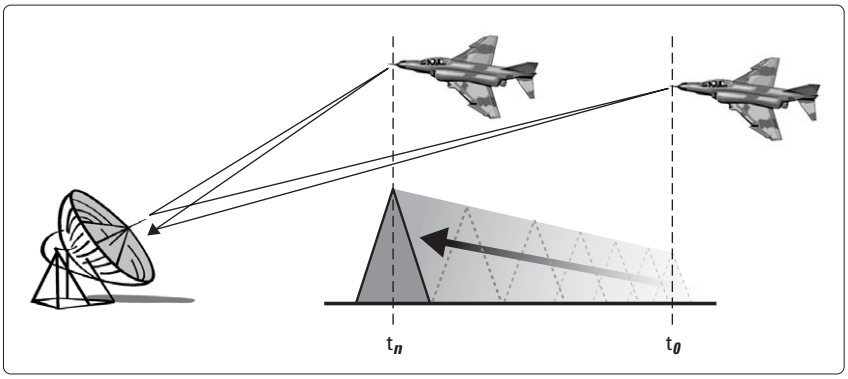


Figure 3. Closing targets can be simulated by ranging parameters on each pulse.

System scalability

Create phase-coherent, multi-emitter simulations using the N6030A's precision SYNC clock. A single N6030A can drive a total of eight AWG modules to synchronize their outputs on a sample-by-sample basis. Any number modules can be synchronized with simple driver hardware. The AWG also includes multiple front-panel trigger and markers for complete system synchronization.

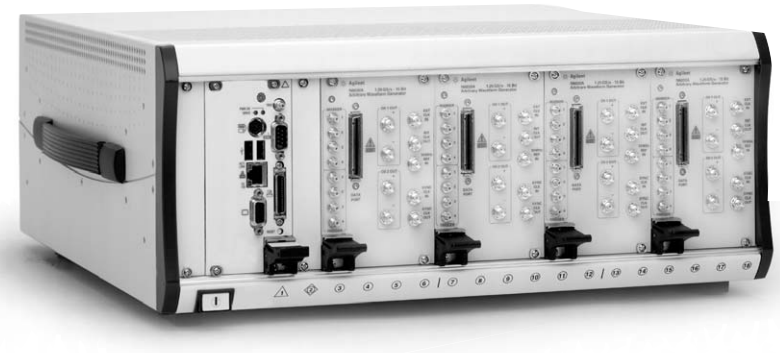


Figure 4. Four N6030A modules fit conveniently inside an 18 slot CompactPCI chassis.

Ease-of-use

The N6030A's graphical user interface guides developers through module setup and waveform file transfers. Users can quickly configure the instrument's signal conditioning paths, marker and trigger lines, sample and reference clock sources and simple sequencing functions. More sophisticated sequencing functions are available through the instrument's numerous programmatic interfaces. The N6030A supports interfaces for MATLAB®, LabView, IVI-C, VEE and Microsoft's .NET® framework.

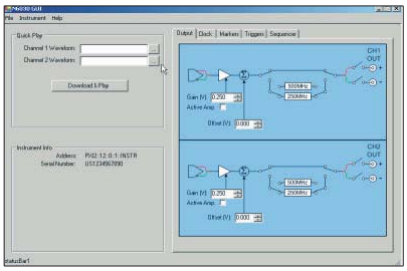


Figure 5. Directly import and play waveforms from the Quick Play menu.

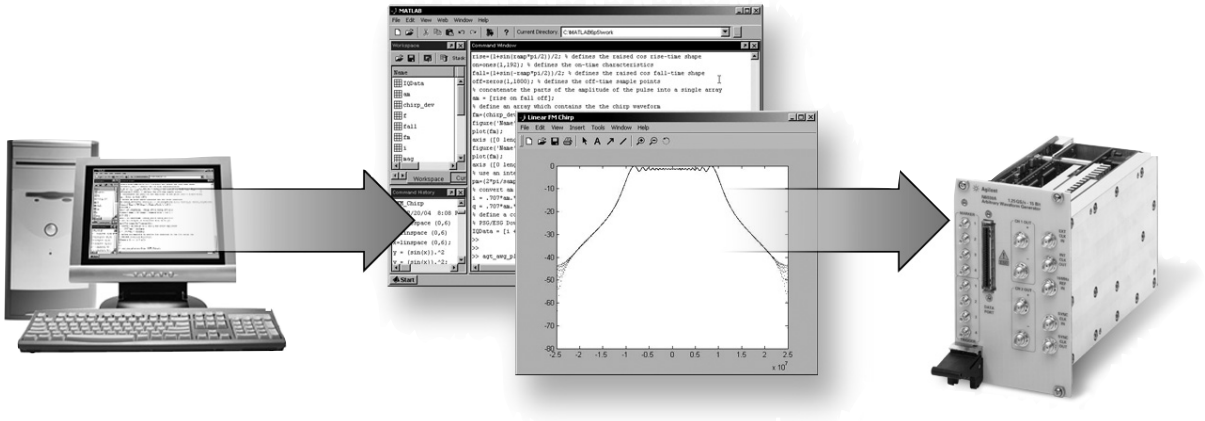


Figure 6. Play waveforms files directly from the MATLAB command line.

Key Characteristics

Channels
Two independent channels available as baseband or IF outputs

- CH1: Single-ended and differential
- CH2: Single-ended and differential

Modulation bandwidth
500 MHz per channel (1 GHz IQ bandwidth)

Resolution
15 bits (1/32,768 levels)

Output spectral purity – (CH1 and CH2)

- Harmonic distortion: ≤-65 dBc for each channel DC to 500 MHz
- Non-Harmonic spurious: ≤-75 dBc for each channel DC to 500 MHz
- Noise floor: ≤-150 dBc/Hz across the channel bandwidth

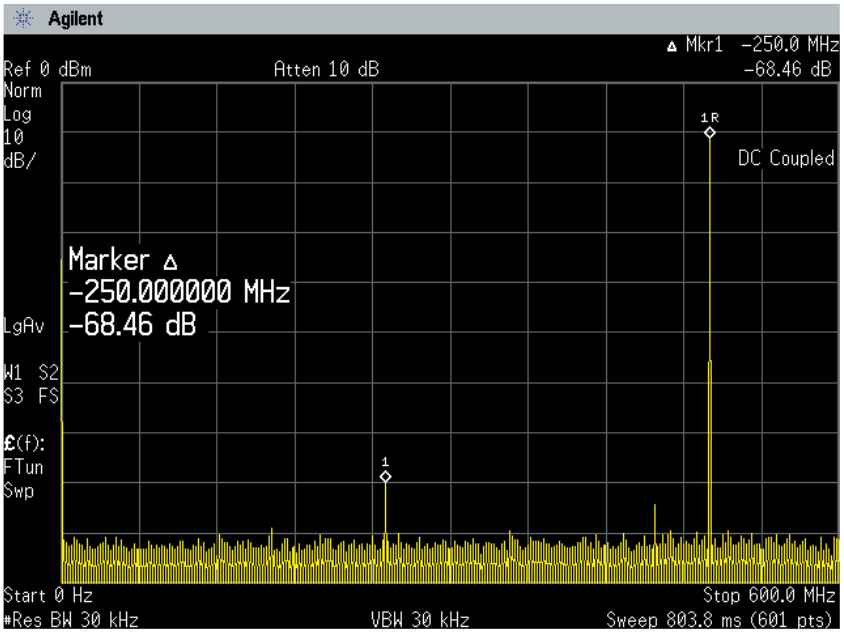


Figure 7. Excellent harmonic and spurious performance are available across the fullbandwidth of each channel.

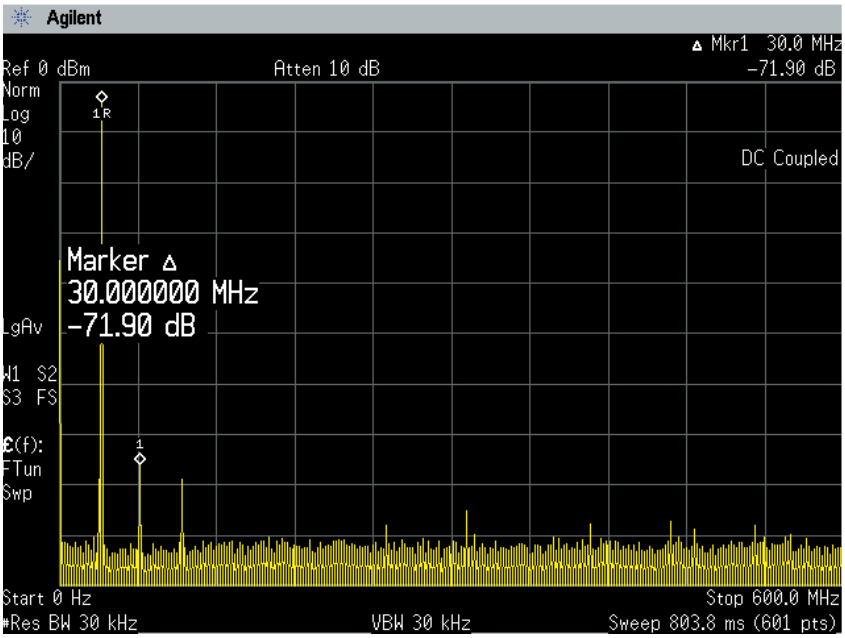


Figure 8. Spurious performance outstanding at low signal frequencies.

Key Characteristics continued

Sample clock

Internal
Fixed 1.25 GS/s

Internal clock output
+3 dBm nominal

External clock input
Tunable 100 MS/s to 1.25 GS/s

External clock input drive level
+5 to –15 dBm typical

Phase noise characteristics:

1 kHz:	-95 dBc/Hz
10 kHz:	-115 dBc/Hz
100 kHz:	-138 dBc/Hz
1 MHz:	-150 dBc/Hz

Noise Floor
-150 dBc/Hz

Accuracy
Same as 10 MHz timebase input

Frequency reference

Input drive level
+2 to +12 dBm into 50 ohms (+2 dBm nominal)

Waveform length

8 MS per channel
(16 MS with option 016)

Minimum waveform length
128 samples

Waveform granularity
16 samples

Segments

1 to 256 k unique segments can be defined consisting of waveform start and stop address, repetitions and marker enable flags.

Segment loops

A total of 1 million (2^{20}) loops can be defined for each segment. Loops can be configured to advance in one of three modes:

- **Single**
  The segment loop plays once and waits at the end of the loop for a trigger.
- **Continuous**
  Segment loop is repeated continuously until a trigger is received.
- **Auto**
  Automatically advances to the next segment after completing the specified number of loop repetitions.

Sequences

Up to 256 k total unique waveform sequences can be defined. A sequence is a contiguous series of waveform segments.

Sequence play modes

Three modes are available to control sequencer play:

- **Table**
  1 to 16 k pointers can be assigned to play sequences. Sequence play begins with the first sequence entry and continues uninterrupted until the last entry is played. The table repeats until stopped.
- **Index**
  Sequences defined in the table are played individually using entries defined by the host processor.
- **Direct**
  Play table is bypassed allowing individual segment addressing by the host processor.

Sequence jump modes

Sequence jumps determine how a sequence responds to a jump trigger. There are no discontinuities in a sequence jump other than those imposed by the waveform data. Three modes are available to control sequence jumps:

- **Jump Immediate**
  Jumps immediately to the next specified sequence address with a fixed latency.
- **End of Segment**
  The current segment (including waveform repeats) is completed before jumping to a new sequence.
- **End of Sequence**
  The current sequence is completed before jumping to a new sequence. Jump latency is the longer of either the jump immediate latency or the length of the remaining sequence.

Key Characteristics continued

External triggers

Number of inputs
8 each (4 SMB female front-panel connectors plus four software triggers over the PCI backplane from host processor)

Trigger polarity
Negative/positive

Trigger impedance
2k ohms

Maximum input level
±4.5 volts

Input sensitivity
250 mV

Trigger threshold
-4.3 volts to +4.3 volts

Trigger timing resolution
Clock/8 (6.4 ns at full rate)

Trigger latency
17*Clk/8 (109 ns at full rate)

Trigger uncertainty
< 50 ps

Minimum trigger width
12.8 ns at full clock rate

Trigger delay
Programmable from
1 to 256 clock cycles

External markers

Markers can be defined for each waveform segment.

Number of outputs
4 each SMB female

Marker polarity
Negative, positive

Output impedance
50 ohms

Marker low level
100 mV nominal into high impedance load

Marker high level
3.2 Volts nominal into high impedance load

Marker timing resolution
Clock/8 (6.4 ns at full rate)

Marker latency
Marker precedes analog output and is adjustable in 2 sample clock period steps.

Marker latency repeatability
<100 ps

Marker width
Programmable from
1 to 256 sync clock cycles

Marker delay
Programmable from
1 to 256 sync clock cycles

Module synchronization

Supports system scaling for any number of N6030A modules. A single module can support fan-out of 8 N6030A modules for precise triggering and repeatability. Driver boards may be used to scale any number of modules.

Sync clock output level
800 mV p-p (50 ohms, AC coupled)

Sync clock input sensitivity
100 mV p-p minimum into 50 ohms AC coupled

Analog output

Output connector
SMA female

Output impedance
50 Ohms

Analog output levels

The following output levels are specified into 50 ohms

	Single-Ended	Differential
Passive Mode	0.5 Vp-p	N/A
Active Mode	1 Vp-p with ±0.4 Vp-p offset	N/A
Direct DAC Mode	0.5 Vp-p (0 volt offset)	0.5 Vp-p (0 volt offset)

Uncorrected passband flatness
±1 dB DC - 200 MHz;
±2.5 dB DC - 500 MHz
(with 1.25 GHz clock)

Uncorrected passband group delay
±500 ps DC - 200 MHz;
±1 ns DC - 500 MHz
(with 1.25 GHz clock)

Reconstruction filters
500 MHz and 250 MHz realized as 7-pole Cauer Chebychev filters plus thru-line output

General Characteristics

Power

Supply	Typical Operation (Watts)
+3.3 VDC	11.2
+5 VDC	22
+12 VDC	5
-12 VDC	5
Total Power	**43.2**

Environmental

Operating temperature
0 to +50 degrees C
(meets IEC-60068-2-1
and IEC-60068-2-2)

Storage temperature
-20 to +70 degrees C
(meets IEC-60068-2-1
and IEC-60068-2-2)

Relative humidity
10 to 90% at 40 degrees,
non-condensing

Altitude
0m to 2000 m above
mean sea level

Shock and vibration

- Transportation shock
  (50 G peak trapezoidal)
  [meets IEC-60068-2-27]
- End use handling shock
  (75 G peak, 1/2 Sine (2-3 ms))
  [meets IEC-60068-2-27]
- Operating random
  (5-500 Hz, .21 g RMS)
  [meets IEC-60068-2-64]
- Survival swept sine
  (5-500 Hz, .5 g)
  [meets IEC-60068-2-6]
- Survival random
  (5-500 Hz, 2.09 g RMS)
  [meets IEC-60068-2-6]

Safety
Designed for compliance
to EN 61010-1 (1993)

EMC
Meets the conduction and
radiated interference and
immunity requirements
of EN 61326-1.

Weight
1.14 kg (2.5 lb)

Security
All user data stored in
volatile memory

Dimensions

3U, 4 slot CompactPCI module
8.1 x 13 x 21.6 cm
(3.2 x 5.1 x 8.5 inches)

Recommended calibration cycle
12 months

ISO compliance
This modular instrument
is manufactured in an
ISO-9001 registered facility
in concurrence with
Agilent Technologies, Inc.
commitment to quality.

Ordering Information



Figure 10. Agilent N6030A AWG with controller in CompactPCI chassis

N6030A	Arbitrary waveform generator with 8 MS memory per channel
Options	
N6030A-016	Waveform memory expansion to 16 MSa per channel
N6030A-500	PXI 18-slot chassis
N6030A-501	PXI embedded controller, P4
N6030A-502	PXI MXI-4 kit (includes PC and chassis PCI cards)
N6030A-503	Shielded PXI chassis filler panel kit
N6030A-504	17-inch flat panel monitor
N6030A-505	PS2 keyboard and mouse
N6030A-506	Rack mount kit for PXI chassis

Other Configurations

The N6030A AWG is a CompactPCI (cPCI) compliant product. It is plug-compatible with third-party manufacturers of both CompactPCI and PXI chassis and controllers. The following products have been tested for interoperability with the N6030A, but are not supported by Agilent.

Vendor	Model	Description
Tracewell Systems	532-6010-F00-00	cPCI Chassis – 8 Slot
Tracewell Systems	532-6000-F00-00	cPCI Chassis – 18 Slot
National Instruments	NI PXI-1042	PXI Chassis – 8 Slot
National Instruments	NI PXI-1045	PXI Chassis – 18 Slot
National Instruments	NI PXI-8184	PXI Embedded Controller
National Instruments	NI PXI-8186	PXI Embedded Controller
National Instruments	NI PXI-PCI8330	MXI-4 Kit

Web Resources
Visit our web sites for additional product information and literature.

N6030A Arbitrary waveform generator
www.agilent.com/find/awg

Signal simulation systems
www.agilent.com/find/signalsimulation

Aerospace and defense test and measurement products and services
www.agilent.com/find/ad

Test and measurement accessories
www.agilent.com/find/accessories

Agilent Technologies' Test and Measurement Support, Services, and Assistance
Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise
Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage
Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

For more assistance with your test and measurement needs or to find your local Agilent office go to: **www.agilent.com/find/assist**

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:
(tel) 800 829 4444
(fax) 800 829 4433

Canada:
(tel) 877 894 4414
(fax) 905 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) 31 20 547 2111

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (080) 769 0800
(fax) (080)769 0900

Latin America:
(tel) (305) 269 7500

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6755 0042
Email: tm_ap@agilent.com

Product specifications and descriptions in this document subject to change without notice.

Microsoft is a U.S. registered trademark of Microsoft Corporation.

MATLAB is a U.S. registered trademark of The Math Works, Inc.

© Agilent Technologies, Inc. 2005
Printed in USA, March 23, 2005
5989-1457EN



Agilent Technologies

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP