

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Acromag / Xembedded / Xycom XVME-976/202* at our website: *Click HERE*

VME Carriers

XVME-976 Dual PMC Carrier Module for the XVME-689 / XVME-690

2 YEAR WARRANTY

XEMBEDDED™

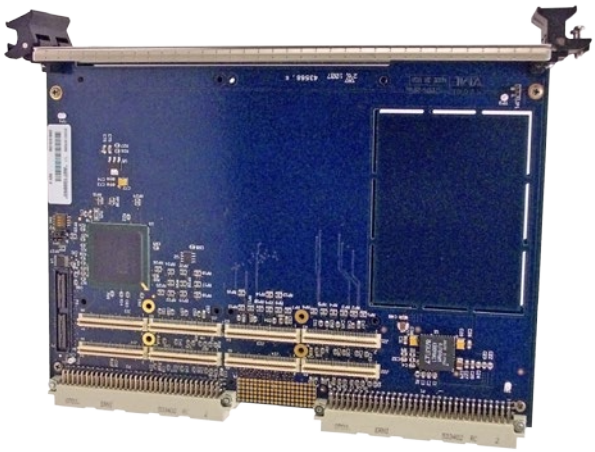

Up to five PMC modules ◆ Occupies only one VMEbus slot ◆ Fits into any standard 6U VMEbus card cage

Description

Acromag's XVME-976 carrier provides an effortless method of deploying PMC modules in the VMEbus rack using the XVME-689 or XVME-690 processor modules.

Using two stacked XVME-976 modules allows expansions of the processor to include up to five PMC modules. One PMC is located on the processor and two on each of the XVME-976 modules. The expansions allow for functions such as: FPGA, Ethernet, SCSI, serial port, digital I/O, analog I/O and special function PMC modules.

The PMC sites on the XVME-976 are IEEE P1386 compliant and will provide the power needed by most PMC modules.

Key Features & Benefits

- Fits into any standard 6U VMEbus card cage adjacent to the XVME-689 or XVME-690 processor module
- Each carrier only occupies one VMEbus slot. Get up to 5 PMC modules using only three VMEbus slots
- One PMC site with I/O out the rear P2, both sites support front I/O
- All PMC sites are capable of providing 14 watts of power to each PMC module
- Draws power and ground from the VMEbus backplane

Performance Specifications

General

PMC Expansion Sites
Two 32-bit sites, one with rear I/O out P2 of the carrier
NOTE: The XVME-976 carrier draws power and ground from the VMEbus backplane.

Environmental

Operating temperature
-25 to 70°C

Storage temperature
-40 to 60°C

Relative humidity
20 to 80% non-condensing

Shock
Operating:
30g peak acceleration, 11ms duration

Non-operating:
50g peak acceleration, 11ms duration

Vibration (5Hz-2kHz)
Operating:
0.015" (380µm) peak-to-peak displacement
2.5g max acceleration

Non-operating:
0.030" (760µm) peak-to-peak displacement
5.0g max acceleration

VME Compliance

Compatible with PMC 2.0 Specifications for IEEE P1386 modules
BGXIN* tied to BGXOUT* on this module

Form Factor

6U VMEbus 9.2"(233mm) x 6.3"(160mm)

Ordering Information

XVME-976-209-X

X = Solder
L - Lead solder
LF - Lead-free solder

Acromag® THE LEADER IN INDUSTRIAL I/O

Tel 248-295-0885 ■ xembeddedsales@acromag.com ■ www.acromag.com/xembedded ■ 30765 Wixom Rd, Wixom, MI 48393 USA

Bulletin #8400-715

All trademarks are property of their respective owners. Copyright © Acromag, Inc. 2012. Data subject to change without notice. Printed in USA 5/2012.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP