

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

NON-CATALOG

DC Pass

Power Splitter/Combiner

ZN4PD1-63W+

4 Way-0° 50Ω 250 to 6000 MHz



CASE STYLE: UU846

The Big Deal

- Wideband performance
- Low amplitude and phase unbalance
- Good insertion loss

Product Overview

This four-way, in-phase splitter and combiner covers a wide frequency range between 250-6000MHz, making this splitter now suitable for GPS, GSM, DCS and PCS frequency bands, in addition to WiFi, Bluetooth and 802.11a uses. This model also features good insertion loss and amplitude and phase unbalance, and is packaged in a 3.5”x 4.5” enclosure with built-in SMA connectors for ease of use.

Feature	Advantages
Operating over a very wide bandwidth from 250MHz to 6000MHz	The very wide bandwidth performance of the ZN4PD1-63W+ enables this splitter/combiner to be used in a wide range of applications including broadband systems such as test, measurement and defense/aerospace. However this model covers a variety of narrow band applications including GSM, GPS, DCS and PCS applications, in addition to WiFi, Bluetooth, 802.11a, U-NII and ISM applications.
Good insertion loss	With typical insertion loss of only 1.0dB above the splitter loss up to 4GHz, this splitter supports medium power signal distribution applications where loss is critical.
Good amplitude and phase performance	Typical amplitude unbalance of 0.2dB and phase unbalance of 2˚ make this splitter ideal for parallel path/multichannel systems.

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit’s applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, “Standard Terms”); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits’ website at www.minicircuits.com/MCLStore/terms.jsp

NON-CATALOG

DC Pass

Power Splitter/Combiner

ZN4PD1-63W+

4 Way-0° 50Ω 250 to 6000 MHz



CASE STYLE: UU846

Connectors	Model
SMA	ZN4PD1-63W-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	3W max.
DC Current	1.0 A (250mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Features

- wide frequency band, 250 to 6000 MHz
- low insertion loss, 1.0 dB typ.
- low amplitude unbalance 0.2 dB typ.
- low phase unbalance 2 deg. typ.


Applications

- high band PCS
- UNII
- ISM 802.11A
- WiFi
- Bluetooth

DC Pass Connections

SUM PORT	3
PORT 1	1
PORT 2	2
PORT 3	4
PORT 4	5

Outline Drawing

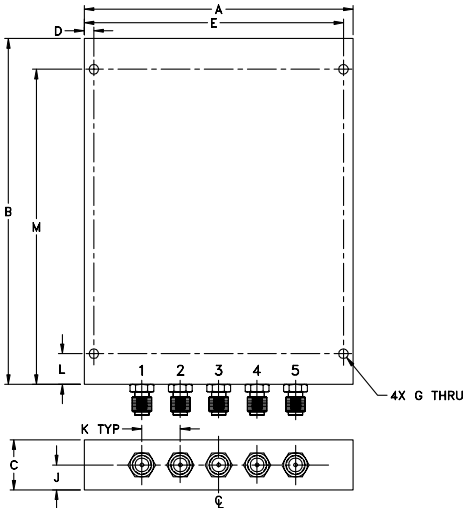

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
3.50	4.50	.65	.125	3.375	--	.125
88.90	114.30	16.51	3.18	85.73	--	3.18

H	J	K	L	M	wt
--	.33	.50	.400	4.100	grams
--	8.38	12.70	10.16	104.14	288

Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		250		6000	MHz
Insertion Loss Above 6.0 dB	250-350 350-6000	— —	0.3 1.2	0.8 3.0	dB
Isolation	250-350 350-5500 5500-6000	8 14 12	14 20 20	— — —	dB
Phase Unbalance	250-350 350-6000	— —	— —	3 6	Degree
Amplitude Unbalance	250-350 350-6000	— —	— —	0.3 0.6	dB
VSWR Input	250-350 350-6000	— —	1.2 1.3	— —	:1
VSWR Output	250-350 350-6000	— —	1.1 1.3	— —	:1

Typical Performance Data


Freq. (MHz)	Total Loss[1] (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
250.00	6.32	6.31	6.32	6.33	0.02	11.87	19.38	11.99	0.27	1.46	1.09	1.09	1.09	1.10
350.00	6.22	6.21	6.22	6.22	0.02	20.88	23.90	20.88	0.30	1.12	1.05	1.05	1.05	1.05
400.00	6.27	6.26	6.27	6.28	0.02	26.84	27.53	26.56	0.30	1.24	1.06	1.07	1.08	1.07
500.00	6.29	6.28	6.29	6.31	0.03	27.50	45.87	27.33	0.38	1.21	1.10	1.10	1.11	1.10
600.00	6.32	6.30	6.31	6.34	0.04	24.35	31.29	24.14	0.50	1.17	1.10	1.11	1.11	1.10
700.00	6.48	6.45	6.46	6.49	0.04	21.55	26.77	21.98	0.60	1.42	1.10	1.11	1.12	1.10
800.00	6.53	6.51	6.52	6.54	0.02	23.25	25.64	23.96	0.66	1.48	1.14	1.15	1.15	1.14
900.00	6.46	6.45	6.46	6.47	0.02	30.37	26.45	29.80	0.69	1.31	1.13	1.15	1.14	1.13
1000.00	6.45	6.44	6.45	6.46	0.02	25.00	29.71	25.26	0.70	1.22	1.05	1.06	1.06	1.06
2000.00	6.77	6.78	6.77	6.79	0.02	28.30	29.48	28.24	1.45	1.33	1.22	1.24	1.23	1.23
3000.00	7.13	7.20	7.09	7.15	0.10	17.84	27.02	17.39	1.70	1.36	1.12	1.11	1.08	1.12
4000.00	7.15	7.31	7.21	7.22	0.17	18.76	33.24	18.64	2.48	1.25	1.22	1.27	1.26	1.24
5000.00	7.71	7.79	7.65	7.82	0.17	25.57	29.50	26.88	3.27	1.58	1.41	1.44	1.45	1.42
5500.00	7.90	8.09	7.94	8.07	0.20	21.38	34.53	21.02	3.47	1.24	1.32	1.37	1.36	1.37
6000.00	8.02	8.27	8.15	8.27	0.25	17.38	27.14	17.61	4.04	1.26	1.21	1.22	1.20	1.24

1. Total Loss = Insertion Loss + 6dB splitter loss.


ZN4PD1-63W+
TOTAL LOSS

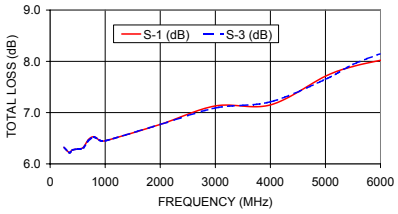


ZN4PD1-63W+
ISOLATION

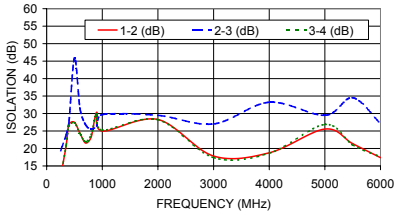

ZN4PD1-63W+
VSWR

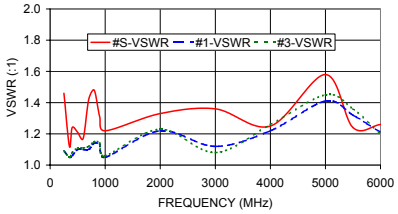

Electrical Schematic

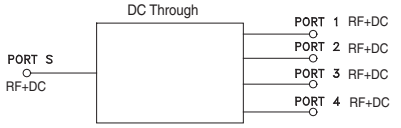

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP