

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Visit our website - *Click HERE*


CM2-BT2

Extreme Rugged™ PC/104-Plus Single Board Computer with Intel Atom® Processor System-on-Chip

Features

- Dual-core Intel Atom® Processor System-on-Chip
- 1x SODIMM slot; up to 8GB DDR3L at 1333MHz
- Supports VGA and LVDS
- 2x GbE
- 1x SATA 3Gb/s (optional 2nd SATA), 3x USB 2.0, 8x GPIO
- Extreme Rugged™ operating temperature: -40°C to +85°C
- Supports Smart Embedded Management Agent (SEMA) functions

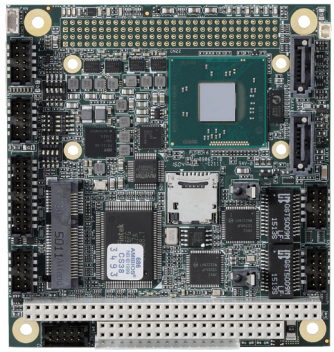

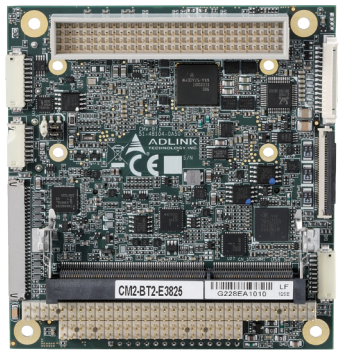

PC104 SEMA

Specifications

Core System

CPU

Dual-core Intel Atom® Processor SoC Atom® E3825 (2C), 1.33 GHz, 533/- (No Turbo), 6W

Supports: single, dual Out-of-Order Execution (OOE) processor cores, Intel® VT-x, Intel® SSE4.1 and SSE4.2, Intel® 64 architecture, IA 32-bit, PCLMULQDQ Instruction DRNG, Intel Thermal Monitor (TM1 & TM2)

Note: Availability of features may vary between processor SKUs

Memory

Up to 8GB DDR3L-1066/1333 MHz SODIMM

Embedded BIOS

AMI EFI with CMOS backup in 8MB SPI BIOS

Cache

Primary 32 KiB, 8-way L1 instruction cache and 24 KiB, 6-way L1 write-back data cache

Expansion Busses

PC/104-Plus (PCI & ISA connectors)

SEMA Board Controller

Supports: Voltage/Current monitoring, Power Sequencing, Logistics and Forensic

Information, Flat Panel Control, I²C Bus Control, GPIO Control, User Flash, Failsafe

BIOS (dual BIOS), Watchdog Timer and Fan Control

Audio

Chipset

Intel® HD Audio integrated in SoC

Audio Codec

ALC888

Ethernet

Intel® MAC/PHY

2x Intel® i210 (MAC/PHY) Ehternet controller

Interface

2x RJ-45 GbE connection

LPC

LPC

LPC UART NCT5104D (Nuvoton)

Video

GPU Feature Support

7th generation Intel® graphics core architecture with four execution units

Supports two independent displays 3D graphics hardware acceleration

Supports for DirectX 11, OCL 1.1, OGL ES Halt/2.0/1.1, OGL 3.2

Video decode hardware acceleration including support for H.264, MPEG2, MVC, VC-1, WMV9 and VP8 formats Video encode hardware acceleration including support for H.264, MPEG2 and MVC formats

LVDS

Single/dual channel 18/24-bit LVDS from eDP

VGA

Yes

CM2-BT2

Specifications

- **I/O Interfaces**

  USB
  3x USB 2.0 (1x shared with mSATA)

  SATA
  1x SATA 3Gb/s shared with mSATA (optional 2nd SATA 3GB/s port w/o mSATA support)

  GPIO
  8x

  Serial
  2x RS-232/422 (with full handshake) + 2x RS-232/422 (TX,RX,CTS,RTS only)

- **Power**

  Standard Input
  ATX = 5V±5% / 5Vsb ±5% or AT = 5V±5%

  Management
  ACPI 5.0 compliant

  Power States
  C1-C6, S0, S3, S4, S5 (Wake on USB S3/S4, Wake on LAN S3/S4/S5)

  ECO mode
  supports deep S5 for power saving

- **Supported Operating System**

  WEC 7
  WES 7/8, Win 7 Pro, Win 10 Pro (32/64-bit)
  Ubuntu 15.10[Kernel 4.2] (32/64-bit)
  QNX 6.5/6.6, VxWorks 6.9

- **Mechanical and Environmental**

  Form Factor
  PC/104 Version 2.6

  Dimension
  90 mm x 96 mm

  Operating Temperature
  Standard: 0°C to +60°C
  Extended Temperature: -20°C to 70°C (SKU dependent, by screening)

  Humidity
  5-90% RH operating, non-condensing
  5-95% RH storage (and operating with conformal coating)


  Shock and Vibration
  IEC 60068-2-64 and IEC-60068-2-27
  MIL-STD-202F, Method 213B, Table 213-I, Condition A and Method 214A, Table 214-I, Condition D

  HALT
  Thermal Stress, Vibration Stress, Thermal Shock and Combined Test

- **Intelligent Middleware**

  SEMA®
  Local management, control of embedded computer systems
  Extended EAPI for monitoring, controlling and analytics applications
  Multiple OS support and across platforms (x86, ARM)

Functional Diagram

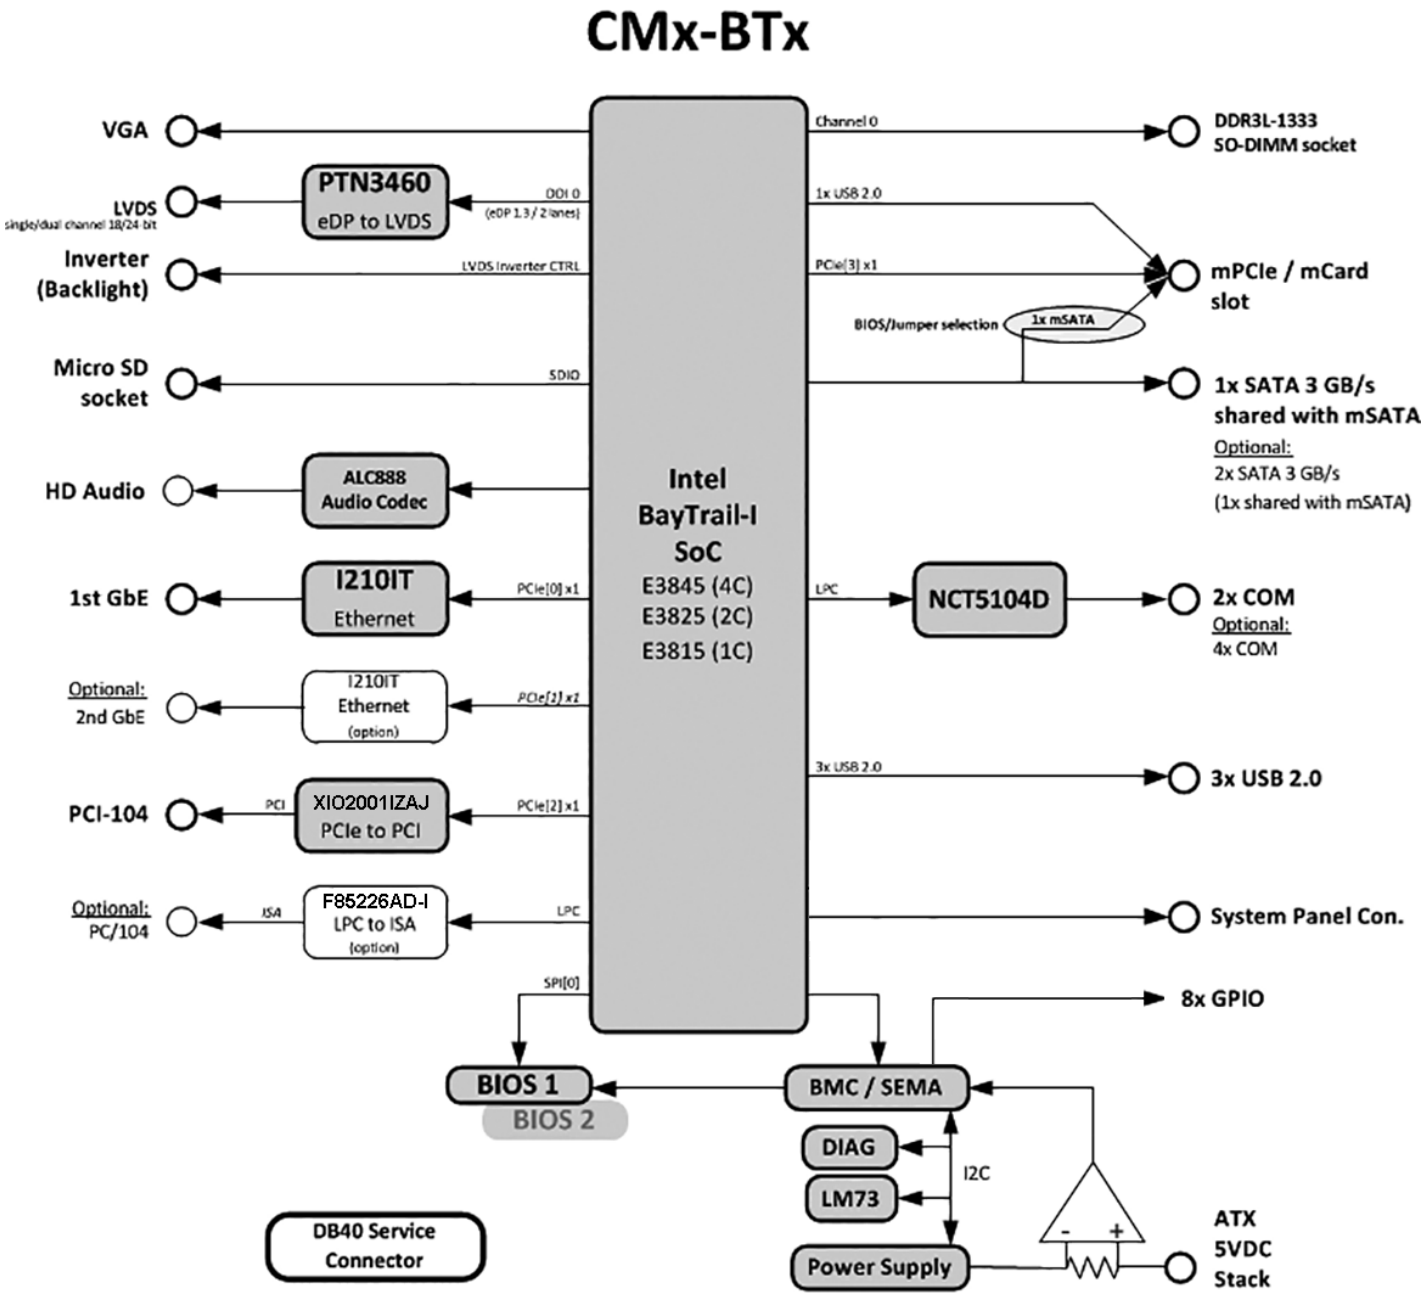

CM2-BT2

Ordering Information

- **CM2-BT2-E3825**
  PC/104-Plus, Atom E3825, 1.33 GHz, Dual-core, incl. heat spreader, standard operating temperature: 0°C to +60°C
- **CM2-BT2-E3825/ETT**
  PC/104-Plus, Atom E3825, 1.33 GHz, dual-core, incl. heat spreader, extended temperature range: -40°C to +85°C (screening)
- **CMx-BTx-X-10**
  CMx-BTx cable kit
- **CMx-BTx-TM-10**
  Passive low profile heatsink for CMx-BTx
- **CMx-BTx-TM-20**
  Active low profile heatsink for CMx-BTx (with fan)
- **DDR3L memory**
  Validated 2GB, 4GB, 8GB DDR3L SODIMM available

  *other configurations by request

CMx-BTx Standard Variant Comparison

Model Number	CM1-BT1-E3815		CM2-BT2-E3825		CM3-BT4-E3845		CM3-BT1-E3815	
Form factor	PC/104		PC/104-Plus		PCI-104		PCI-104	
PCI Bus (PCI-104)	No		Yes		Yes		Yes	
ISA Bus (PC/104)	Yes		Yes		No		No	
CPU	E3815		E3825		E3845		E3815	
CPU cores	1		2		4		1	
VGA	1x		1x		1x		1x	
LVDS	1x		1x		1x		1x	
	config 1	config 2	config 1	config 2	config 1	config 2	config 1	config 2
SATA	2	1	2	1	2	1	1	0
mSATA	0	1	0	1	0	1	0	1
mPCIe	1	0	1	0	1	0	1	0
MicroSD card slot	1x		1x		1x		0x	
GbE	2x		2x		2x		1x	
COM	4x		4x		4x		2x	
GPIO	8x		8x		8x		8x	
HD Audio	1x		1x		1x		1x	
USB 2.0	3x		3x		3x		3x	

All products and company names listed are trademarks or trade names of their respective companies.
Updated Mar. 16, 2023. ©2023 ADLINK Technology, Inc. All Rights Reserved.
All specifications are subject to change without further notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP