

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

cPCIS-2501 Series

3U CompactPCI® 6-slot Cubic Chassis with CompactPCI® Power Module

Features

- Compact size, 4U enclosure for 3U CompactPCI® cards
- Side handle design for portable applications
- Stand feet on bottom side for desktop applications
- Versatile wall-mount application with mounting kit
- Standard PICMG® 2.11 47-pin modular power supply
- Bottom-access removable filter for easy maintenance
- Built-in efficient cooling system



Specifications

Standards
CompactPCI® 2.0 R3.0
Form Factor: For 3U CompactPCI® cards without rear I/O
Enclosure: Coated metal plate outer covering with aluminum framework

Cooling System
Bottom-access removable fans for intake:
12V DC brush-less, ball bearings
Two fans with 67.02 CFM/fan
Rated speed for each fan: 4500 RPM
Rated power for each fan: 6 W

Power Supply
Power backplane: cBP-3061
Supports single in-rack 3U cPCI 8HP power module
PICMG® 2.11 47-pin power interface
Available power module: cPS-H325/AC (250 W)
DC input models available for OEM programs

Backplane
cBP-3206: 6-slot 32-bit 3U cPCI Backplane

Chassis Partition
Five slots for peripheral cards
One slot for system module
One slot for 3U 8HP cPCI power module

Dimensions
221.4 x 237 x 177 (mm, W x D x H, w/o wall mount kit or stand feet)
253.1 x 237 x 177 (mm, W x D x H, with wall mount kit or stand feet)

Weight
4.5 kg/9.9 lbs (without SBC, PSU, with backplane)

Operating Temperature
0˚C to +60˚C

Storage Temperature
-20˚C to +80˚C

Humidity
5% to 95%, non-condensing


Shock
15 G peak-to-peak, 11 ms duration, non-operation

Vibration
Non-operation: 1.88 Grms, 5-500 Hz, each axis
Operation: 0.5Grms, 5-500 Hz, each axis, tested with 2.5” HDD

Safety or Certificate
CE/LVD

Dimensions

Units: mm

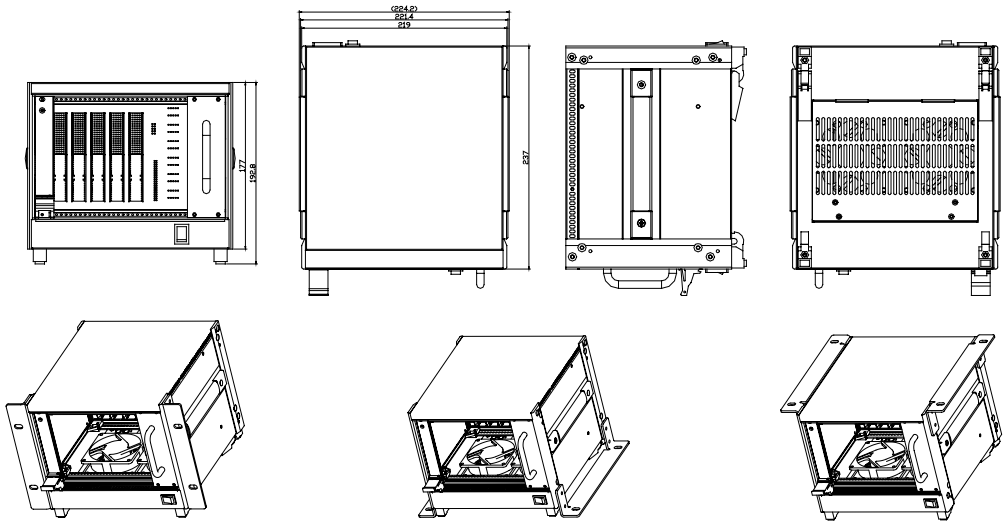

Wall mount on the front side

Wall mount on the bottom

Wall mount on the top

Ordering Information

- **cPCIS-2501/AC**
  3U CompactPCI® 6-slot Cubic Chassis with cPS-H325/AC

Note: All models above do not include any system or peripheral boards.

All products and company name listed are trademarks or trade names of their respective companies.
Updated Mar. 10, 2017. ©2017 ADLINK Technology, Inc. All Rights Reserved.
All specifications are subject to change without further notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP