ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Adlink cPS-H325/AC* at our website: *Click HERE*

cPS-H325/AC, H325/48

PICMG® 2.11 47-pin Hot-Swap Redundant 3U CompactPCI® 8HP 250 W Power Module

Features

- PICMG® 2.11 CompactPCI® Power Interface compliant
- 3U CompactPCI® 8HP form factor
- PICMG® 2.11 47-pin CompactPCI® in-rack power module interface
- 250 W DC output
- Active PFC (Power Factor Correction) meets IEC1000-3-2 Harmonic Correction
- Internal OR-ing Diodes for N + 1 redundancy
- Hot swappable
- Active current sharing
- EMI meets EN 55022 & FCC Class A
- Supports remote ON/OFF
- Supports power failure signal & degradation signal



Specifications

Model Name: cPS-H325/AC
PICMG® Standards: PICMG® 2.11 CompactPCI®
Form Factor: 3U cPCI (100 x 160mm), 2-slot (8HP) wide
Input Voltage: 90-264 ± 10% VAC
Input Frequency: 47-63 ±5% Hz
Input Current: 2.8 A @ 115 VAC
1.4 A @ 230 VAC
Inrush Current: <30 A @ 230 VAC

Model Name: cPS-H325/48
PICMG® Standards: Power Interface compliant
Form Factor: 3U cPCI (100 x 160mm), 2-slot (8HP) wide
Input Voltage: 36-72 VDC
Input Frequency: DC
Input Current: typ. 20A @ 48 VDC
Inrush Current: N/A

Power Factor (PFC, only for AC)

Correction Typical 0.95-0.97
Meets Harmonic Correction IEC1000-3-2

Output Voltage/Current

5V: Typ. 25.0A, Max. 33.0A
3.3V: Typ. 18.0A, Max. 33.0A
+12V: Typ. 5.0A, Max. 6A
-12V: Typ. 0.5A, Max.1.5A
Max. load is the continuous operating load of each rail individually. The max. load of each rail cannot be drawn from all outputs simultaneously.

Output Voltage

0.5 A @ +5 V
Minimum Load

Output Wattage

Typical 250W continuous
Line Regulation: Typical 0.1%
Load Regulation: Typical ± 1-2%
Ripple: 50 mV @ +5 V and 3.3 V outputs
120 mV @ +12 V and -12 V outputs
Hold-up Time: 5 ms after power fail signal
Efficiency: Typical 78-79%

Output Voltage Sense

Available at 5V, 3.3V, and +12V outputs and current sharing
N+1 Redundancy: Equipped with internal OR-ing diodes at all outputs for N+1 redundancy operation
Remote ON/OFF: Available at [INH#] & [EN#]

Power Failure Signal

Available at [FAL#] pin

Power Degradation Signal

Available at [DEG#] pin

Specifications

Protections

Over Temperature Protection (OTP): +70˚C

Over Current Protection (OCP): Installed at each rail

Over Load Protection (OLP): Typical 120% max. load, fully protected against output overload or short circuit.

Over Voltage Protection (OVP): Built-in at all outputs

Status LED

<Green LED> [POWER] means valid input voltage

<Amber LED> [FAULT] means a critical fault

Earth Leakage: <0.5 mA @ 230 VAC <0.5 mA @ 48 VDC <0.5 mA @ 24 VDC

Operating Temperature

-40 °C to +70 °C at full load with at least 600LFM air flow Derates linearly to 60% at +70°C for H325/24 (A warm-up time 3 minutes is required after cold start at temperatures from -40 °C to +0°C.)

Storage Temperature

-45˚C to +85˚C

Humidity

5% to 95% non-condensing

Shock

15 G peak-to-peak, 11 ms duration, non-operation

Vibration

Operation: 1.88 Grms, 5-500 Hz, each axis


Cooling Requirement: Min. 20 CFM is required for typical full power rating

Certifications

IEC950, EN 55022, FCC Class A, IEC60950 Class I

Ordering Information

- **cPS-H325/AC**
  PICMG® 2.11 47-pin hot-swap redundant 3U CompactPCI® 8HP 250 W power module with universal AC Input
- **cPS-H325/48**
  PICMG® 2.11 47-pin hot-swap redundant 3U CompactPCI® 8HP 250 W power module with 36-72VDC Input

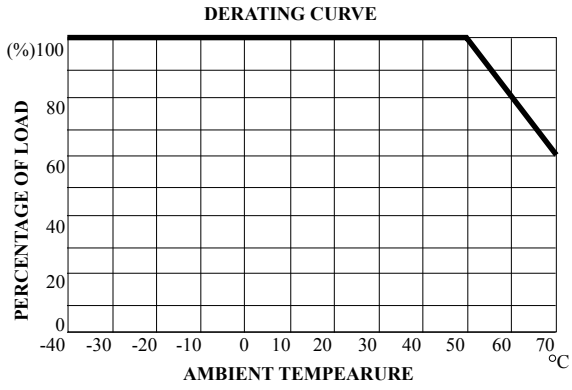

All products and company name listed are trademarks or trade names of their respective companies.
Updated Mar. 10, 2017. ©2017 ADLINK Technology, Inc. All Rights Reserved.
All specifications are subject to change without further notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP