ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments PXIe-4464* at our website: *Click HERE*

SPECIFICATIONS

PXIe-4464

204.8 kS/s, 119 dB, 6 Gains, AC/DC-Coupled, 4-Input PXI Sound and Vibration Module

This document lists specifications for the PXIe-4464 Dynamic Signal Acquisition (DSA) analog input module. All specifications are subject to change without notice. Visit `ni.com/manuals` for the most current specifications and product documentation.

Caution BNC version only—Electromagnetic interference can adversely affect the measurement accuracy of this product. The construction of a BNC coaxial cable is inherently unbalanced in that the outer conductor (LO) is used as a shield for the inner conductor (HI). However, for functional reasons, there is no input configuration of the PXIe-4464 that directly connects the LO terminal to the chassis ground. Without a direct connection to chassis ground, the outer conductor does not act as a shield for unwanted noise and may act as an antenna for coupling noise into the module inputs. For single-ended measurements, the noise immunity for the system can be improved by directly connecting the outer conductor to the chassis or earth ground at the load end of the cable. For differential measurements, where such a connection is inherently not possible, the BNC cable can alternatively be wrapped in a separate grounded shield. In addition, you might need to use snap-on ferrite beads or other remedial measures to improve electromagnetic compatibility.

Terminology

Maximum and *minimum* specifications characterize the warranted performance of the instrument within the recommended calibration interval and under the stated operating conditions. These specifications are subject to production verification or guaranteed by design.

Typical specifications are specifications met by the majority of the instruments within the recommended calibration interval and under the stated operating conditions, based on measurements taken during production verification and/or engineering development. The performance of the instrument is not warranted.

Supplemental specifications describe the basic function and attributes of the instrument established by design and are not subject to production verification. They provide information that is relevant for the adequate use of the instrument that is not included in the previous definitions.

All performance specifications are *typical* unless otherwise noted. These specifications are valid within the full operating temperature range. Accuracy specifications are valid within ±5 °C of the self-calibration or over the full operating range as specifically noted.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Input Characteristics

Number of simultaneously sampled input channels 4

Input configuration ..... Differential or pseudodifferential (50 Ω between negative input and chassis ground), each channel independently software-selectable

Input coupling ..... AC or DC, each channel independently software-selectable

A/D converter (ADC) resolution ..... 24 bits

ADC type ..... Delta-sigma

Sample rates (f_s)

- Range ..... 100 S/s to 204.8 kS/s
- Resolution[1] ..... ≤181.9 µS/s

ADC modulator sample rate ..... 6.640625 MS/s

FIFO buffer size ..... 1,023 samples

Data transfers ..... Direct memory access (DMA), programmed I/O

Signal Range

Gain (dB)	Full-Scale Range*, Min	
	V_{pk}	V_{rms}†
30	±0.316	0.224
20	±1.00	0.707
10	±3.16	2.24
0	±10.0	7.07
-10	±31.6	22.4
-20	±42.4	30.0

* Each input channel gain is independently software-selectable.
† Sine input.

[1] Depends on the sample rate. Refer to the *NI-DAQmx Help* for more information.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Common-Mode Range

Gain (dB)	Input	Configuration	
		Differential (V_{pk})*	Pseudodifferential (V_{pk})*
0, 10, 20, 30	Positive input (+)	±12	±12
	Negative input (-)	±12	±10
-10, -20	Positive input (+)	±42.4	±42.4
	Negative input (-)	±42.4	±10

* Voltages with respect to chassis ground.

Overvoltage Protection

Input	Configuration	
	Differential (V_{pk})*	Pseudodifferential (V_{pk})*
Positive input (+)	±42.4	±42.4
Negative input (-)	±42.4	±10

* Voltages with respect to chassis ground.

Transfer Characteristics

Offset (Residual DC)

Gain (dB)	DC-Coupled Offset (±mV)*, †, Max, T_{cal}‡ ±5 °C	DC-Coupled Offset (±mV)*, Max, Over Full Operating Temperature Range	AC-Coupled Offset (±mV), Max, Over Full Operating Temperature Range
30	0.1	0.5	3.4
20	0.15	0.7	3.4
10	0.3	1.6	3.7
0	0.9	5.0	6.0
-10	3.0	16	16
-20	9.0	50	50

* Source impedance ≤50 Ω.
† Listed accuracy is valid for 30 days following a self-calibration.
‡ T_{cal} = ambient temperature at which the last self-calibration was performed.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Gain Amplitude Accuracy

1 kHz input tone

T_{cal} ±5 °C .....±0.03 dB max

(Listed accuracy is valid for 30 days following a self-calibration.)

(T_{cal} = ambient temperature at which the last self-calibration was performed.)

Over full operating temperature range.....±0.15 dB max

Amplifier Characteristics

Input Impedance

Input Impedance	Configuration	
	Differential	Pseudodifferential
Between positive input and chassis ground	1 MΩ || 265 pF	1 MΩ || 265 pF
Between negative input and chassis ground	1 MΩ || 265 pF	50 Ω

Common-Mode Rejection Ratio (CMRR)

Gain (dB)	DC-Coupled CMRR (dBc)*, †	AC-Coupled CMRR (dBc)†, ‡
30	105	90
20	100	
10	90	
0	80	80
-10, -20	60	75

* $f_{in} \leq 1$ kHz.
† Differential configuration.
‡ f_{in} = 50 Hz or 60 Hz.

Dynamic Characteristics

Bandwidth and Alias Rejection

Alias-free bandwidth (BW) (passband) .....DC to 0.454 f_s

Alias rejection .....120 dBc min,
0.546 f_s < f_{in} < 6.5272 MHz

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Filter Delay

Digital filter delay..... Adjustable[1]

Analog filter delay


- 0 dB gain..... 300 ns
- 10 dB gain..... 310 ns
- 20 dB gain..... 375 ns
- 30 dB gain..... 530 ns

AC Coupling

-3 dB cutoff frequency..... 0.72 Hz

-0.1 dB cutoff frequency ..... 4.7 Hz


Figure 1. Magnitude Response of AC Coupling Circuit (Typical)

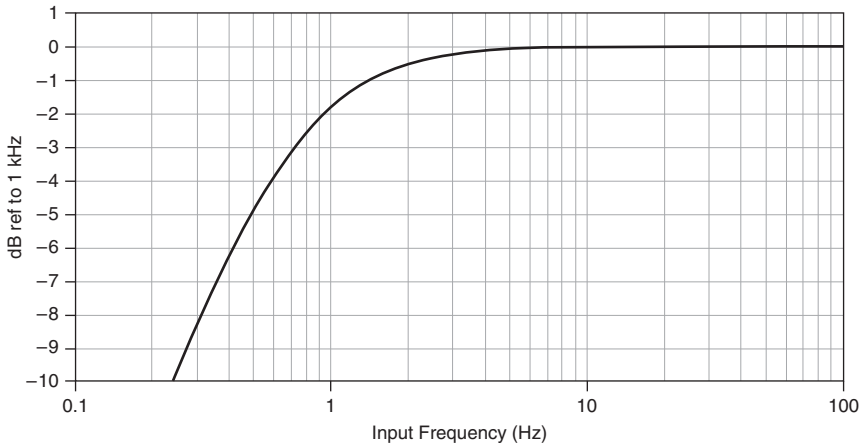

[1] Digital filter delay is compensated to 0 ns by default and adjustable in software.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 2. Phase Response of AC Coupling Circuit (Typical)

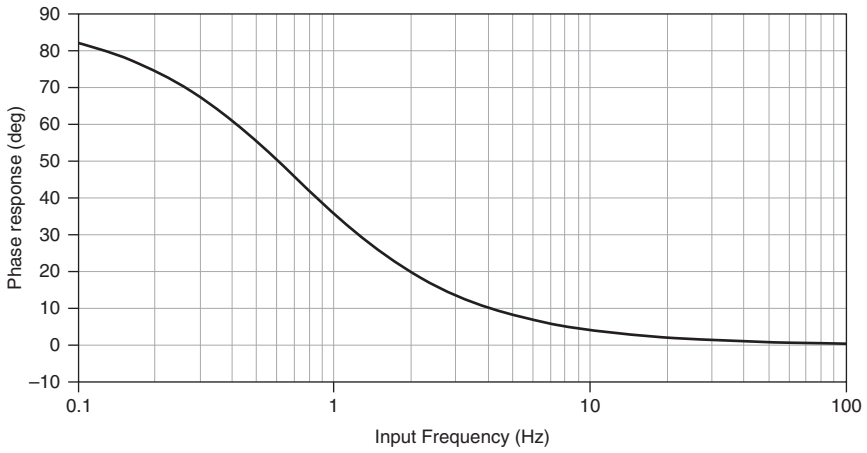

Flatness

Gain (dB)	f_s = 51.2 kS/s		
	DC-Coupled Flatness (dB)*, Max (Typical)	AC-Coupled Flatness (dB)*, Max (Typical)	
	f_{in} = 20 Hz to 20 kHz	$f_{in} \leq$ 30 Hz	f_{in} > 30 Hz to 20 kHz
0, 10, 20, 30	±0.006 (±0.003)	Refer to Figure 3	±0.006 (±0.003)
-10, -20	±0.2 (±0.1)	Refer to Figure 3	±0.2 (±0.1)


* Relative to 1 kHz.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Gain (dB)	f_s = 204.8 kS/s						
	DC-Coupled Flatness (dB)*, Max (Typical)			AC-Coupled Flatness (dB)*, Max (Typical)			
	f_{in} = 20 Hz to 20 kHz	f_{in} > 20 kHz to 45 kHz	f_{in} > 45 kHz to 92.2 kHz	$f_{in} \leq$ 30 Hz	f_{in} > 30 Hz to 20 kHz	f_{in} > 20 kHz to 45 kHz	f_{in} > 45 kHz to 92.2 kHz
0, 10, 20, 30	±0.006 (±0.003)	±0.03 (±0.02)	±0.1 (±0.08)	Refer to Figure 3	±0.006 (±0.003)	±0.03 (±0.02)	±0.1 (±0.08)
-10, -20	±0.2 (±0.1)	±0.6 (±0.33)	±1 (±0.55)	Refer to Figure 3	±0.2 (±0.1)	±0.6 (±0.33)	±1 (±0.55)

* Relative to 1 kHz.

Figure 3. AC-Coupled Flatness (Typical)

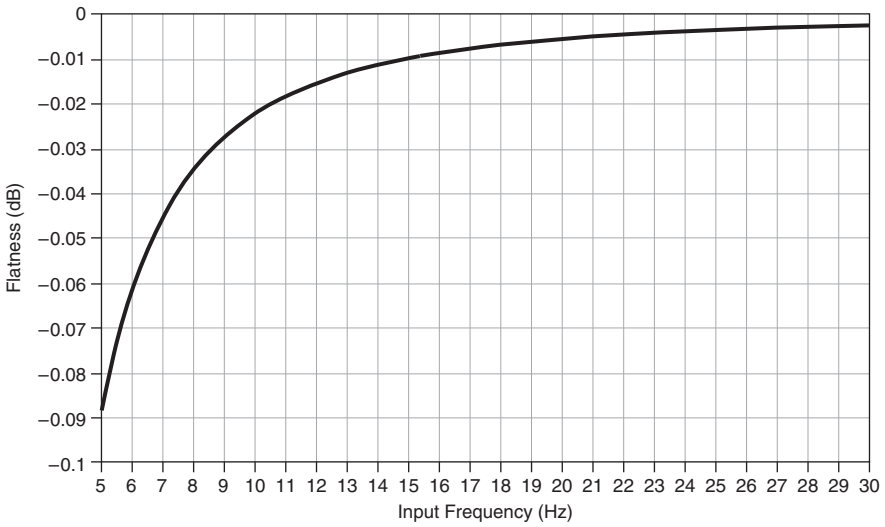

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Interchannel Gain Mismatch

Gain (dB)	AC/DC-Coupled Mismatch (dB)*, †, Max (Typical)			AC-Coupled Mismatch (dB)*, Max (Typical)	
	f_{in} = 20 Hz to 20 kHz	f_{in} > 20 kHz to 45 kHz	f_{in} > 45 kHz to 92.2 kHz	f_{in} = 5 Hz	f_{in} = 10 Hz
30	0.015 (0.004)	0.016 (0.006)	0.033 (0.015)	0.018 (0.007)	0.015 (0.004)
20	0.014 (0.004)	0.014 (0.004)	0.016 (0.005)		
10	0.014 (0.004)	0.014 (0.004)	0.015 (0.005)		
0	0.014 (0.004)	0.014 (0.004)	0.015 (0.005)		
-10, -20	0.1 (0.05)	0.25 (0.125)	0.4 (0.2)		

* Identical channel configurations.
† Operating temperature within 5 °C of the last self-calibration temperature.

Interchannel Phase Mismatch

Gain (dB)	AC/DC-Coupled Mismatch*, Max (Typical)			AC-Coupled Mismatch*, Max (Typical)	
	f_{in} = 20 Hz to 20 kHz	f_{in} > 20 kHz to 45 kHz	f_{in} > 45 kHz to 92.2 kHz	f_{in} = 5 Hz	f_{in} = 10 Hz
30	0.32° (0.16°)	0.73° (0.37°)	1.48° (0.74°)	0.48° (0.24°)	0.24° (0.12°)
20	0.14° (0.07°)	0.31° (0.15°)	0.63° (0.31°)		
10	0.08° (0.04°)	0.17° (0.09°)	0.35° (0.18°)		
0	0.05° (0.02°)	0.11° (0.05°)	0.23° (0.11°)		
-10, -20	1.2° (0.6°)	1.4° (0.7°)	2° (1°)		

* Identical channel configurations.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Note Listed gain and phase mismatch specifications are valid for measurements made on channels on the same module. For measurements made on channels on different modules, the listed gain and phase mismatch specifications still apply, but are subject to the following conditions:

- For gain matching, all modules must be properly warmed up and then self-calibrated.
  Refer to the *Environmental* section for the specified warm-up time.
- For phase matching, all modules must be synchronized to a common timebase. To the listed specifications, add the following error: $360° \times f_{in} \times$ *clock skew*.
  Refer to the *General Specifications* section for the maximum intermodule clock skew.

Phase Linearity

Gain (dB)	Phase Linearity	
	f_{in} = 20 Hz to 20 kHz	f_{in} > 20 kHz to 92.2 kHz
0, 10, 20, 30	±0.01°	±0.03°
-10, -20	±0.1°	±1°

Idle Channel Noise

Gain (dB)	Idle Channel Noise (μV_{rms})*, Max (Typical)			
	f_s = 51.2 kS/s		f_s = 204.8 kS/s	
	Audio BW†	Full BW‡	Audio BW†	Full BW**
30	1.3 (1.1)	1.4 (1.2)	1.3 (1.1)	2.8 (2.5)
20	1.8 (1.4)	2.0 (1.6)	1.8 (1.4)	4.3 (3.2)
10	4.3 (2.9)	4.7 (3.1)	4.3 (2.9)	10.8 (6.8)
0	12.9 (8.3)	14.0 (9.0)	12.9 (8.3)	32.9 (19.9)
-10	108 (84)	117 (91)	108 (84)	243 (184)
-20	182 (115)	197 (124)	182 (115)	445 (262)


* Source impedance ≤50 Ω.
† 20 Hz to 20 kHz.
‡ 0.1 Hz to 23.2 kHz.
** 0.1 Hz to 92.8 kHz.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Spectral Noise Density

Spectral noise density ..... 8 nV/$\sqrt{\text{Hz}}$ at 30 dB gain, 1 kHz

Figure 4. Spectral Noise Density (30 dB Gain)

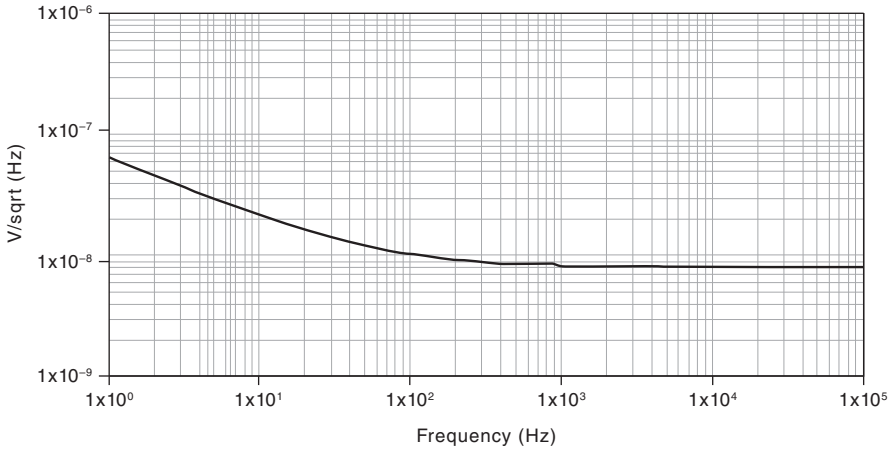

Dynamic Range

Gain (dB)	Dynamic Range (dBFS)*, †, Min (Typical)			
	f_s = 51.2 kS/s		f_s = 204.8 kS/s	
	Audio BW‡	Full BW**	Audio BW‡	Full BW††
30	105 (106)	104 (105)	105 (106)	98 (99)
20	112 (114)	111 (113)	112 (114)	104 (107)
10	114 (118)	114 (117)	114 (118)	106 (110)
0	115 (119)	114 (118)	115 (119)	107 (111)
-10	106 (109)	106 (108)	106 (109)	99 (102)
-20	104 (108)	104 (108)	104 (108)	97 (101)

* 1 kHz input tone, -60 dBFS input amplitude.
† Source impedance ≤50 Ω.
‡ 20 Hz to 20 kHz.
** 0.1 Hz to 23.2 kHz.
†† 0.1 Hz to 92.8 kHz.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Representative Measurement FFTs (1 kHz)

Test conditions for all FFTs: Unaveraged computation of 65,536 samples, differential input configuration.

Figure 5. FFT of -1 dBFS, 1 kHz Tone Acquired at 51.2 kS/s, 0 dB Gain


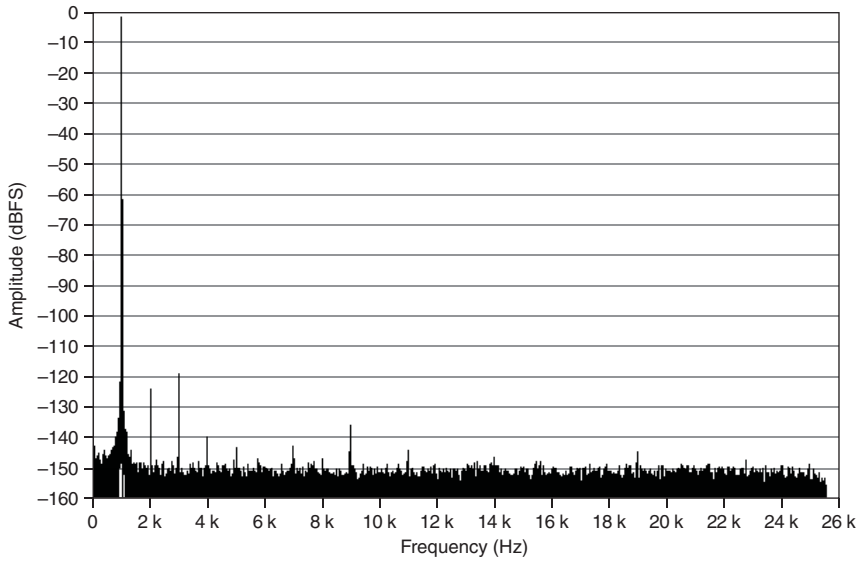


Figure 6. FFT of -1 dBFS, 1 kHz Tone Acquired at 51.2 kS/s, 10 dB Gain

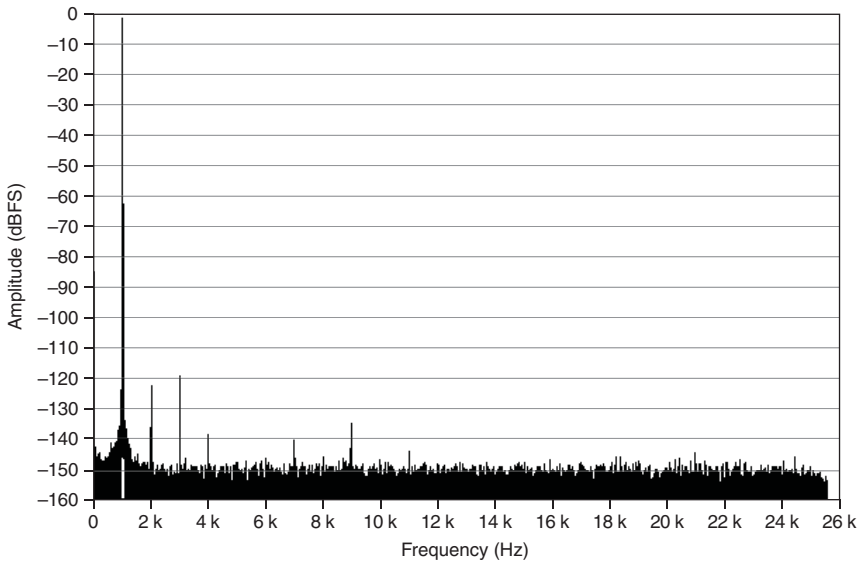

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 7. FFT of -1 dBFS, 1 kHz Tone Acquired at 51.2 kS/s, 20 dB Gain


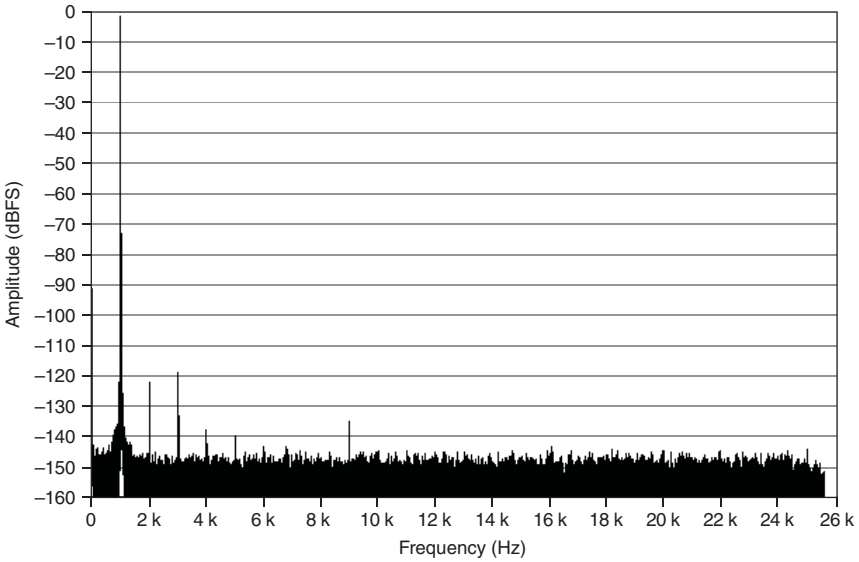


Figure 8. FFT of -1 dBFS, 1 kHz Tone Acquired at 51.2 kS/s, 30 dB Gain

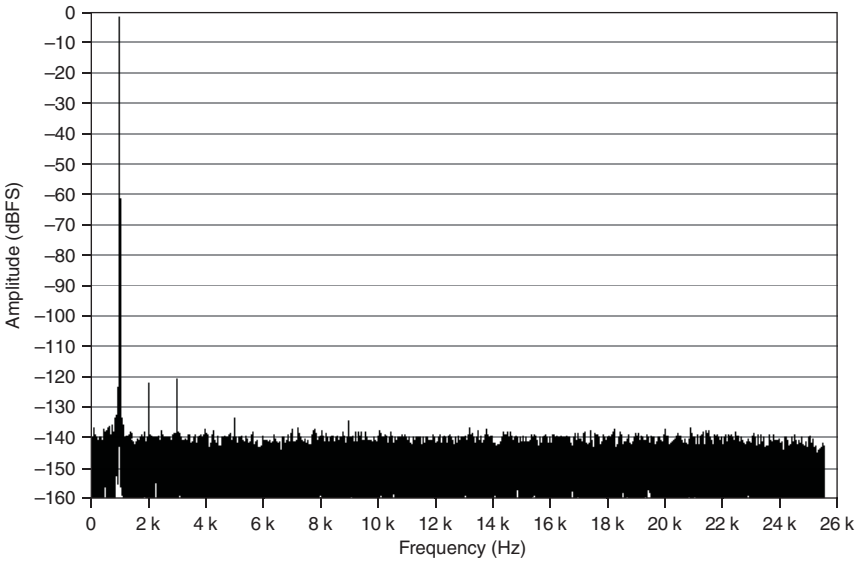

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Representative Measurement FFTs (10 kHz)

Test conditions for all FFTs: Unaveraged computation of 262,144 samples, differential input configuration.

Figure 9. FFT of -1 dBFS, 10 kHz Tone Acquired at 204.8 kS/s, 0 dB Gain


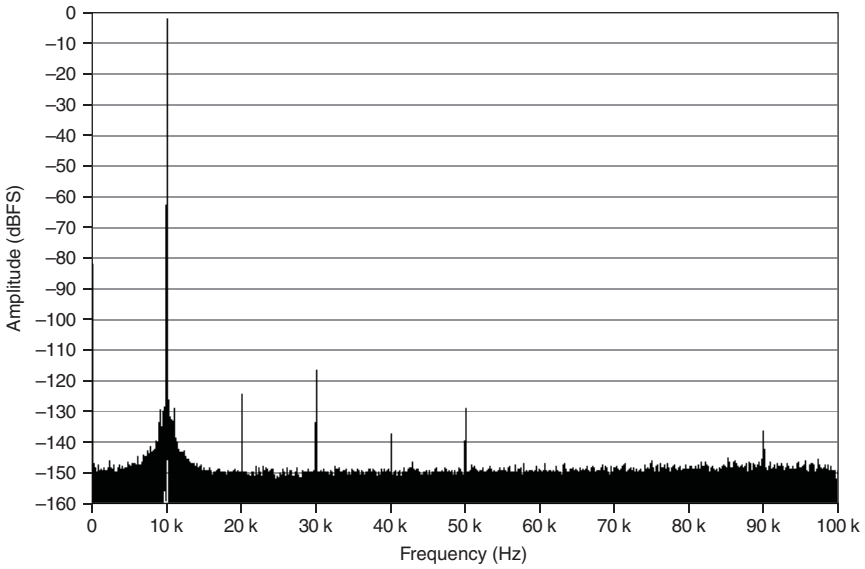


Figure 10. FFT of -1 dBFS, 10 kHz Tone Acquired at 204.8 kS/s, 10 dB Gain

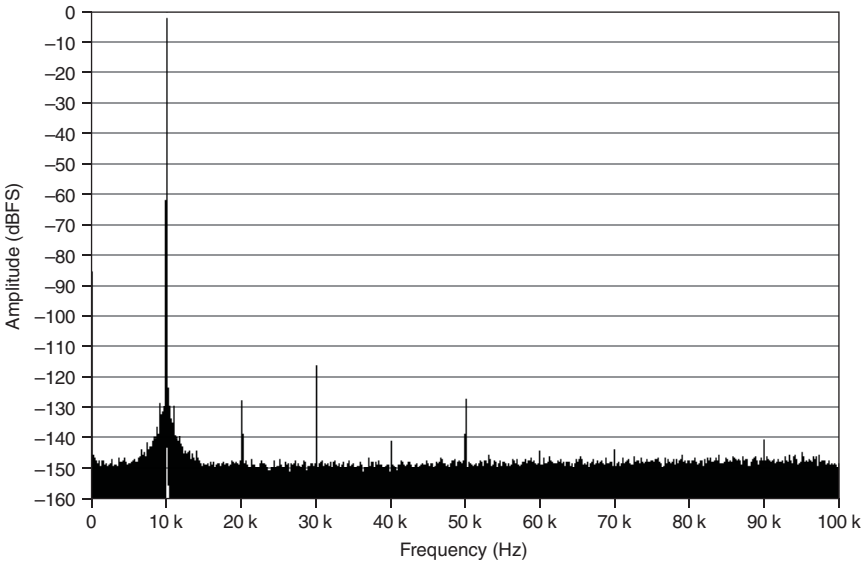

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 11. FFT of -1 dBFS, 10 kHz Tone Acquired at 204.8 kS/s, 20 dB Gain


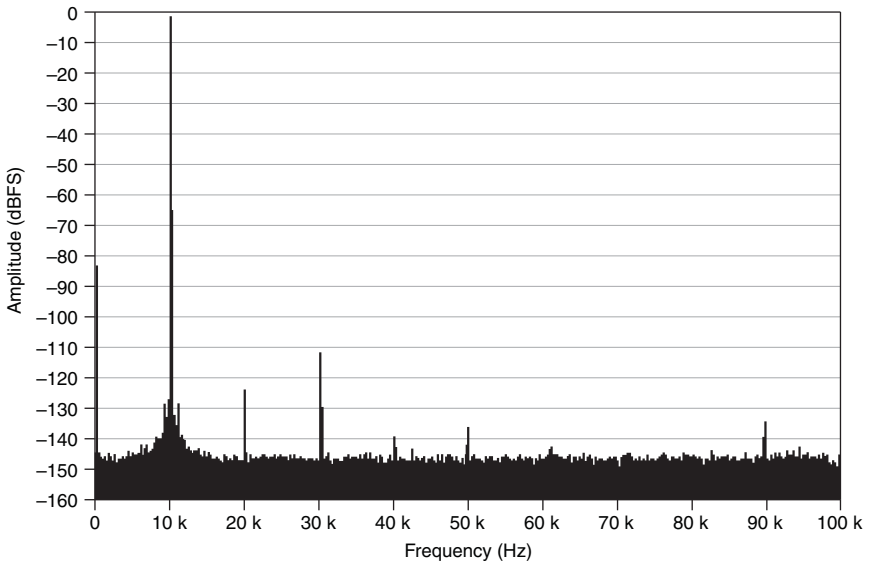


Figure 12. FFT of -1 dBFS, 10 kHz Tone Acquired at 204.8 kS/s, 30 dB Gain

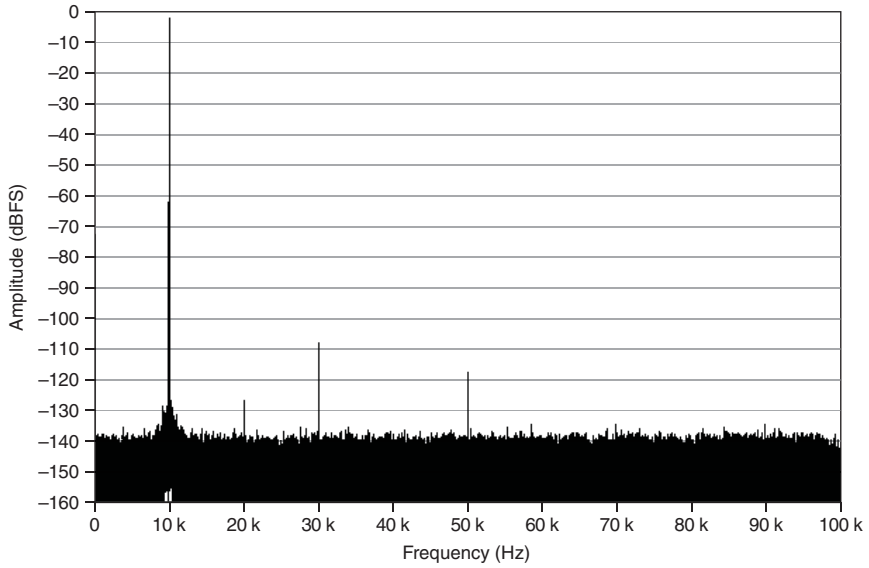

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Spurious Free Dynamic Range (SFDR)

Gain (dB)	SFDR (dBc)*, †	
	f_s = 51.2 kS/s	f_s = 204.8 kS/s
30	106	106
20	108	108
10	108	108
0	108	108
-10	110	110
-20	110	110

* 1 kHz input tone, input amplitude is the lesser of -1 dBFS or 8.91 V_{pk}.
† Differential configuration.

Total Harmonic Distortion (THD), Balanced Source

Gain (dB)	THD (dBc)*, †				
	f_s = 51.2 kS/s		f_s = 204.8 kS/s		
	f_{in} = 1 kHz	f_{in} = 20 Hz to 20 kHz	f_{in} = 1 kHz	f_{in} = 20 Hz to 20 kHz	f_{in} > 20 kHz to 92.2 kHz
30	-104	-100	-104	-100	-97
20	-109	-102	-109	-102	-102
10	-107	-102	-107	-102	-102
0	-107	-102	-107	-102	-102
-10	-108	-102	-108	-102	-102
-20	-108	-102	-108	-102	-102

* Input amplitude is the lesser of -1 dBFS or 8.91 V_{pk}.
† Differential configuration.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Total Harmonic Distortion (THD), Unbalanced Source

Gain (dB)	THD (dBc)*, †				
	f_s = 51.2 kS/s		f_s = 204.8 kS/s		
	f_{in} = 1 kHz	f_{in} = 20 Hz to 20 kHz	f_{in} = 1 kHz	f_{in} = 20 Hz to 20 kHz	f_{in} > 20 kHz to 92.2 kHz
30	-104	-100	-104	-100	-93
20	-106	-102	-106	-102	-94
10	-105	-102	-105	-102	-94
0	-102	-99	-102	-96	-87
-10	-105	-97	-105	-93	-91
-20	-105	-97	-105	-93	-91

* Input amplitude is the lesser of -1 dBFS or 8.91 V_{pk}.
† Pseudodifferential configuration.

Figure 13. THD (0 dB Gain, Balanced Source, Differential Configuration, 204.8 kS/s)

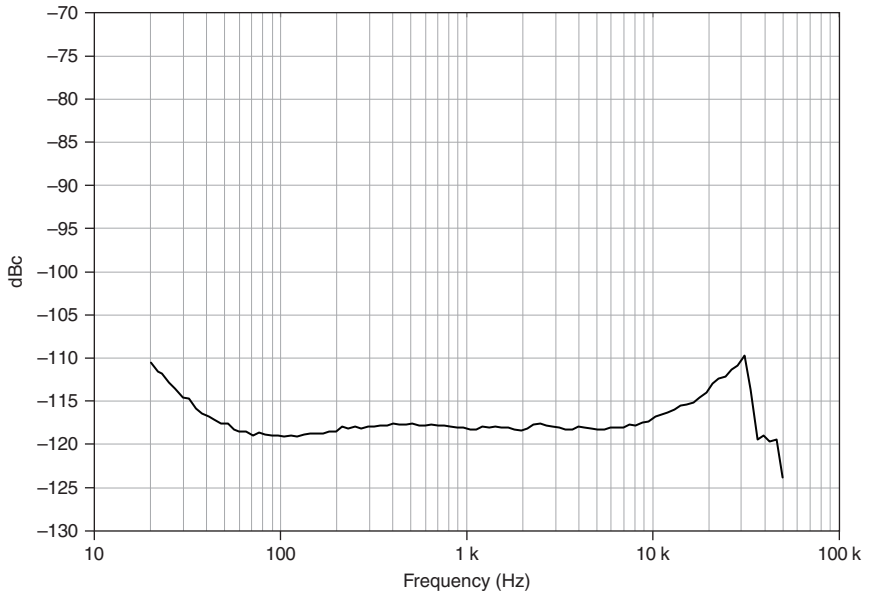

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 14. THD (10 dB Gain, Balanced Source, Differential Configuration, 204.8 kS/s)



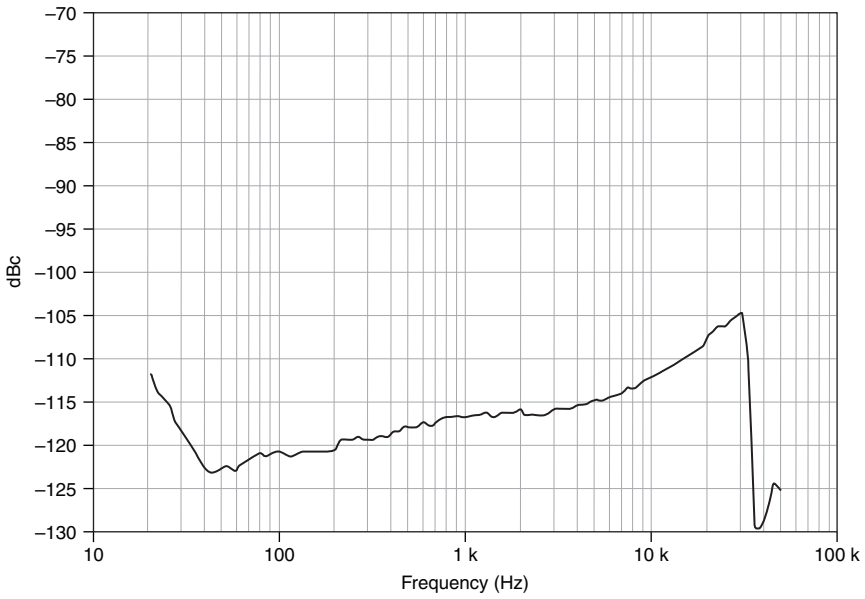


Figure 15. THD (20 dB Gain, Balanced Source, Differential Configuration, 204.8 kS/s)

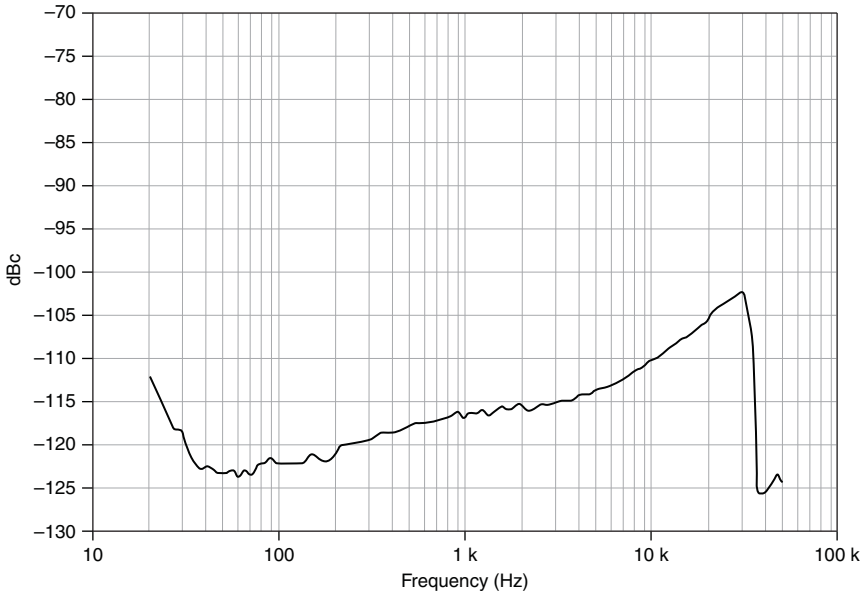

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 16. THD (30 dB Gain, Balanced Source, Differential Configuration, 204.8 kS/s)

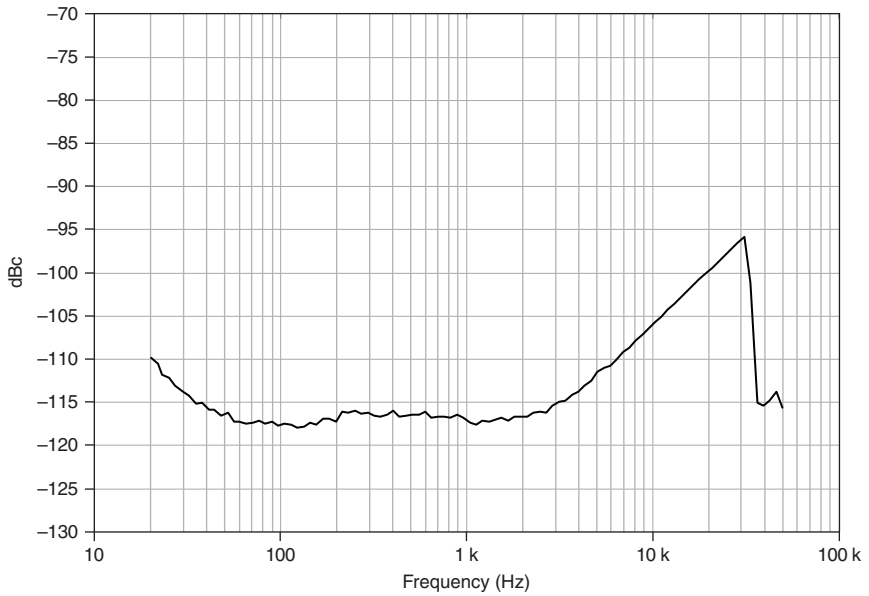

Total Harmonic Distortion Plus Noise (THD+N), Balanced Source

Gain (dB)	THD+N (dBc)*				
	f_s = 51.2 kS/s†		f_s = 204.8 kS/s‡		
	f_{in} = 1 kHz	f_{in} = 20 Hz to 20 kHz	f_{in} = 1 kHz	f_{in} = 20 Hz to 20 kHz	f_{in} > 20 kHz to 92.2 kHz
30	-100	-97	-96	-94	-93
20	-107	-102	-100	-100	-98
10	-107	-102	-102	-100	-98
0	-107	-102	-103	-100	-98
-10	-97	-97	-93	-93	-93
-20	-94	-94	-89	-89	-89

* Input amplitude is the lesser of -1 dBFS or 8.91 V_{pk}, differential configuration.
† Measurement BW = 0.1 Hz to 23.2 kHz.
‡ Measurement BW = 0.1 Hz to 92.8 kHz.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Total Harmonic Distortion Plus Noise (THD+N), Unbalanced Source

Gain (dB)	THD+N (dBc)*				
	f_s = 51.2 kS/s†		f_s = 204.8 kS/s‡		
	f_{in} = 1 kHz	f_{in} = 20 Hz to 20 kHz	f_{in} = 1 kHz	f_{in} = 20 Hz to 20 kHz	f_{in} > 20 kHz to 92.2 kHz
30	-100	-97	-83	-83	-83
20	-106	-102	-91	-90	-89
10	-105	-102	-98	-97	-91
0	-102	-99	-101	-95	-86
-10	-97	-97	-93	-91	-90
-20	-94	-94	-89	-88	-87

* Input amplitude is the lesser of -1 dBFS or 8.91 V_{pk}, pseudodifferential configuration.
† Measurement BW = 0.1 Hz to 23.2 kHz.
‡ Measurement BW = 0.1 Hz to 92.8 kHz.

Intermodulation Distortion (IMD)

Gain (dB)	IMD (dBc)*
30	-109
20	-109
10	-107
0	-104
-10	-111
-20	-111

* CCIF 14 kHz + 15 kHz, each tone amplitude is the lesser of -6 dBFS or 5 V_{pk}.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Crosstalk, Input Channel Separation

Gain (dB)	Crosstalk for Adjacent (Nonadjacent) Channels (dBc)*, †	
	f_{in} = 1 kHz	f_{in} = 92.2 kHz
30	-145 (-145)	-110 (-130)
20	-145 (-145)	-110 (-130)
10	-145 (-145)	-110 (-130)
0	-145 (-145)	-110 (-130)
-10	-95 (-125)	-60 (-100)
-20	-95 (-125)	-60 (-100)

* Input amplitude is the lesser of -1 dBFS or 8.91 V_{pk}.
† Source impedance ≤50 Ω.

Onboard Calibration References

Voltage

DC level ..... 5.000 V

Temperature coefficient ..... 9 ppm/°C max

Time stability ..... 50 ppm/ $\sqrt{1{,}000\ \text{hr}}$

Frequency

Oscillator..... 20 MHz TCXO

Temperature stability ..... 2.8 ppm max over full temperature range

Time stability ..... 1 ppm/year

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

IEPE Excitation

Current settings

OFF ..... 0 mA

4 mA ..... 4 mA min, 4.15 mA typ, 4.3 mA max

10 mA ..... 9.6 mA min, 10 mA typ, 10.4 mA max

20 mA ..... 19.3 mA min, 20 mA typ, 20.7 mA max

Each channel independently software-selectable.

Voltage compliance..... 25 V

Note Use the following equation to make sure that your configuration meets the IEPE voltage compliance range:

$$V_{common\text{-}mode} + V_{bias} \pm V_{full\text{-}scale} + (I_{IEPE} \times 50\ \Omega) \text{ must be 0 V to 25 V}$$

where

$V_{common\text{-}mode}$ is the common-mode voltage seen by the input channel,

V_{bias} is the DC bias voltage of the sensor,

$V_{full\text{-}scale}$ is the AC full-scale voltage of the sensor, and

I_{IEPE} is the selected excitation setting.

Sensor open detection[1] (software-readable)

4 mA ..... 26 V

10 mA ..... 25.5 V

20 mA ..... 25 V

Sensor short detection[2] (software-readable)

4 mA ..... 1.3 V

10 mA ..... 1 V

20 mA ..... 0.5 V

Channel input impedance
with IEPE enabled ..... 1 MΩ || 315 pF, pseudodifferential

[1] Voltage between positive input (+) and negative input (-).

[2] Voltage between positive input (+) and negative input (-).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Transducer Electronic Data Sheet (TEDS) Support

Supports Transducer Electronic Data Sheet (TEDS) according to the IEEE 1451 Standard ..... Class I, all module inputs

Note For more information about TEDs, go to `ni.com/info` and enter the Info Code `rdteds`.

Maximum load capacitance ..... 10,000 pF

Frequency Timebase Characteristics

Accuracy

Using internal VCXO timebase

T_{cal} ±5 °C ..... ±27 ppm max

(T_{cal} = ambient temperature at which the last self-calibration was performed.)

(Listed accuracy is valid for 30 days following a self-calibration.)

Over full operating temperature range ..... ±100 ppm max

Using external timebase ..... Equal to accuracy of external timebase

Triggers

Analog trigger

Purpose ..... Reference trigger only

Source ..... Any channel

Level ..... Full scale, programmable

Mode ..... Rising-edge or falling-edge with hysteresis, entering or leaving window

Resolution ..... 24 bits

Digital Trigger

Purpose ..... Start or reference trigger

Source ..... PFI0, PXI_Trig<0..7>, PXI_Star, PXIe_DStar<A..B>

Polarity ..... Rising or falling edge, software-selectable

Minimum pulse width ..... 100 ns for PXI_Trig<0..7>, 20 ns for others

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output Timing Signals

Sources ..... Start Trigger Out, Reference Trigger Out, Sync Pulse Out

Destinations ..... PFI0, PXI_Trig<0..7>, PXIe_DStarC

Polarity ..... Software-selectable except for Sync Pulse Out (always active low)

PFI0 (Front Panel Digital Trigger)

Input

- Logic compatibility ..... 3.3 V or 5 V
- Input range ..... 0 V to 5.5 V
- V_{IL} ..... 0.95 V max
- V_{IH} ..... 2.4 V min
- Input impedance ..... 10 kΩ
- Overvoltage protection ..... ±10 V_{pk}

Output

- Output range ..... 0 V to 3.45 V
- V_{OL} ..... 0.33 V max @ 5 mA
- V_{OH} ..... 2.8 V min @ 5 mA
- Output impedance ..... 42 Ω
- Output current ..... ±5 mA max

General Specifications

This section lists general specification information for the PXIe-4464.

Bus Interface

Form factor ..... x1 PXI Express peripheral module, Specification rev 1.0 compliant

Slot compatibility ..... x1 and x4 PXI Express or PXI Express hybrid slots

DMA channels ..... 2, analog input

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Timing and Synchronization

Number of timing engines ..... 2[1]

Reference clock source ..... Onboard clock, backplane PXIe_CLK100

Intermodule ADC clock skew[2]

T_{tb} ±5 °C ..... 12 ns max

(Listed accuracy is valid for 30 days following a timebase change.)

(T_{tb} = ambient temperature at which the timebase source was last changed.)

Over full operating temperature range ..... 20 ns max

Power Requirements

Voltage (V)	Current (A), Max (Typical)
+3.3	3.0 (2.0)
+12	2.0 (1.6)

Physical

Dimensions (not including connectors) ..... 16 cm × 10 cm
(6.3 in. × 3.9 in.)
3U CompactPCI slot

Analog input connectors ..... BNC female or Mini-XLR male

Digital trigger connector (PFI0) ..... SMB male

Weight ..... 260 g (9.2 oz)

Measurement Category ..... I[3]

Caution Do *not* use the PXIe-4464 for connections to signals or for measurements within Categories II, III, or IV.

Caution The protection provided by the PXIe-4464 can be impaired if it is used in a manner not described in this document.

Caution Clean the hardware with a soft, nonmetallic brush. Make sure that the hardware is completely dry and free from contaminants before returning it to service.

---

[1] Channels can be arbitrarily grouped into timing engines. Timing engines can be independently synchronized, started, and stopped. Both timing engines must use the same reference clock source.

[2] Valid between PXIe-4464 modules installed in the same chassis. Between PXIe-4464 modules in different chassis, add the potential skew in the PXI_CLK10 clock distribution. Refer to the appropriate chassis documentation for its clock skew specifications.

[3] Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connections to the MAINS building installations of Measurement Categories CAT II, CAT III, CAT IV.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Environmental

Operating Environment

Ambient temperature range ..... 0 °C to 55 °C
(Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.)

Relative humidity range..... 10% to 90%, noncondensing
(Tested in accordance with IEC 60068-2-56.)

Altitude ..... 2,000 m (800 mbar)

Pollution Degree 2

Indoor use only.

Storage Environment

Ambient temperature range ..... -20 °C to 70 °C
(Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.)

Relative humidity range..... 5% to 95%, noncondensing
(Tested in accordance with IEC 60068-2-56.)

Shock and Vibration

Operational shock ..... 30 g peak, half-sine, 11 ms pulse
(Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)

Random vibration

- Operating ..... 5 Hz to 500 Hz, 0.3 g_{rms}
- Nonoperating ..... 5 Hz to 500 Hz, 2.4 g_{rms}
  (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Calibration

Self-calibration ..... On software command, the module computes gain and offset corrections relative to the high-precision internal voltage reference and a timebase correction relative to the high-precision internal frequency reference.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Self-calibration interval ..... Recommended whenever the ambient temperature differs from T_{cal} by more than ±5 °C. T_{cal} = ambient temperature at which the last calibration was performed. Listed accuracies are valid for 30 days following a self-calibration.

External calibration interval..... 2 years

Warm-up time ..... 15 minutes

Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1

Note For UL and other safety certifications, refer to the product label or the *Online Product Certification* section.

Electromagnetic Compatibility

Mini-XLR Version

The PXIe-4464 meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.

Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Note For EMC declarations and certifications, and additional information, refer to the *Online Product Certification* section.

BNC Version

The PXIe-4464 meets the requirements of the following EMC standards for sensitive electrical equipment for measurement, control, and laboratory use:

- EN 61326-2-1 (IEC 61326-2-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.

Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.

Note For EMC declarations and certifications, and additional information, refer to the *Online Product Certification* section.

CE Compliance CE

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit `ni.com/certification`, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste and Electronic Equipment, visit ni.com/environment/weee.

电子信息产品污染控制管理办法 （中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。 (For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Worldwide Support and Services

The National Instruments website is your complete resource for technical support. At ni.com/support you have access to everything from troubleshooting and application development self-help resources to email and phone assistance from NI Application Engineers.

Visit ni.com/services for NI Factory Installation Services, repairs, extended warranty, and other services.

Visit ni.com/register to register your National Instruments product. Product registration facilitates technical support and ensures that you receive important information updates from NI.

National Instruments corporate headquarters is located at 11500 North Mopac Expressway, Austin, Texas, 78759-3504. National Instruments also has offices located around the world. For telephone support in the United States, create your service request at ni.com/support or dial 1 866 ASK MYNI (275 6964). For telephone support outside the United States, visit the Worldwide Offices section of ni.com/niglobal to access the branch office websites, which provide up-to-date contact information, support phone numbers, email addresses, and current events.

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for more information on National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the patents.txt file on your media, or the *National Instruments Patents Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2014–2016 National Instruments. All rights reserved.

376165B-01 Dec16

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP