ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments SCXI-1167* at our website: *Click HERE*

NI SCXI™-1167 Specifications

64-Channel Relay Driver Module

このドキュメントには、日本語ページも含まれています。

This document lists specifications for the NI SCXI-1167 relay driver module. All specifications are subject to change without notice. Visit `ni.com/manuals` for the most current specifications.

Configuration ..... 64 channels, non-latching

Channels are in a bank arrangement, with eight banks of eight channels.

Input Characteristics

Maximum drive voltage, external power ..... 50 VDC

Maximum drive current

- Per channel ..... 600 mA
- Per module ..... 25 A

Internal drive power ..... 5 V at 0.75 A

Per-channel protection circuitry

- Overvoltage protection activates at 80 V maximum.
- Over-current protection activates at 1.5 A minimum.
- Over-temperature protection activates at 150 °C junction temperature.

Internal drive power protection circuitry

- The 5 V internal power supply has a fuse for over-current protection. This fuse is customer replaceable. Refer to the *Accessories* section for fuse ratings.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dynamic Characteristics

Single-channel operate time
(typical at 25 °C).....60 µs

Note The operate time is measured from an input trigger to 90% activation of a 500 Ω resistor or between consecutive channel operations.

During power-on or reset, all relay drivers disconnect (power down).

Trigger Characteristics

Input trigger

- Sources .....SCXI trigger lines 0–7, Front panel, Rear connector
- Minimum pulse width.....150 ns
- Front panel input voltage
  - Minimum.....–0.5 V
  - VL maximum .....+0.7 V
  - VH minimum.....+2.0 V
  - Nominal.....+3.3 V
  - Maximum .....+5.5 V

Output trigger

- Destinations .....SCXI trigger lines 0–7, Front panel, Rear connector
- Pulse width .....Programmable (1 µs to 62 µs)
- Front panel nominal voltage.....3.3 V TTL, 8 mA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Physical Characteristics

I/O connector ..... 78-pin D-subminiature

Power requirement, including optional internal drive power ..... 6.3 W at ±18.5 V
200 mW at 5 V

Dimensions (W × H × D) ..... 3.0 cm × 17.3 cm × 19.8 cm
(1.2 in. × 6.8 in. × 7.8 in.)

Weight ..... 700 g (1 lb 9 oz)

Environment

Operating temperature ..... 0 °C to 55 °C

Storage temperature ..... –20 °C to 70 °C

Relative humidity ..... 5% to 85%, noncondensing

Pollution Degree 2

Approved at altitudes up to 2,000 m

Indoor use only

Accessories

Caution You *must* install mating connectors according to local safety codes and standards and according to the specifications provided by the connector manufacturer. You are responsible for verifying safety compliance of third-party connectors and their usage according to the relevant standard(s), including UL and CSA in North America and IEC and VDE in Europe.

The module comes with one mating connector and backshell kit. Replacement fuses and additional mating connectors are available through general electronics catalogs.

Table 1. Third-Party Accessories for the NI SCXI-1167


Accessory	Rating	Manufacturer and Part Number
5 V internal supply fuse	F2 A, 125 V	Littlefuse, NANO^2, 154.002
78-pin D-subminiature, female, vertical or right-angle	60 V, 5 A	Any

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

How to Replace the Fuse

The front panel LED shows the status of the +5 V fuse. If the LED is on, the fuse is intact. To replace a fuse, refer to Figure 1 as you complete the following steps:


1. Ground yourself with a grounding strap or with a ground connected to your SCXI chassis. Proper grounding prevents damage to your SCXI module from electrostatic discharge.
2. Power off the SCXI chassis, and remove the module with the blown fuse.
3. Remove the grounding screw of the top cover.
4. Snap out the top cover of the shield by placing a screwdriver in the groove at the bottom of the module and pushing down on the screwdriver to lift out the fuse.
5. Replace the blown fuse. Refer to Figure 2 for the fuse location.
6. Reinstall the top cover and grounding screw.

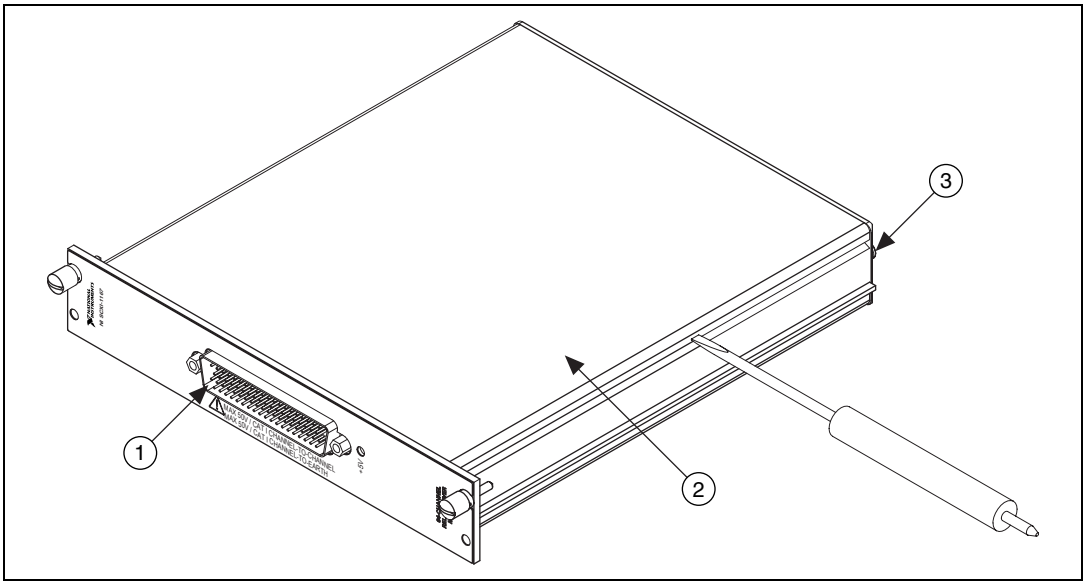

1 Front Connector	3 Grounding Screw
2 Removable Cover	

Figure 1. Removing the SCXI Module Cover

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

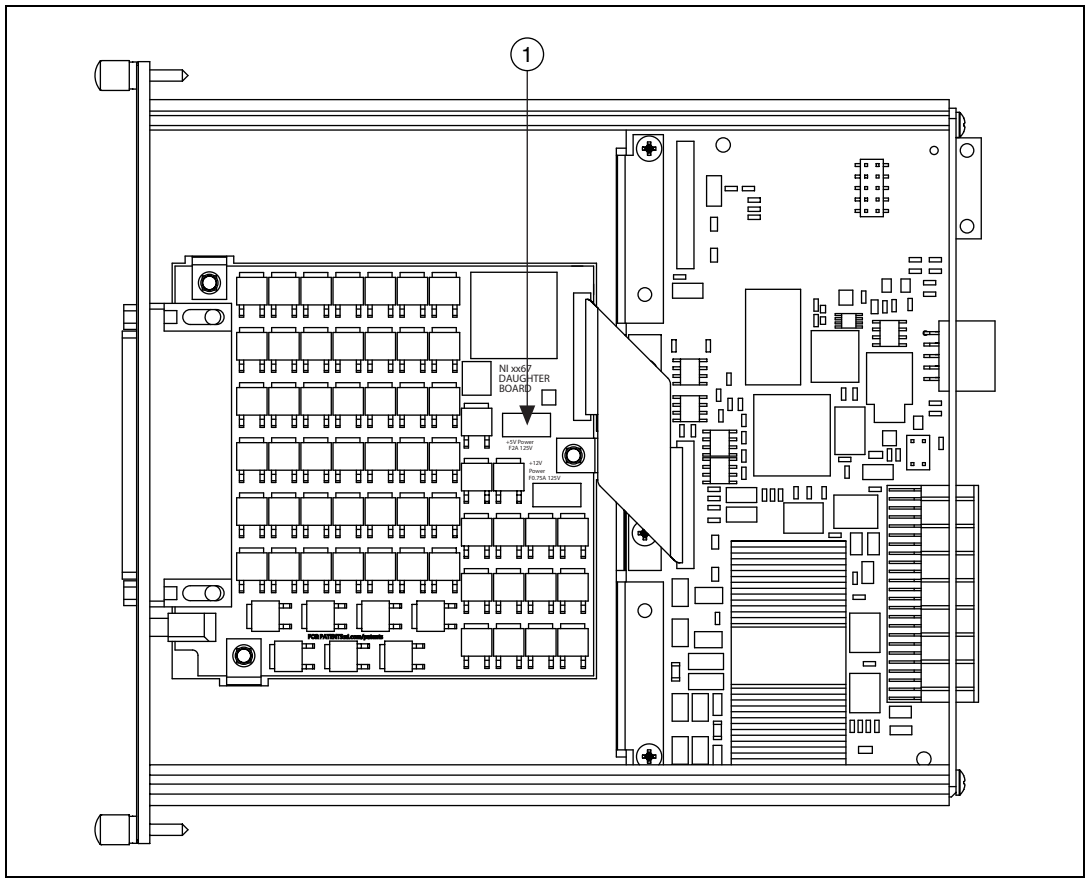

1 +5 V Fuse

Figure 2. NI SCXI-1167 Daughterboard Diagram with Fuse Location

Note The +12 V fuse is not used on the SCXI-1167, is only rated for 0.75 A, and should not be used as a replacement for the +5 V fuse.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Compliance and Certifications

Safety

This product meets the requirements of the following standards for safety and electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 3111-1, UL 61010B-1
- CAN/CSA C22.2 No. 1010.1

Note For UL and other safety certifications, refer to the product label, or visit `ni.com/hardref.nsf`, search by model number or product line, and click the appropriate link in the Certification column.

Electromagnetic Compatibility

Emissions.....EN 55011 Class A at 10 m
FCC Part 15A above 1 GHz

Immunity .....EN 61326:1997 + A2:2001, Table 1

EMC/EMI .....CE, C-Tick, and FCC Part 15 (Class A) Compliant

Note For EMC compliance, you *must* operate this device with shielded cabling.

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

Low-Voltage Directive (safety).....73/23/EEC

Electromagnetic Compatibility
Directive (EMC) 89/336/EEC

Note Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit `ni.com/hardref.nsf`, search by model number or product line, and click the appropriate link in the Certification column.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

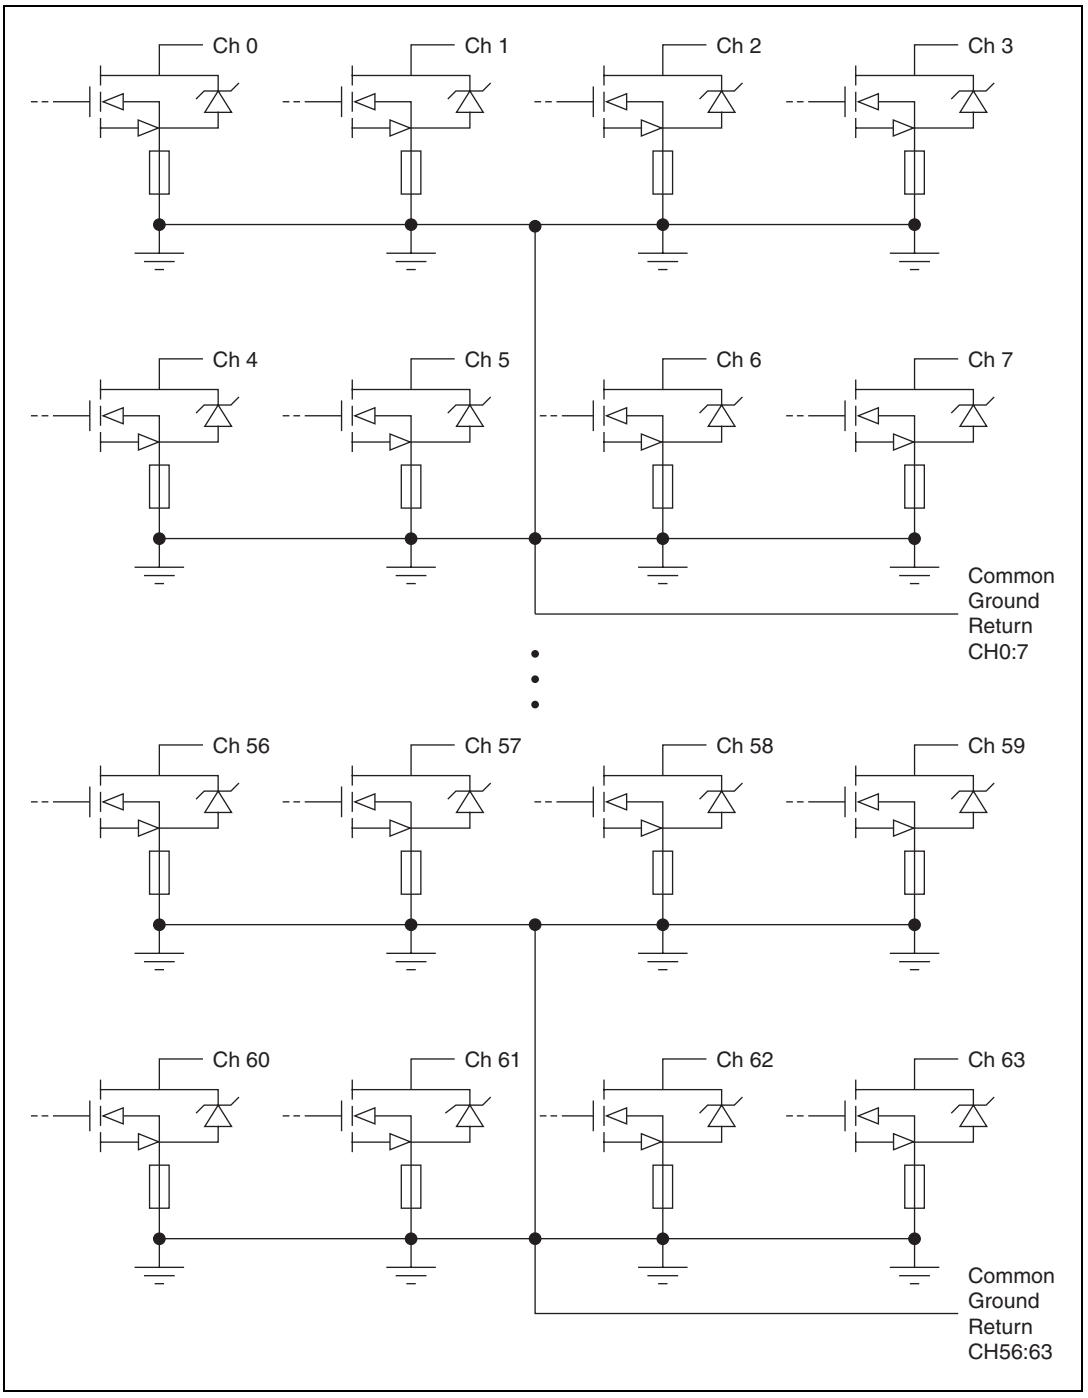


Figure 3. SCXI-1167 Relay Driver Output Topology

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

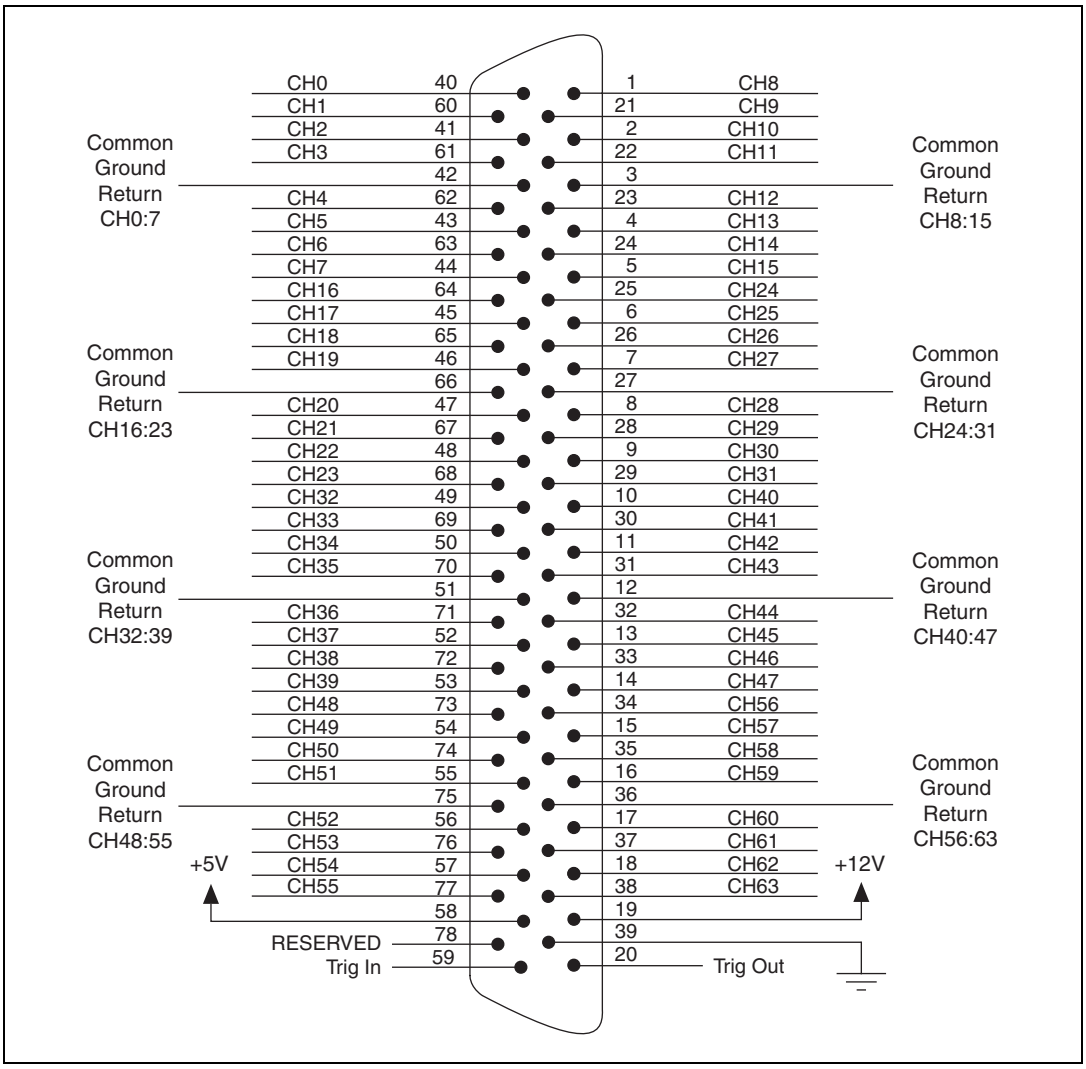


Figure 4. NI SCXI-1167 Front Panel Pinout

National Instruments, NI, ni.com, and LabVIEW are trademarks of National Instruments Corporation. Refer to the *Terms of Use* section on `ni.com/legal` for more information about National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or `ni.com/patents`.

© 2003–2007 National Instruments Corporation. All rights reserved.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP