



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

NI 6132/6133 Specifications

This document lists the I/O terminal summary and specifications for the NI PXI-6132/6133.

For the most current edition of this document, refer to ni.com/manuals. Refer to the *DAQ Quick Start Guide* for more information about accessing documents on the NI-DAQ CD.



Note With NI-DAQmx, National Instruments has revised its terminal names so they are easier to understand and more consistent among NI hardware and software products. The revised terminal names used in this document are usually similar to the names they replace. For a complete list of Traditional NI-DAQ terminal names and their NI-DAQmx equivalents, refer to the *Terminal Name Equivalents* table in the *S Series Help*.

Table 1. I/O Terminal Summary

Terminal Name	Terminal Type and Direction	Impedance Input/ Output	Protection (Volts) On/Off	Source (mA at V)	Sink (mA at V)	Rise Time (ns)	Bias
AI <0..7>	AI	100 M Ω in parallel with 10 pF	35/25	—	—	—	± 16 nA ± 35 nA
AI GND	—	—	—	—	—	—	—
D GND	—	—	—	—	—	—	—
+5 V	—	0.1 Ω 0.45 Ω	Short-circuit to ground	1 A	—	—	—
P0.<0..7>	DIO	—	$V_{CC} + 0.5$	13 at ($V_{CC} - 0.4$)	24 at 0.4	1.1	50 k Ω pu
EXTSTROBE*	DO	—	—	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 0/ AI START TRIG	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 1/ AI REF TRIG	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 2	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu



Table 1. I/O Terminal Summary (Continued)

Terminal Name	Terminal Type and Direction	Impedance Input/Output	Protection (Volts) On/Off	Source (mA at V)	Sink (mA at V)	Rise Time (ns)	Bias
PFI 3/ CTR 1 SOURCE	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 4/ CTR 1 GATE	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
CTR 1 OUT	DO	—	—	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 5	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 6	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 7/ AI SAMP CLK	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 8/ CTR 0 SOURCE	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
PFI 9/ CTR 0 GATE	DIO	—	$V_{CC} + 0.5$	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
CTR 0 OUT	DO	—	—	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
FREQ OUT	DO	—	—	3.5 at ($V_{CC} - 0.4$)	5 at 0.4	1.5	50 k Ω pu
AI = Analog Input DIO = Digital Input/Output DO = Digital Output pu = pull-up Note: The tolerance on the 50 k Ω pull-up resistors is large. Actual value might range between 17 k Ω and 100 k Ω .							

Specifications

The following specifications are typical at 25 °C unless otherwise noted.

Analog Input

Input Characteristics

Number of channels

NI 6132.....4

NI 6133.....8

Type of ADC

Resolution.....14 bits, 1 in 16,384

Pipeline.....0

Sampling rate	
Maximum.....	2.5 MS/s per channel
Minimum	No minimum
Input impedance	
AI – to AI GND	100 MΩ in parallel with 10 pF
AI + to AI GND.....	100 MΩ in parallel with 10 pF
Input bias current	±2 pA typ, ±25 pA max
Input offset current.....	±1 pA typ, ±10 pA max
Input coupling	DC
Max working voltage for all analog input channels	
Positive input (AI +)	±11 V for all ranges, Measurement Category I
Negative input (AI –).....	±11 V for all ranges, Measurement Category I



Caution Do *not* use for measurements within Categories II, III, and IV.

Overvoltage protection (AI +, AI –)	±36 V
Input current during overvoltage conditions	±20 mA max
Input FIFO size	
NI 6132	16 MS
NI 6133	16 or 32 MS
Data transfers	DMA, interrupts, programmed I/O
DMA mode	Scatter-gather

DC Transfer Characteristics

INL	±0.6 LSB typ, ±1 LSB max
DNL	±0.25 typ, ±0.75 max, no missing codes

Absolute Accuracy

Nominal Range at Full Scale (V)	Residual Gain Error (ppm of Reading)	Gain Tempco (ppm/°C)	Reference Tempco	Residual Offset Error (ppm of Range)	Offset Tempco (ppm of Range/°C)	INL Error (ppm of Range)	Random Noise, σ (μ Vrms)	Absolute Accuracy at Full Scale ¹ (μ V)	Sensitivity ² (μ V)
±10	151	25	5	47	39	122	1080	4660	432.0
±5	176	25	5	40	43	122	546	2440	218.4
±2.5	207	25	5	47	61	122	305	1370	122.0
±1.25	234	25	5	45	78	122	172	740	68.8

AbsoluteAccuracy = Reading · (GainError) + Range · (OffsetError) + NoiseUncertainty
 GainError = ResidualAGainError + GainTempco · (TempChangeFromLastInternalCal) + ReferenceTempco · (TempChangeFromLastExternalCal)
 OffsetError = ResidualAOffsetError + OffsetTempco · (TempChangeFromLastInternalCal) + INL_Error

$$\text{NoiseUncertainty} = \frac{\text{RandomNoise} \cdot 3}{\sqrt{100}}$$

For a coverage factor of 3 σ and averaging 100 points.

¹ Absolute accuracy at full scale on the analog input channels is determined using the following assumptions:

TempChangeFromLastExternalCal = 10 °C
 TempChangeFromLastInternalCal = 1 °C
 number_of_readings = 100
 CoverageFactor = 3 σ

For example, on the 10 V range, the absolute accuracy at full scale is as follows:

GainError = 151 ppm + 25 ppm · 1 + 5 ppm · 10 GainError = 226 ppm
 OffsetError = 47 ppm + 39 ppm · 1 + 122 ppm OffsetError = 208 ppm

$$\text{NoiseUncertainty} = \frac{1,080 \mu\text{V} \cdot 3}{\sqrt{100}} \quad \text{NoiseUncertainty} = 320 \mu\text{V}$$

$$\text{AbsoluteAccuracy} = 10 \text{ V} \cdot (\text{GainError}) + 10 \text{ V} \cdot (\text{OffsetError}) + \text{NoiseUncertainty} \quad \text{AbsoluteAccuracy} = 4,660 \mu\text{V}$$

² Sensitivity is the smallest voltage change that can be detected. It is a function of noise.

Dynamic Characteristics


Phase mismatch..... $\pm 2^\circ$ at 1 MHz

Table 2. NI 6132/6133 Analog Input Dynamic Characteristics

Input Range	Bandwidth ¹ (MHz)	SFDR Typ ² (dB)	CMRR ³ (dB)	System Noise ⁴ (LSB _{rms})	Crosstalk ⁵ (dB)	THD (dB at 10 kHz)
± 10 V	1.3	95	70	0.78	-74	-101.1
± 5 V	1.3	95	70	0.79	-74	-102.5
± 2.5 V	1.25	96	70	0.86	-74	-102.2
± 1.25 V	1.25	94	70	0.95	-74	-102.1

¹ -3 dB frequency for input amplitude at 10% of the input range (-20 dB)
² Measured at 100 kHz with twelfth-order bandpass filter after signal source
³ DC to 60 Hz
⁴ LSB_{rms}, including quantization
⁵ DC to 100 kHz

Typical Performance Graphs

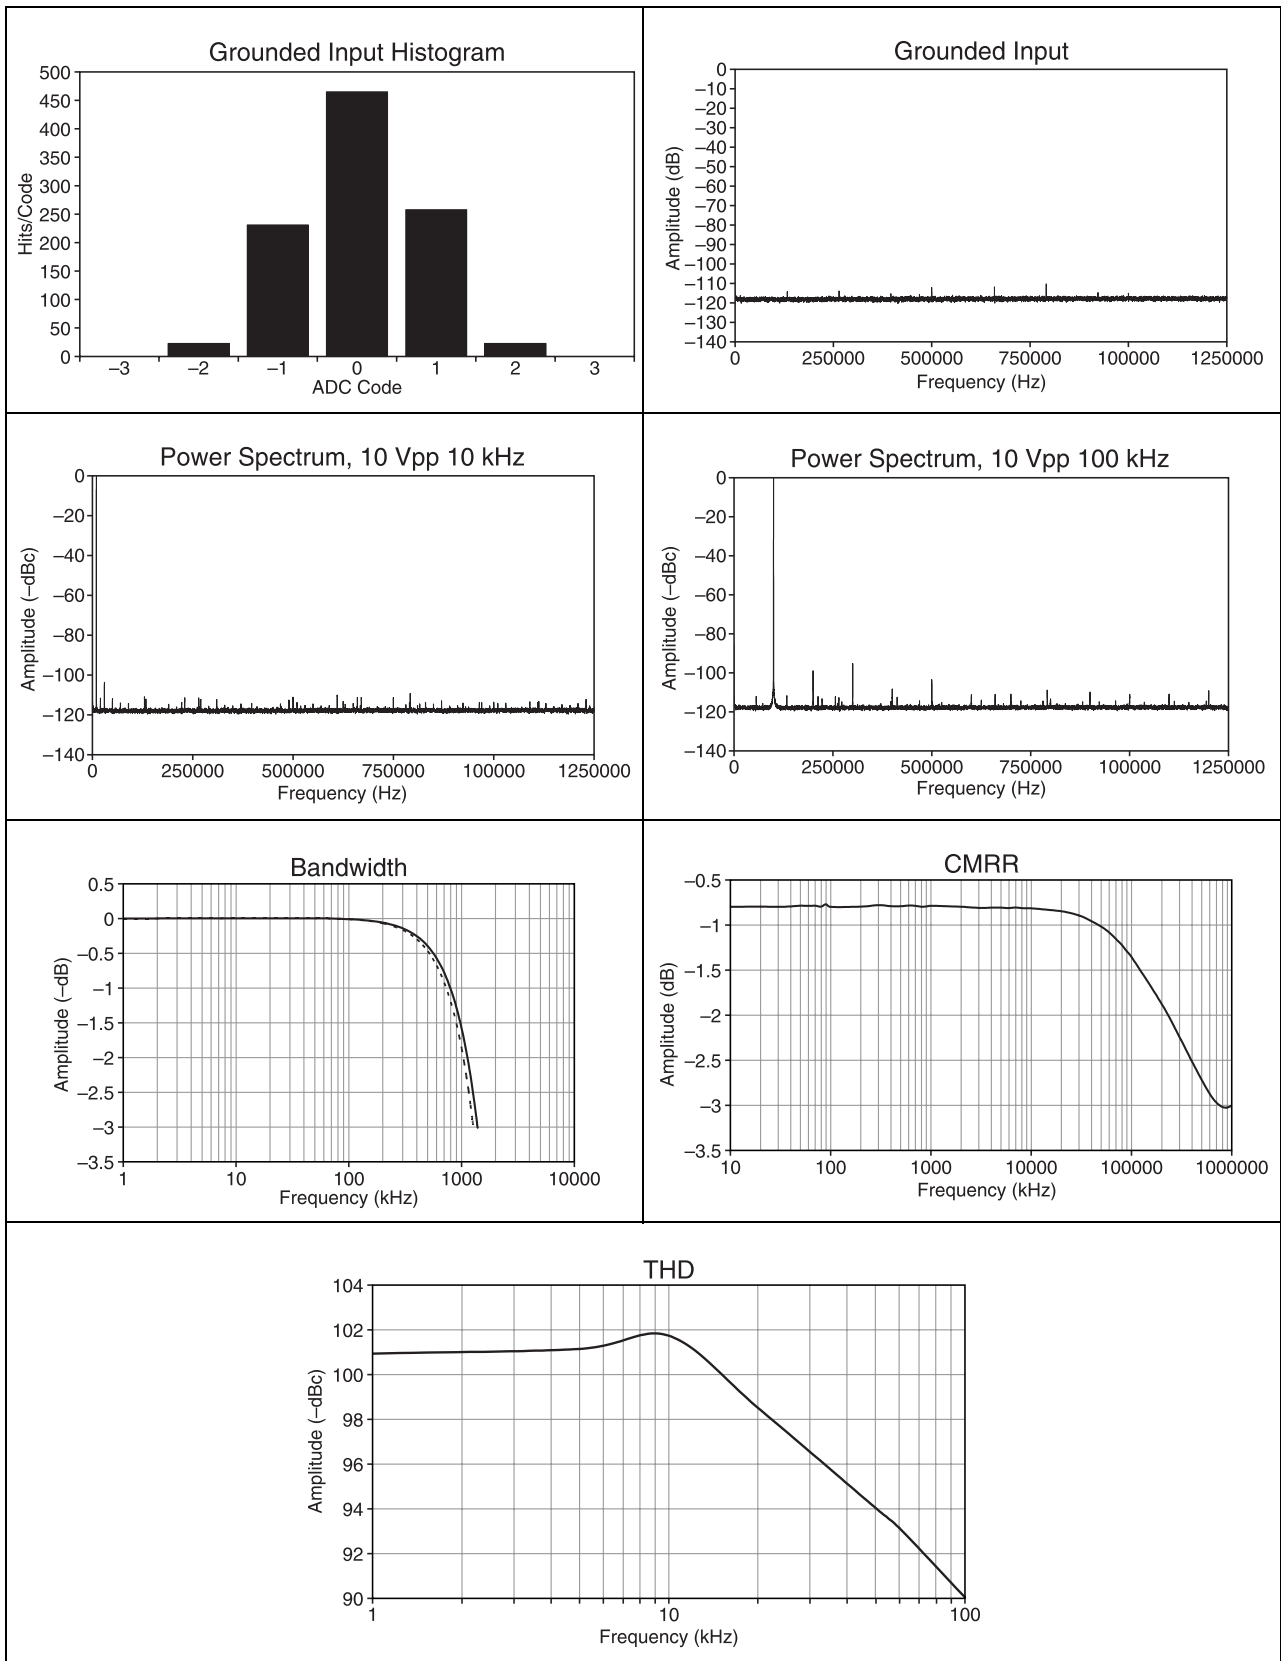

Stability

Recommended warm-up time 15 min

Calibration

Level..... 5.000 V (± 2.5 mV)
(actual value stored in EEPROM)

Temperature coefficient ± 5.0 ppm/ $^{\circ}$ C max

Long-term stability..... ± 15 ppm/ $\sqrt{1,000}$ h

Digital I/O

Number of channels 8 input/output

Compatibility TTL/CMOS

Table 3. Digital Logic Levels

Level	Min	Max
Input low voltage	0.0 V	0.8 V
Input high voltage	2.0 V	5.0 V
Input low current ($V_{in} = 0$ V)	—	$-320 \mu\text{A}$
Input high current ($V_{in} = 5$ V)	—	$10 \mu\text{A}$
Output low voltage ($I_{OL} = 24$ mA)	—	0.4 V
Output high voltage ($I_{OH} = 13$ mA)	4.35 V	—

Power-on state..... Input (high-impedance)

Data transfers DMA, interrupts,
programmed I/O

Input buffer 2,044 bytes

Output buffer..... 2,044 bytes

Transfer rate (1 word = 8 bits) 10 Mwords/s

Timing I/O

Number of channels 2 up/down counter/timers,
1 frequency scaler

Resolution	
Counter/timers	24 bits
Frequency scaler	4 bits
Compatibility	TTL/CMOS
Base clocks available	
Counter/timers	20 MHz, 100 kHz
Frequency scaler	10 MHz, 100 kHz
Base clock accuracy.....	$\pm 0.01\%$
Max source frequency.....	20 MHz
Min source pulse duration	10 ns, edge-detect mode
Min gate pulse duration	10 ns, edge-detect mode
Data transfers	DMA, interrupts, programmed I/O
DMA modes	Scatter-gather

Triggers

Analog Trigger

Source	All analog input channels
Level	\pm full-scale
Slope	Positive or negative (software-selectable)
Resolution	8 bits, 1 in 256
Hysteresis.....	Programmable
Bandwidth (-3 dB)	5 MHz internal/external

Digital Trigger

Compatibility	TTL
Response	Rising or falling edge
Pulse width	10 ns min

RTSI Trigger Lines (PCI Only)

Trigger lines <0..6>.....	7
RTSI clock	1

PXI Trigger Bus (PXI Only)

Trigger lines <0..6>.....	7
Star trigger.....	1

Bus Interface

Type	Master, slave
------------	---------------

Power Requirement

+5 VDC ($\pm 5\%$)

NI 6132	2.2 A
NI 6133	3.0 A

+3.3 V

NI 6132	1.0 A
NI 6133	1.2 A

-12 VDC

NI 6132	45 mA
NI 6133	70 mA

Power available at I/O connector +4.65 to +5.25 VDC at 1 A

Physical

Dimensions (not including connectors)

NI PCI-6132/6133.....	31.2 cm \times 10.6 cm (12.3 \times 4.2 in.)
NI PXI-6132/6133	16.0 cm \times 10.0 cm (6.3 in. \times 3.9 in.)

I/O connector..... 68-pin male SCSI-II type

Environmental

Operating temperature..... 0 to 50 °C

Storage temperature -20 to 70 °C

Humidity	10 to 90% RH, noncondensing
Maximum altitude.....	2,000 m
Pollution Degree (indoor use only)	2

Safety

The NI 6132/6133 devices are designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1
- CAN/CSA-C22.2 No. 61010-1



Note For UL and other safety certifications, refer to the product label, or visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Electromagnetic Compatibility

Emissions.....	EN 55011 Class A at 10 m FCC Part 15A above 1 GHz
Immunity	EN 61326:1997 + A2:2001, Table 1
EMC/EMI	CE, C-Tick, and FCC Part 15 (Class A) Compliant



Note For EMC compliance, operate this device with shielded cabling.

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

Low-Voltage Directive (safety).....	73/23/EEC
Electromagnetic Compatibility Directive (EMC)	89/336/EEC



Note Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

National Instruments, NI, ni.com, and LabVIEW are trademarks of National Instruments Corporation. Refer to the *Terms of Use* section on ni.com/legal for more information about National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or ni.com/patents.

© 2004–2005 National Instruments Corporation. All rights reserved.

371231C-01

May05



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com