

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

MIC-3358A

6U CompactPCI® Intel® Pentium® 4 Processor-M Board with VGA/Dual Gigabit LAN/PMC (PICMG 2.16)

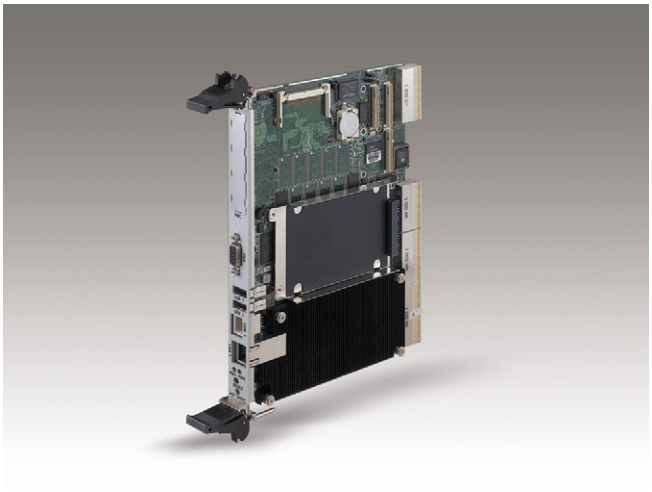

Features

- Supports Intel® Pentium® 4 Processor-M up to 2.2 GHz
- Dual Gigabit Ethernet on board
- Up to 2 GB (DDR 266) memory on board with ECC
- Intel 845E chipset
- PICMG® 2.16 (CompactPCI® Packet Switching Backplane) compliance
- PICMG 2.1 (CompactPCI Hot Swap) compliance
- Onboard 2.5" HDD PMC connector and CompactFlash socket

CE FCC

Introduction

The MIC-3358A is a high-performance Intel Pentium 4 Processor-M based CompactPCI server blade, fully compliant with the PICMG 2.16 Packet Switched Backplane specification. It provides a cost effective platform for applications which demand lower power and high performance. The MIC-3358A can be used in either a system slot or peripheral slot, making it an ideal choice for emerging applications requiring fast switched-fabric interconnection between blades. With these features and full hot swap functionality, the MIC-3358A is well-suited for mission critical telecom and data communication applications where high availability is essential, such as 3G wireless infrastructure, Voice-over-IP, media gateways, soft switches and triple-play server clusters.

The MIC-3358A is architected around the Intel Pentium 4 Processor-M and the Intel 845E chipset. It excels as a high performance CompactPCI platform, delivering compelling system bus performance across a 400 MHz Intel NetBurst. microarchitecture. Its innovative wider data paths and flexible memory refresh technology maximize DDR SDRAM performance.

In addition to its full array of industry standard I/O features, the MIC-3358A also provides dual Gigabit Ethernet ports and one PMC site for onboard I/O expansion. The MIC-3358A single-board computing blade is ready to meet the most demanding high performance, computation-intensive, and I/O processing needs.

Specifications

Processor System	CPU (CPU not included)	Intel Pentium 4 Processor-M
	Max. Speed	2.2 GHz (400 MHz FSB)
	L2 Cache	512 KB on die
	Chipset	Intel 845E + ICH4
	BIOS	Award 4 Mbit Flash (Network booting/Console Redirect optional)
Bus	Front Side Bus	400 MHz
	PCI	32-bit/33 MHz
Memory	Technology	DDR 200/266 MHz SDRAM with ECC support
	Max. Capacity	2 GB
	Integrated	512 MB/1 GB/2 GB memory onboard (No onboard SO-DIMM connector for upgradility)
Graphic	Controller	ATI RageXL
	VRAM	8 MB onboard
Ethernet	Interface	10/100/1000Base-TX Gigabit Ethernet
	Controller	Intel 82540 x 2
	I/O Connector	RJ-45 x 1 (front)
EIDE	Mode	ATA 33/66/100 mode
	Channel	2
	Storage Site	One IDE connector and space reserved for embedded 2.5" HDD
PCI-to-PCI Bridge	Interface	System/Drone mode capability
	Controller	HiNT HB6
	System Bus	Up to 64-bit/33 MHz
Front I/O Interface	LAN	1
	Serial	1 (RS-232, RJ-45 connector)
Operating System	Compatibility	Windows® XP/2000/NT 4.0, Red Hat Linux 8.0 and 9.0, VxWorks
Hardware Monitor	Controller	Winbond W83782D
	Monitor	CPU temperature, 3.3 V/5 V/12 V
Watchdog Timer	Output	Interrupt, system reset, NMI
	Interval	Programmable, 0 ~ 255 sec.
PMC	Site	1
	Interface	32-bit/33 MHz PCI Mezzanine (IEEE1386.1)
	Signal	+5 V/+3.3 V compliant

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Specifications Cont.

Miscellaneous	Solid State Disk	1 CompactFlash socket			
	LED Indicator	HDD, power, hot swap			
	USB (2.0)	2 channels			
	Real Time Clock	Built-in			
Power Requirement (Intel Pentium 4 M 1.7GHz)	Voltage	+3.3 V	+5 V	+12 V	-12 V
	Maximum	4.43 A	4.9 A	35 mA	<25 mA
Environment		Operating		Non-Operating	
	Temperature	0 ~ 55 °C (32 ~ 131 °F)		-40 ~ 70 °C (-40 ~ 158 °F)	
	Humidity	-		95% @ 60 °C (non-condensing)	
	Shock	20 G		50 G	
	Vibration (5 ~ 500 Hz)	1.5 Grms		2.0 G	
Physical Characteristics	Dimensions (W x D)	233.35 x 160 mm (9.19" x 6.3"), 1-slot width			
	Weight	0.8 kg (1.76 lb)			
Compliance		PICMG 2.0 R3.0 CompactPCI Specification PICMG 2.1 R2.0 CompactPCI Hot Swap Specification PICMG 2.16 R1.0 CompactPCI Packet Switching Backplane Specification			

Recommended Configurations

CPU Board	PMC Module	Rear I/O Board	Enclosure
MIC-3358A	MIC-3665-A, MIC-3665-B	RIO-3309C-A RIO-3309S-A1 RIO-3309S-A2	MIC-3036-A/S2, MIC-3039-B, MIC-3056A, MIC-3038A/C, MIC-3041A/B/C/CW/L, MIC-3042A/B, MIC-3081B, MIC-3082A, CP-150, MIC-3043A/B/C

Rear Transition Board

Part Number	Rear Panel							Onboard Header/Socket/Connector							Slot Width
	KB & Mouse	COM2*	GbE LAN	VGA	USB	10/100 LAN**	SCSI	IDE	FDD	SCSI	COM1	PRT	USB	Conn.	
RIO-3309C-A	1	1	2	1	1	1	-	1	1	-	1	1	1	J3/J5	1
RIO-3309S-A1	1	1	2	1	1	1	-	1	1	1	1	1	1	J1/J2/ J3/J5	1
RIO-3309S-A2	1	1	2	1	1	1	1	1	1	-	1	1	1	J1/J2/ J3/J5	1


* Supports RS-232/422/485 selectable
** Optional for 3rd LAN from MIC-3358 but occupies the I/O port for COM2.


Ordering Information


Part Number	Front Panel I/O					Onboard Main Features				
	LAN	COM	PMC	USB	VGA	CPU	Memory	IDE Channel	CF Socket	Slot Width
MIC-3358A-M0 *	1	1	1	2	1	-	512 MB	2.5" HDD	1	1
MIC-3358A-M1 *	1	1	1	2	1	-	1 GB	2.5" HDD	1	1
MIC-3358A-M2 **	1	1	1	2	1	-	2 GB	2.5" HDD	1	1

* Please order RIO module (refer to above table) with MIC-3358 for rear I/O access.

** Please contact your local distributor for MIC-3358A-M2 availability.
Note: The above part numbers do not include the CPU, please order separately.

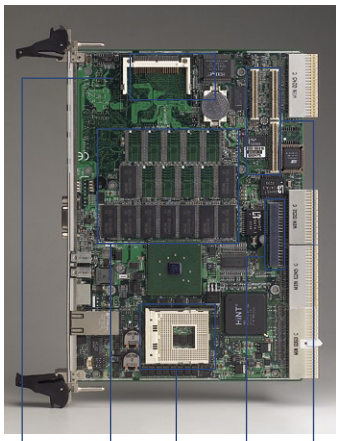

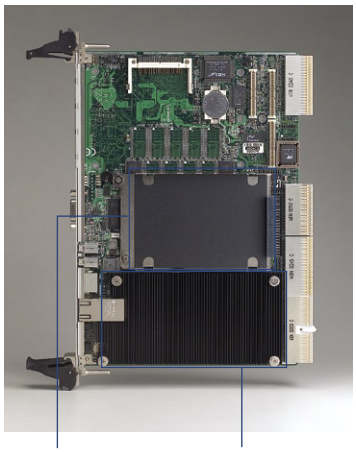

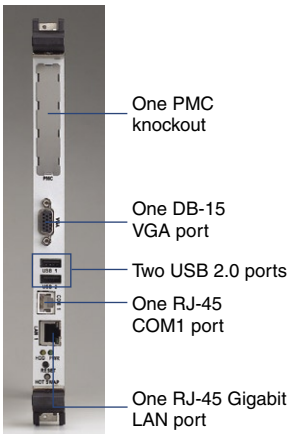

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP