ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Advantech PCI-1610* at our website: ***Click HERE***

PCI-1602
PCI-1604
PCI-1610
PCI-1612

2-port RS-232/422/485 PCI Communication Card
2-port RS-232 PCI Communication Card
4-port RS-232 PCI Communication Card
4-port RS-232/422/485 PCI Communication Card

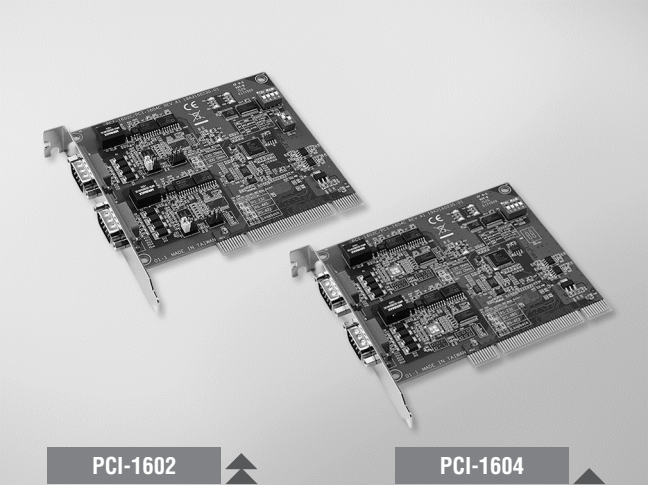

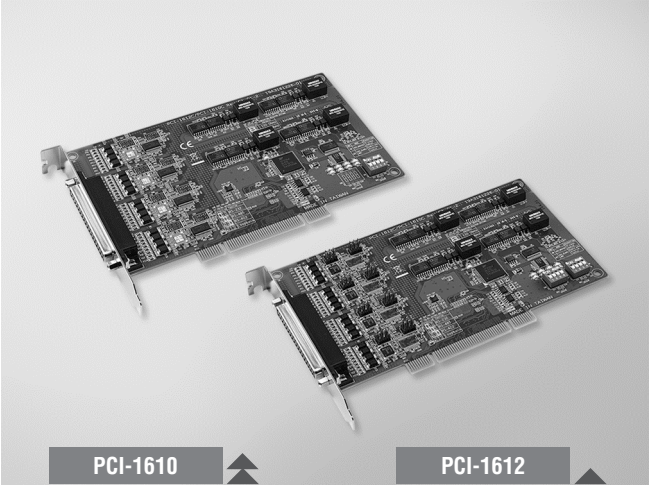

Features

- Universal PCI v2.2
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 2 x RS-232 or RS- 232/422/485 ports
- Supported operating systems: Windows 7/8/10, and Linux.
- XR17V352 UART with 256-byte FIFOs

Specifications

General

- **Bus Type** Universal PCI v2.2
- **Certification** CE, FCC class A
- **Connectors** 2x male DB9
- **Dimensions (L x W)** 119.91 x 106.67 mm (4.72" x 4.2")
- **Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- **Comm. Controller** XR17V352
- **Data Bits** 5, 6, 7, 8
- **FIFO** 256 bytes
- **Parity** None, Odd, Even, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 7/8/10, and Linux. (You can reference the SW release note to know the supported OS version.)

Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCI-1602B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1602C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V_{DC}
PCI-1604C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V_{DC}

Ordering Information

- **PCI-1602B-CE** 2-port RS-232/422/485 PCI Comm. Card w/Surge
- **PCI-1602C-AE** 2-port RS-232/422/485 PCI Comm. Card w/Surge & Isolation
- **PCI-1604C-AE** 2-port RS-232 PCI Comm. Card w/Surge & Isolation

Features

- Universal PCI v2.2
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 4 x RS-232 or RS- 232/422/485 ports
- Supported operating systems: Windows 7/8/10, and Linux.
- XR17V354 UART with 256-byte FIFOs

Specifications

General

- **Bus Type** Universal PCI v2.2
- **Certification** CE, FCC class A
- **Connectors** 1x Female DB37
- **Dimensions (L x W)** 174.65 x 106.67 mm (6.88"x 4.2")
- **Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- **Comm. Controller** XR17V354
- **Data Bits** 5, 6, 7, 8
- **FIFO** 256 bytes
- **Parity** None, Odd, Even, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 7/8/10, and Linux. (You can reference the SW release note to know the supported OS version.)

Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCI-1610B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1610C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V_{DC}
PCI-1612B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1612C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V_{DC}

Ordering Information

- **PCI-1610B-DE** 4-port RS-232 PCI Comm. Card w/Surge
- **PCI-1610C-CE** 4-port RS-232PCI Comm. Card w/ Surge & Isolation Protection
- **PCI-1612B-DE** 4-port RS-232/422/485 PCI Comm. Card w/Surge
- **PCI-1612C-CE** 4-port RS-232/422/485 PCI Comm. Card w/Surge & Isolation

Note: this series includes cable OPT4A.

Accessories

- **OPT4A-AE** DB37 x1 to DB9 x4 Cable, 30cm

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP