ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments SCXI-1326* at our website: *Click HERE*

SCXI 32-Channel Optically Isolated Digital Input Modules

NI SCXI-1162, NI SCXI-1162HV

- 32 channels
- 8 banks of 4 lines
- 300 V_{rms} isolation per bank
- TTL and CMOS (SCXI-1162)
- Up to 240 VAC/VDC signals (SCXI-1162HV)
- NI-DAQ driver software simplifies configuration and measurement

Operating Systems
- Windows 2000/NT/XP

Recommended Software
- LabVIEW
- LabWindows/CVI
- Measurement Studio
- VI Logger

Driver Software
- NI-DAQ 7



Overview

The National Instruments SCXI-1162 and the SCXI-1162HV are optically-isolated digital input modules. The NI SCXI-1162 has 32 channels of optically-isolated digital inputs, arranged into eight isolated banks of four input lines each. The SCXI-1162 interfaces to field digital logic signals, such as TTL and CMOS, where high common-mode voltages can be present. The SCXI-1162HV senses the presence of a wide range of AC or DC signals, from digital logic level signals up to 240 VAC/VDC signals. The optical isolation of the SCXI-1162 and SCXI-1162HV eliminates ground-loop problems and isolates the host computer from damaging voltages.

The SCXI-1162 and SCXI-1162HV are controlled by the DAQ device serially in multiplexed-mode over the SCXIbus. You can therefore easily integrate multiple SCXI-1162 and SCXI-1162HV modules into existing SCXI systems without additional DAQ devices or cabling. The modules can also operate in parallel mode when cabled directly to a DIO device.

Applications

You can use an SCXI system equipped with the SCXI-1162 or the SCXI-1162HV in a variety of industrial and laboratory applications. The SCXI-1162 and SCXI-1162HV safely isolate the computer from the large common-mode voltages, ground loops, and voltage spikes that often occur in industrial and research environments. The SCXI-1162HV can monitor TTL level inputs as well as sense the presence of high-voltage AC and DC signals. For example, you can use an SCXI-1162HV to sense the on/off state of power circuits, proximity switches, pushbutton switches, thermostats, or relays. The SCXI-1162 interfaces directly to field digital logic input signals that should be isolated from the host computer.

Description

Figure 1 is a block diagram of the SCXI-1162 and SCXI-1162HV. The major functions and operation of the modules are described in the following paragraphs.

Module	TTLC/CMOS	240 VAC/VDC
SCXI-1162	✓	–
SCXI-1162H	✓	✓

Table 1. Module Compatibility

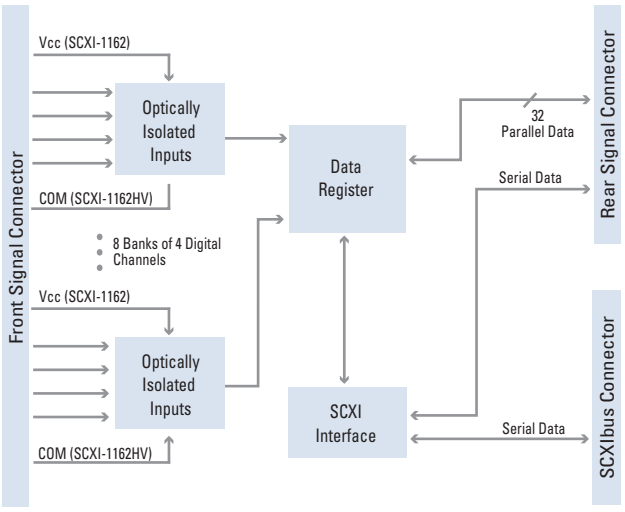


Figure 1. SCXI-1162 and SCXI-1162HV Block Diagram

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

SCXI 32-Channel Optically Isolated Digital Input Modules

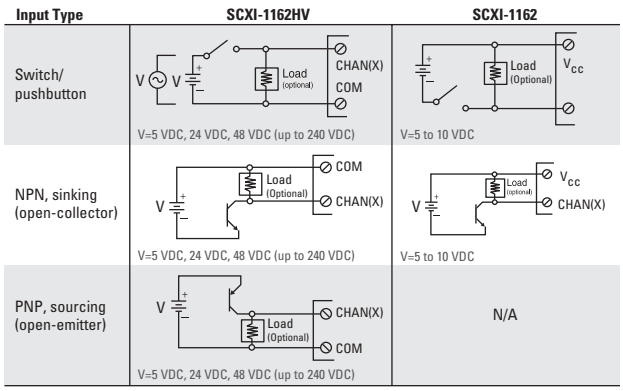


Figure 2. Input Wiring Diagrams for SCXI-1162 and SCXI-1162HV

Optically Isolated Digital Inputs

The 32 channels of the SCXI-1162 and SCXI-1162HV are organized into eight banks of four inputs each. Each bank is optically isolated to 300 V_{rms} from each other and from the SCXI chassis earth ground. The SCXI-1162 accepts many types of digital signals, including TTL, CMOS, and voltage references from 5 to 10 V (Figure 2). A 360 resistor in series with the optoisolator limits the current, as diagrammed in Figure 3. Each bank of four input lines shares one +5 to +10 V reference voltage, V_{CC}, which you supply. Each input of the SCXI-1162HV consists of current-limiting circuitry in series with a bidirec-tional optoisolator, as diagrammed in Figure 4. Each bank of four inputs share a COM pin, to which you must connect a ground reference. A positive or negative DC input signal with a magnitude greater than 2 V, up to 240 V, turns on the optocoupler circuit and register as a logic high. When sensing the presence of AC signals, a 50 or 60 Hz sinusoidal signal with a magnitude of at least 10 VAC registers a constant logic high. A 1 kHz sinusoidal signal registers a constant logic high when its magnitude exceeds 2 VAC. The SCXI-1162HV returns a constant logic low as long as the peak magnitude of the signal does not exceed ±1 V.

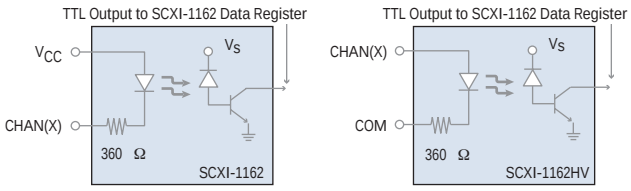


Figure 3. Digital Input Diagrams of the SCXI-1162 and the SCXI-1162HV

Data Register

The logical states of the 32 digital input channels are placed into the 32-bit data register. If the module is operating in serial mode, the 32-bit data register value is read through the SCXIbus. You can access the data register at 700 words/s. One word corresponds to all 32 digital lines. This transfer rate was determined using a 500 MHz Pentium III computer and is highly computer and system dependent. The data register also has a 32-bit parallel interface to the rear signal connector (for parallel operation with a plug-in DIO device).

Modes of Operation

Multiplexer

In serial mode, a single DAQ device reads 32-bit digital patterns from the data register of one or more SCXI modules through the SCXIbus using a serial data protocol. This serial-mode operation uses a maximum of five DIO lines of the DAQ device. With serial-mode operation, you can control several SCXI modules in one or more chassis using a single DAQ device.

Parallel

You can also operate the SCXI-1162 and SCXI-1162HV in parallel mode, connecting each module directly to a digital I/O DAQ device – 6503 (DIO-24), 6533 (DIO-32HS), 6534, and 6508 (DIO-96). In this configuration, each input channel of the SCXI-1162 or SCXI-1162HV module connects directly to a corresponding digital input line of the DIO device.

Signal Connection

Field digital signals connect to screw terminals located in the SCXI-1326 terminal block, which connects directly to the front of the SCXI module, or the TBX-1326, a DIN-rail mountable terminal block, which connects to the SCXI-1162 or SCXI-1162HV using the SH48-48-B shielded cable (Table 2).

Terminal Block	Part Number	Type	Cabling	Page
SCXI-1326	777687-26	Screw terminals Front-mounting	–	328
TBX-1326	777207-26	Screw terminals DIN-rail mount	SH48-48-B	328

Table 2. Terminal Block Options for SCXI-1162 and SCXI-1162HV

Ordering Information

NI SCXI-1162 776572-62
NI SCXI-1162HV 776572-62H

For information on extended warranty and value-added services, see page 20.

BUY ONLINE!

Visit ni.com/info and enter scxi1162 and/or scxi1162hv.

See page 276 to configure your complete SCXI system.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

SCXI Digital I/O, and SSR Switch Specifications

Specifications

SCXI-1162, SCXI-1162HV

Typical for 25 °C unless otherwise noted.

Digital Input

Number of channels ..... 32 organized into 8 optically-isolated banks of 4 inputs each
Reference voltage Vcc (SCXI-1162) ..... +5 to +10 V
Digital Logic Levels for the SCXI-1162

Level	Minimum	Maximum
Input low voltage	Vcc - 10 V	Vcc - 4 V
Input high voltage	Vcc - 1.5 V	Vcc + 5 V
Input low current	-7 mA	-25 mA

Digital logic levels for the SCXI-1162HV

Level	Minimum	Maximum
Input low voltage (DC or peak AC)	–	± 1 V
Input high voltage (DC)	±2 VDC	±240 VDC
50-60 Hz AC	10 VAC[1]	±240 VAC[1]
1 kHz AC	2 VAC[1]	

Input impedance (SCXI-1162) 360
Input current limiting (SCXI-1162HV) ..... 1 mA
Common-mode isolation ..... 300 V_{rms} between banks and bank to earth
Common-mode transient rejection ..... 500 V/µs typical, 100 V/µs minimum
Transfer rate in MUX mode[2] ..... 750 words/s (1 word = 32 bits)
Propagation delay (in parallel mode)
  SCXI-1162 ..... 0.5 µs typical, 2.0 µs maximum
  SCXI-1162HV ..... 1.5 ms

SCXI-1163, SCXI-1163R

Typical for 25 °C unless otherwise noted.

Digital Output

Number of channels ..... 32 organized into 8 optically isolated banks of 4 outputs each
Compatibility ..... Most TTL and CMOS logic
Supply voltage (Vcc) ..... +5 V ±0.5 V, provided by user
Power requirement from Vcc ..... 60 mA/bank typical, 80 mA/bank max
Digital logic levels

Level	Minimum	Maximum
Output low voltage (Iout = 12 mA)	–	0.6 V
Output high voltage (Iout = -0.4 mA)	3.0 V	–
Output low current (per channel)	–	15 mA

Common-mode isolation ..... 250 V_{rms} between banks, and bank to earth
Common-mode transient rejection ..... 500 V/µs typical, 100 V/µs minimum
Transfer rate in MUX mode[2]
  (1 word = 32 bits) ..... 750 words/s
Propagation delay (parallel mode) ..... 100 ns
Power-on state ..... High

SCXI-1163R (only)

Number of relays ..... 32 organized as 8 optically isolated banks of 4 relays each
Relay type ..... Normally open (Form A), solid-state relays
Maximum switching voltage
  AC ..... 240 VAC[1]
  DC ..... 240 VDC
Maximum switching capacity ..... 200 mA
Common-mode isolation ..... 250 V_{rms} between banks, and bank to ground
On resistance 6
Output capacitance ..... 110 pF at 50 V, 1 MHz
Leakage current ..... 1 µA maximum
Transfer rate in serial mode[2]
  (1 word = 32 bits) ..... 750 words/s
Relay set time ..... 0.6 ms
Relay reset time ..... 0.1 ms
Power-on state ..... Relays open

Certification and Compliance

SCXI-1162/HV, SCXI-1163/R ..... 300 V, Cat II working voltage

European Compliance

EMC ..... EN 61326 Group I Class A, 10m, Table 1 Immunity
Safety ..... EN 61010-1

North American Compliance

EMC ..... FCC Part 15 Class A using CISPR
Safety ..... UL Listed to UL 3111-1
CAN/CSA C22.2 No. 1010.1

Australia & New Zealand Compliance

EMC ..... AS/NZS 2064.1/2 (CISPR-11)

[1]VAC assumes sinusoidal waveform.
[2]Transfer rate depends largely on the computer and software. These tests were made using an AT-MIO-16E-2 installed in a 500 MHz PIII computer running NI LabVIEW and Windows NT.

For a definition of specific terms, please visit *ni.com/glossary*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP