ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Advantech PCI-1756* at our website: ***Click HERE***

PCI-1752U
PCI-1754
PCI-1756

64-ch Isolated Digital Output Universal PCI Card

64-ch Isolated Digital Input PCI Card

64-ch Isolated Digital I/O PCI Card

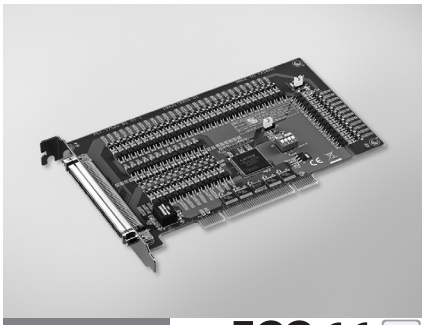

PCI-1752U

Features

- 64 isolated digital output channels
- High-voltage isolation on output channels (2,500 V_{DC})
- Wide output range (5 ~ 40 V_{DC})
- High-sink current on isolated output channels (200 mA max./channel)
- Output status readback
- Keeps the output settings and values after system hot reset
- Channel-freeze function
- High-density 100-pin SCSI connector

Specifications

Isolated Digital Output

- **Channels** 64 (16-ch/group)
- **Output Type** Sink (NPN)
- **Isolation Protection** 2,500 V_{DC}
- **Output Voltage** 5 ~ 40 V_{DC}
- **Sink Current** 200 mA max./channel
- **Opto-isolator Response** 100 µs

General


- **Bus Type** Universal PCI V2.2
- **I/O Connectors** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 230 mA
Max.: 5 V @ 500 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95%, RH non-condensing

Ordering Information

- **PCI-1752U** 64-ch Isolated Digital Output Universal PCI Card

Accessories

- **PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

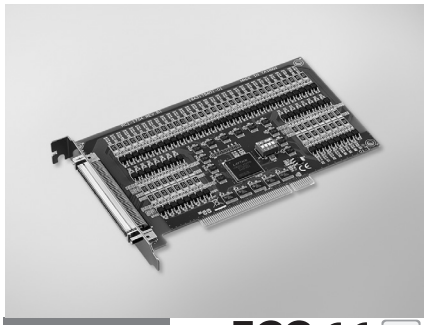

PCI-1754

Features

- 64 isolated digital input channels
- Either ± voltage input for DI by group
- High-voltage isolation on input channels (2,500 V_{DC})
- High over-voltage protection (70 V_{DC})
- Wide input range (10 ~ 50 V_{DC})
- 2,000 V_{DC} ESD protection
- Interrupt handling capability
- High-density 100-pin SCSI connector

Specifications

Isolated Digital Input

- **Channels** 64 (16-ch/group)
- **Input Voltage** Logic 0: 3 V max.
Logic 1: 10 V min. (50 V max.)
- **Input Current (Typical)** 10 V_{DC} @ 1.7 mA,
12 V_{DC} @ 2.1 mA
24 V_{DC} @ 4.4 mA,
48 V_{DC} @ 9.0 mA
50 V_{DC} @ 9.4 mA
- **Interrupt Capable Ch.** 4 (IDI0,IDI16,IDI32,IDI48)
- **Isolation Protection** 2,500 V_{DC}
- **Overvoltage Protection** 70 V_{DC}
- **ESD** 2,000 V_{DC}
- **Opto-Isolator Response** 100 µs

General


- **Bus Type** PCI V2.2
- **I/O Connectors** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 340 mA
Max.: 5 V @ 450 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCI-1754** 64-ch Isolated Digital Input PCI Card

Accessories

- **PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

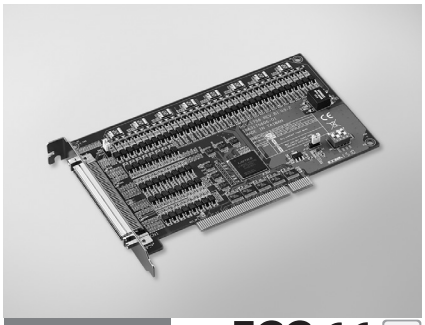

PCI-1756

Features

- Either ± voltage input for DI by group
- High-voltage isolation input/output channels (2,500 V_{DC})
- 2,000 V_{DC} ESD protection for DI
- High over-voltage protection (70 V_{DC}) for DI
- High-sink current on isolated output channels (200 mA max./channel)
- Output status readback
- Keeps output settings/ values after system hot reset
- Interrupt handling capability
- High-density 100-pin SCSI connector

Specifications

Isolated Digital Input

- **Channels** 32 (16-ch/group)
- **Input Voltage** Logic 0: 3 V max.
Logic 1: 10 V min. (50 V max.)
- **Interrupt Capable Ch.** 2 (IDI0, IDI16)
- **Isolation Protection** 2,500 V_{DC}
- **Overvoltage Protection** 70 V_{DC}
- **Opto-Isolator Response** 100 µs
- **Input Current** 10 V_{DC} @ 1.7 mA,
12 V_{DC} @ 2.1 mA
24 V_{DC} @ 4.4 mA,
48 V_{DC} @ 9.0 mA
50 V_{DC} @ 9.4 mA

Isolated Digital Output

- **Channels** 32 (16-ch/group)
- **Output Type** Sink (NPN)
- **Isolation Protection** 2,500 V_{DC}
- **Output Voltage** 5 ~ 40 V_{DC}
- **Sink Current** 200 mA max./channel
- **Opto-isolator Response** 100 µs

General

- **Bus Type** PCI V2.2
- **I/O Connectors** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 285 mA
Max.: 5 V @ 475 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95%, non-condensing

Ordering Information

- **PCI-1756** 64-ch Isolated Digital I/O PCI Card

Accessories

- **PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

All product specifications are subject to change without notice

Date updated: 15-Jul-2015

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP