ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Advantech PCL-725* at our website: ***Click HERE***

PCL-725

8-ch Relay and 8-ch Isolated Digital Input ISA Card

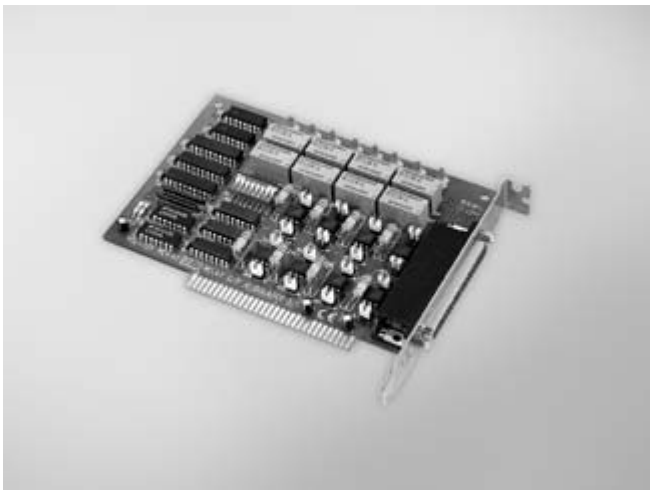

Features

- 8 x relay output channels and 8 x isolated digital input channels
- LED indicators to show activated relays
- 4 x Form C and 4 x Form A type relay output channels
- Male DB37 matching connector included
- Output status readback

Introduction

The PCL-725 relay actuator and isolated digital input card offers 8 relay actuators and 8 opto-isolated digital inputs on a single board.Typically, the onboard relays can serve as on/off control devices or small power switches. The 8 x opto-isolated DI channels are ideal devices for collecting digital inputs under noisy environment or floating potential. Also, the 8 x isolated inputs provide the best method to prevent any ground loop problems.

For easy monitoring, each relay is equipped with one red LED to reflect its on/off status. Each input channel is jumper selectable to either isolated or non-isolated input. Access to input and output channels is made possible through an onboard 37-pin D type connector.

Specifications

Isolated Digital Input

- **Channels** 8
- **Input Voltage** 5 ~ 24 V_{DC}
- **Isolation Protection** 1,500 V_{DC}
- **Input Resistance** 560 Ω
- **Input Current** 60 mA max.

Non-isolated Digiteal Input

- **Channels** 8 (Jumper-selectable)
- **Input Voltage** Logic 0: 0.8 V max.
  Logic 1: 2.0 V min. (5.25 V max.)

Relay Output

- **Channels** 8
- **Relay Type** SPDT (4 x Form C and 4 x Form A)
- **Contact Rating** 120 V_{AC} @ 0.5 A, or 30 V_{DC} @ 1 A
- **Relay on Time** 8 ms max.
- **Relay off Time** 8 ms max.
- **Life Span** 1 x 10^7 operations
- **Resistance** Contact: 50 mΩ
  Insulation: 100 MΩ min.

General

- **Bus Type** ISA
- **I/O Connectors** 1 x DB37 female connector
- **Dimensions (L x H)** 147 x 100 mm (5.75" x 3.9")
- **Power Consumption** 5 V @ < 0.2 A; 12 V @ 33 mA for each relay
  < 0.27 A if all eight relays are energized
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F) (IEC 68-2-1, 2)
- **Storage Temperature** -20 ~ 70° C (-4 ~ 158° F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing (IEC 68-2-3)

Ordering Information

- **PCL-725** 8-ch Relay/Isolated Digital Input ISA Card
- **PCL-10137-1** DB37 Cable, 1 m
- **PCL-10137-2** DB37 Cable, 2 m
- **PCL-10137-3** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCLD-880** Wiring Board w/ Two 20-pin Flat Cables & Adapter

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP