ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Advantech PCL-757* at our website: ***Click HERE***

PCL-813B

25 kS/s, 12-bit, 32-ch Isolated Analog Input ISA Card

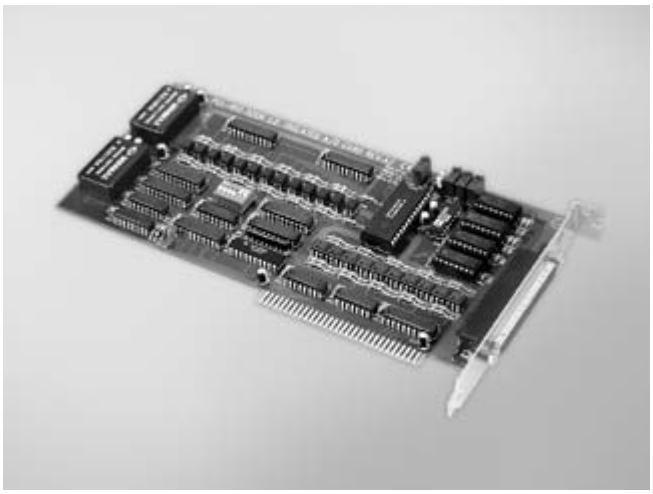

Features

- 32 single-ended analog input channels
- 12-bit A/D converter, with up to 25 kHz sampling rate
- Isolation protection (500 V_{DC})
- Program-controlled A/D trigger and data transfer

Introduction

PCL-813B is a 12-bit 32-channel analog input card that offers high-voltage isolation on each analog input. It is an extremely cost effective solution for applications in industrial measurement and monitoring. The card offers 32 analog input channels with software programmable gain on each channel and two DC-to-DC converters on a 4-layer PCB with an integral ground plane. Optically-isolated inputs provide over 500 V_{DC} of isolation between the analog inputs and the PC, protecting the PC and peripherals from damage due to high voltages on the input lines. PCL-813B is ideal for situations where the budget-conscious user requires flexibility, stability and a high level of isolation protection. PCL-813B comes with the PCLD-881B wiring terminal board and a DB37 cable assembly.

Specifications

Analog Input

- **Channels** 32 single-ended
- **Resolution** 12 bits
- **Max. Sampling Rate** 25 kHz
- **Overvoltage Protection** 30 Vp-p
- **Isolation Protection** 500 V_{DC} from analog input to PC
- **Input Impedance** > 10 MΩ
- **Sampling Modes** software trigger
- **Input Range** (V, software programmable)

Unipolar (jumper selection)	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Bipolar (software selection)	±5	±2.5	±1.25	±0.625
Accuracy (% of FSR ±1LSB)	0.1	0.2	0.2	0.4


General

- **Bus Type** ISA
- **I/O Connectors** 1 x DB37 female connector
- **Dimensions (L x H)** 219 x 100 mm (8.6" x 3.9")
- **Power Consumption** 5 V @ 660 mA max.
  12 V @ 140 mA max.
- **Operating Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** -20 ~ 65° C (-4 ~ 149° F)
- **Storage Humidity** 5 ~ 95% RH non-condensing (refer to IEC 68-2-3)

Ordering Information

- **PCL-813B** 25 kS/s, 12-bit, 32-ch Isolated AI ISA Card
- **PCLD-881B** Wiring Board for PCI-1713U, PCI-1715U & PCL-813B
- **PCL-10137-1** DB37 Cable, 1 m
- **PCL-10137-2** DB37 Cable, 2 m
- **PCL-10137-3** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

Typical application for PCL-813B:

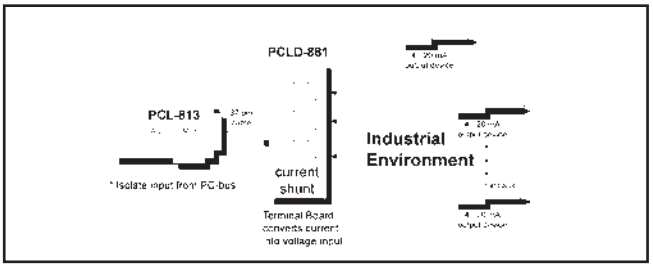

Industrial 4 ~ 20 mA Output Device Monitoring

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP