ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *OMRON J7TKN-B-1E8* at our website: *Click HERE*

OMRON

Thermal Overload Relay
J7TKN

Thermal Overload Relay

- Direct and separate mounting
- Single phasing sensivity according to IEC 947-4-1
- Finger proof (VBG 4)

Accessoires

- Busbar sets
- Set for single mounting



Approved Standards

Standard	Guide No (US,C)
UL	NKCR, NKCR7
ICE 947-4-1	
VDE 0660	
EN 60947-4-1	

Ordering Information

■ Model Number Legend

1. Thermal Overload Relay

J7TKN-□-□□□
1 2 3

1) Thermal Overload Relay
2) A: for mini motor contactor and motor contactor (4-11 kW)
   B: for motor contactor (4-15 kW)
   C: for motor contactor (18.5 kW)
   D: for motor contactor (22-37 kW)
   E: for motor contactor (45-55 kW)
   F: for motor contactor (75-110 kW)
3) Setting range (examples)
   E16: 0.12-0.16 A
   E27: 0.18-0.27 A
   ...
   2E7: 1.8-2.7 A
   ...
   11: 8-11 A

2. Accessories for Thermal Overload Relay




J74TK-□□-□□□
1 2 3

1) Accessories for Thermal Overload Relay
2) SM: Single mounting for J7TKN-B Types (4-32 kW)
   SU: Busbar sets
3) 175: for J7TKN-F Types (75-90 kW)
   200: for J7TKN-F Types (110 kW)


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ System overview



Thermal Overload Relays for plug-in mounting

	Setting Range D.O.L. (A)	Star Delta (A)		Type	Pack pcs.	Weight kg/pc.
For contactors J7KNA-09..., J7KNA-12..., J7KN-10... to J7KN-22...						
	0.12 - **0.18**	-	 hand reset	**J7TKN-A-E18**	1	0.10
	0.18 - **0.27**	-		**J7TKN-A-E27**	1	0.10
	0.27 - **0.4**	-		**J7TKN-A-E4**	1	0.10
	0.4 - **0.6**	-		**J7TKN-A-E6**	1	0.10
	0.6 - **0.9**	-		**J7TKN-A-E9**	1	0.10
	0.8 - **1.2**	-		**J7TKN-A-1E2**	1	0.10
	1.2 - **1.8**	-		**J7TKN-A-1E8**	1	0.10
	1.8 - **2.7**	-		**J7TKN-A-2E7**	1	0.10
	2.7 - **4**	-		**J7TKN-A-4**	1	0.10
	4 - **6**	7 - 10.5		**J7TKN-A-6**	1	0.10
	6 - **9**	10.5 - 15.5		**J7TKN-A-9**	1	0.10
	8 - **11**	14 - 19		**J7TKN-A-11**	1	0.10
	10 - **14**	18 - 24		**J7TKN-A-14**	1	0.10
	13 - **18**	23 - 31		**J7TKN-A-18**	1	0.10
	17 - **23**	30 - 40		**J7TKN-A-23**	1	0.10
	22 - **30**	38 - 52		**J7TKN-A-30**	1	0.10
For contactors J7KN-10... to J7KN-40...						
	0.12 - **0.18**	-	 hand- and auto reset	**J7TKN-B-E18**	1	0.14
	0.18 - **0.27**	-		**J7TKN-B-E27**	1	0.14
	0.27 - **0.4**	-		**J7TKN-B-E4**	1	0.14
	0.4 - **0.6**	-		**J7TKN-B-E6**	1	0.14
	0.6 - **0.9**	-		**J7TKN-B-E9**	1	0.14
	0.8 - **1.2**	-		**J7TKN-B-1E2**	1	0.14
	1.2 - **1.8**	-		**J7TKN-B-1E8**	1	0.14
	1.8 - **2.7**	-		**J7TKN-B-2E7**	1	0.14
	2.7 - **4**	-		**J7TKN-B-4**	1	0.14
	4 - **6**	7 - 10.5		**J7TKN-B-6**	1	0.14
	6 - **9**	10.5 - 15.5		**J7TKN-B-9**	1	0.14
	8 - **11**	14 - 19		**J7TKN-B-11**	1	0.14
	10 - **14**	18 - 24		**J7TKN-B-14**	1	0.14
	13 - **18**	23 - 31		**J7TKN-B-18**	1	0.14
	17 - **24**	30 - 41		**J7TKN-B-24**	1	0.14
	23 - **32**	40 - 55		**J7TKN-B-32**	1	0.14
For contactors J7KN-24... to J7KN-40...						
	28 - **42**	48 - 73		**J7TKN-C-42**	1	0.30

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

	Setting Range D.O.L. (A)	Star Delta (A)		Type	Pack pcs.	Weight kg/pc.
For contactors J7KN-50...-J7KN-74...						
	40 - **52**	70 - 90		**J7TKN-D-52**	1	0.40
	52 - **65**	90 - 112		**J7TKN-D-65**	1	0.40
	60 - **74**	104 - 128		**J7TKN-D-74**	1	0.40

Thermal Overload relays for separate mounting

	Setting Range D.O.L. (A)	Star Delta (A)		Type	Pack pcs.	Weight kg/pc.
For contactors J7KN-85... to J7KN-150...						
	60 - **90**	104 - 156	 hand reset	**J7TKN-E-90**	1	0.90
	80 - **120**	140 - 207		**J7TKN-E-120**	1	0.90
For contactors J7KN-175... to J7KN-200...						
	100 - **150**	175 - 260	 hand reset	**J7TKN-F-150**	1	1.5
	140 - **220**	240 - 380 busbar sets see accessories		**J7TKN-F-210**	1	1.5

Accessories

	for overload relays	for contactors	Type	Pack pcs.	Weight kg/pc.
Busbar Sets					
	J7TKN-F-175	J7KN-150, J7KN-175	**J73TK-SU-175**	1	0.6
	J7TKN-F-210	J7KN-200	**J73TK-SU-200**	1	0.7
	busbars must be installed by users				

		Cable Cross-section to clamp (mm^2)			Type	Pack	Weight
	for overload relay	solid or stranded	flexible	flex. with multicore cable end		pcs.	kg/pc.
Sets for single mounting							
	U3/32	0.75 - 6	0.75 - 4	0.5 - 4	**J73TK-SM**	1	0.035

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

■ Engineering data and Characteristics

Thermal Overload Relays, tripping times for selection to motors of protection degree EEx e

Relays With Standard Tripping Characteristic

Setting Range			Tripping time depending on the multiple of the current setting from cold condition (tolerance ±20% of the tripping time)					
			I_A/I_N	I_A/I_N	I_A/I_N	I_A/I_N	I_A/I_N	I_A/I_N
A		**A**	3	4	5	6	7,2	8
J7TKN-A-...			s	s	s	s	s	s
0,12	-	**0,18**	18,5	10,4	7,2	5,5	4,3	**3,6**
0,18	-	**0,27**	16,7	9,8	6,5	5	4,1	**3,5**
0,27	-	**0,4**	19,4	12,1	8,2	5,9	4,9	**4,2**
0,4	-	**0,6**	18,7	11,2	8	6	4,9	4,1
0,6	-	**0,9**	19,7	11,6	8,1	6,1	4,9	**4,2**
0,8	-	**1,2**	22,9	13,6	10	7,3	6	**5,2**
1,2	-	**1,8**	22,2	13,2	9,2	7,6	5,8	**5,3**
1,8	-	**2,7**	23	13,7	9,3	7,6	5,7	**5,1**
2,7	-	**4**	24	14,4	9,9	7,8	5,9	5,1
4	-	**6**	24,7	13,8	9,9	7,3	5,6	4,8
6	-	**9**	22	13,4	8	5,7	4,1	3,5
8	-	**11**	17,4	9,2	5,9	4,1	2,9	2,3
10	-	**14**	26,4	12,9	7,6	5,2	3,5	2,8
13	-	**18**	14,7	7,7	4,8	3,2	2,3	1,7
17	-	**23**	16,2	8,4	5	3,6	2,4	1,8
22	-	**30**	16,8	8,5	5	3,6	2,3	1,9
J7TKN-C-42			s	s	s	s	s	s
28	-	**42**	25,2	13,3	8	5,5	4	3,1
J7TKN-D-...			s	s	s	s	s	s
40	-	**52**	18,3	9,2	5,6	3,9	2,8	2,2
52	-	**65**	17,8	8,7	5,2	3,4	2,5	1,9
60	-	**74**	19,5	13,5	11	10	9,5	8,5
J7TKN-E-...			s	s	s	s	s	s
60	-	**90**	19,5	13,5	11	10	9,5	8,5
80	-	**120**	18	11	10	9	8,5	8
J7TKN-F-...			s	s	s	s	s	s
100	-	**150**	34	26	24	20,5	19	**18**
140	-	**210**	30	24	21	18,5	17	**16**


When selecting a standard overload, refer to the tripping curve. Determine the values of the starting current ratio $\mathbf{I_A/I_N}$ and the time $\mathbf{t_E}$ which is marked on the label of the motor. The overload must trip within the $\mathbf{t_E}$ time, which means that the tripping curve from cold condition must be (20% due to tolerance) below the coordination point $\mathbf{I_A/I_N}$ and the time $\mathbf{t_E}$.

$\mathbf{I_A}$= Starting current of motor

$\mathbf{I_N}$ = Rated current of motor

$\mathbf{t_E}$ = t_E-time of motor

All tripping times of overload relays J7TKN-A are shorter than the minimum values of the tE time for motors of protection degree EEx e acc. to EN 50019 and therefore are suitable for all motors of protection degree EEx e. For these overload relays the selection on basis of tripping curves is thereby not necessary.

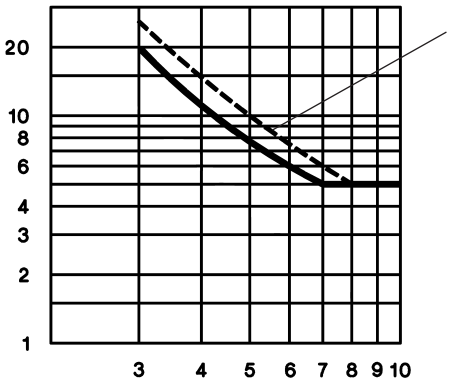

Labels of tripping curves for each setting range, sized 148x105mm (self-adhesive) are available on request.

Specify type and setting range.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Fuses for J7TKN-A; J7TKN-B; J7TKN-C; J7TKN-D; J7TKN-E; J7TKN-F

Type	Setting Range						Max. Fuse Size According to Coordination-type				Fuse UL
	DOL			Star Delta			"2"*1 quick	slow, gL(gG)	"1"*1 slow, gL(gG)	aM	
	A			A			A	A	A	A	A
J7TKN-A	0.12	-	**0.18**		-		0.5*2	0.5*2	25	-	15
J7TKN-B	0.18	-	**0.27**		-		1.0*2	1.0*2	25	-	15
	0.27	-	**0.4**		-		2	2	25	-	15
	0.4	-	**0.6**		-		2	2	25	-	15
	0.6	-	**0.9**		-		4	4	25	-	15
	0.8	-	**1.2**		-		4	4	25	2	15
	1.2	-	**1.8**		-		6	6	25	2	15
	1.8	-	**2.7**		-		10	10	25	4	15
	2.7	-	**4**		-		16	10	25	4	15
	4	-	**6**	7	-	10.5	20	16	25	6	15
	6	-	**9**	10.5	-	15.5	35	25	35	10	25
	8	-	**11**	14	-	19	35	25	35	16	30
	10	-	**14**	18	-	24	50	35	63	16	40
	13	-	**18**	23	-	31	50	35	63	20	50
	17	-	**(23)24**	30	-	(40)41	63	50	63	25	60
	(22)23	-	**(30)32**	(38)40	-	(52)55	80	63	80	35	70
J7TKN-C	28	-	**42**	48	-	73	100	80	150	50	110
J7TKN-D	40	-	**52**	70	-	90	160	100	150	63	200
	52	-	**65**	90	-	112	160	125	150	80	250
	60	-	**74**	104	-	128	160	125	150	80	250
J7TKN-E	60	-	**90**	104	-	156	For short circuit protecting overload relays with current transformer use fuse according to the contactor of the combination.				300
	80	-	**120**	140	-	207					-
J7TKN-F	all ranges										-

*1) Coordination-type according to IEC 947-4-1:
„2“: Light contact welding accepted. Thermal overload relay must not be damaged.
„1“: Welding of contactor and damage of the thermal overload relay allowed.
*2) Miniature fuse


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Tripping Characteristics for J7TKN-A, J7TKN-B, J7TKN-C, J7TKN-D

Detailed tripping times for each range see table page 54

with three-phase load

Tripping time
min. s

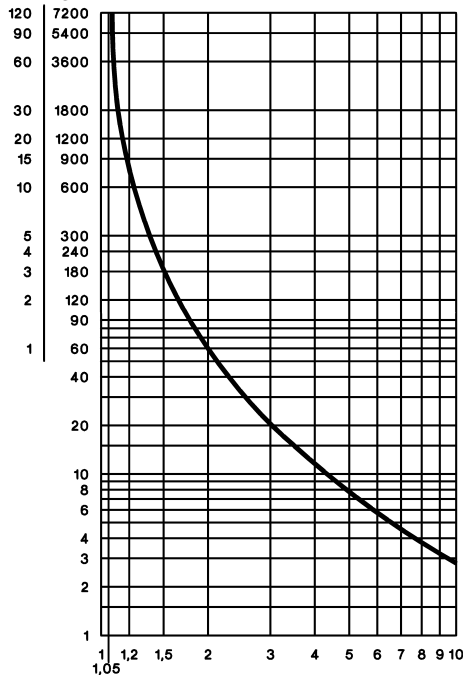


F.L.C. multiplication factor

Average value of typical tolerance curves from cold condition

Proceeding from service conditions the times decrease to 20-30% of the characteristic values

with two-pole load

Tripping time
min. s

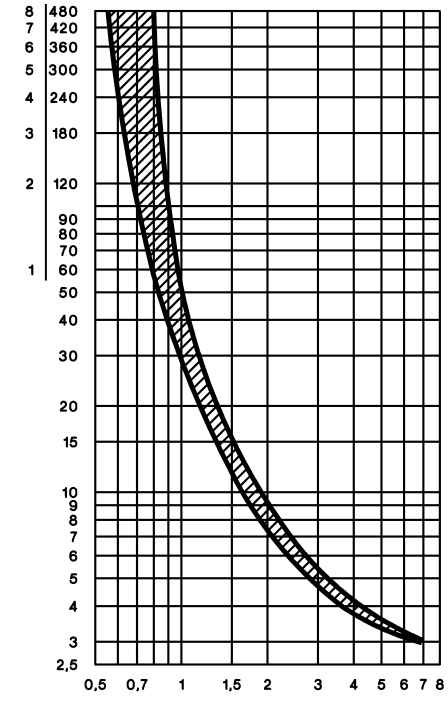

Typical tolerance curve from cold condition

Proceeding from service conditions the times decrease to 70-80% of the characteristic values

$K = I_{max}/I_e$


I_{max} = max. phase current
I_e = max. scale value

Tripping Characteristics for J7TKN-E

Detailed tripping times for each range see table page 54

with three-phase load

Tripping time
min. s

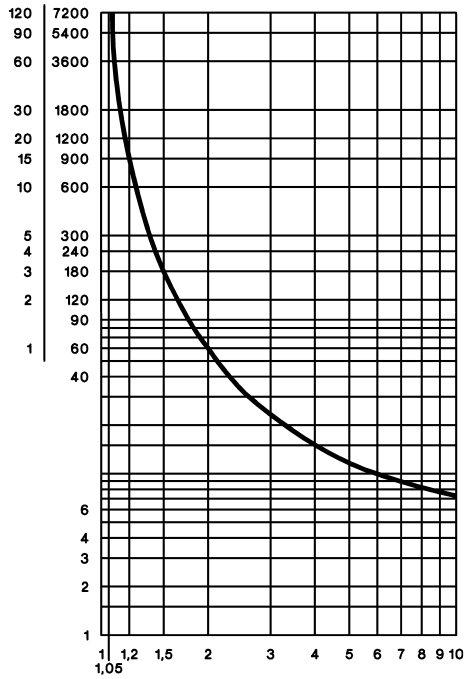


F.L.C. multiplication factor

Average value of typical tolerance curves from cold condition

Proceeding from service conditions the times decrease to 20-30% of the characteristic values

with two-pole load

Tripping time
min. s

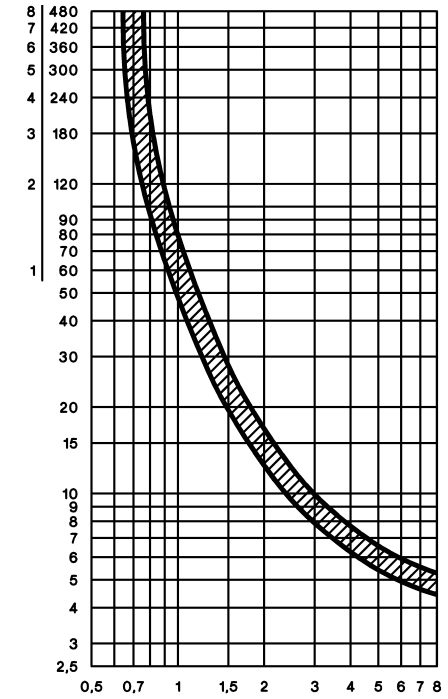

Typical tolerance curve from cold condition

Proceeding from service conditions the times decrease to 70-80% of the characteristic values

$K = I_{max}/I_e$

I_{max} = max. phase current
I_e = max. scale value


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Tripping Characteristics for J7TKN-F

Detailed tripping times for each range see table page 54

with three-phase load

Tripping time
min. s

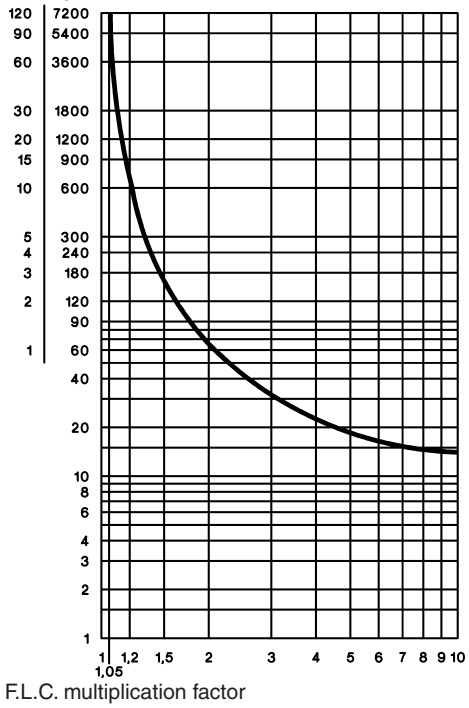


F.L.C. multiplication factor

Average value of typical tolerance curves from cold condition

Proceeding from service conditions the times decrease to 20-30% of the characteristic values

with two-pole load

Tripping time
min. s

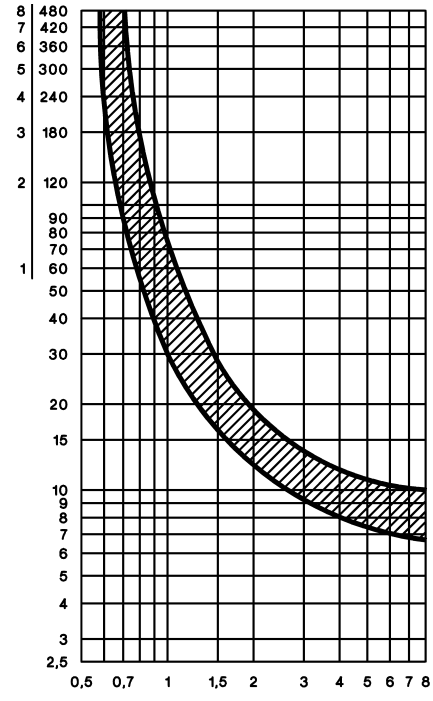




Typical tolerance curve from cold condition

Proceeding from service conditions the times decrease to 70-80% of the characteristic values

$K = I_{max}/I_e$

I_{max} = max. phase current
I_e = max. scale value

Position of Terminals

J7TKN-A	J7TKN-B	J7TKN-C; J7TKN-D
		

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Thermal Overload Relays

Data according to IEC 947-4-1, IEC 947-5-1, VDE 0660, EN 60947-4-1, EN 60947-5-1

Type			J7TKN-A	J7TKN-B	J7TKN-C	J7TKN-D	J7TKN-E	J7TKN-F
Rated insulation voltage U_i[*1]		V~	690	690	690	690	750	690
Permissible ambient temperature								
operation	open	°C			-25 to +60			
storage		°C			-50 to +70			
Trip class according to IEC 947-4-1			10A	10A	10A	10A	20	20
Cable cross-section								
main connector	solid or stranded	mm²	0.75-6 + 0.75-2.5[*2]	0.75-6	0,75-10	4-35[*2]	[*3]	[*4]
	flexible	mm²	0.75-4 + 0.5-2.5[*2]	1-4	0,75-6	6-25[*2]		
	flexible with multicore cable end	mm²	0.5-2.5 + 0.5-1.5	0.75-4	0.75-6	4-25		
Cables per clamp	number		1+1	2	2	1		
auxiliary connector	solid	mm²			0.75-2.5[*2]			
	flexible	mm²			0.5-2.5[*2]			
	flexible with multicore cable end	mm²			0.5-1.5			
Cables per clamp	number				2			
Auxiliary contacts								
Rated insulation voltage U_i[*1]								
same potential		V~	690	690	690		690	
different potential		V~	440	440	250		440	
Utilization category AC15								
Rated operational current I_e	24V	A	5	3	4[*5]		5	
	230V	A	3	2	2.5		3	
	400V	A	2	1	1.5		2	
	690V	A	0.6	0.5	0.6		0.6	
Utilization category DC13								
Rated operational current I_e	24V	A	1.2	1	1.2		1.2	
	110V	A	0.15	0.15	0.15		0.15	
	220V	A	0.1	0.1	0.1		0.1	
Short circuit protection (without welding 1kA)								
highest fuse rating	gL (gG)	A	6	4	6		6	
Setting range		A	to 23	all	28-42	52-65	all	-
Power loss per current path (max.)								
minimum setting value		W	1.1	1.1	1.3	2.9	1.1	-
maximum setting value		W	2.3	2.3	3.3	4.5	2.5	-

*1) Suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry: Uimp = 4kV (at 440V), 6kV (at 690V). Data for other conditions on request.

*2) Maximum cable cross-section with prepared conductor

*3) Without terminals, suitable for bushing one connector 70mm² (stranded) per phase

*4) Busbar sets see accessories page 53

*5) Switching capacity of the start contact: AC15 300VA, max. 1.5A, DC13 (max. 220V) 30W, max. 1.5A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Data according to cULus

Type		J7TKN-A	J7TKN-B	J7TKN-C	J7TKN-D	J7TKN-E
Rated insulation voltage	V~	600	600	600	600	600
Rated current	A	23	32	42	74	85
Auxiliary contacts						
Rated voltage						
same potential	V AC	600	600	600	600	600
different potential	V~	150	150	150	150	150
Switching capacity AC	VA	500	500	600	600	600
of aux. contacts	A	4	2	4	4	4

Temperature Compensation

In case of higher ambient temperature use the following formula:
(Ambient temperature - 20) x 0.125 = correction factor in % of the full load motor current

Example:
Ambient temperature 70°C, full load motor current 7A


(70 - 20) x 0.125 = 6.25%

Setting value: 7A + 6,25% = 7.44A


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Dimensions


J7KNA-09 + J7TKN-A
J7KNA-12

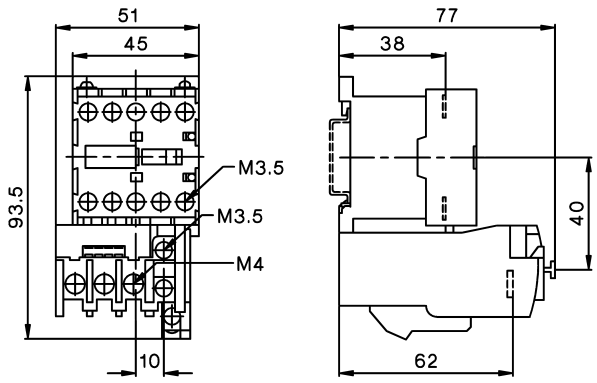


J7KN-10 + J7TKN-B
J7KN-14
J7KN-18
J7KN-22

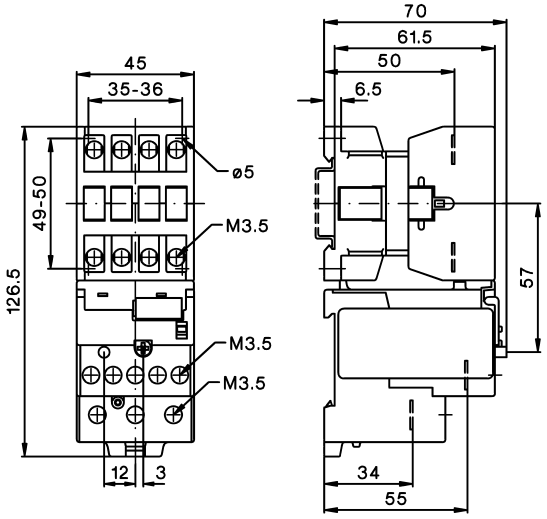

J7KN-10 + J7TKN-A
J7KN-14
J7KN-18
J7KN-22

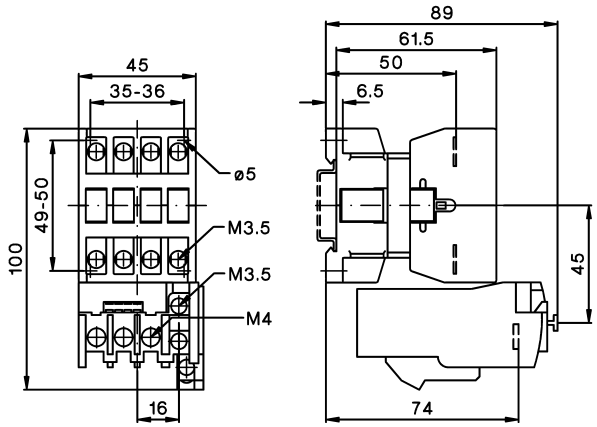


J7KN-24 + J7TKN-B
J7KN-32
J7KN-40

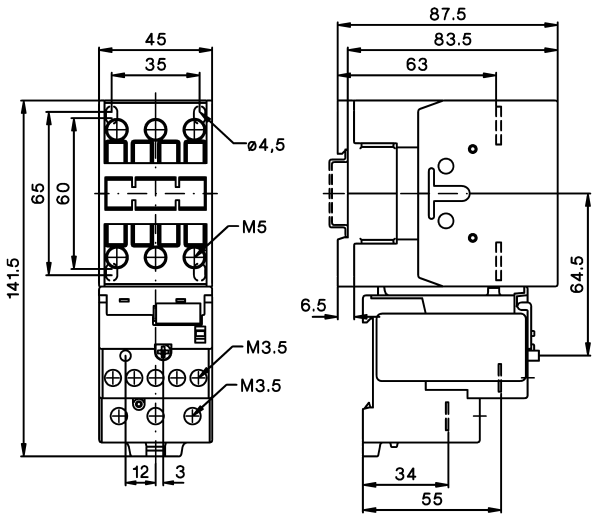


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


J7KN-24 + J7TKN-C
J7KN-32
J7KN-40

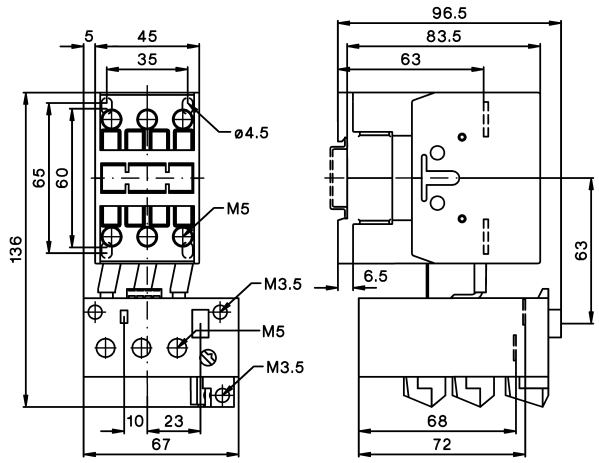


J7KN-50 + J7TKN-D
J7KN-62
J7KN-74

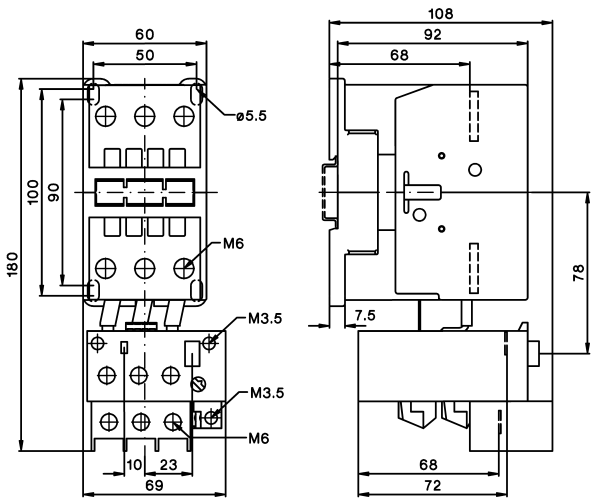


J7KN-85 + J7TKN-E
J7KN-110

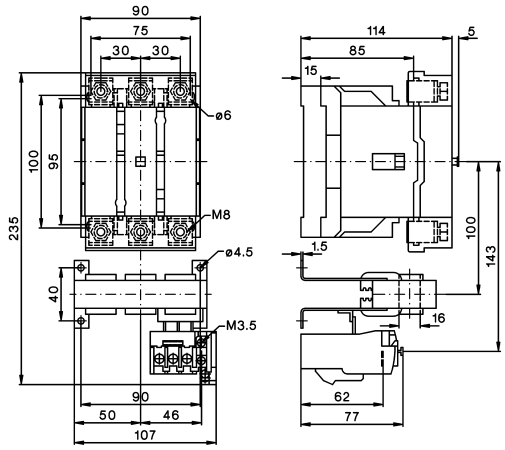

J7KN-150 + J7TKN-F
J7KN-175

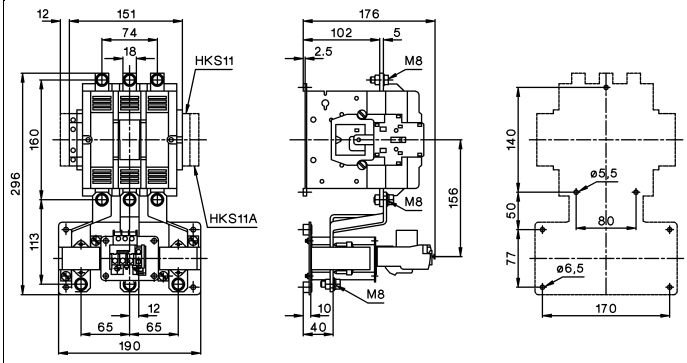

J7KN-200 + J7TKN-210

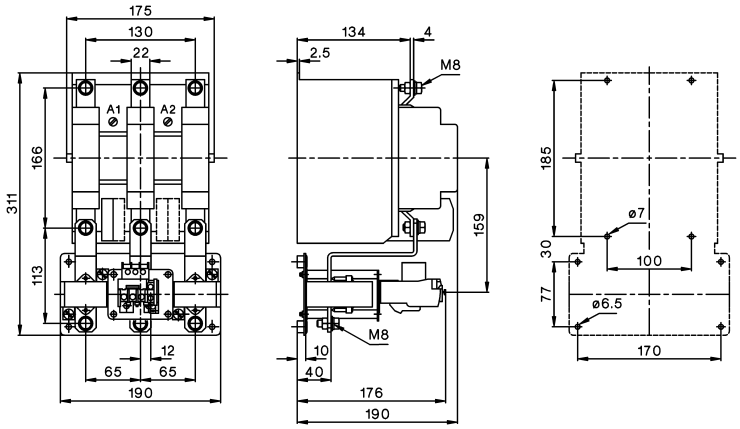

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. J509-E2-01

In the interest of product improvement, specifications are subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP