

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PCM-3110A

1-slot PCMCIA Module

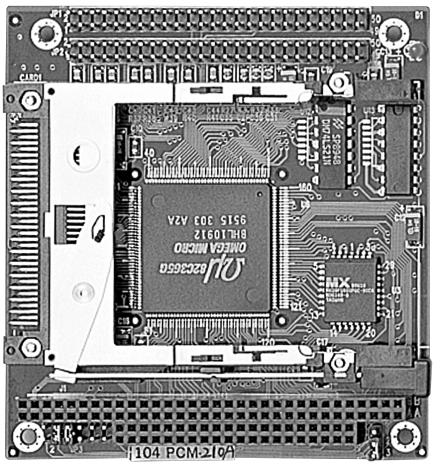

FCC CE

Features:

- *Supports type I, II, III PCMCIA cards*
- *16-bit data bus*
- *Busy status LED*

Specifications

Standard	Complies with PCMCIA V2.10 and JEIDA 4.1
PC Card Format	Accepts Type I/II/III PCMCIA cards
Data Bus	16-bit
Secondary PCMCIA Drive	Supports (PC/104 or external drive) Card drive with PC/104 bus 1 main PCMCIA slot extended to 2nd slot with extended (TEAC) FDD extended to 3.5" FDD bay
BIOS	Programmable 32 KB SMD boot Flash BIOS
Power Consumption	+5 V @ 70 mA (typical)
Power requirements	+5 V, ±5 % tolrance on power supply
Size/Weight	96 mm x 90 mm (3.8" x 3.5"), 0.092 kg (0.203 lb)
Temperature	Operating: 0 ~ 60º C (32 ~ 140º F) Storage: -40 ~ 85º C (-40 ~ 185º F)
Operating Humidity	0% ~ 90% Relative Humidity, non-condensing

Packing List


- Manual
- CD-ROM (Manual, Driver, Utility)

Ordering Information

- PCM-3110A-00A3 PCMCIA Module with DOS, Win3.1, Win95 utility
- PCM-3110A-03A3 PCMCIA Module utility disk for Win NT

PCM-3112

2-Slot PCMCIA Module

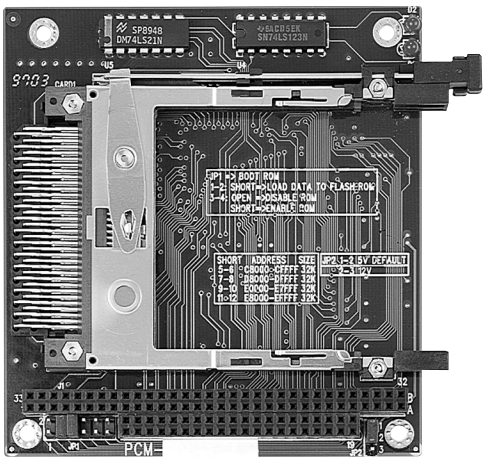

FCC CE

Features:

- *2 PCMCIA slots*
- *Bootable from linear Flash card or ATA Flash, ATA HDD*
- *16-bit data bus*
- *Busy status LED*

Specifications

Standard	Complies with PCMCIA V2.10 and JEIDA 4.1 spec.
PC Card Format	Accepts Type I/II/III PCMCIA cards
Data Bus	16-bit
Secondary PCMCIA Drive	Features 2 PCMCIA drives
BIOS	Programmable 32 KB SMD-type boot EEPROM BIOS
Power Consumption	+5 V @ 70 mA (typical)
Power requirements	+5 V, ±5 % tolrance on power supply
Size/Weight	96 mm x 90 mm (3.8" x 3.5"), 0.1 kg (0.22 lb)
Temperature	Operating: 0 ~ 60º C (32 ~ 140º F) Storage: -40 ~ 85º C (-40 ~ 185º F)
Operating Humidity	0% ~ 90% Relative Humidity, non-condensing

Packing List

- Manual
- CD-ROM (Manual, Driver, Utility)

Ordering Information

- PCM-3112-0000 2-slot PCMCIA module with DOS, Win3.1, Win95 utility

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP