ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *OMRON V600-A45* at our website: ***Click HERE***

OMRON

Electromagnetic Coupling RFID System
V600


Non-contact Data Communications System

- Superior environmental resistance.
- Heat-resistant Data Carrier available (150°C max.).
- High memory capacity of 8 kbytes for Built-in-battery Data Carriers and 254 bytes for Battery-less Data Carriers.
- Built-in-battery Data Carriers have a battery life detecting function.
- Data of Battery-less Data Carriers can be overwritten 300,000 times at normal temperatures.
- Thin, compact, and low-cost Data Carriers are available.
- Transmission distance of 100 mm max.
- CE marking/FCC approvals.





Ordering Information

■ Data Carriers





Item	Model		Specifications/Design/Memory capacity	
Built-in-battery Data Carriers	V600-D8KR12		Rectangular compact 65 × 40 × 15 mm	8 Kbytes
	V600-D8KR13		Thin rectangular 86 × 54 × 10.3 mm	
	V600-D8KR04		Intermediate-range rectangular 86 × 54 × 20 mm	
Replaceable-battery Data Carriers	V600-D2KR16		Compact 65 × 40 × 5 mm	2 Kbytes
Battery-less Data Carriers	V600-D23P71		Ultrathin card-type 86 × 54 × 1.5 mm	254 bytes
	V600-D23P72		Thin half-size card-type 50 × 34 × 1.5 mm	
	V600-D23P66N		Rectangular 34 × 34 × 3.5 mm	
	V600-D23P66SP		Rectangular package with PFA 95 × 36.5 × 6.5 mm	
	V600-D23P61		Rectangular compact 32 × 24 × 6 mm	
	V600-D23P53		Round super-compact 8 dia. × 5 mm	
	V600-D23P54		Round compact 12 dia. × 6 mm	
	V600-D23P55		Round super-compact 8 dia. × 5 mm	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ R/W Heads





Item		Model		Specifications/Design	
Rectangular type		V600-H07 (0.5 m)		Dimensions: 100 × 100 × 30 mm	0.5-m cable
		V600-H07 (2 m)			2-m cable
		V600-H07 (5 m)			5-m cable
		V600-H07 (10 m)			10-m cable
		V600-H11 (0.5 m)		Dimensions: 53 × 40 × 23 mm	0.5-m cable
		V600-H11-R (0.5 m)			0.5-m cable
		V600-H11 (2 m)			2-m cable
		V600-H11 (5 m)			5-m cable
		V600-H11 (10 m)			10-m cable
Cylinder type		V600-H51 (0.5 m)		Dimensions: 22 dia. × 80 mm	0.5-m cable
		V600-H51 (2 m)			2-m cable
		V600-H51 (5 m)			5-m cable
		V600-H51 (10 m)			10-m cable
		V600-H52 (0.5 m)		Dimensions: 22 dia. × 85 mm	0.5-m cable
		V600-H52 (2 m)			2-m cable
		V600-H52 (5 m)			5-m cable
		V600-H52 (10 m)			10-m cable
Separate-amplifier type	Amplifier section	V600-HA51 (2 m)		73.8 × 22.6 × 36.5 mm, with 2-m cable	
		V600-HA51 (5 m)		73.8 × 22.6 × 36.5 mm, with 5-m cable	
		V600-HA51 (10 m)		73.8 × 22.6 × 36.5 mm, with 10-m cable	
	Sensor section	V600-HS51		12 dia. × 35 mm deep, with 2-m cable	
		V600-HS61		30.5 × 18 × 10 mm, with a 2-m cable	

■ ID Controllers



Item	Model		Specifications/Design	
AC Power Supply	V600-CA1A-V2		100 to 240 VAC, 50/60 Hz Two R/W Heads connectable 200 × 100 × 100 mm	RS-232C host interface
	V600-CA2A-V2			RS-422 host interface
	V600-CA8A-V2			Parallel PNP host interface
	V600-CA9A-V2			Parallel NPN host interface
DC Power Supply	V600-CD1D-V3		24 VDC Single R/W Head connectable 115 × 68 × 80 mm	RS-232C host interface
	V600-CM1D		24-VDC, 5-VDC 2-system input Single R/W Head connectable Board type	
Handheld Controller	V600-CB-US-S		A Battery Charger, Ni-Cd Battery Pack, Battery Case, and Carrying Belt are included.	
DC Power Supply	V600-IDSC02		24 VDC RS-232C interface	Two R/W Heads connectable
	V600-IDSC04			Four R/W Heads connectable

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com




■ Accessories (Order Separately)

Item	Model		Specifications/Design	
Extension cable for R/W Heads	V600-A45		Standard cable Non-water-resistant connectors	3-m cable
	V600-A44			5-m cable
	V600-A40			10-m cable
	V600-A41			20-m cable
	V600-A42			30-m cable
	V600-A56		Robotic cable Non-water-resistant connectors	3-m cable
	V600-A55			5-m cable
	V600-A50			10-m cable
	V600-A51			20-m cable
	V600-A52			30-m cable
Holder	V600-A81		For the V600-D2KR16 *Mount with M3 flat countersunk head screws (at least two).	
	V600-A84		For the V600-D23P71/D23P72 Ultrasonic deposition can be used on the plastic container.	
Attachment	V600-A86		For the V600-D23P66N	
Monitor Unit	V600-P01		Special Unit for the V600-CA□A-□ Controller	

■ RS-232C Cables (Order Separately)

Model	Cable length	Compatible ID Controllers	
XW2Z-200P	2 m	V600-CA1A-V2	
XW2Z-500P	5 m		
XW2Z-200S	2 m	V600-CD1D-V3 V600-CM1D	
XW2Z-500S	5 m		


■ Connectors for ID Controllers (One Set per Unit)

Model	Name	Compatible ID Controllers	
XM2A-0901	Connector Plug	V600-CA2A-V2 V600-CD1D-V3 V600-CM1D	
XM2S-0911	Connector Hood		
XM2A-2501	Connector Plug	V600-CA1A-V2	
XM2S-2511	Connector Hood		
MR-50F (Honda Tsushin Kogyo)	Connector Plug	V600-CA8A-V2 V600-CA9A-V2	
MR-50L (Honda Tsushin Kogyo)	Connector Hood		

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

■ Battery-less Data Carriers

Item									
Shape		**Ultrathin Card-type**	**Ultrathin Half-size Card-type**	**Rectangular Compact**	**Chemical-resistant**	**Rectangular Compact**	**Round Super-compact**	**Round Compact**	**Round Super-compact**
Model		**V600-D23P71** 	**V600-D23P72**	**V600-D23P66N** 	**V600-D23P66SP** 	**V600-D23P61** 	**V600-D23P53** 	**V600-D23P54** 	**V600-D23P55** 
Memory capacity		254 bytes							
Memory type		EEPROM (non-volatile memory)							
Transmission distance		Refer to “Transmission Distance Specifications for Battery-less DCs” on page 10.							
Data retention time (after writing data)		10 years		10 years (–40 to 110°C) 1 year (–40 to 150°C)	10 years				10 years (–40 to 110°C) 1 year (–40 to 150°C)
Number of overwrites (per address) (Refer to separate item for ambient temperature)	**Up to 0°C**	800,000 times							
	Up to 25°C	400,000 times							
	Up to 60°C	300,000 times							
	Up to 85°C	100,000 times							
Transmission error detection		16-bit CRC in both directions (CRC: Cyclic Redundancy Check)							
Ambient temperature	**For data storage**	–20 to 110°C		–40 to 150°C (See note.)	–40 to 110°C	–40 to 85°C			–40 to 150°C (See note.)
	For reading/writing	–10 to 70°C		–20 to 85°C	–20 to 70°C	–25 to 70°C			–25 to 85°C
Storage temperature		–20 to 110°C		–40 to 150°C (See note.)	–40 to 110°C	–40 to 85°C			–40 to 150°C (See note.)
Ambient humidity		Operating: 35% to 95%							
Degree of protection		IEC 60529: IP67		IEC 60529: IP68	IEC 60529: IP67	IEC 60529: IP67			IEC 60529: IP67
Vibration resistance (destruction)		10 to 2,000 Hz, 3.0-mm double amplitude, 300 m/s² acceleration for 30 min each in 3 directions (90 min total)		10 to 2,000 Hz, 1.5-mm double amplitude, 150 m/s² acceleration 10 times each in 3 directions (15 min)	10 to 2,000 Hz, 3.0-mm double amplitude, 300 m/s² acceleration for 30 min each in 3 directions (90 min total)				10 to 2,000 Hz, 1.5-mm double amplitude, 150 m/s² acceleration 10 times each in 3 directions (15 min)
Shock resistance (destruction)		1,000 m/s² 3 times each in 3 directions (18 times total)		500 m/s² 3 times each in 3 directions (18 times total)	1,000 m/s² 3 times each in 3 directions (18 times total)				500 m/s² 3 times each in 3 directions (18 times total)
Weight		Approx. 15 g	Approx. 5 g	Approx 6.5 g	Approx. 19 g	Approx. 5.8 g	Approx. 0.4 g	Approx. 1.0 g	Approx. 0.6 g

Note: The 150°C heat resistance was confirmed by leaving the Unit at 150°C for 1,000 continuous hours, and by a thermal shock test consisting of 1,000 –10°C/150°C cycles of 30 min each. No defect was found among the 22 test samples.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Built-in-battery Data Carriers

Item	Shape	Rectangular Compact	Rectangular Thin	Rectangular Intermediate Range	Rectangular Compact with Replaceable Battery
	Model	V600-D8KR12 	V600-D8KR13 	V600-D8KR04 	V600-D2KR16 
Memory capacity		8 KB			2 KB
Memory type		SRAM (volatile memory)			
Transmission distance		Refer to “Transmission Distance Specifications for Built-in-battery DCs” on page 15			
Battery life (See note 1.)		Refer to “Battery Life” on page 20			2 years (at 25°C) (See note 2.)
Number of reads/writes		Unlimited			Unlimited (Does not affect battery life)
Transmission error detection		16-bit CRC in both directions (CRC: Cyclic Redundancy Check)			
Ambient temperature	**For data storage**	–40 to 70°C			–15 to 70°C
	For reading/ writing	–25 to 70°C			0 to 50°C
Storage temperature		–40 to 70°C			–15 to 70°C
Ambient humidity		35% to 95%			35% to 85%
Storage humidity		35% to 95%			
Degree of protection		IEC 60529: IP67			IEC 60529: IP50 (dustproof) (See note 3.)
Vibration resistance (destruction)		10 to 500 Hz, 1.0-mm single amplitude, 150 m/s^2 acceleration with 3 sweeps of 11 min each in X, Y, and Z directions			10 to 150 Hz, 0.75-mm single amplitude, 100-m/s^2 acceleration for 30 min each in X, Y, and Z directions
Shock resistance (destruction)		1,000 m/s^2 3 times each in X, Y, and Z directions (18 times total)			300 m/s^2 3 times each in X, Y, and Z directions (18 times total)
Weight		Approx. 70 g		Approx. 160 g	Approx. 15 g



Note: 1. A low battery detection function is built-in.

2. The battery life is applicable for batteries used at a temperature of 25°C. Refer to “Temperature and Battery Life” on page 21 for details on the relationship between temperature and battery life. The lithium battery is commercially available (CR2016).

3. The Data Carrier is dustproof when the provided battery replacement cover seal is used.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Read/Write (R/W) Heads with Built-in Amplifier

Model / Item	V600-H07	V600-H11/H11-R	V600-H51	V600-H52
				
Oscillation frequency	530 kHz			
Ambient temperature	–25 to 70°C	–10 to 60°C		
Storage temperature	–40 to 85°C	–25 to 75°C		
Ambient humidity	35% to 95%			
Storage humidity	35% to 95%			
Insulation resistance	50 MΩ (at 500 VDC) between cable terminals and case			
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between cable terminals and case (Leakage current: 1 mA max.)			
Degree of protection	IEC 60529: IP67			
Vibration resistance (destruction)	10 to 500 Hz, 1.0-mm single amplitude, 150 m/s^2 acceleration with 3 sweeps of 11 min each in X, Y, and Z directions			
Shock resistance	Destruction: 500 m/s^2 3 times each in X, Y, and Z directions (18 times total)			
Cable length (See note 1.)	Standard lengths of 0.5 m, 2 m, 5 m, and 10 m.			
Wireless transmission error detection	16-bit CRC in both directions (CRC: Cyclic Redundancy Check)			
Indicators	Power: green; transmission: orange			
Weight	Approx. 1 kg (with 10-m cable)	Approx. 650 g (with 10-m cable)		

Note: 1. Extension cables are also available. The maximum cable length is 30.5 m for the V600-H07 and 50.5 m for the V600-H11/H51/H52.

2. The connectors are not water-resistant.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Read/Write (R/W) Heads with Separate Amplifier







Item \ Model	Sensor section		Amplifier section	
	V600-HS51 	V600-HS61 	V600-HA51 	
Oscillation frequency	530 kHz		---	
Ambient temperature	–10 to 60°C			
Storage temperature	–25 to 75°C			
Ambient humidity	35% to 95%			
Insulation resistance	50 MΩ (at 500 VDC) between cable terminals and case			
Dielectric strength	1,000 VAC 50/60 Hz for 1 min between cable terminals and case (Leakage current: 1 mA max.)			
Degree of protection	IEC 60529: IP67		IEC 60529: IP66	
Vibration resistance (destruction)	10 to 2,000 Hz, 1.5-mm single amplitude, 300 m/s^2 acceleration with 2 sweeps of 15 min each in 3 directions		Installed in panel	10 to 2,000 Hz, 1.5-mm single amplitude, 300-m/s^2 acceleration with 2 sweeps of 11 min each in 3 directions
			DIN Track installation	10 to 500 Hz, 1.0-mm single amplitude, 150-m/s^2 acceleration with 3 sweeps of 11 min each in 3 directions
Shock resistance (destruction)	1,000 m/s^2 3 times each in 3 directions (18 times total)		500 m/s^2 3 times each in 3 directions (18 times total)	
Cable length / **Sensor to amplifier**	2 m (fixed)		---	
Amplifier to controller	---		Standard lengths of 2 m, 5 m, and 10 m (See note 1.)	
Wireless transmission error detection	16-bit CRC in both directions (CRC: Cyclic Redundancy Check)			
Indicators	---		Power: green; transmission: orange	
Weight	Approx. 70 g (with 2-m cable)		Approx. 650 g (with 10-m cable)	

Note: 1. Extension cables are also available. The maximum cable length is 50 m for the V600-HA51. Extension cables are not available for the V600-HS51/HS61.

2. The connectors are not water-resistant.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ ID Controllers


Item \ Series / Model		V600 Series (Electromagnetic RFID System)					
		V600-CA1A-V2 	V600-CA2A-V2 	V600-CA8A-V2 	V600-CA9A-V2 	V600-CD1D-V3 	V600-CM1D 
Host interface		RS-232C	RS-422A (Maximum of 16 Units can be connected)	Parallel PNP output	Parallel NPN output	RS-232C	
Possible number of R/W Heads		2				1	
Power supply voltage		100 to 240 VAC, 50/60 Hz				24 VDC	24 VDC, 5 VDC
Acceptable power supply voltage		85 to 264 VAC				20.4 to 26.4 VDC	20.4 to 26.4 VDC 4.5 to 5.5 VDC
Power consumption		35 VA max.				7.2 W max.	24 VDC: 7.2 W max. 5 VDC: 1.5 W max.
Insulation resistance		50 MΩ min. (at 500 VDC) between power terminals and case, between I/O terminals and case, or between the power supply terminals and I/O terminals					---
Dielectric strength		1,500 VAC, 50/60 Hz for 1 min between the points listed above; Leakage current: 10 mA max.				1,000 VAC, 50/60 Hz for 1 min between the points listed above; Leakage current: 10 mA max.	
Noise immunity		1,500-V (p-p) pulses of 100-ns to 1-µs pulse width with a 1-ns rise time					---
Vibration resistance	**Destruction**	10 to 150 Hz, 0.3-mm double amplitude for 32 min each in X, Y, and Z directions					---
	Malfunction	10 to 150 Hz, 0.2-mm double amplitude for 32 min each in X, Y, and Z directions					---
Shock resistance		Destruction: 200 m/s^2 3 times each in X, Y, and Z directions (18 times total)					---
Ambient temperature		–10 to 55°C					0 to 50°C
Ambient humidity		35% to 85% (with no condensation)					
Operating conditions		No corrosive gases					
Storage temperature		–25 to 65°C					–15 to 70°C
Memory back-up		A capacitor backs up the most recent error data and statistical error data for up to 20 days (at 25°C) after a power interruption.				Memory backup is not available. Error details, however, can be read from the personal computer when the power is turned ON.	
Diagnostic functions		Checks for CPU errors, memory errors, power interruptions, and transmission errors					
Ground		Ground to 100 Ω or less.					
Degree of protection		IEC 60529: IP30 (panel mounted)					---
Weight		Approx. 890 g	Approx. 930 g	Approx. 960 g		Approx 360 g	Approx. 180 g

■ Monitor Unit

V600-P01 (for use with V600-CA□A Controllers)


The Monitor Unit is a monitoring device that can be mounted to an ID Controller. It can be used to test communications between the R/W Head and Data Carrier when the RFID System is started up, check the data in Data Carriers, and read error information or statistical error information.

The specifications conform to those of the ID Controller, except the operating temperature range is 0°C to 40°C.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Handheld ID Controllers

Model / Item	V600-CB-US-S
	
Power supply	Built-in nickel-cadmium batteries (6 VDC) or 9-V alkaline batteries (9 VDC) (See note.)
Power consumption	700 mA max.
Continuous operating time (See note.)	3 hrs min. when using the built-in nickel-cadmium batteries; 1.5 hrs min. when using the alkaline batteries
Automatic power-saver	The power is turned OFF automatically if a key input or response is not received in 10 min.
Automatic command cancellation	A command will be cancelled automatically if a response is not received from a Data Carrier within 2 min.
Low battery indicator	This display appears when the battery voltage falls below the minimum voltage required for operation.
User memory	32 KB (Data will be retained for at least 24 hrs after batteries are removed.)
Vibration resistance	Destruction: 10 to 150 Hz, 0.3-mm double amplitude for 32 min each in X, Y, and Z directions
Shock resistance	Destruction: 200 m/s^2 3 times each in X, Y, and Z directions (18 times total)
Ambient temperature	0 to 45°C
Ambient humidity	35% to 85% (with no condensation)
Operating conditions	No corrosive gases
Storage temperature	–25 to 60°C (excluding the battery pack)
Degree of protection	IEC 60529: IP30
Weight	680 g max. (including the battery pack)

Note: The continuous operating time is for new, fully charged nickel cadmium batteries or new alkaline batteries used at room temperature. The V600-A14 Battery Charger is UL-listed.

V600-CB-US-S Configuration




Model	Name	Remarks
V600-CB-US	Handheld ID Controller	Controller
V600-A11	Battery Case	Accessory (for alkaline batteries)
V600-A12	Ni-Cd Battery Pack	Accessory (built-in to ID Controller)
V600-A13	Carrying Belt	Accessory
V600-A14	Battery Charger	Accessory

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ V600-IDSC

Item \ Series / Model	V600-IDSC Series	
	V600-IDSC02 	V600-IDSC04 
Host interface	RS-232C	
Possible number of R/W Heads	2	4
Power supply voltage	24 VDC	
Acceptable power supply voltage	19.2 to 28.8 VDC	
Power consumption	50 W max.	
Insulation resistance	20 MΩ min. (at 500 VDC) between power supply terminals and frame ground terminals	
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between power supply terminals and frame ground terminals with a detected current of10 mA max.	
Vibration resistance	10 to 57 Hz, 0.075-mm amplitude, 57 to 150 Hz, 9.8 m/s^2 acceleration for 10 sweeps each in X, Y, and Z directions	
Shock resistance	147 m/s^2 3 times each in X, Y, and Z directions	
Ambient temperature	0 to 55°C (with no icing)	
Ambient humidity	10% to 90% (with no condensation)	
Storage temperature	–20 to 75°C (with no icing)	
Storage humidity	10% to 90% (with no condensation)	
Ground	Ground to 100 Ω or less.	Ground to 100 Ω or less.
Construction	Installed in panel	Installed in panel
Weight	Approx. 700 g	Approx. 800 g

■ Transmission Distance Specifications for Battery-less DCs




Recommended combinations		Installation		Controller mode	Transmission distance	Condition for DC and R/W head installation
Data Carrier	**R/W Head**					
V600-D23P71 	V600-H07 	Stationary	Read/Write distance	Irrelevant	10 to 70 mm (max. axial offset ±10 mm)	These Data Carriers are for installation on non-metallic surfaces only.  Data transmission will be impossible if the DC is installed directly on a metal surface. Refer to the *V600 R/W Heads and EEPROM Data Carriers Operation Manual* (Cat. No. Z128) for details.
		Moving			30 to 60 mm (max. axial offset ±10 mm)	
	V600-H11/-H11-R 	Stationary	Read/Write distance	Irrelevant	5 to 40 mm (max. axial offset ±10 mm)	
		Moving			15 to 40 mm (max. axial offset ±10 mm)	
V600-D23P72 	V600-H07 	Stationary	Read/Write distance	Irrelevant	10 to 50 mm (max. axial offset ±10 mm)	
		Moving			30 to 40 mm (max. axial offset ±10 mm)	
	V600-H11/-H11-R 	Stationary	Read/Write distance	Irrelevant	5 to 30 mm (max. axial offset ±10 mm)	
		Moving			15 to 30 mm (max. axial offset ±10 mm)	

Note: 1. The transmission distance/transmission time priority mode setting can be made using the lower-level transmission mode setting switch or memory switch only with a Serial-interface Controller or ID Sensor Unit.

2. With Parallel-interface Controllers, the mode setting is always transmission distance priority.

3. The specifications take fluctuations in ambient temperature and slight differences between products into account.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Recommended combinations		Installation		Controller mode	Transmission distance	Condition for DC and R/W head installation
Data Carrier	R/W Head					
V600-D23P66N 	V600-H07 	Stationary	Read distance	Transmission distance priority	5 to 45 mm (max. axial offset ±10 mm)	 Data transmission will be impossible if the DC is installed directly on a metal surface. Refer to the *V600 R/W Heads and EEPROM Data Carriers Operation Manual* (Cat. No. Z128) for details.
				Transmission time priority	5 to 35 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	5 to 35 mm (max. axial offset ±10 mm)	
		Moving	Read distance	Transmission distance priority	25 to 40 mm (max. axial offset ±10 mm)	
				Transmission time priority	25 to 30 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	25 to 30 mm (max. axial offset ±10 mm)	
	V600-H11/-H11-R 	Stationary	Read distance	Transmission distance priority	5 to 30 mm (max. axial offset ±10 mm)	
				Transmission time priority	5 to 25 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	5 to 25 mm (max. axial offset ±10 mm)	
		Moving	Read distance	Transmission distance priority	15 to 25 mm (max. axial offset ±10 mm)	
				Transmission time priority	15 to 20 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	15 to 20 mm (max. axial offset ±10 mm)	
V600-D23P66SP 	V600-H07 	Stationary	Read distance	Transmission distance priority	5 to 40 mm (max. axial offset ±10 mm)	
				Transmission time priority	5 to 30 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	5 to 30 mm (max. axial offset ±10 mm)	
		Moving	Read distance	Transmission distance priority	20 to 40 mm (max. axial offset ±10 mm)	
				Transmission time priority	20 to 30 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	20 to 30 mm (max. axial offset ±10 mm)	
	V600-H11/-H11-R 	Stationary	Read distance	Transmission distance priority	5 to 25 mm (max. axial offset ±10 mm)	
				Transmission time priority	5 to 20 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	5 to 20 mm (max. axial offset ±10 mm)	
		Moving	Read distance	Transmission distance priority	10 to 25 mm (max. axial offset ±10 mm)	
				Transmission time priority	10 to 20 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	10 to 20 mm (max. axial offset ±10 mm)	

Note: 1. The transmission distance/transmission time priority mode setting can be made using the lower-level transmission mode setting switch or memory switch only with a Serial-interface Controller or ID Sensor Unit.

2. With Parallel-interface Controllers, the mode setting is always transmission distance priority.

3. The specifications take fluctuations in ambient temperature and slight differences between products into account.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



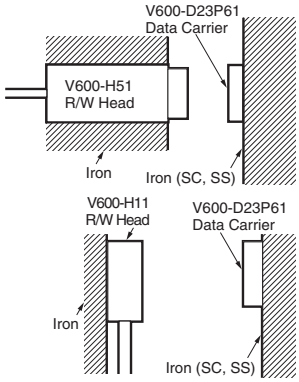
Recommended combinations		Installation		Controller mode	Transmission distance	Condition for DC and R/W head installation
Data Carrier	R/W Head					
V600-D23P61 	V600-H11/-H11-R 	Stationary	Read distance	Transmission distance priority	2 to 19 mm (max. axial offset ±10 mm)	These Data Carriers can be installed on metallic surfaces.  The listed transmission distances also apply for installation on non-metallic surfaces. Refer to the *V600 R/W Heads and EEPROM Data Carriers Operation Manual* (Cat. No. Z128) for details.
				Transmission time priority	2 to 16 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	2 to 16 mm (max. axial offset ±10 mm)	
		Moving	Read distance	Transmission distance priority	12 to 19 mm (max. axial offset ±10 mm)	
				Transmission time priority	12 to 16 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	12 to 16 mm (max. axial offset ±10 mm)	
	V600-H51 	Stationary	Read distance	Transmission distance priority	1 to 16 mm (max. axial offset ±10 mm)	
				Transmission time priority	1 to 14 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	1 to 14 mm (max. axial offset ±10 mm)	
		Moving	Read distance	Transmission distance priority	7 to 16 mm (max. axial offset ±10 mm)	
				Transmission time priority	7 to 14 mm (max. axial offset ±10 mm)	
			Write distance	Irrelevant	7 to 14 mm (max. axial offset ±10 mm)	

Note: 1. The transmission distance/transmission time priority mode setting can be made using the lower-level transmission mode setting switch or memory switch only with a Serial-interface Controller or ID Sensor Unit.

2. With Parallel-interface Controllers, the mode setting is always transmission distance priority.

3. The specifications take fluctuations in ambient temperature and slight differences between products into account.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Recommended combinations		Installation		Controller mode	Transmission distance		Condition for DC and R/W head installation
Data Carrier	R/W Head						
V600-D23P53 	V600-HS51 (See note 4.) 	Stationary	Read distance	Transmission distance priority	0.5 to 4.0 mm (max. axial offset ±2 mm)	0.5 to 4.5 mm (max. axial offset ±1 mm)	These Data Carriers are for flush mounting in metallic bases only.    The listed transmission distances also apply for installation on non-metallic surfaces. Refer to the *V600 R/W Heads and EEPROM Data Carriers Operation Manual* (Cat. No. Z128) for details.
				Transmission time priority	0.5 to 3.0 mm (max. axial offset ±2 mm)	0.5 to 3.5 mm (max. axial offset ±1 mm)	
			Write distance	Irrelevant	0.5 to 3.0 mm (max. axial offset ±2 mm)	0.5 to 3.5 mm (max. axial offset ±1 mm)	
	V600-HS61 (See note 4.) 	Stationary	Read distance	Transmission distance priority	0.5 to 4.0 mm (max. axial offset ±2 mm)	0.5 to 4.5 mm (max. axial offset ±1 mm)	
				Transmission time priority	0.5 to 3.0 mm (max. axial offset ±2 mm)	0.5 to 3.5 mm (max. axial offset ±1 mm)	
			Write distance	Irrelevant	0.5 to 3.0 mm (max. axial offset ±2 mm)	0.5 to 3.5 mm (max. axial offset ±1 mm)	
	V600-H52 	Stationary	Read distance	Transmission distance priority	0.5 to 4.0 mm (max. axial offset ±2 mm)	0.5 to 4.5 mm (max. axial offset ±1 mm)	
				Transmission time priority	0.5 to 3.0 mm (max. axial offset ±2 mm)	0.5 to 3.5 mm (max. axial offset ±1 mm)	
			Write distance	Irrelevant	0.5 to 3.0 mm (max. axial offset ±2 mm)	0.5 to 3.5 mm (max. axial offset ±1 mm)	
V600-D23P54 	V600-HS51 (See note 4.) 	Stationary	Read distance	Transmission distance priority	0.5 to 6.0 mm (max. axial offset ±2 mm)	0.5 to 6.5 mm (max. axial offset ±1 mm)	
				Transmission time priority	0.5 to 5.5 mm (max. axial offset ±2 mm)	0.5 to 6.0 mm (max. axial offset ±1 mm)	
			Write distance	Irrelevant	0.5 to 5.0 mm (max. axial offset ±2 mm)	0.5 to 5.5 mm (max. axial offset ±1 mm)	
	V600-HS61 (See note 4.) 	Stationary	Read distance	Transmission distance priority	0.5 to 6.5 mm (max. axial offset ±2 mm)	0.5 to 7.0 mm (max. axial offset ±1 mm)	
				Transmission time priority	0.5 to 5.5 mm (max. axial offset ±2 mm)	0.5 to 6.0 mm (max. axial offset ±1 mm)	
			Write distance	Irrelevant	0.5 to 5.5 mm (max. axial offset ±2 mm)	0.5 to 6.0 mm (max. axial offset ±1 mm)	
	V600-H52 	Stationary	Read distance	Transmission distance priority	0.5 to 6.5 mm (max. axial offset ±2 mm)	0.5 to 7.0 mm (max. axial offset ±1 mm)	
				Transmission time priority	0.5 to 5.5 mm (max. axial offset ±2 mm)	0.5 to 6.0 mm (max. axial offset ±1 mm)	
			Write distance	Irrelevant	0.5 to 5.5 mm (max. axial offset ±2 mm)	0.5 to 6.0 mm (max. axial offset ±1 mm)	




Note: 1. The transmission distance/transmission time priority mode setting can be made using the lower-level transmission mode setting switch or memory switch only with a Serial-interface Controller or ID Sensor Unit.

2. With Parallel-interface Controllers, the mode setting is always transmission distance priority.

3. The specifications take fluctuations in ambient temperature and slight differences between products into account.

4. This is the transmission distance when using the V600-HS□1 and V600-HA51 combination.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Recommended combinations		Installation		Controller mode	Transmission distance	Condition for DC and R/W head installation
Data Carrier	R/W Head					
V600-D23P55 	V600-HS51 (See note 4.) 	Stationary	Read distance	Transmission distance priority	0.5 to 6.5 mm (max. axial offset ±2 mm)	These Data Carriers are for flush mounting in non-metallic bases only.    The transmission distance decreases considerably when flush mounted in non-metallic bases. Refer to the *V600 R/W Heads and EEPROM Data Carriers Operation Manual* (Cat. No. Z128) for details.
				Transmission time priority	0.5 to 6.0 mm (max. axial offset ±2 mm)	
			Write distance	Transmission distance priority	0.5 to 6.5 mm (max. axial offset ±2 mm)	
				Transmission time priority	0.5 to 6.0 mm (max. axial offset ±2 mm)	
	V600-HS61 (See note 4.) 	Stationary	Read distance	Transmission distance priority	0.5 to 7.0 mm (max. axial offset ±2 mm)	
				Transmission time priority	0.5 to 6.0 mm (max. axial offset ±2 mm)	
			Write distance	Transmission distance priority	0.5 to 7.0 mm (max. axial offset ±2 mm)	
				Transmission time priority	0.5 to 6.0 mm (max. axial offset ±2 mm)	
	V600-H52 	Stationary	Read distance	Transmission distance priority	0.5 to 9.0 mm (max. axial offset ±2 mm)	
				Transmission time priority	0.5 to 8.5 mm (max. axial offset ±2 mm)	
			Write distance	Transmission distance priority	0.5 to 8.5 mm (max. axial offset ±2 mm)	
				Transmission time priority	0.5 to 8.5 mm (max. axial offset ±2 mm)	

Note: 1. The transmission distance/transmission time priority mode setting can be made using the lower-level transmission mode setting switch or memory switch only with a Serial-interface Controller or ID Sensor Unit.






2. With Parallel-interface Controllers, the mode setting is always transmission distance priority.

3. The specifications take fluctuations in ambient temperature and slight differences between products into account.

4. This is the transmission distance when using the V600-HS□1 and V600-HA51 combination.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Transmission Distance Specifications for Built-in-battery DCs


Recommended combinations		Installation		Controller mode	Transmission distance	Condition for DC and R/W head installation
Data Carrier	R/W Head					
V600-D8KR12 	V600-H07 	Stationary	Flush-mounted in metal	Irrelevant	10 to 50 mm (max. axial offset ±10 mm)	   The listed transmission distances also apply for installation on non-metallic surfaces. Refer to the *V600 R/W Heads and SRAM Data Carriers Operation Manual* (Cat. No. Z127) for details.
			Surface-mounted on metal		10 to 60 mm (max. axial offset ±10 mm)	
		Moving	Flush-mounted in metal		25 to 50 mm (max. axial offset ±10 mm)	
			Surface-mounted on metal		25 to 60 mm (max. axial offset ±10 mm)	
	V600-H11 	Stationary	Flush-mounted in metal	Irrelevant	5 to 40 mm (max. axial offset ±10 mm)	
			Surface-mounted on metal		5 to 45 mm (max. axial offset ±10 mm)	
		Moving	Flush-mounted in metal		25 to 40 mm (max. axial offset ±10 mm)	
			Surface-mounted on metal		25 to 45 mm (max. axial offset ±10 mm)	
V600-D8KR13 	V600-H07 	Stationary	Flush-mounted in metal	Irrelevant	10 to 30 mm (max. axial offset ±10 mm)	
			Surface-mounted on metal		10 to 35 mm (max. axial offset ±10 mm)	
		Moving	Flush-mounted in metal		20 to 30 mm (max. axial offset ±10 mm)	
			Surface-mounted on metal		20 to 35 mm (max. axial offset ±10 mm)	
	V600-H11 	Stationary	Flush-mounted in metal	Irrelevant	10 to 30 mm (max. axial offset ±10 mm)	
			Surface-mounted on metal			
		Moving	Flush-mounted in metal		15 to 30 mm (max. axial offset ±10 mm)	
			Surface-mounted on metal			

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Recommended combinations		Installation		Controller mode	Transmission distance	Condition for DC and R/W head installation
Data Carrier	R/W Head					
V600-D8KR04 (unsealed) 	V600-H07 	Stationary	Flush-mounted in metal	Irrelevant	See note1.	The listed transmission distances also apply for installation on non-metallic surfaces. Refer to the *V600 R/W Heads and SRAM Data Carriers Operation Manual* (Cat. No. Z127) for details.
			Surface-mounted on metal		10 to 100 mm (max. axial offset ±10 mm)	
		Moving	Flush-mounted in metal		See note1.	
			Surface-mounted on metal		50 to 100 mm (max. axial offset ±10 mm)	
	V600-H11 	Stationary	Flush-mounted in metal	Irrelevant	See note1.	
			Surface-mounted on metal		10 to 65 mm (max. axial offset ±10 mm)	
		Moving	Flush-mounted in metal		See note1.	
			Surface-mounted on metal		30 to 65 mm (max. axial offset ±10 mm)	
V600-D2KR16 	V600-H11 	Stationary	Flush-mounted in metal	Irrelevant	2 to 15 mm (max. axial offset ±10 mm) (See note 2.)	
			Surface-mounted on metal		2 to 15 mm (max. axial offset ±10 mm)	
		Moving	Flush-mounted in metal		6 to 15 mm (max. axial offset ±10 mm) (See note 2.)	
			Surface-mounted on metal		10 to 15 mm (max. axial offset ±10 mm)	

Note: 1. When Data Carriers are flush-mounted in metal, the read/write distance will depend on the distance (x) between the side of the DC and the metal surface.


Refer to the *V600 R/W Heads and SRAM Data Carriers Operation Manual* (Cat. No. Z127) for details.




2. Use the following method for flush mounting into a metallic base.



Combined with V600-H07

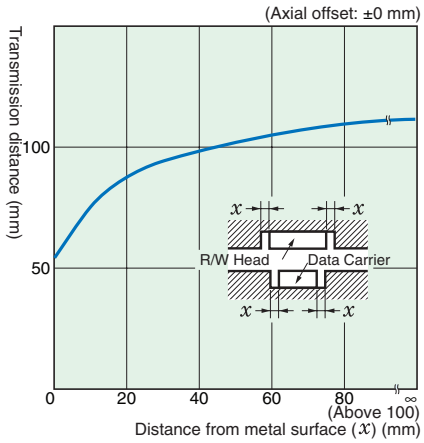

Combined with V600-H11

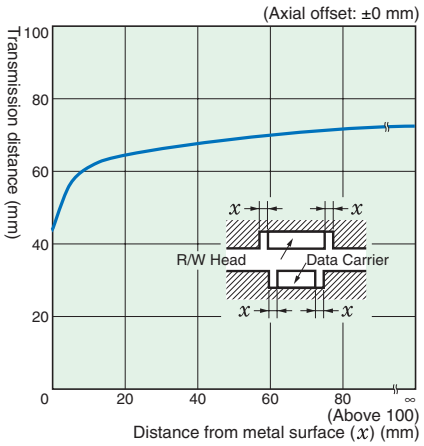

Lower-level Communications Mode Setting (Distance/Time Priority)

The lower-level communications mode is set with the DIP Switch or memory switch on the Serial-interface Controller (V600-CA1A-□/CA2A-□, V600-CD1D-V3, V600-CMID) or ID Sensor Unit. (Refer to the Controller's operation manual for more details on the setting.)

With Parallel-interface Controllers (V600-CA8A-V2/CA9A-V2) the mode is fixed to transmission distance priority.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Characteristic Data (Typical)

■ Transmission Range


Note: The values shown in the following graphs are in millimeters. Refer to pages 10 to 16 for details on Data Carrier and R/W Head mounting conditions.

Battery-less DCs


V600-D23P71 & V600-H07

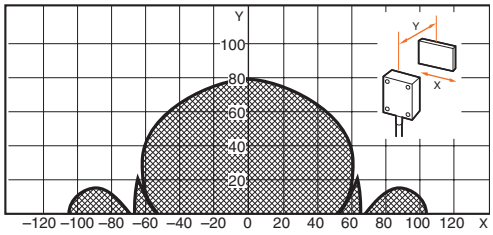


V600-D23P71 & V600-H11

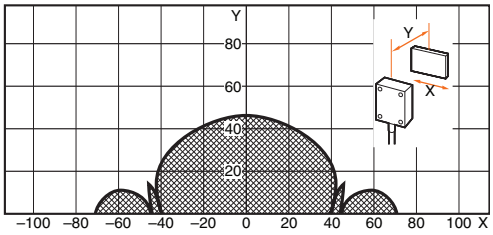


V600-D23P72 & V600-H07

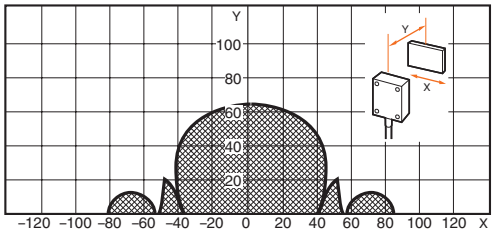


V600-D23P72 & V600-H11

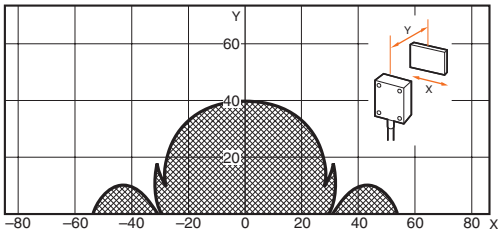


V600-D23P66N & V600-H07

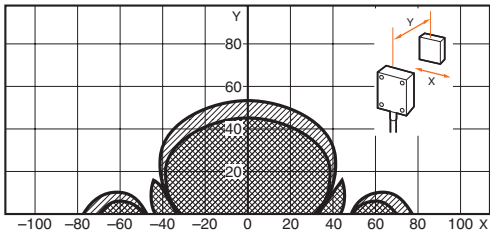


V600-D23P66N & V600-H11

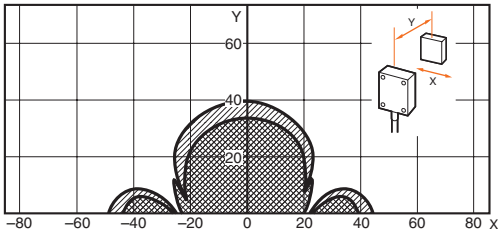


V600-D23P66SP & V600-H07

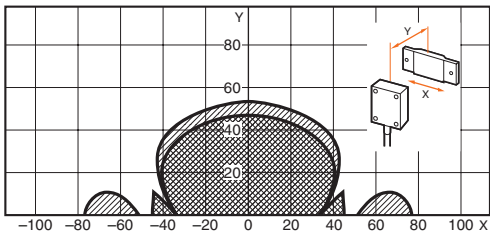


V600-D23P66SP & V600-H11

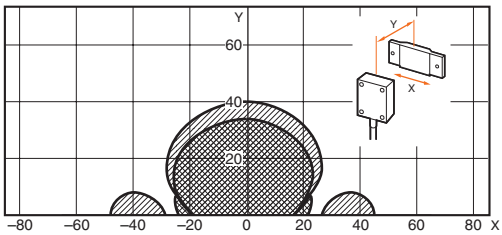

V600-D23P61 & V600-H11

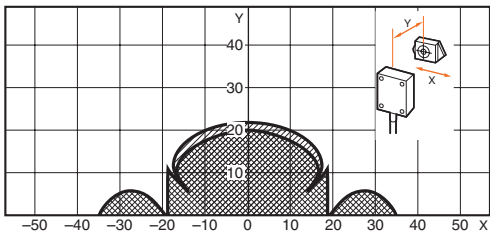

V600-D23P61 & V600-H51

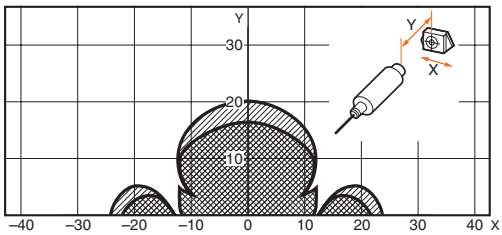


Read range (in transmission distance priority mode)


Write range (in transmission distance or transmission time priority mode)
Read range (in transmission time priority mode)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


V600-D23P53 & V600-HS51 +V600-HA51

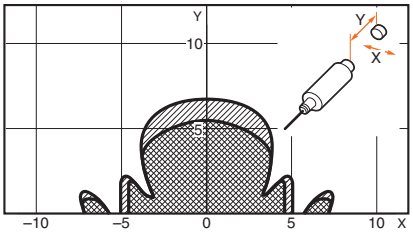


V600-D23P53 & V600-HS61 +V600-HA51

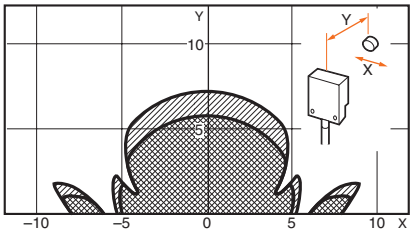


V600-D23P53 & V600-H52

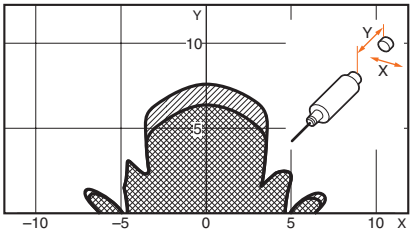


V600-D23P54 & V600-HS51 +V600-HA51

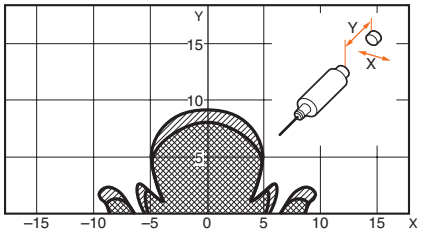


V600-D23P54 & V600-HS61 +V600-HA51

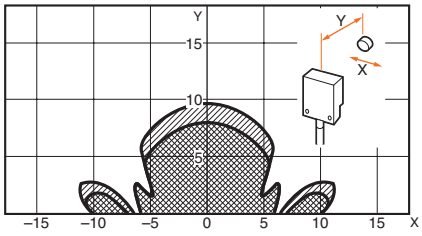


V600-D23P54 & V600-H52

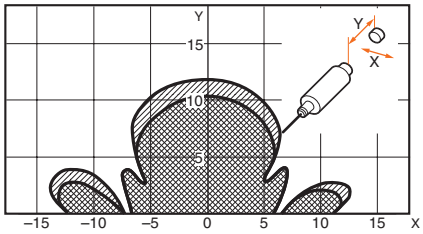


V600-D23P55 & V600-HS51 +V600-HA51

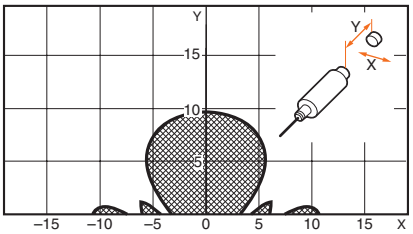

V600-D23P55 & V600-HS61 +V600-HA51

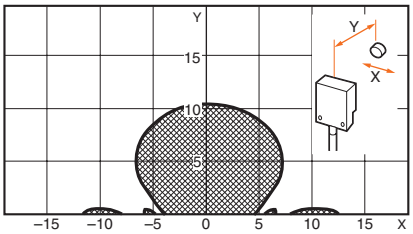

V600-D23P55 & V600-H52

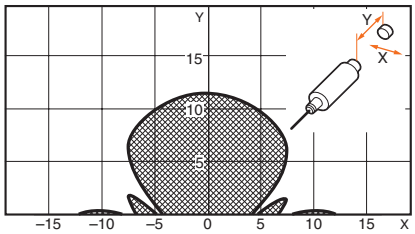


Read range (in transmission distance priority mode)

Write range (in transmission distance or transmission time priority mode)
Read range (in transmission time priority mode)


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Built-in-battery DCs


V600-D8KR12 & V600-H07

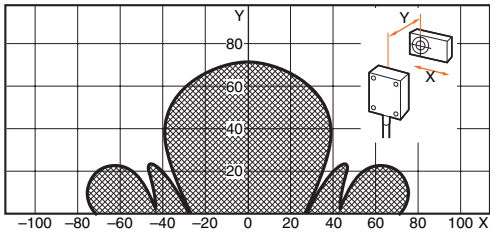


V600-D8KR12 & V600-H11

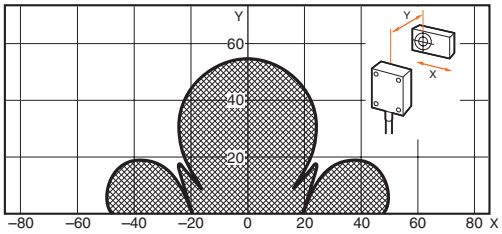


V600-D8KR13 & V600-H07

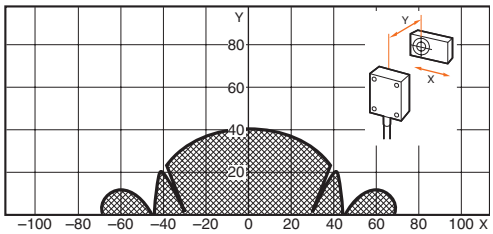


V600-D8KR13 & V600-H11

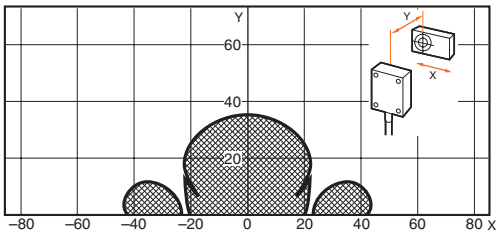

V600-D8KR04 & V600-H07

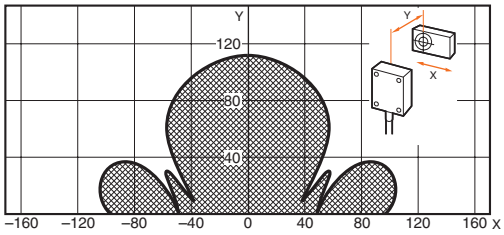


V600-D8KR04 & V600-H11

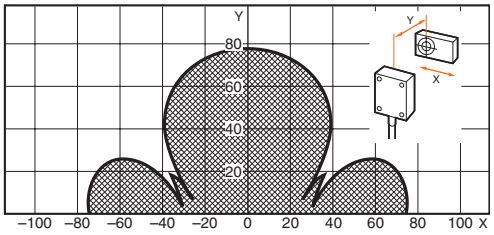

Replaceable-battery DC's

V600-D2KR16 & V600-H11

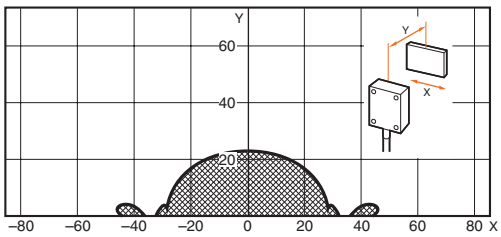


Read/Write range (in transmission distance or transmission time priority mode)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


■ Communications Time

- The communications time does not depend on the model of R/W Head or Data Carrier, although communications times differ between Data Carriers with and without batteries.
- The turn around time (TAT) is the total time required from the issuance of a command from the host device (for example, a host computer) until the reception of a response.
- The lower-level communications time does not include the host communications; it is the time required for communications between the R/W Head and Data Carrier. The lower-level communications time is used in the equation for the DC speed.

  DC Speed = (Distance travelled in the transmission range)/(Lower-level communications time)

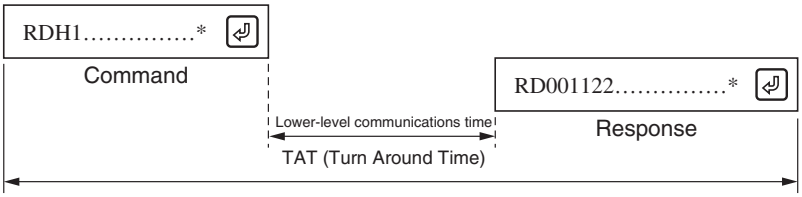

Lower-level Communications Time with Built-in-battery Data Carriers (Reference)

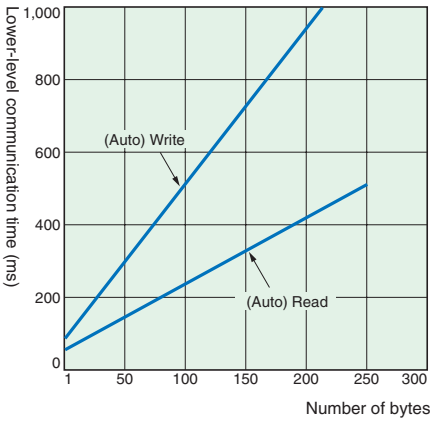


Calculation (Reference)

	Lower-level communications time (ms)
READ	t = 1.8 N + 48.4
WRITE	t = 4.2 N + 86.5

N is the number of processing bytes.

Lower-level Communications Time with Battery-less Data Carriers (Reference)

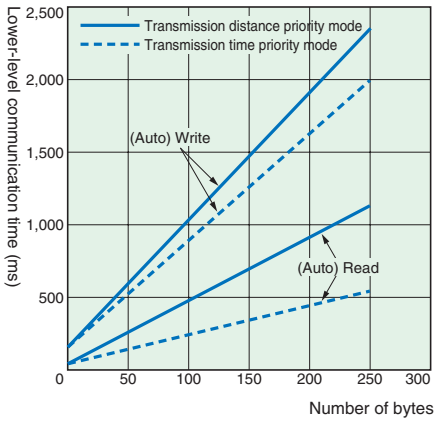

Calculation (Reference)

	R/W	Lower-level communications time (ms)
Distance priority mode	READ	t = 4.3 N + 64.6
	WRITE	t = 8.7 N + 167.1
Time priority mode	READ	t = 1.8 N + 79.0
	WRITE	t = 7.1 N + 180.4


N is the number of processing bytes.

■ Battery Life


The Data Carrier has a built-in lithium battery.

The following graphs show the relationship between the number of bytes per transmission, the number of transmissions per day, and the battery life.


V600-D8KR12 (Typical Example)

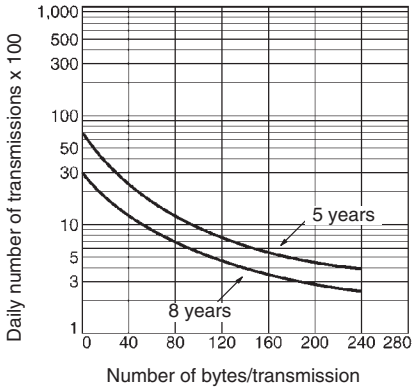

V600-D8KR13 (Typical Example)

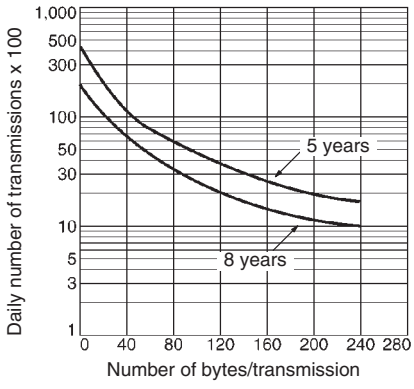

V600-D8KR04 (Typical Example)

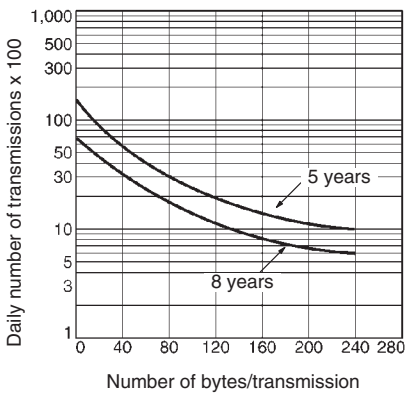


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Temperature and Battery Life

V600-D2KR16

The battery life is two years at 25°C regardless of the relationship between the number of bytes read/written and the number of transmissions.

Examples Showing Relationship between Battery Life and Temperature

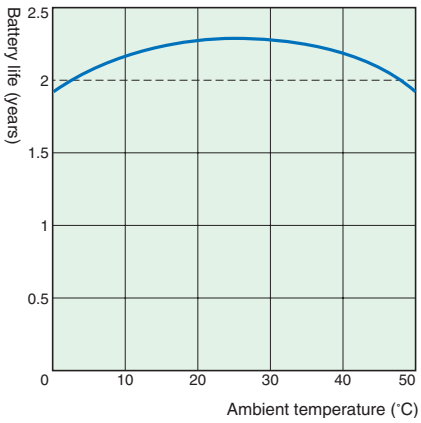

The following table shows the standard values.

Temperature	Battery consumption rate in one year
20°C	1%
30°C	2%
40°C	4%
50°C	8%
60°C	16%
70°C	32%

Note: If the battery is stored at 70°C and is not installed, the battery life is calculated as follows:

2 (years) × (1 - 0.32) = 1.36 years

If the battery is stored at 25°C after one year's storage, the battery life will be approximately 1 year and 4 months. (The battery life will be shortened if the battery is used at temperatures close to 0°C or 50°C.)

The values in the above graph are based on the battery being installed (i.e., the insulation sheet is removed). If the battery is not installed, the values shown in the above table will apply.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Precautions

Data Carrier Batteries

Built-in-battery Data Carriers

⚠ WARNING

The SRAM-type Data Carrier has a built-in lithium battery which may occasionally ignite, explode, and burn if mishandled. Do not disassemble, deform, heat above 212°F (100°C), or incinerate the Data Carrier.



Replaceable-battery Data Carriers

⚠ WARNING

The SRAM-type Data Carrier has replaceable lithium batteries which may occasionally take fire, explode, burn, or leak liquid if mishandled. Do not deform, heat above 212°F (100°C), incinerate, or charge the batteries, or short-circuit their positive and negative terminals.




■ Mutual Interference (Reference Values)

Mutual Interference between R/W Heads


When more than one set of R/W Heads are used, mutual interference between the Heads can be avoided by mounting the Heads at the specified distance as shown below.

V600-H07

- Facing
  RD/WT command: 650 mm min.
  Auto command: 900 mm min.




- Side-by-side
  RD/WT command: 550 mm min.
  Auto command: 1,200 mm min.

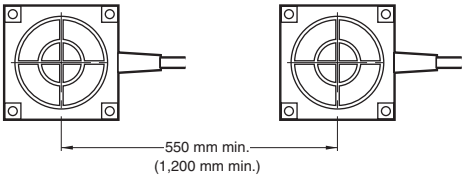


V600-H11

- Facing
  RD/WT command: 200 mm min.
  Auto command: 200 mm min.




- Side-by-side
  RD/WT command: 200 mm min.
  Auto command: 200 mm min.

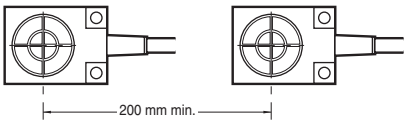


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

V600-H51

- Facing: 120 mm min.




- Side-by-side: 100 mm min.




V600-H52

- Facing: 80 mm min.




- Side-by-side: 80 mm min.




V600-HS51

- Facing: 80 mm min.




- Side-by-side: 80 mm min.




V600-HS61

- Facing: 80 mm min.



- Side-by-side: 80 mm min.
- V600-HS61 V600-HS61




Note: If the two R/W Heads are not transmitting simultaneously (i.e., independent read/write), mutual interference will not occur. Therefore, the restriction on the distance between the Heads will not be applicable.
The commands will be received by the R/W Heads and transmission will oscillate between them.

Mutual Interference between Proximity Sensors


The V600-series Units use electromagnetic coupling (frequency: 530 kHz). When a V600 Unit is wired close to R/W Heads, Proximity Switches, and Sensors that have an oscillating frequency between 400 and 600 kHz, the Proximity Sensor may malfunction, so be sure to install the Units according to the distance restrictions specified in the following diagrams. Make sure to thoroughly test that the mounting positions and the fixed positions of the Sensors are correct before putting them into actual operation.

V600-H07

- Vertical/Parallel: 400 mm min.

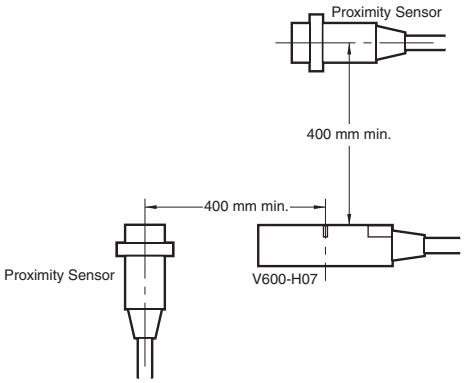


- Facing: 300 mm min.

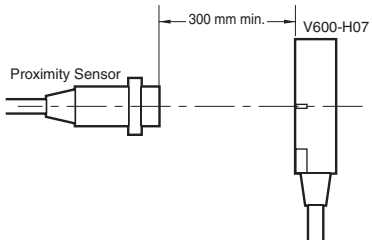


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

V600-H11


- Vertical/Parallel: 100 mm min.




- Facing: 100 mm min.

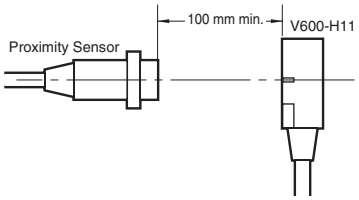


V600-H51/H52

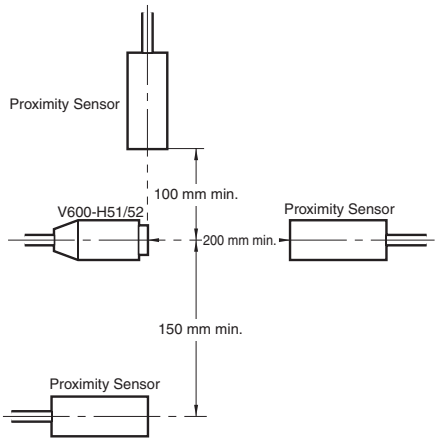

V600-HS51

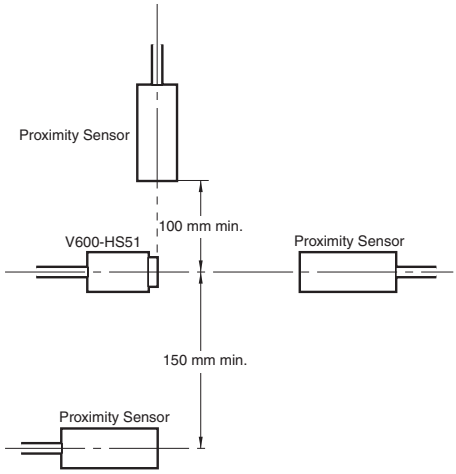

V600-HS61

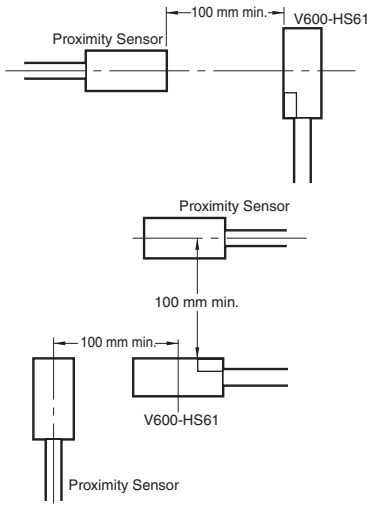

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Mutual Interference between Data Carriers

When more than one Data Carrier is used, mutual interference between the DCs can be avoided by making sure that they are mounted apart at the distances specified below.

Reading/Writing


V600-D23P53

R/W Head: V600-H52, V500-HS51 + V600-HA51, V600-HS61 + V600-HA51




V600-D23P54

R/W Head: V600-H52, V600-HS51 + V600-HA51, V600-HS61 + V600-HA51




V600-D23P55

R/W Head: V600-H52, V600-HS51 + V600-HA51, V600-HS61 + V600-HA51




V600-D23P61

R/W Head: V600-H11/-H51




V600-D23P66N

R/W Head: V600-H11




R/W Head: V600-H07




V600-D23P66SP

R/W Head: V600-H11





R/W Head: 600-H07




V600-D23P72


R/W Head: V600-H51







R/W Head: V600-H11






R/W Head: V600-H07






V600-D23P71

R/W Head: V600-H07

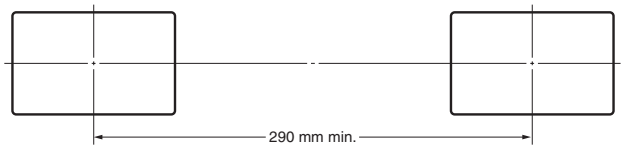


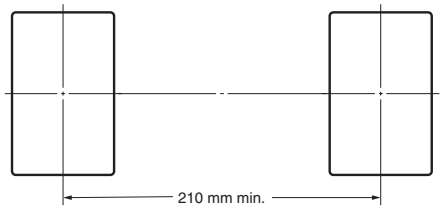


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


V600-D8KR12


R/W Head: V600-H11






R/W Head: V600-H07

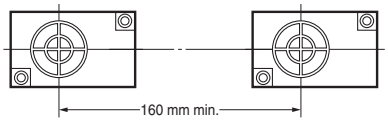





V600-D8KR13


R/W Head: V600-H11

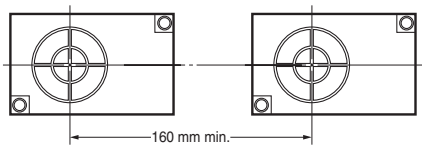

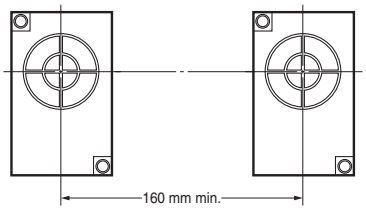


R/W Head: V600-H07

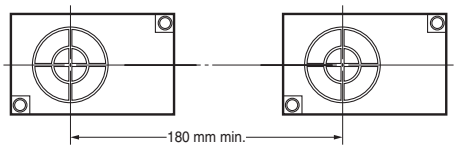


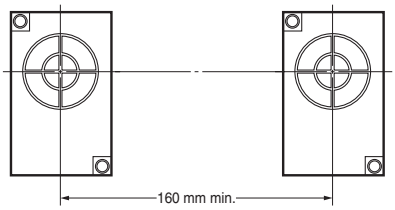


V600-D8KR04

R/W Head: V600-H11

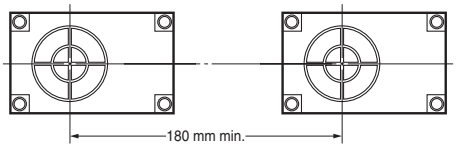

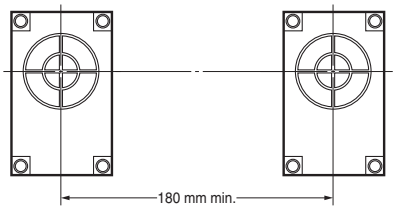



R/W Head: V600-H07

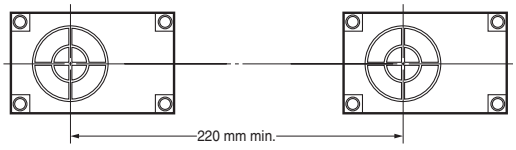

V600-D2KR16

R/W Head: V600-H11

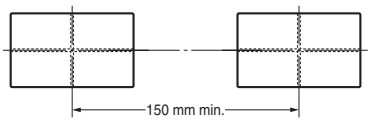



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Dimensions

Note: All units are in millimeters unless otherwise indicated.


Data Carriers

Built-in-battery DCs


V600-D8KR12

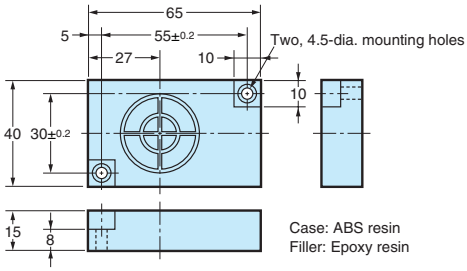

V600-D8KR13

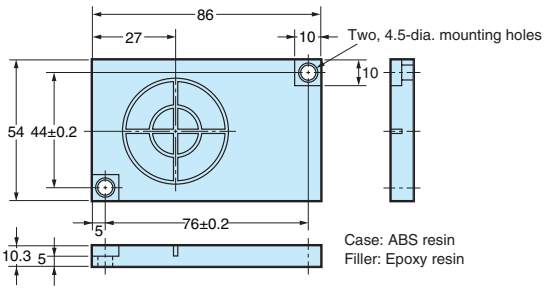


V600-D8KR04

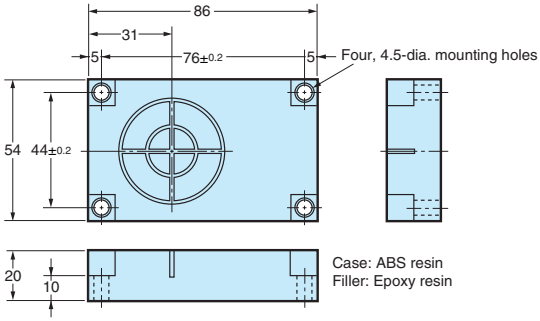


Replaceable-battery DCs

V600-D2KR16

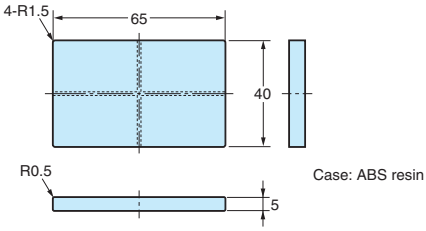


Battery-less DCs

V600-D23P53




Case: ABS resin
Filler: Epoxy resin

V600-D23P54




Case: ABS resin
Filler: Epoxy resin

V600-D23P55




Case: PPS resin
Filler: Epoxy resin

V600-D23P61




Case: ABS resin
Filler: Epoxy resin

V600-D23P66N

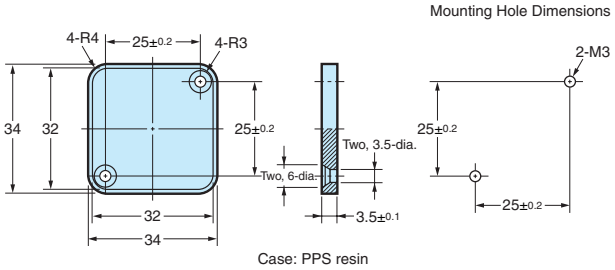

Case: PPS resin


V600-D23P66SP

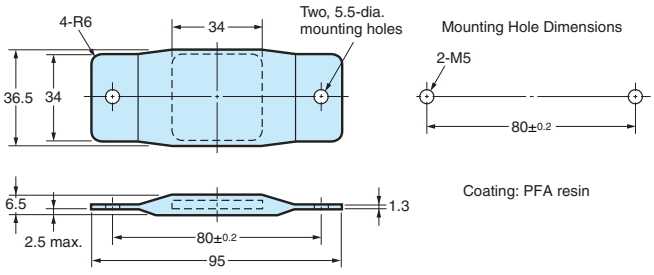

Coating: PFA resin


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

V600-D23P71



Case: Glass epoxy resin
Coating: Polyurethane resin


V600-D23P72



Case: Glass epoxy resin
Coating: Polyurethane resin


R/W Heads

V600-H07

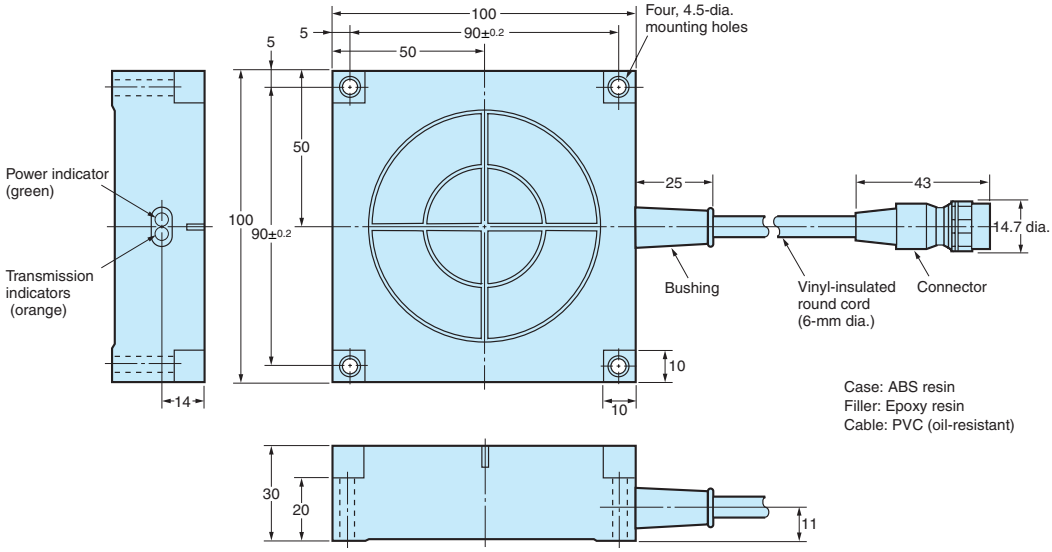

Case: ABS resin
Filler: Epoxy resin
Cable: PVC (oil-resistant)


V600-H11

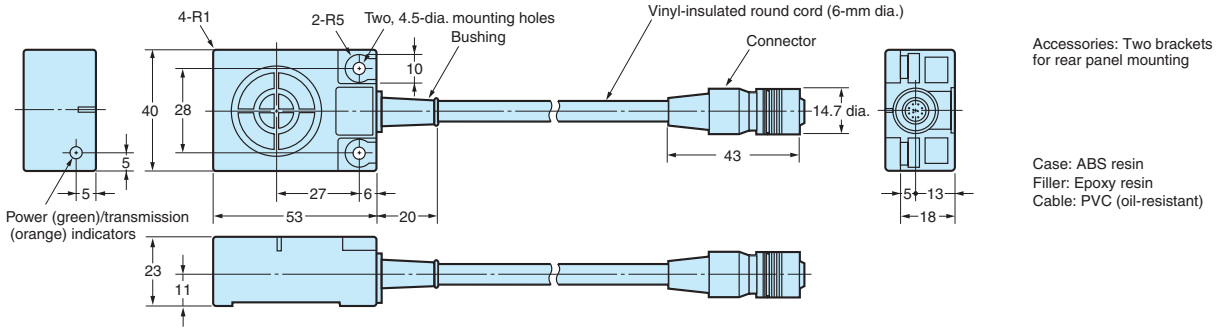

Accessories: Two brackets for rear panel mounting


Case: ABS resin
Filler: Epoxy resin
Cable: PVC (oil-resistant)

V600-H51

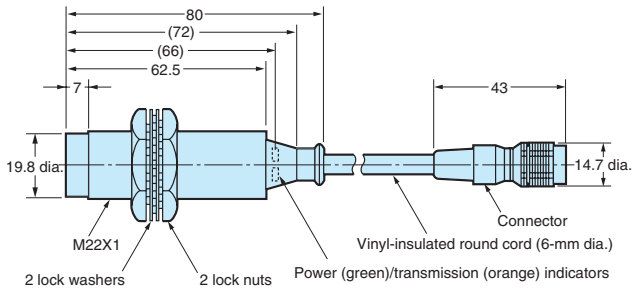

Case: Brass
Transmission window: ABS resin
Filler: Epoxy resin
Cable: PVC (oil-resistant)


V600-HS51 (Sensor Section)

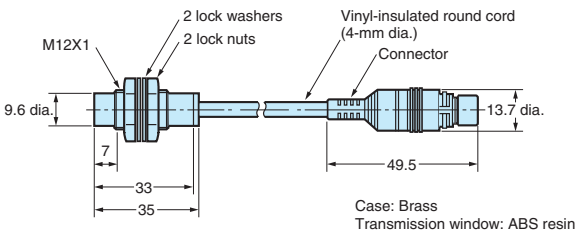

Case: Brass
Transmission window: ABS resin
Filler: Epoxy resin
Cable: PVC (oil-resistant)


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

V600-H52

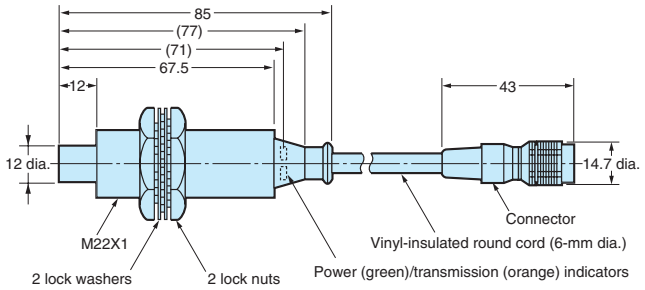


Case: Brass
Transmission window: ABS resin
Filler: Epoxy resin
Cable: PVC (oil-resistant)

V600-HS61 (Sensor Section)

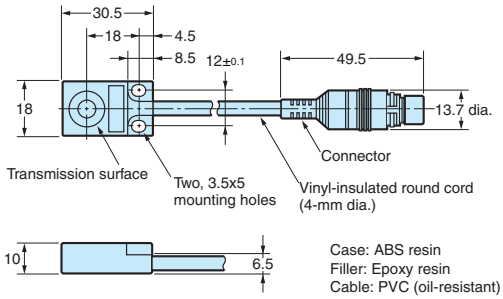

Case: ABS resin
Filler: Epoxy resin
Cable: PVC (oil-resistant)

V600-HA51 (Amplifier Section)

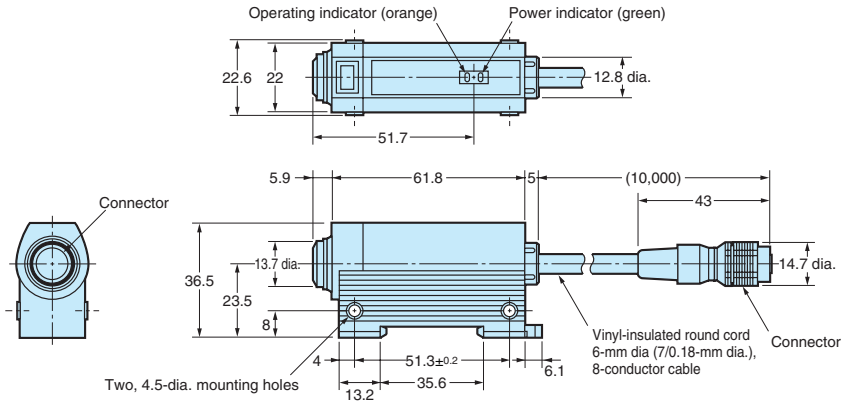


Case: ABS resin
Filler: Epoxy resin
Cable: PVC (oil-resistant)


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ID Controllers


V600-CA□A-□ (Multipurpose)

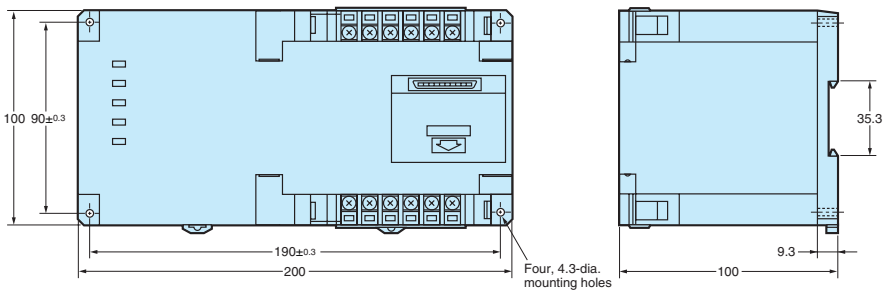


V600-P01 Monitor Unit (For use with V600-CA□A-□)

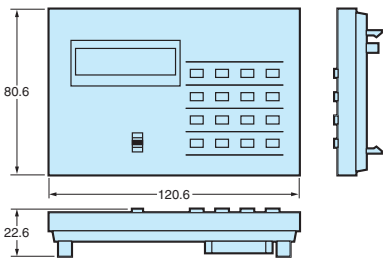


V600-CD1D-V3 (Compact)

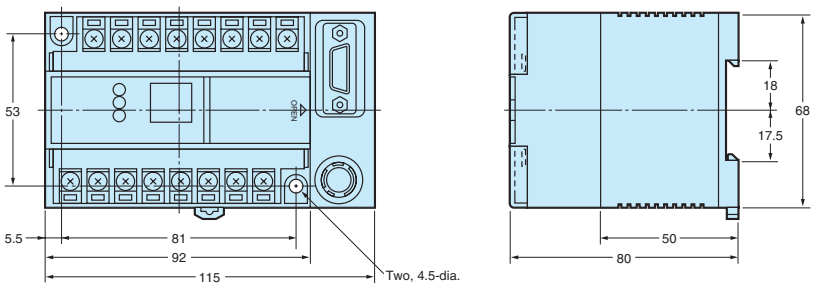


V600-CB-US Hand-held ID Controller

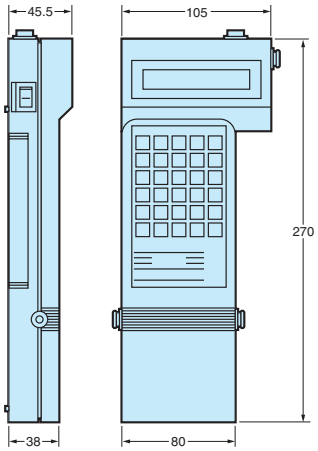

V600-CM1D (Board-mounted)

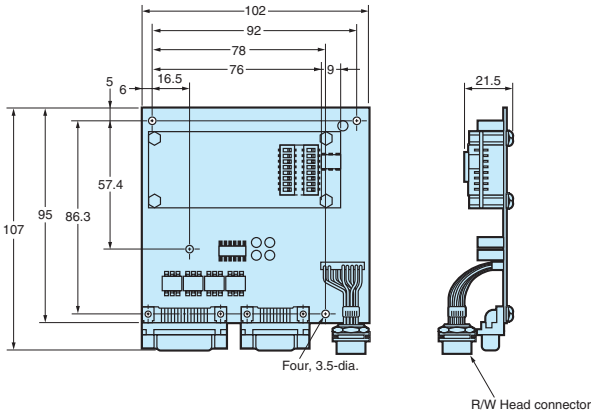

Battery Charger

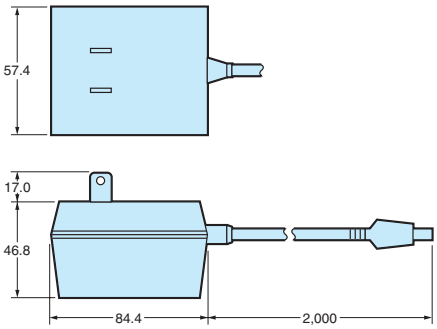

Multifunctional Controllers and V600-IDSC02/-IDSC04 Power Supplies


Ask your OMRON representative for more information on the above products.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Accessories


Holder

V600-A81

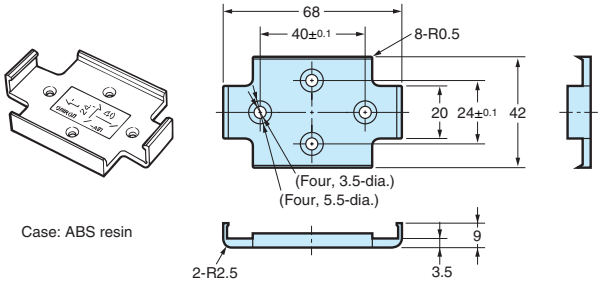


Case: ABS resin

V600-A84

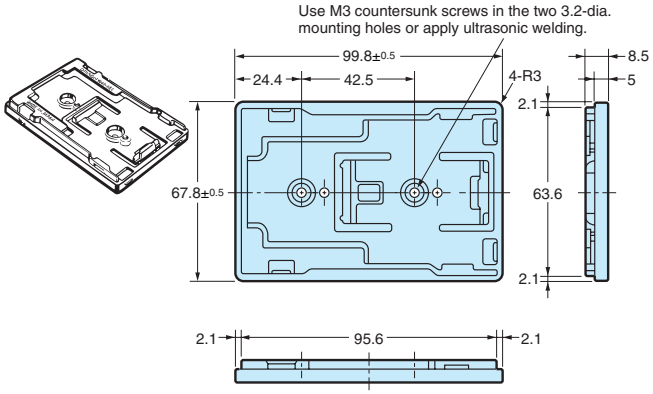


Attachment


V600-A86



Material: PPS resin

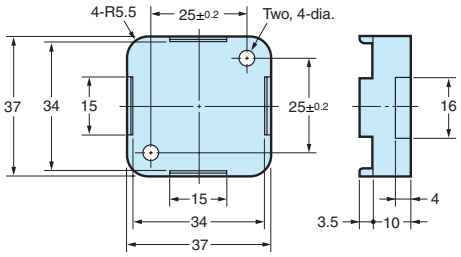

Mounting Hole Dimensions



ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

READ AND UNDERSTAND THIS DOCUMENT

Please read and understand this document before using the products. Please consult your OMRON representative if you have any questions or comments.

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

SUITABILITY FOR USE

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PERFORMANCE DATA

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

COPYRIGHT AND COPY PERMISSION

This document shall not be copied for sales or promotions without permission.

This document is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this document in any manner, for any other purpose. If copying or transmitting this document to another, please copy or transmit it in its entirety.

Cat. No. Q124-E1-02

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

Application Sensors Division
Sensing Devices and Components Division H.Q.
Shiokoji Horikawa, Shimogyo-ku,
Kyoto, 600-8530 Japan
Tel: (81)75-344-7068/Fax: (81)75-344-7107

Printed in Japan
1004 (0301)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP