ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Advantech PCM-3730* at our website: ***Click HERE***

PCM-3725
PCM-3730
PCM-3780


8-ch Relay and Isolated Digital Input PC/104 Module

16-ch Isolated Digital I/O PC/104 Module


2-ch Counter/Timer with 24-ch Digital I/O PC/104 Module

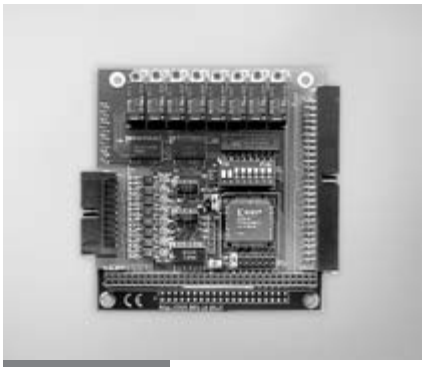

PCM-3725

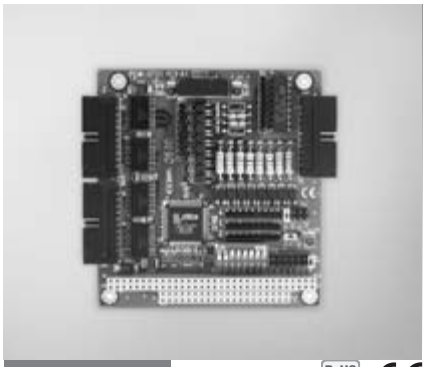

PCM-3730

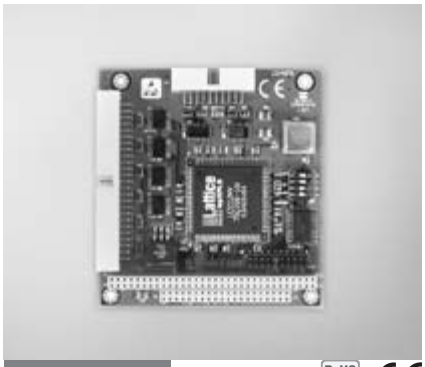

PCM-3780

Specifications

Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 3 V
  Logic 1: 10 V (50 V max.)
- **Isolation Protection** 2,500 V_{DC}
- **Overvoltage Protection** 70 V_{DC}
- **Opto-Isolator Response** 25 µs
- **Input Resistance** 4.7 KΩ

Relay Output

- **Channels** 8
- **Relay Type** SPDT (Form C)
- **Contact Rating** 30 V_{DC}@ 1.5 A
- **Relay on Time** 4 ms
- **Relay off Time** 4 ms
- **Life Span** 100,000 min @ 2 A/30 V
- **Resistance** Contact: 100 mΩ
  Insulation: 1 GΩ @ 500 V_{DC}

General

- **Bus Type** PC/104
- **I/O Connectors** 1 x 20-pin head for IDI
  1 x 50-pin head for relay
- **Dimensions (L x H)** 96 x 90 mm (3.8" x 3.5")
- **Power Consumption** Typical: 5 V @ 100 mA
  Max.: 5 V @ 280 mA
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F)
- **Storage Temperature** -20 ~ 70° C (-4 ~ 158° F)
- **Storage Humidity** 5 ~ 95% RH, non-cond.

Ordering Information

- **PCM-3725** 8-ch Relay/Isolated Digital Input PC/104 Module
- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10120-2** 20-pin Flat Cable, 2 m
- **PCL-10150-1.2** 50-pin Flat Cable, 1.2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board
- **PCLD-780** Screw Terminal Board w/ Two 20-pin Flat Cables

Specifications

Digital Input

- **Channels** 16, 5 V/TTL
- **Interrupt Capable Ch.** 4

Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 2 V max.
  Logic 1: 5 V min. (24 V max.)
- **Isolation Protection** 2,500 V_{DC}
- **Opto-Isolator Response** 0.1 ms
- **Input Resistance** 2 kΩ @ 0.5 W

Digital Output

- **Channels** 16, 5 V/TTL
- **Output Capability**
  Sink: 8 mA @ 0.5 V max.
  Source: -0.4 mA @ 2.4 V min.

Isolated Digital Output

- **Channels** 8
- **Output Type** Sink (NPN)
- **Isolation Protection** 2,500 V_{DC}
- **Output Voltage** 5 ~ 40 V_{DC}
- **Sink Current** 200 mA max./channel
- **Opto-Isolator Response** 100 µs

General

- **Bus Type** PC/104
- **I/O Connectors** 3 x 20-pin box header
- **Dimensions (L x H)** 96 x 90 mm (3.8" x 3.5")
- **Power Consumption** Typical: 5 V @ 330 mA
  Max.: 5 V @ 500 mA
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F)
- **Storage Temperature** -20 ~ 70° C (-4 ~ 158° F)
- **Storage Humidity** 5 ~ 95% RH, non-cond.

Ordering Information

- **PCM-3730** 16-ch Isolated DI/O PC/104 Module w/ 20p Cable
- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10120-2** 20-pin Flat Cable, 2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-780** Screw Terminal Board w/ Two 20-pin Flat Cables
- **PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- **PCLD-885** 16-ch Power Relay Board w/ 20p & 50p Flat Cables

Specifications

Digital Input

- **Channels** 24 (shared with output)
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
  Logic 1: 2.4 V min.
- **Interrupt Capable Ch.** 24

Digital Output

- **Channels** 24 (shared with input)
- **Compatibility** 5 V/TTL
- **Output Voltage**
  Logic 0: 0.5 V max. @ 24 mA (sink)
  Logic 1: 2.4 V min. @ 15 mA (source)

Counter/Timer

- **Channels** 2
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 20 MHz
- **Counter Modes** 12 (programmable)
- **Interrupt Capable Ch.** 2

General

- **Bus Type** PC/104
- **I/O Connectors** 1 x 50-pin box header
  1 x 20-pin box header
- **Dimensions (L x H)** 96 x 90 mm (3.8" x 3.5")
- **Power Consumption** Typical: 5 V @ 300 mA
  Max.: 5 V @ 0.8 mA
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F)
- **Storage Temperature** -20 ~ 70° C (-4 ~ 158° F)
- **Operating Humidity** 5 ~ 85% RH non-cond.

Ordering Information

- **PCM-3780** 2-ch Counter/Timer, DI/O, PC/104 Module w/Cables
- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10150-1.2** 50-pin Flat Cable, 1.2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP