

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PPC-123

Pentium® III processor-based panel PC with 12.1" LCD flat panel display

User's Manual

Copyright notice

This document is copyrighted 2001, by Advantech Co., Ltd. All rights are reserved. Advantech Co., Ltd. reserves the right to alter the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated or transmitted in any form or by any means without the prior written permission of Advantech. Information provided in this manual is intended to be accurate and reliable. However, Advantech assumes no responsibility for use of this manual, nor for any infringements upon the rights of third parties which may result from such use.

All brand and product names mentioned herein are trademarks or registered trademarks of their respective holders.

Part No. 2008012310

2nd Edition Printed in Taiwan May 2001

Packing List

Before installing your panel PC, ensure that the following materials have been received:

- PPC-123 series panel PC
- User's manual
- Accessories for PPC-123
  - Y-shaped adapter for PS/2 mouse and keyboard
  - Power cord (1.8 m) - USA type (other types are available on request)
  - Floppy disk with CD-ROM drive driver
  - "Drivers and Utilities" CD-ROM disc
  - Mounting kits and packet of screws
  - Heat sink (optional) (refer to Notes 1 and 2 below)

If any of these items are missing or damaged, contact your distributor or sales representative immediately.

Note 1: *If the unit you have bought is basic (i.e. without a CPU, HDD, or SDRAM), you will find this optional item in the accessory box.*

Note 2: *If you install an Intel® processor yourself, you must install a heat sink above the CPU. This will avoid heat damage to the CPU.*

FCC Class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses and can radiate radio frequency energy. If not installed and used in accordance with this user's manual, it may cause harmful interference to radio communications. Note that even when this equipment is installed and used in accordance with this user's manual, there is still no guarantee that interference will not occur. If this equipment is believed to be causing harmful interference to radio or television reception, this can be determined by turning the equipment on and off. If interference is occurring, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment to a power outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Warning: *Any changes or modifications made to the equipment which are not expressly approved by the relevant standards authority could void your authority to operate the equipment.*



Additional Information and Assistance

1. Visit the Advantech websites at **www.advantech.com** or **www.advantech.com.tw** where you can find the latest information about the product.
2. Contact your distributor, sales representative, or Advantech's customer service center for technical support if you need additional assistance. Please have the following information ready before you call:
   - Product name and serial number
   - Description of your peripheral attachments
   - Description of your software (operating system, version, application software, etc.)
   - A complete description of the problem
   - The exact wording of any error messages

Warning!



1. Input voltage rated 100-250 V_{AC}, 50/60 Hz, 3 A

2. Use a 3 V @ 195 mA lithium battery

3. Packing: please carry the unit with both hands, handle with care

4. Our European representative:

Advantech Europe GmbH
Kolberger Straße 7
D-40599 Düsseldorf, Germany
Tel: 49-211-97477350
Fax: 49-211-97477300

5. Maintenance: to properly maintain and clean the surfaces, use only approved products or clean with a dry applicator

Safety Instructions

1. Read these safety instructions carefully.
2. Keep this User's Manual for later reference.
3. Disconnect this equipment from any AC outlet before cleaning. Use a damp cloth. Do not use liquid or spray detergents for cleaning.
4. For plug-in equipment, the power outlet socket must be located near the equipment and must be easily accessible.
5. Keep this equipment away from humidity.
6. Put this equipment on a reliable surface during installation. Dropping it or letting it fall may cause damage.
7. The openings on the enclosure are for air convection. Protect the equipment from overheating. DO NOT COVER THE OPENINGS.
8. Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
9. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
10. All cautions and warnings on the equipment should be noted.
11. If the equipment is not used for a long time, disconnect it from the power source to avoid damage by transient overvoltage.
12. Never pour any liquid into an opening. This may cause fire or electrical shock.
13. Never open the equipment. For safety reasons, the equipment should be opened only by qualified service personnel.
14. If one of the following situations arises, get the equipment checked by service personnel:
    a. The power cord or plug is damaged.
    b. Liquid has penetrated into the equipment.
    c. The equipment has been exposed to moisture.
    d. The equipment does not work well, or you cannot get it to work according to the user's manual.
    e. The equipment has been dropped and damaged.
    f. The equipment has obvious signs of breakage.
15. DO NOT LEAVE THIS EQUIPMENT IN AN UNCONTROLLED ENVIRONMENT WHERE THE STORAGE TEMPERATURE IS BELOW -20° C (-4° F) OR ABOVE 60° C (140° F). THIS MAY DAMAGE THE EQUIPMENT.

The sound pressure level at the operator's position according to IEC 704-1:1982 is no more than 70dB(A).

DISCLAIMER: This set of instructions is given according to IEC 704-1. Advantech disclaims all responsibility for the accuracy of any statements contained herein.

Wichtige Sicherheishinweise

1. Bitte lesen sie Sich diese Hinweise sorgfältig durch.
2. Heben Sie diese Anleitung für den späteren Gebrauch auf.
3. Vor jedem Reinigen ist das Gerät vom Stromnetz zu trennen. Verwenden Sie Keine Flüssig-oder Aerosolreiniger. Am besten dient ein angefeuchtetes Tuch zur Reinigung.
4. Die NetzanschluBsteckdose soll nahe dem Gerät angebracht und leicht zugänglich sein.
5. Das Gerät ist vor Feuchtigkeit zu schützen.
6. Bei der Aufstellung des Gerätes ist auf sicheren Stand zu achten. Ein Kippen oder Fallen könnte Verletzungen hervorrufen.
7. Die Belüftungsöffnungen dienen zur Luftzirkulation die das Gerät vor überhitzung schützt. Sorgen Sie dafür, daB diese Öffnungen nicht abgedeckt werden.
8. Beachten Sie beim. AnschluB an das Stromnetz die AnschluBwerte.
9. Verlegen Sie die NetzanschluBleitung so, daB niemand darüber fallen kann. Es sollte auch nichts auf der Leitung abgestellt werden.
10. Alle Hinweise und Warnungen die sich am Geräten befinden sind zu beachten.
11. Wird das Gerät über einen längeren Zeitraum nicht benutzt, sollten Sie es vom Stromnetz trennen. Somit wird im Falle einer Überspannung eine Beschädigung vermieden.
12. Durch die Lüftungsöffnungen dürfen niemals Gegenstände oder Flüssigkeiten in das Gerät gelangen. Dies könnte einen Brand bzw. elektrischen Schlag auslösen.
13. Öffnen Sie niemals das Gerät. Das Gerät darf aus Gründen der elektrischen Sicherheit nur von authorisiertem Servicepersonal geöffnet werden.
14. Wenn folgende Situationen auftreten ist das Gerät vom Stromnetz zu trennen und von einer qualifizierten Servicestelle zu überprüfen:

    a - Netzkabel oder Netzstecker sind beschädigt.

    b - Flüssigkeit ist in das Gerät eingedrungen.

    c - Das Gerät war Feuchtigkeit ausgesetzt.

    d - Wenn das Gerät nicht der Bedienungsanleitung entsprechend funktioni ert oder Sie mit Hilfe dieser Anleitung keine Verbesserung erzielen.

    e - Das Gerät ist gefallen und/oder das Gehäuse ist beschädigt.

    f - Wenn das Gerät deutliche Anzeichen eines Defektes aufweist.
15. Bitte lassen Sie das Gerät nicht unbehehrt hinten unter -20° C (-4° F) oder oben 60° C (140° F), weil diesen Temperaturen das Gerät zerstören könten.

Der arbeitsplatzbezogene Schalldruckpegel nach DIN 45 635 Teil 1000 beträgt 70 dB(A) oder weiger.

DISCLAIMER: This set of instructions is given according to IEC704-1. Advantech disclaims all responsibility for the accuracy of any statements contained herein.

Contents

Chapter 1 General Information **1**
1.1 Introduction 2
1.2 How to Use This Manual 4
1.3 Specifications 6
General 6
Standard PC functions 6
Flat panel interface 7
Audio function 7
PCI bus Ethernet interface 8
PCMCIA interface 8
Touchscreen (optional) 8
Optional modules 9
Environment 9
1.4 Dimensions 10
Chapter 2 System Setup **11**
2.1 A Quick Tour of the Panel PC 12
2.2 Preparing For First-time Use 15
2.3 Installation Procedures 15
2.3.1 Connecting the power cord 15
2.3.2 Installing the DC power insulator with hood 16
2.3.3 Connecting the keyboard and mouse 19
2.3.4 Switching on the power 19
2.4 Running the BIOS Setup Program 20
2.5 Installing System Software 21
2.6 Installing the Drivers 22
Chapter 3 Using the Panel PC **25**
3.1 Introduction 26
3.2 Floppy Drive 26
3.3 CD-ROM Drive 27
3.4 PCMCIA 28

3.5 PS/2 Mouse and Keyboard 31
3.6 PCI/ISA Bus Expansion 31
3.7 Parallel Port 33
3.8 Serial COM Ports 33
3.9 VGA Port 34
3.10 Game Port 34
3.11 USB Ports 34
3.12 Audio Interface 35
3.13 Ethernet 35
3.14 Adjusting the LCD Contrast and Brightness 35
3.15 Infrared Module 36
3.16 Touchscreen (Optional) 36
Chapter 4 Hardware Installation and Upgrading 37
4.1 Overview of Hardware Installation and Upgrading .. 38
4.2 Disassembling the Panel PC 38
4.3 Installing the 2.5" Hard Disk Drive (HDD) 40
4.4 Installing the Central Processing Unit (CPU) 41
4.5 Installing the SDRAM Memory Module 44
4.6 Installing the Floppy Disk Drive (FDD) and Slim CD-ROM Drive 45
Chapter 5 Jumper Settings and Connectors 47
5.1 Jumpers and Connectors 48
5.1.1 Setting jumpers 48
5.1.2 Jumpers and switch 49
5.1.3 Locating jumpers and switch 50
5.1.4 Connectors 51
5.1.5 Locating connectors 52
5.2 CPU Installation 53
5.3 CMOS Clear for External RTC (JP8) 53
5.4 COM-port Interface 54
5.4.1 COM2 RS-232/422/485 setting (JP3, JP4, JP5) 54
5.4.2 COM1 / COM2 pin 9 output type setting (JP9) 55
5.4.3 COM3 / COM4 pin 9 output type setting (JP6) 56

5.5 Internal -12 V source selection setting (JP1) 56
5.6 VGA Interface 57
5.6.1 LCD panel power setting 57
5.6.2 Panel type select (SW3) 57
5.7 Watchdog Timer Configuration 58
5.7.1 Watchdog activity selection (JP7) 58
Chapter 6 PCI Bus Ethernet Interface 59
6.1 Introduction 60
6.2 Installation of Ethernet Driver 60
6.2.1 Installation for Windows 95 61
6.2.2 Installation for Windows 98 63
6.2.3 Installation for Windows NT 66
6.2.4 Installation for Windows 2000/ME 67
6.3 Further Information 68
Chapter 7 AGP SVGA Setup 69
7.1 Introduction 70
7.1.1 Chipset 70
7.1.2 Display memory 70
7.1.3 Display types 70
7.2 Installation of SVGA Driver 71
7.2.1 Installation for Windows 95/98 72
7.2.2 Installation for Windows NT 73
7.2.3 Installation for Windows 2000 74
7.2.4 Installation for Windows ME 75
7.3 Further Information 76
Chapter 8 Audio 77
8.1 Introduction 78
8.2 Installation of Audio Driver 78
8.2.1 Installation for Windows 95/98 79
8.2.2 Installation for Windows NT 81
8.2.3 Installation for Windows 20000/ME 82
Chapter 9 Award BIOS Setup 83
9.1 Award BIOS Setup 84
9.2 CMOS Setup Utility 84

9.3 Standard CMOS Setup 85
9.3.1 Hard Disk Configurations 86
9.4 BIOS Features Setup 87
9.5 Chipset Features Setup 91
9.6 Power Management Setup 93
9.7 PNP/PCI Configuration Setup 96
9.8 Load BIOS Defaults 97
9.9 Load Setup Defaults 97
9.10 Integrated Peripherals 98
9.11 Password Setting 100
9.12 IDE HDD Auto Detection 101
9.13 Save and Exit Setup 102
9.14 Exit Without Saving 102
Chapter 10 PCMCIA 103
10.1 Introduction 104
10.2 Installation of PCMCIA Driver 104
10.2.1 Installation for Windows 95 105
Chapter 11 Touchscreen 107
11.1 Introduction 108
11.1.1 General information 108
11.1.2 General specifications 108
11.1.3 Environmental specifications 108
11.2 Installation of Driver for Resistive Touchscreen 109
11.2.1 Installation for Windows 95 110
11.2.2 Installation for Windows 98 112
11.2.3 Installation for Windows NT 114
11.2.4 Intallation for Windows 2000 116
11.2.5 Installation for Windows ME 119
11.3 Installation of Driver for Capacitive Touchscreen .. 121
11.3.1 Installation for Windows 95/98/NT 122
Appendix A LCD Specifications and Selection Settings 125
A.1 PPC-123 LCD Specifications 126

Appendix B Programming the Watchdog Timer 127
B.1 Programming the Watchdog Timer 128
Appendix C Full Disassembly Procedures 131
C.1 Full Disassembly Procedures 132
Appendix D Pin Assignments 139
D.1 AT Power Connector (J1) 140
D.2 TV Output Connector (J2) (*Reserved) 140
D.3 Inverter Power Connector (J4) 141
D.4 Internal Speaker Connector (J6) 141
D.5 Front Panel Control Connector (J8) (*Reserved) .. 142
D.6 IR Connector (J9) 142
D.7 Flat Panel Display Connector (CN2) 143
D.8 Flat Panel Display Connector (CN3) 144
D.9 Panel Link Interface (CN4) (*Reserved) 145
D.10 Floppy Drive Connector (CN10) 146
D.11 EIDE Hard Disk Drive Connector (CN16) 147
D.12 CD-ROM Connector (CN18) 148
D.13 CPU Fan Power Connector (FAN1) 149
D.14 System Fan Power Connector (FAN2) 149
D.15 PCI/ISA Bus Expansion Connector (SLOT1) 150
D.16 Touchscreen Connector (CN23) 155
D.17 COM2 155
Appendix E Mounting Instructions 157
E.1 Introduction 158
E.2 Panel Mounting 158
E.2.1 Introduction 158
E.2.2 Installation procedure 159
E.3 Desktop Stand Mounting 160
E.4 Swingarm Stand Mounting 162

Figures

Figure 1-1: The panel PC in perspective 3
Figure 1-2: How to read the PPC-123 manual 5
Figure 1-3: Dimensions of the PPC-123 10
Figure 2-1: Front view of the panel PC 12
Figure 2-2: Left side view of the panel PC 13
Figure 2-3: Rear view of the panel PC 14
Figure 2-4: Tilted rear view of the panel PC 14
Figure 2-5: Connecting the power cord 15
Figure 2-6: Connecting the keyboard and mouse 19
Figure 3-1: Inserting and ejecting a floppy diskette 26
Figure 3-2: Inserting and ejecting a CD-ROM disc 27
Figure 3-3: Inserting and ejecting a PCMCIA card 28
Figure 3-4: Using the I/O interface (upper level ports excluding COM ports) 29
Figure 3-5: Using the I/O interface (lower level ports and COM ports) . 30
Figure 3-6: PCI/ISA bus expansion 32
Figure 4-1: Disassembling the plastic rear cover of the panel PC 39
Figure 4-2: Installing the primary 2.5" HDD 40
Figure 4-3: Installing the CPU 43
Figure 4-4: Installing SDRAM 44
Figure 4-5: Installing the FDD and slim CD-ROM drive 46
Figure 5-1: Locating jumpers on the PPC-123 motherboard 50
Figure 5-2: Locating connectors on the PPC-123 motherboard 52
Figure 9-1: Setup program initial screen 84
Figure 9-2: CMOS setup screen 85
Figure 9-3: BIOS features setup screen 87
Figure 9-4: Chipset features setup screen 91
Figure 9-5: Power Management setup screen 93
Figure 9-6: PNP/PCI configuration setup screen 96
Figure 9-7: Load BIOS defaults screen 97
Figure 9-8: Integrated peripherals screen 98
Figure 9-9: IDE HDD auto detection screen 101
Figure 9-10: Save and exit setup screen 102

Figure C-1: Disassembly steps 1 - 4 133
Figure C-2: Disassembly steps 5 - 6 135
Figure C-3: Disassembly steps 7 - 11 137
Figure E-1: Cutout dimensions of the PPC-123 158
Figure E-2: Panel mounting 159
Figure E-3: Desktop stand mounting 161
Figure E-4: Swingarm stand mounting 162

Tables

Table 5-1: Jumpers and their functions 49
Table 5-2: Panel PC connectors 51
Table 5-3: Clear CMOS / External RTC (JP8) 53
Table 5-4: COM2 RS-232/422/485 setting (JP3, JP4) 54
Table 5-5: COM2 RS-232/422/485 setting (JP5) 54
Table 5-6: Serial port default settings 55
Table 5-7: COM1 / COM2 pin 9 output type setting (JP9) 55
Table 5-8: COM3/COM4 pin 9 output type setting (JP6) 56
Table 5-9: Internal -12 V setting (JP1) 56
Table 5-10: Panel type select (SW3) 57
Table 5-11: Watchdog activity selection (JP7) 58
Table D-1: AT power connector (J1) 140
Table D-2: TV output connector (J2) 140
Table D-3: Inverter power connector (J4) 141
Table D-4: Internal speaker connector (J6) 141
Table D-5: Front panel control connector (J8) (*Reserved) 142
Table D-6: IR connector (J9) (Reserved) 142
Table D-7: Flat panel display connector (CN2) 143
Table D-8: Flat panel display connector (CN3) 144
Table D-9: PanelLink Interface (CN4) (*Reserved) 145
Table D-10: Floppy drive connector (CN10) 146
Table D-11: EIDE hard disk drive connector (CN16) 147
Table D-12: CD-ROM connector (CN18) 148
Table D-13: CPU fan power connector (FAN1) 149
Table D-14: Fan power connector (FAN2) 149
Table D-15: PCI/ISA slot pin assignments (Pins A and B) 151
Table D-16: PCI/ISA slot pin assignments (Pins C and D) 152
Table D-17: PCI/ISA slot pin assignments (Pins E and F) 153
Table D-18: PCI/ISA slot pin assignments (Pins G and H) 154
Table D-19: Internal COM4 and PS/2 Connector (CN23) 155
Table D-20: COM2 155

CHAPTER 1

General Information

This chapter gives background information on the PPC-123 panel PC.

- Introduction
- How to Use This Manual
- Specifications
- Dimensions

1.1 Introduction

The PPC-123 panel PC is a multimedia Pentium® III processor-based computer that is designed to serve as a human machine interface (HMI) and as a desktop computer. It is a PC-based system with 12.1" color TFT LCD display, on-board PCI Ethernet controller, multi-COM port interfaces and a 16-bit stereo audio controller. With built-in CD-ROM drive, floppy drive and PCMCIA expansion sockets, the PPC-123 is as compact and user-friendly as a notebook computer. Unlike notebook computers however, the PPC-123 is more durable and versatile in all applications. The panel PC can be placed on a desktop to replace the traditional desktop computer. In addition, its "fit anywhere" design makes it very flexible and able to be used in many different kinds of installations. It can be wall mounted, panel mounted or stood upright on a desktop.

For system integrators, this simple, complete, compact and highly integrated multimedia system lets you easily build a panel PC into your applications. Common industrial applications include factory automation systems, precision machinery, and production process control. It is also suitable for many non-industrial applications, including interactive kiosk systems, entertainment management, and car park automation. Our panel PC is a reliable, cost-effective solution to your application's processing requirements.

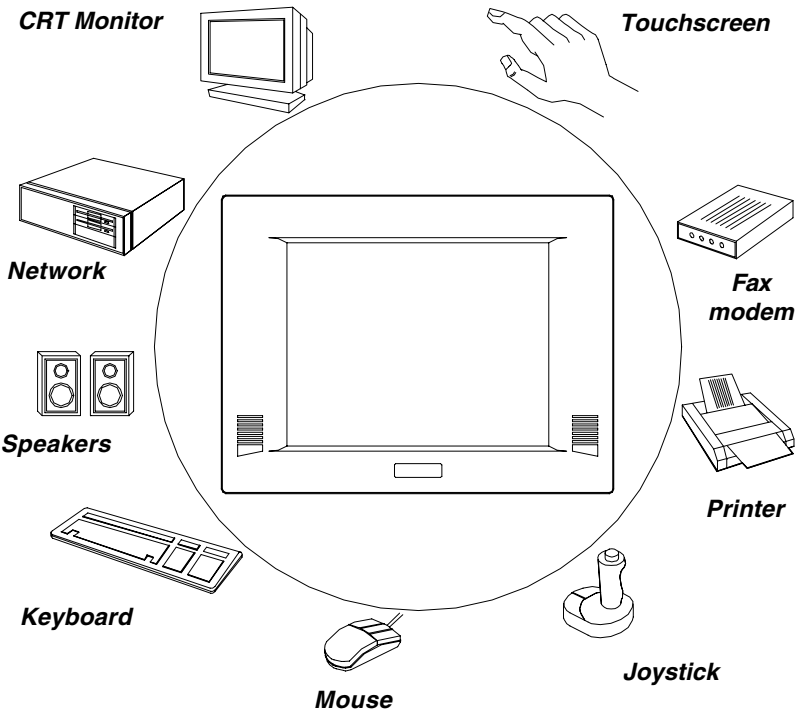


Figure 1-1: The panel PC in perspective

1.2 How to Use This Manual

This manual contains all the information you need to set up and use the panel PC. In addition to this manual, you may also want to consult the manuals for your operating system, software applications and peripherals.

Whether you are a new or an experienced user, you will benefit more from this manual if you are familiar with its organization. This manual is divided into ten chapters, plus five appendices.

Chapter 1 (this chapter) outlines the organization of this User's Manual, provides a complete specification description of the PPC-123, and summarizes its main features.

Chapter 2 provides step-by-step instructions to help you set up and begin using the panel PC as quickly as possible.

Chapter 3 provides important information about the daily use of the panel PC, including using the CD-ROM drive, floppy drive and enjoying the panel PC's audio capabilities.

Chapter 4 provides detailed step-by-step instructions to help you install the internal key components, including the CPU, hard disk drive, memory module, and so on.

Chapter 5 provides a detailed description of jumper settings and connectors of the motherboard of the PPC-123.

Chapter 6 explains the PCI bus Ethernet setup.

Chapter 7 explains the AGP SVGA setup.

Chapter 8 explains the audio setup.

Chapter 9 explains the Award BIOS setup.

Chapter 10 explains the PCMCIA setup.

Chapter 11 explains how to configure and use the optional touchscreen.

Appendix A details the LCD specifications used in the PPC-123.

Appendix B explains how to program the watchdog timer.

Appendix C includes various exploded diagrams of the PPC-123. These diagrams will help system integrators disassemble the panel

PC.

Appendix D includes all pin assignments on the connectors.

Appendix E helps users install the panel PC, which is mountable in a variety of ways.

If you are a commercial user and the panel PC unit you bought is a complete set with CPU, hard disk drive, SDRAM, CD-ROM drive, floppy disk drive and PCMCIA expansion slots included, you may only need to read Chapters 1 through 3 regarding hardware operation. For additional drivers and BIOS setup information, you should read Chapters 6 through 10. If you want to upgrade your system, you may follow the instructions in Chapters 4 and 5. Chapter 11 is for users who want information about the optional touchscreen. If you are a system integrator who wants to integrate the panel PC into your system, you can refer to Appendices A through E for information such as pin assignments and how to fully disassemble the panel PC.

A suggested guide for reading this manual is shown below:

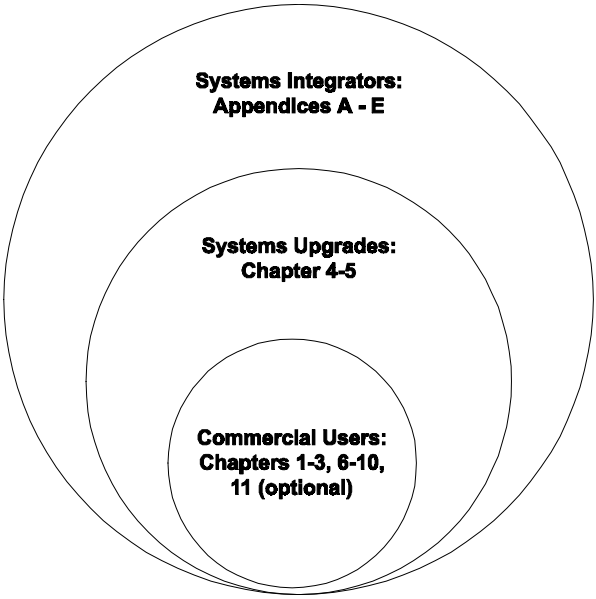


Figure 1-2: How to read the PPC-123 manual

1.3 Specifications

General

- **Dimensions (W x H x D):** 375 x 285 x 93.3 mm (14.7" x 11.2" x 3.7")
- **Weight:** 5.2 kg (11.5 lb)
- **Power supply:**
  AC model: 80 watts
  Input voltage: 100~250 V_{AC}, 3 A max. @ 50 ~ 60 Hz
  Output voltage: +5 V @ 12 A, +12 V @ 1 A
  DC model: 60 watts
  Input voltage: 24 V_{DC}, 5 A max or
  12 V_{DC}, 7 A max
  Output voltage: +5 V @ 10 A, +12 V @ 1 A
- **Cooling fan dimensions (L x W x H):**
  Power fan: 40 x 40 x 10 mm (1.6" x 1.6" x 0.4")
  CPU fan: 60 x 60 x 10 mm (2.4" x 2.4" x 0.4")
- **Disk drive housing:** Space for one 2.5" HDD, one 12.7 mm compact CD-ROM drive, and one slim type 3.5" FDD
- **Front panel:** IP65 protection

Standard PC functions

- **CPU:** Intel® Celeron™ or Pentium ® III CPU up to 850 MHz
- **BIOS:** Award 256 KB Flash BIOS, supports Plug & Play, APM
- **Chipset:** Intel® 82443BX / 82371EB
- **2nd level cache:** On-die 256 KB
- **RAM:** One 168-pin DIMM socket accepts 32 ~ 256 MB SDRAM (3.3V)
- **PCI bus master IDE interface:** Supports two connectors. Each connector has one channel and supports two IDE devices. Each channel supports PIO modes 0 ~ 4, DMA mode 0 ~ 2, and Ultra DMA 33 simultaneously. The secondary connector is designated for the CD-ROM drive. BIOS supports IDE CD-ROM boot-up.

•**Floppy disk drive:** Supports up to two FDDs (720 KB / 1.44 MB). One built-in FDD included inside FDD housing.

- **Parallel port:** One parallel port, supports SPP/EPP/ECP parallel mode. BIOS configurable to LPT1, LPT2, LPT3 or disabled
- **Serial ports:** Four serial ports with three RS-232 ports (COM1, 3, and 4), one RS-232/422/485 port (COM2). All ports are compatible with 16C550 UARTs
- **Universal serial bus (USB) port:** Supports up to two USB ports
- **PCI/ISA bus expansion slot:**
  Accepts either one ISA card or one PCI bus card
- **Watchdog timer:** 62-level, interval 1 ~ 62 seconds.
  Automatically generates system reset or IRQ11 when the system stops due to a program error or EMI. Jumperless selection and software enabled/disabled
- **Battery:** 3.0 V @ 195 mA lithium battery

Flat panel interface

- **Chipset:** Lynx3DM8 SMI721
- **Display memory:** 8 MB on-die memory
- **Display type:** Simultaneously supports CRT and flat panel displays (EL, LCD and gas plasma)
- **Display resolution:** Supports non-interlaced CRT and TFT LCD displays up to 1280 x 1024 @ 16 M colors.

Audio function

- **Chipset:** ESS 1946S
- **Audio controller:** 16-bit codec, Full-Duplex stereo single-chip PCI audio solution
- **Stereo sound:** 100% DOS GAME compatible (Sound Blaster or Sound Blaster Pro)

- **Audio interface:** Microphone-in, Line-in, Line-out and Game ports (MPU-401)

PCI bus Ethernet interface

- **Chipset:** Realtek RTL 8139 PCI local bus Ethernet controller
- **Ethernet interface:** Full compliance with IEEE 802.3u 100Base-T and 10Base-T specifications. Includes software drivers and boot ROM
- **100/10Base-T auto-sensing capability**

PCMCIA interface

- **Chipset:** RICOH 5C478II
- **Cardbus controller:** A PC card controller offers a single chip solution as a bridge between the PCI bus and the Cardbus
- **PCI bus interface:** Complies with PCI Local Bus Specification 2.1, and supports the 32-bit Cardbus (Card-32) and the 16-bit PC card (Card-16) without external buffers
- **Hot insertion and removal**

Touchscreen (optional)

Type	Analog Resistive	Capacitive
Resolution	Continuous	1024 x 1024
Light Transmission	75%	85%
Controller	RS-232 interface (uses COM4)	RS-232 interface (uses COM4)
Power Consumption	+5 V @ 200 mA	+5 V @ 100 mA
Software Driver	Supports DOS, Windows 3.1, Windows 95/98, Windows NT4.0	
Duriability (touches in a lifetime)	30 million	20 million

Note: The panel PC with the optionally installed touchscreen will share COM4. Once the touchscreen is installed, COM4 cannot be used for other purposes.

Optional modules

- **CPU:** Intel® Celeron™ or Pentium® III up to 850 MHz
- **Memory:** 32/64/128/256 MB SDRAM
- **HDD:** 2.5" HDD
- **Touchscreen:** Analog resistive or capacitive
- **CD-ROM drive:** Compact 24X CD-ROM or above
- **DVD-ROM drive:** Compact 6X DVD-ROM or above
- **PCMCIA interface:** Complies with 1995 PCMCIA card standard. Supports two PCMCIA card/CardBus slots. Two sockets support both a 16-bit PCMCIA card and a 32-bit CardBus simultaneously. Hot insertion and removal

Note: The PCMCIA driver of Windows 95 which includes a PCMCIA interface is available on the "Drivers and Utilities" CD-ROM of your PPC-123 package.

Environment

- **Temperature:** 0 ~ 45° C (32 ~ 122° F)
- **Relative humidity:** 10 ~ 95% @ 40° C (non-condensing)
- **Shock:** 10 G peak acceleration (11 msec duration)
- **Power MTBF:** 100,000 hrs
- **Certification:**
  AC model: EMC: CE, FCC, VCCI, BSMI approved
  Safety: UL1950, UL2601-1, EN60950, EN60601-1 approved
  DC model: Pending

1.4 Dimensions

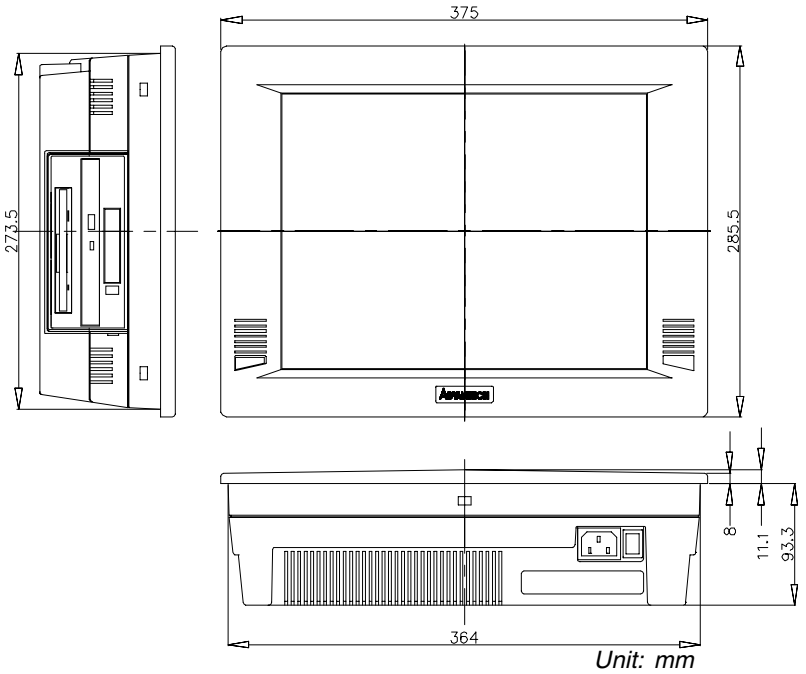


Figure 1-3: Dimensions of the PPC-123

CHAPTER 2

System Setup

- A Quick Tour of the Panel PC
- Preparing for First-time Usage
- Running the Setup Program
- Installing the System Software
- Installing the Drivers

2.1 A Quick Tour of the Panel PC

Before you start to set up the panel PC, take a moment to become familiar with the locations and purposes of the controls, drives, connectors and ports, which are illustrated in the figures below.

When you place the panel PC upright on the desktop, its front panel appears as shown in Figure 2-1.

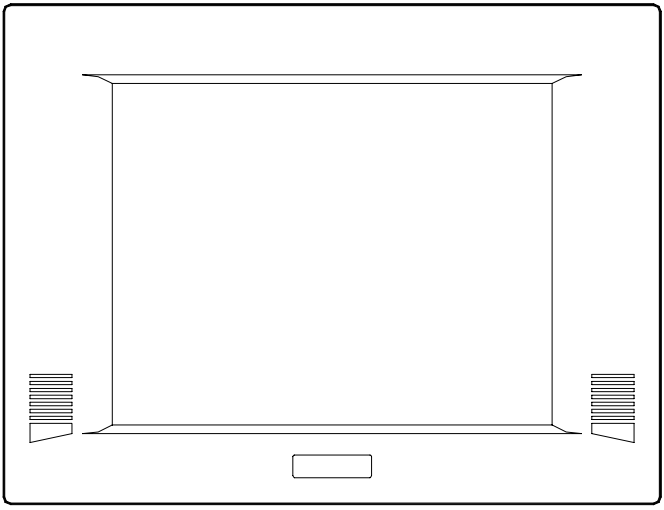


Figure 2-1: Front view of the panel PC

When you look at the left side of the panel PC, you will see the floppy disk drive, CD-ROM drive and PCMCIA expansion sockets, as shown in Fig. 2-2.

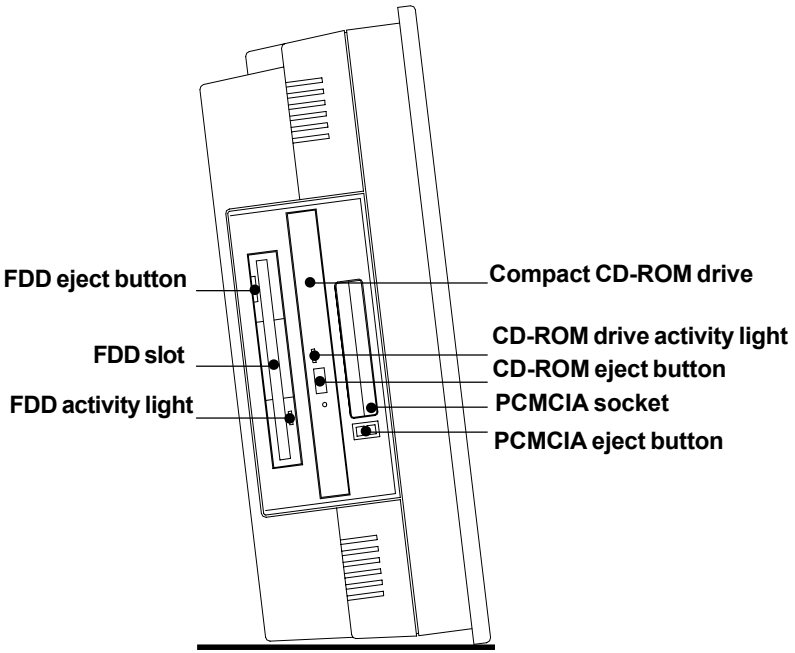


Figure 2-2: Left side view of the panel PC

When you turn the panel PC around and look at its rear cover, you will find the PCI/ISA expansion slot located on the left side. This slot is covered by a side panel cover. The sunken I/O section is at the bottom of the panel PC, as shown in Fig. 2-3. (The I/O section includes various I/O ports, including serial ports, parallel port, the Ethernet port, USB ports, the microphone jack, and so on.)

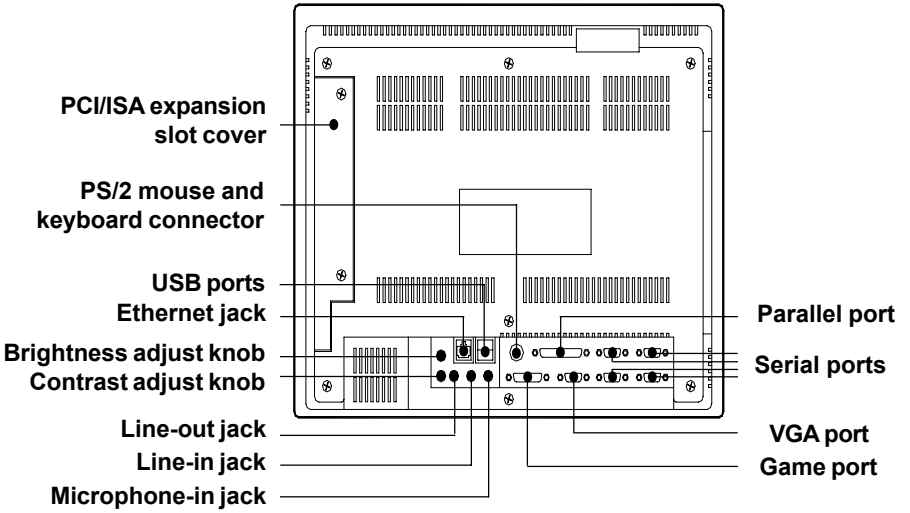


Figure 2-3: Rear view of the panel PC

Figure 2-4 shows the I/O section and power switch of the panel PC.

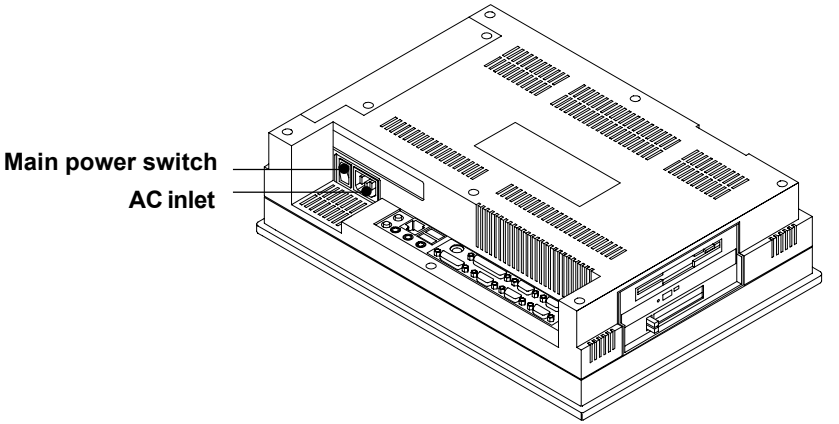


Figure 2-4: Tilted rear view of the panel PC

2.2 Preparing For First-time Use

Before you start to set up the panel PC system, you should have at least the following items ready:

- Power cord (in the accessory box)
- Y-shaped connector (in the accessory box)
- keyboard
- Mouse (for system software installation i.e. Microsoft Windows, NT, etc.)

2.3 Installation Procedures

2.3.1 Connecting the power cord

The panel PC can only be powered by an AC electrical outlet (100 ~ 250 volts, 50 ~ 60 Hz). Be sure to always handle the power cords by holding the plug ends only.

Follow these procedures in order:

1. Connect the female end of the power cord to the AC inlet of the panel PC. (See Fig. 2-5.)
2. Connect the 3-pin male plug of the power cord to an electrical outlet.


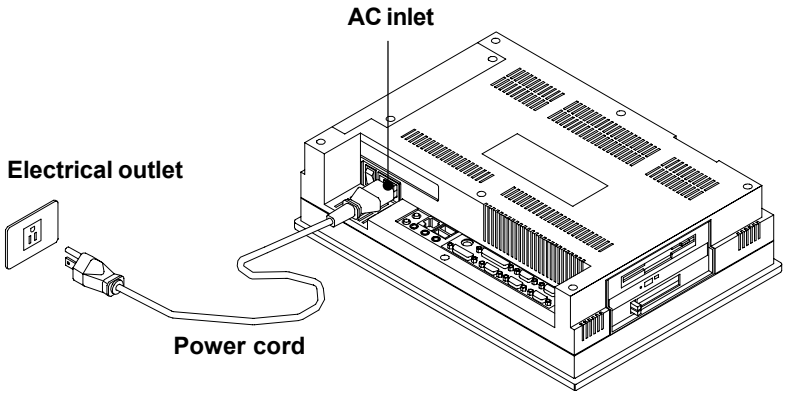



Figure 2-5: Connecting the power cord

2.3.2 Installing the DC power insulator with hood

The panel PC can also be powered by DC electrical outlet (24 V_{DC} or 12 V_{DC}, which depends on the power type). Follow the procedure in order to install the DC power insulator with hood then make sure to connect the insulator with the system.

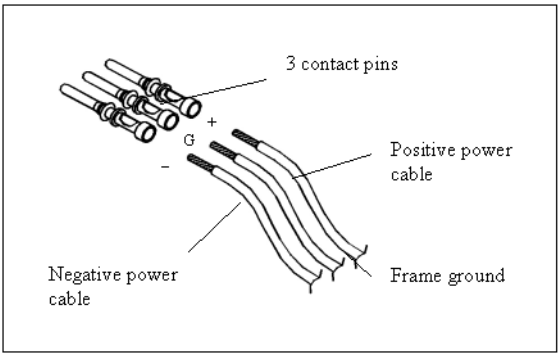


STEP 1. Connect the three contact pins individually to the negative and positive power cables of the power adaptor, as well as to the frame ground cable. Solder firmly.

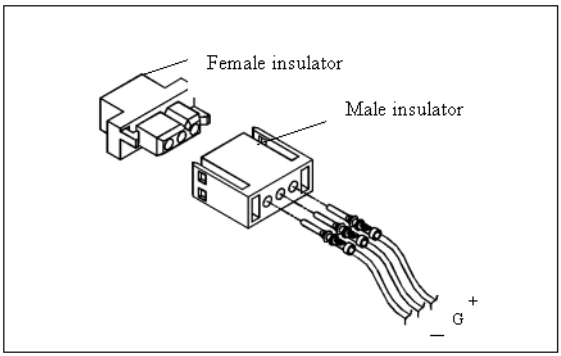


STEP 2: Align the soldered pins and their cables with the corresponding polarization marks on the front part of the male insulator (+ / G / -). Now plug the pins separately into the holes of the male insulator. Pin 1 should go into the positive DC power input (+), pin 2 connects to the


frame ground (G), and pin 3 should be plugged into the negative DC power input (-).

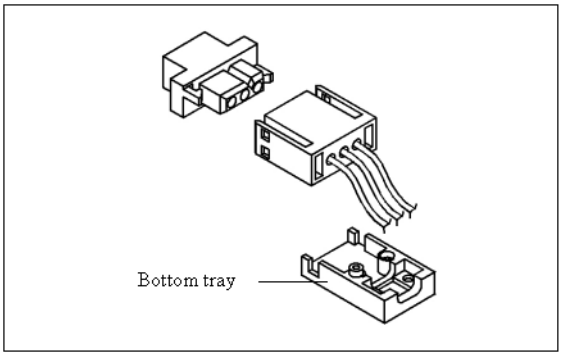


STEP 3: Mount the front part of the male insulator onto the bottom tray.

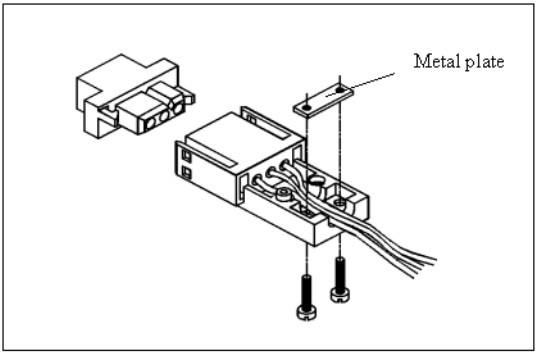

STEP 4: Use the metal plate and the two screws to secure the cables to the bottom tray. Please refer to the illustration above.

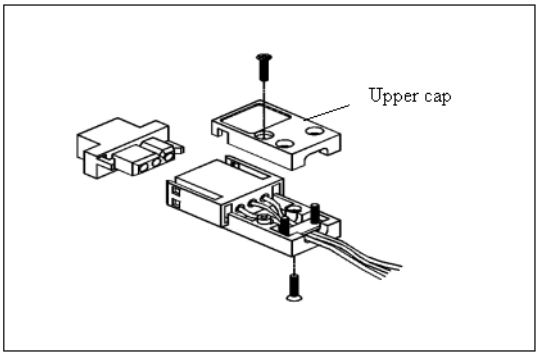

STEP 5: Attach the upper cap to the bottom tray and secure it with the screws.

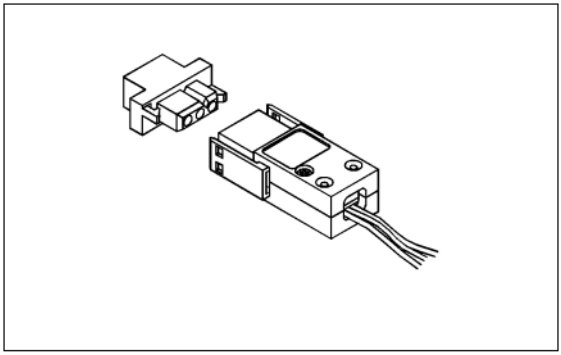

STEP 6: Now that you have completed the assembly of the male insulator, plug it into the female insulator.

2.3.3 Connecting the keyboard and mouse

1. Connect the Y-shaped adapter to the PS/2 mouse and keyboard port on the I/O section of the panel PC. (See Fig. 2-6.)
2. Connect the PS/2 mouse and keyboard to the Y-shaped adapter. (See Fig. 2-6.)

If you use a serial mouse and your panel PC has a touchscreen, you can connect the mouse to any COM port except COM4.

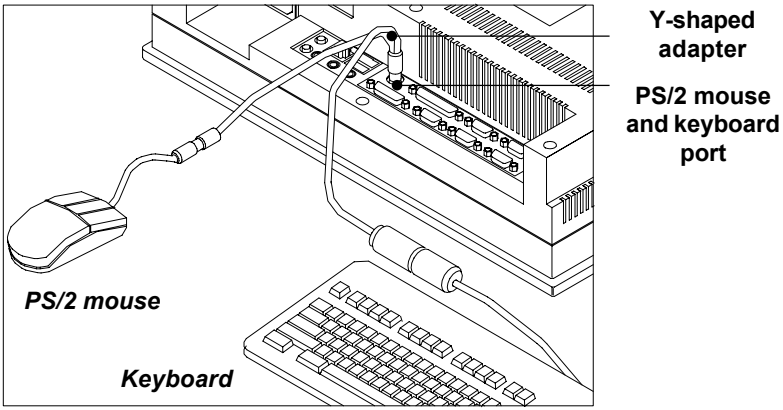


Figure 2-6: Connecting the keyboard and mouse

2.3.4 Switching on the power

Switch on the power switch on the rear cover. (See Fig. 2-4.)

2.4 Running the BIOS Setup Program

Your panel PC is likely to have been properly set up and configured by your dealer prior to delivery. You may still find it necessary to use the panel PC's BIOS (Basic Input-Output System) setup program to change system configuration information, such as the current date and time or your type of hard drive. The setup program is stored in read-only memory (ROM). It can be accessed either when you turn on or reset the panel PC, by pressing the "Del" key on your keyboard immediately after powering on the computer.

The settings you specify with the setup program are recorded in a special area of memory called CMOS RAM. This memory is backed up by a battery so that it will not be erased when you turn off or reset the system. Whenever you turn on the power, the system reads the settings stored in CMOS RAM and compares them to the equipment check conducted during the power on self-test (POST). If an error occurs, an error message will be displayed on screen, and you will be prompted to run the setup program.

If you want to change the setup of BIOS, refer to Chapter 9 for more detailed information.

2.5 Installing System Software

Recent releases of operating systems from major vendors include setup programs which load automatically and guide you through hard disk preparation and operating system installation. The guidelines below will help you determine the steps necessary to install your operating system on the panel PC hard drive.

Note: Some distributors and system integrators may have already pre-installed system software prior to shipment of your panel PC.

If required, insert your operating system's installation or setup diskette into the diskette drive until the release button pops out. (See Fig. 3-1.)

The BIOS of the panel PC supports system boot-up directly from the CD-ROM drive. You may also insert your system installation CD-ROM into the CD-ROM drive. (See Fig. 3-2.) Refer to Chapter 9 if you wish to change the BIOS settings.

Power on your panel PC or reset the system by pressing the "Ctrl"+"Alt"+"Del" keys simultaneously. The panel PC will automatically load the operating system from the diskette or CD-ROM.

If you are presented with the opening screen of a setup or installation program, follow the instructions on screen. The setup program will guide you through preparation of your hard drive, and installation of the operating system.

If you are presented with an operating system command prompt, such as A:\>, then you must partition and format your hard drive, and manually copy the operating system files to it. Refer to your operating system user's manual for instructions on partitioning and formatting a hard drive.

2.6 Installing the Drivers

After installing your system software, you will be able to set up the Ethernet, SVGA, audio, PCMCIA and touchscreen functions. All the drivers except the CD-ROM drive driver are stored in a CD-ROM disc entitled "Drivers and Utilities." The CD-ROM drive driver is stored in a floppy disk. Both the CD-ROM and the floppy disk can be found in your accessory box.


To set up the CD-ROM function, insert the floppy disk with the CD-ROM drive driver into the floppy disk drive and type "install" after the following prompt is displayed on screen:

```
A: > INSTALL
```

Press "Enter", and the installation process will be completed in a few seconds.

The standard procedures for installing the Ethernet, SVGA, audio, PCMCIA and touchscreen drivers are described in Chapters 6, 7, 8, 10 and 11 respectively.

For your reference, the directory of drivers on the "Drivers and Utilities" CD-ROM is:

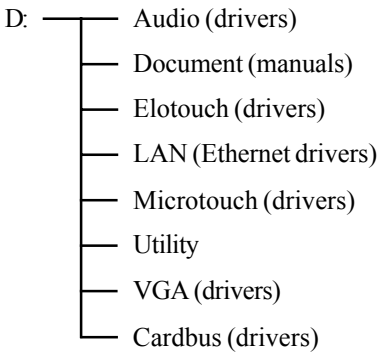

The utility directory includes multimedia programs. Refer to the README.TXT file inside the VGA folders for more detailed information.

The various drivers and utilities in the CD-ROM disc have their own text files which help users install the drivers and understand their functions. These files are a very useful supplement to the information in this manual.

Note: The drivers and utilities used for the PPC-123 panel PCs are subject to change without notice. If in doubt, check Advantech's website or contact our application engineers for the latest information regarding drivers and utlities.

CHAPTER 3

Using the Panel PC

- Floppy Drive
- CD-ROM Drive
- PCMCIA Sockets
- PS/2 Mouse and Keyboard
- Audio Interface
- PCI/ISA Bus Expansion
- Parallel Port
- Serial COM Ports
- VGA Port
- Game Port
- USB Ports
- Audio Interface
- Ethernet
- Adjusting the LCD Contrast and Brightness
- Infrared module
- Touchscreen (Optional)

3.1 Introduction

This chapter describes basic features and procedures for using the panel PC. Topics covered include the floppy drive, CD-ROM drive, I/O ports, touchscreen, and so on.

3.2 Floppy Drive

To insert a diskette, hold it with your left hand, between your thumb and your other fingers, and push it toward the drive. (See Fig. 3-1.) Slide the disk until it clicks into place. Note that new diskettes must be formatted by your operating system before you can use them for data storage. See your operating system manual for details.

To eject a diskette, first ensure that the drive activity light is off, and then press the eject button on the drive. When the diskette pops out of the drive, remove it and store it properly.

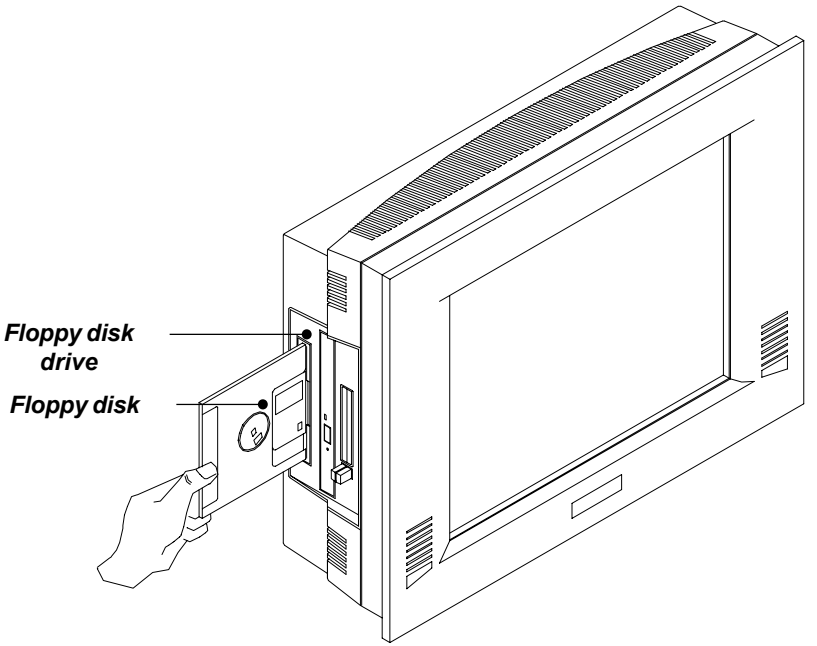


Figure 3-1: Inserting and ejecting a floppy diskette

3.3 CD-ROM Drive

To insert a CD-ROM disc, press the eject button of the CD-ROM drive. The yellow activity light will flash and the front panel will come out a short distance. Using your fingertips, hold the top and bottom of the front panel and pull it outward to the very end. (See Fig 3-2.) Align the center hole of the CD-ROM disc with the center circle of the CD-ROM holding plate. Press the transparent ring around the center hole of the CD-ROM until you hear a click. Push the front panel of the CD-ROM drive back to its original place.

To eject a CD-ROM disc, first ensure that the drive activity light is off. Then press the eject button on the drive. When the disc pops out of the drive, remove it and store it properly.

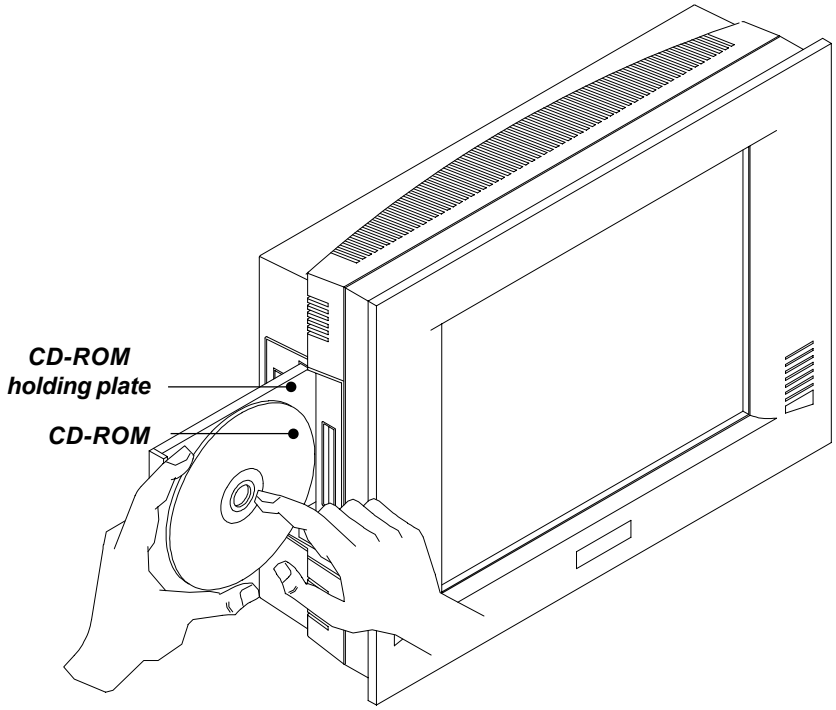


Figure 3-2: Inserting and ejecting a CD-ROM disc

3.4 PCMCIA

PCMCIA cards are inserted and ejected in much the same way as diskettes.

To insert a PCMCIA card, align the card with the socket and slide the card into the socket until it locks into place. Note that some PCMCIA memory cards must be prepared by your operating system before you can use them for data storage. See your PCMCIA card manual for details.

To eject a PCMCIA card, first ensure that the panel PC is not accessing the memory card or device. Then press the appropriate eject button on the socket. When the card pops out of the socket, remove it and store it properly.

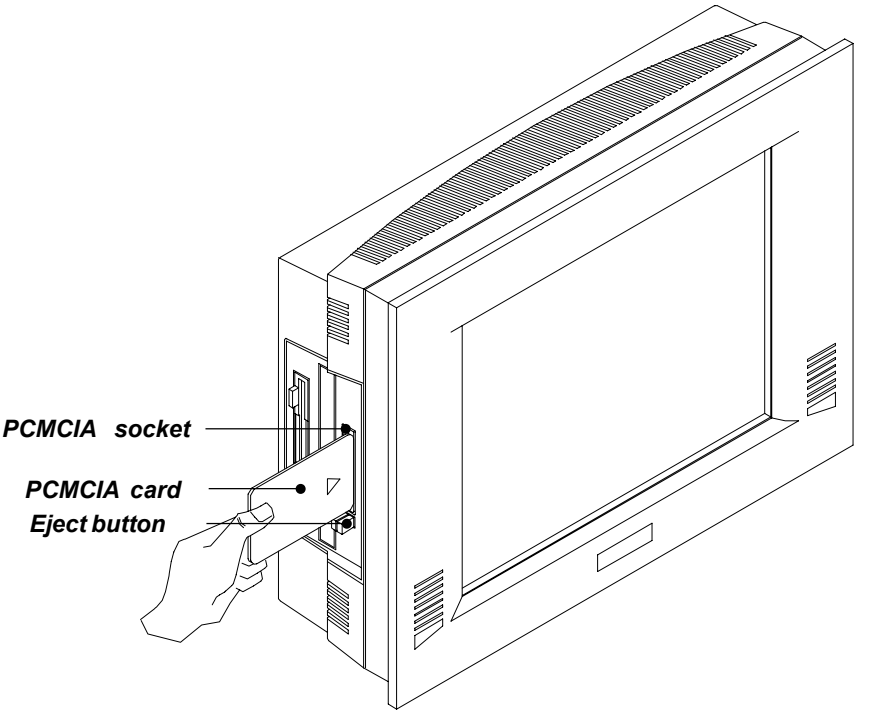


Figure 3-3: Inserting and ejecting a PCMCIA card

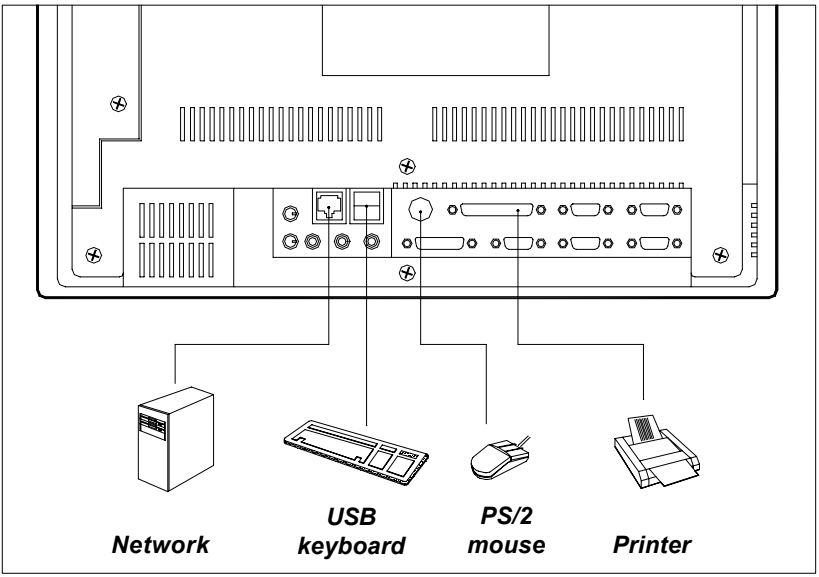


Figure 3-4: Using the I/O interface (upper level ports excluding COM ports)

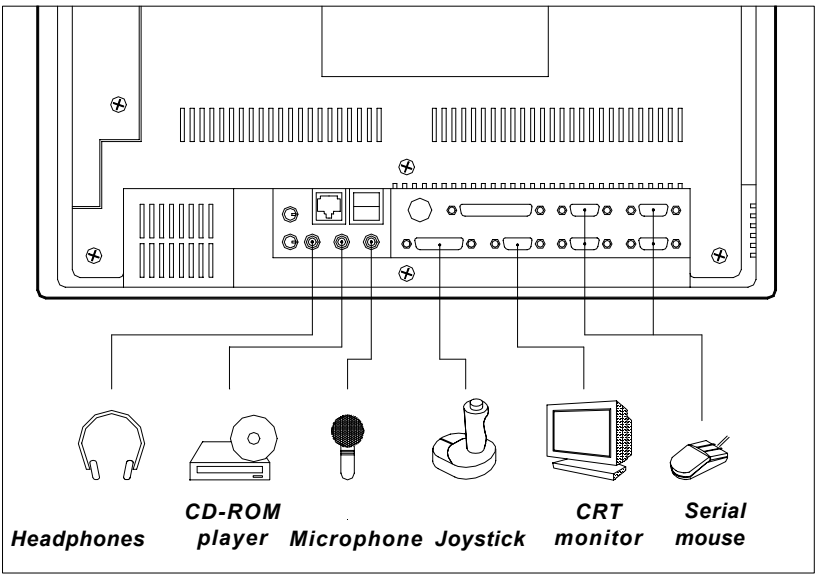


Figure 3-5: Using the I/O interface (lower level ports and COM ports)

3.5 PS/2 Mouse and Keyboard

If you wish to use a full-size desktop keyboard and PS/2 mouse with your panel PC, follow these instructions:

1. Be sure the panel PC is turned off.
2. Connect the Y-shaped adapter to the PS/2 mouse and keyboard port on the rear bottom side of the rear cover. (See Fig. 3-4 and Fig. 2-6.)
3. Attach the keyboard to the 5-pin port of the Y-shaped adapter.
4. Attach the PS/2 mouse to the 6-pin female PS/2 port of the Y-shaped adapter.
5. Turn on the panel PC.

3.6 PCI/ISA Bus Expansion

The panel PC supports PCI and ISA bus expansion cards. To integrate a new PCI or ISA bus card into your system, follow these instructions:

1. Turn off the panel PC.
2. Unscrew the two screws on the top of the PCI/ISA bus expansion slot cover, and remove this cover.
3. Remove the metal plate by unscrewing the single attaching screw.
4. Insert the PCI or ISA bus card into the PCI/ISA slot of the riser card. (See Fig. 3-6 overleaf.)
5. Run the setup program within your operating system to configure your system.

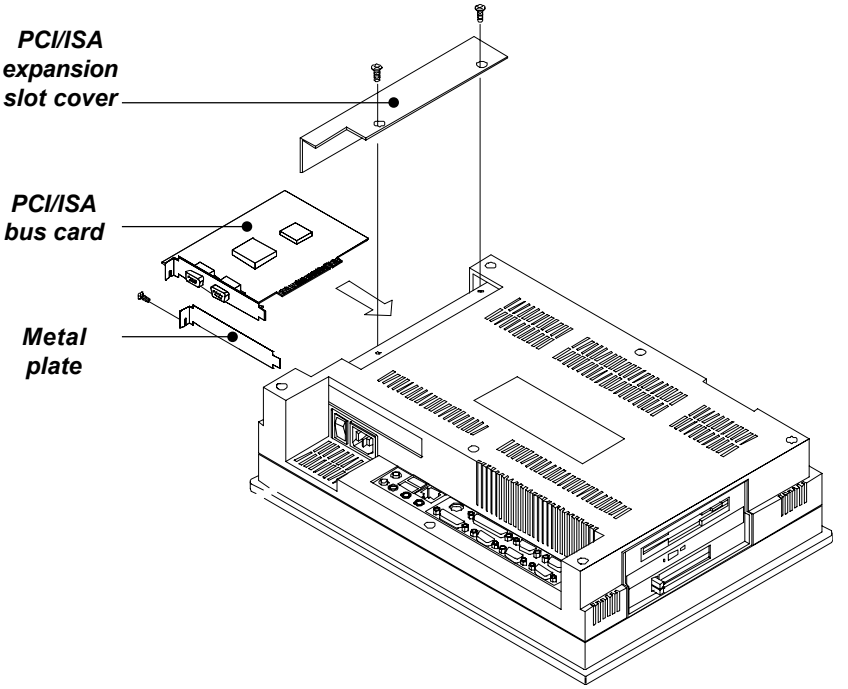


Figure 3-6: PCI/ISA bus expansion

3.7 Parallel Port

The panel PC supports the latest EPP and ECP parallel port protocols for improved performance and versatility with compatible printers or other devices.

To connect the panel PC to a printer or other devices:

1. Be sure both the panel PC and the printer/devices are turned off.
2. Connect the 25-pin male connector of the printer cable to the 25-pin female port on the panel PC labelled "parallel port".
3. If necessary, attach the other end of your printer cable to your printer, and fasten any retaining screws. A typical parallel printer connection is illustrated in Fig. 3-4.
4. Turn on the printer and any other peripheral devices you may have connected to the panel PC, and then turn on the panel PC.
5. If necessary, run the panel PC's BIOS setup program to configure the parallel port to respond as required by your printer and software operating environment.

3.8 Serial COM Ports

There are four serial COM ports on the bottom of the rear cover. You can easily attach a serial device to the panel PC, such as an external modem or mouse. Follow these instructions:

1. Be sure the panel PC and any other peripherial devices you may have connected to the panel PC are turned off.
2. Attach the interface cable of the serial device to the panel PC's serial port. (See Fig. 3-5.) If necessary, attach the other end of the interface cable to your serial device. Fasten any retaining screws.
3. Turn on any other peripheral devices you may have connected to the panel PC, and then turn on the panel PC.
4. Refer to the manual(s) which accompanied your serial device(s) for instructions on configuring your operating environment to recognize the device(s).
5. Run the BIOS setup program and configure the jumper settings to change the mode of the COM ports. (See Section 5.3.)

3.9 VGA Port

An external VGA-compatible device may be connected to the system through the 15-pin external port located on the rear of the system unit. The panel PC simultaneously supports an external CRT monitor in addition to its own LCD display.

1. Be sure the panel PC is turned off.
2. Connect the external monitor to the system. (See Fig. 3-5.)
3. Turn on the panel PC and the external monitor.

3.10 Game Port

An external game device may be connected to the system through the 15-pin external port located on the rear of the system unit.

1. Be sure the panel PC is turned off.
2. Connect the external joystick or game device to the system. (See Fig. 3-5.)
3. Turn on the panel PC and the external joystick or game device (if applicable).
4. Install the driver before you use the joystick or game device.

3.11 USB Ports

An external USB device may be connected to the system through the 4-pin USB ports located on the rear side of the system unit.

1. Connect the external device to the system. (See Fig. 3-4.)
2. The USB ports support hot plug-in connection. You should install the device driver before you use the device.

3.12 Audio Interface

The audio interface includes three jacks: microphone in, line out and line in. (See Fig. 3-5.) Their functions are:

Microphone in: Use an external microphone to record voice and sound.

Line out: Output audio to external devices such as speakers or earphones.

Line in: Input audio from an external CD player or radio.

1. Connect the audio device to the system. (See Fig. 3-5.)
2. Install the driver before you use the device.

3.13 Ethernet

External devices on your network may be connected to the system through the external ethernet port located on the rear side of the system unit.

1. Be sure the panel PC is turned off.
2. Connect the external device(s) to the panel PC. (See Fig. 3-4.)
3. Turn on the panel PC and the external device(s).
4. Under DOS, run the RSET8139 program to check the hardware network status before installing the Ethernet driver.
5. Run the Ethernet driver to connect up to the network.

3.14 Adjusting the LCD Contrast and Brightness

The contrast control knob does not function because the PPC-123 includes the TFT LCD display. Only panel PCs with DSTN LCD displays have this function.

The brightness control knob allows you to adjust the brightness of the LCD display panel.

3.15 Infrared Module

This sensor on the front panel supports the optional wireless transmitting and receiving of infra-red data. (See Fig. 2-1.) You must configure the setting through the BIOS setup (chipset features) to select whether UART2 is directed for use with COM2 or IrDA.

1. Place the panel PC and the infrared transceiving device (eg. printer) with their IrDA ports facing each other at the same horizontal level. The distance between the two IrDA ports should not exceed 1 meter (38").
2. Run the infrared transceiving function on the panel PC. (The function is supported by various operating systems and application software.)
3. The transceiving device also needs to run its infrared transceiving driver to receive or transmit data.

3.16 Touchscreen (Optional)

The touchscreen is connected to COM4. Its function is similar to that of a mouse. The only difference is that you put your fingertip on the screen to move the cursor.

You will need to install the touchscreen driver before it will work. The touchscreen drivers for various operating systems are stored on the CD-ROM disc inside the accessory box. The touchscreen manual can also be found on this disc. Read Chapter 11 of this manual carefully before you install the driver.

CHAPTER 4

Hardware Installation and Upgrading

- Overview of Hardware Installation and Upgrading
- Disassembling the Panel PC
- Installing the 2.5" Hard Disk Drive (HDD)
- Installing the Central Processing Unit (CPU)
- Installing the SDRAM Memory Module
- Installing the Floppy Disk Drive (FDD) and CD-ROM Drive

4.1 Overview of Hardware Installation and Upgrading

The panel PC consists of a PC-based computer that is housed in a plastic rear panel and a metal shielding case. Your HDD, SDRAM, power supply, CPU, and so on are all readily accessible by removing the rear panel and shielding case. Any maintenance or hardware upgrades can be easily completed after removing the rear panel and shielding case.

If you are a systems integrator and need to know how to completely disassemble the panel PC, you can find more useful information in Appendix C.

Warning! *Do not remove the plastic rear cover until you have verified that no power is flowing within the panel PC. Power must be switched off and the power cord must be unplugged. Every time you service the panel PC, you should be aware of this.*

4.2 Disassembling the Panel PC

The following are standard procedures for disassembling the panel PC before you upgrade your system. All procedures are illustrated in Fig. 4-1.

1. Unscrew the seven screws that secure the plastic rear cover, and then remove the cover.
2. Unscrew the two screws of the PCI/ISA expansion PCB, and remove it.
3. Unscrew the four screws that secure the CPU cover.
4. Remove the floppy drive, HDD, and CD-ROM cables; then remove the side panel.
5. Unscrew the ten screws of the shielding case, and remove it.

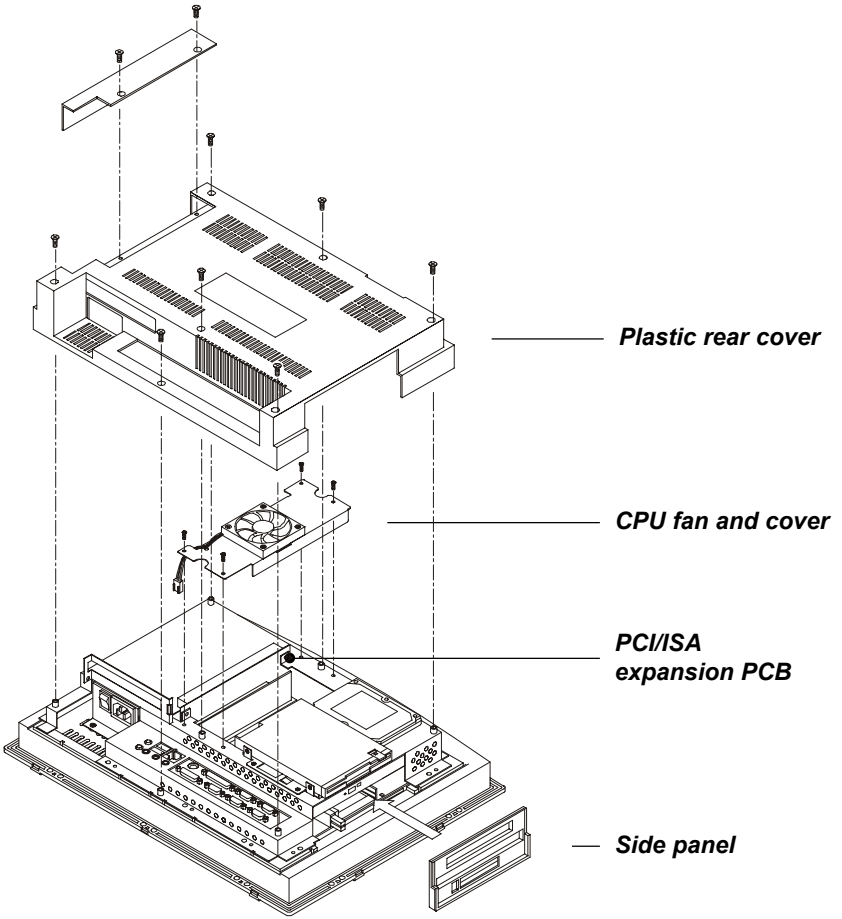


Figure 4-1: Disassembling the plastic rear cover of the panel PC

4.3 Installing the 2.5" Hard Disk Drive (HDD)

You can attach one enhanced Integrated Device Electronics (IDE) hard disk drive to the panel PC's internal controller which uses a PCI local-bus interface. The advanced IDE controller supports faster data transfer and allows the IDE hard drive to exceed 528 MB. The following are instructions for installation:

1. Detach and remove the plastic rear cover and side panel.
2. There is a metal plate which holds the HDD to the upper right-hand side of the metal shielding case. (See Fig. 4-2.) Remove the two screws on the metal plate.
3. Pull the metal plate toward the outside of the unit, and remove it from the two lugs of the shielding case.
4. Place the HDD on the metal plate, and tighten the four screws from the bottom of the metal plate.
5. The HDD cable (1 x 44-pin to 1 x 44-pin) is next to the metal plate. Connect the HDD cable to the HDD. The other end of the HDD cable is connected to the PC board (CN16). Make sure that the red/blue wire corresponds to Pin 1 on the connector, which is labeled on the board. Plug the other end of the cable into the IDE hard drive, with Pin 1 on the cable corresponding to Pin 1 on the hard drive.

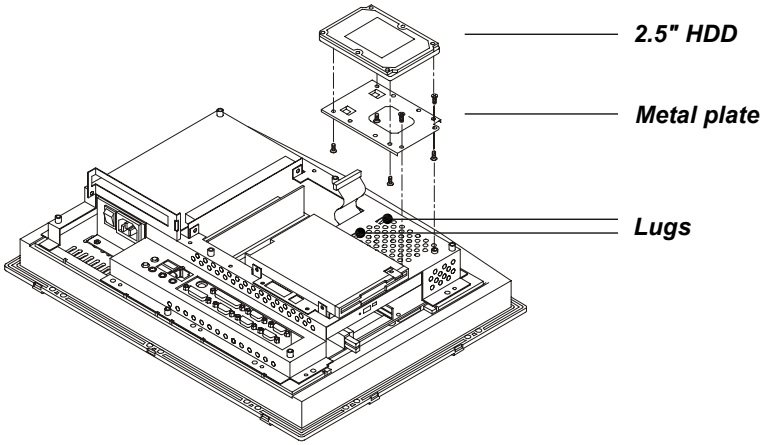


Figure 4-2: Installing the primary 2.5" HDD

4.4 Installing the Central Processing Unit (CPU)

The panel PC's central processing unit (CPU) can be upgraded to improve system performance. The panel PC provides one 370-pin ZIF (Zero Insertion Force) socket (Socket 370). The CPU must come with an attached heat sink and CPU fan to prevent overheating.

Warning! *The CPU may be damaged if operated without a heat sink and a fan.*



Caution! *Always disconnect the power cord from your panel PC when you are working on it. Do not make connections while the power is on as sensitive electronic components can be damaged by the sudden rush of power. Only experienced electronics personnel should open the panel PC.*



1. Detach and remove the plastic rear cover.
2. Remove the four screws of the CPU cover, and remove the cover.
3. Detach the CPU fan power cable from the CPU fan.
4. There is a metal plate which holds the FDD and slim CD-ROM drive to the metal shielding case. There are two screws ("A") on this metal plate. Loosen these two screws.
5. Remove the plastic side cover of the FDD.
6. Push the FDD and slim CD-ROM drive toward the outside of the panel PC, as far as they will go. This will expose the entire CPU assembly underneath.
7. Locate the ZIF socket and open it by first pulling the lever sideways away from the socket, then upwards at an angle of 90 degrees.

8. Insert the CPU with the correct orientation. The notched corner of the CPU (with the white dot) should point towards the end of the lever. The end of the lever is the blank area where one hole is missing from the corner of the square array of pin holes. An arrowhead printed on the motherboard points to the end of the lever. (See Fig. 4-3 overleaf.)
9. Slide the CPU in gently. It should insert easily. If not, pull the lever up a little more and make sure the pins of the CPU correspond with the holes of the socket. DO NOT USE EXCESSIVE FORCE!
10. Press the lever down. The plate will slide across slightly.
11. Place the heat sink on top of the CPU and fasten it with the heat sink clip (shown in Fig. 4-3).
12. Move the FDD and slim CD-ROM drive back to their original position.
13. Put back the plastic side cover of the FDD.
14. Tighten the two screws ("A") on the metal plate.
15. Connect the CPU fan power cable to the 3-pin connector (FAN1).
16. Put back the CPU cover, and secure the four screws on it.

Note: *To remove the CPU, follow steps 1 through 7 above. You should then be able to freely lift out the CPU chip.*

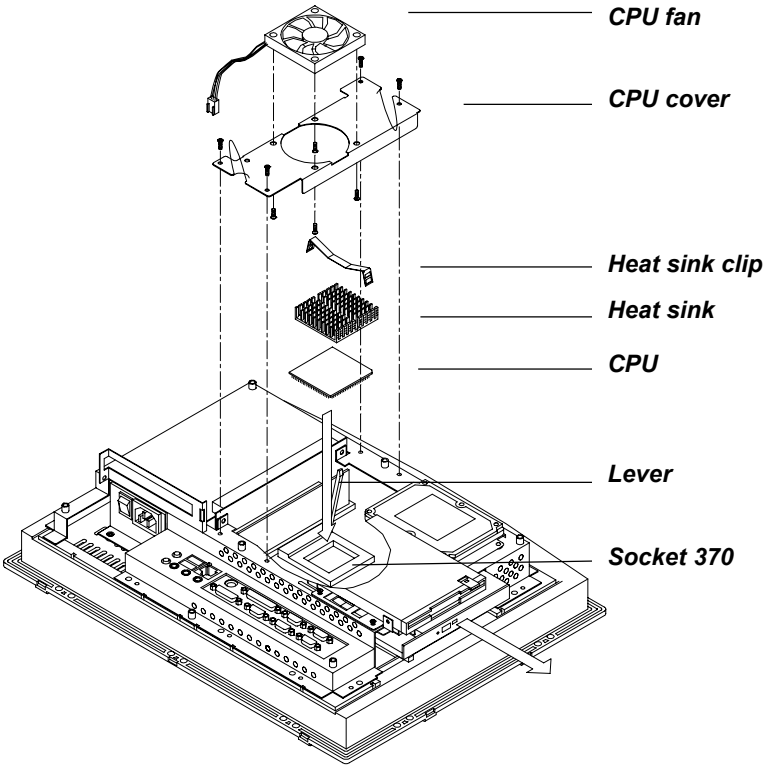


Figure 4-3: Installing the CPU

4.5 Installing the SDRAM Memory Module

You can install from 32 to 256 MB of SDRAM memory. The panel PC system provides one 168-pin DIMM (Dual Inline Memory Module) socket and supports 3.3 V SDRAM with a minimum speed of 12 ns.

Note: The module can fit into the socket only one way. Pin 1 of the DIMM module must line up with the small arrowhead printed on the motherboard next to the DIMM socket. The golden pins of the module must point down into the DIMM socket.

1. Detach and remove the plastic rear cover and CPU cover.
2. Push the two white eject levers on each side of the DIMM outward until they are separated from the black vertical posts. (See Fig. 4-4.)
3. Insert the memory module into the socket at an angle of 90 degrees.
4. Push the two eject levers toward the vertical posts at each end of the socket until the module is upright.

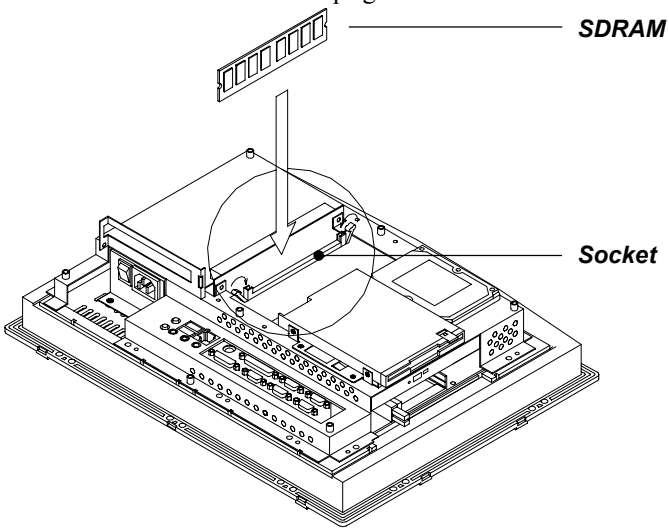


Figure 4-4: Installing SDRAM

4.6 Installing the Floppy Disk Drive (FDD) and Slim CD-ROM Drive

Installation of a floppy disk drive and slim CD-ROM drive is similar to that for a hard disk drive. The metal plate for holding the FDD and the CD-ROM support bracket are on the left side of the shielding case. The 26-pin and 40-pin yellow FPC cables are for connecting the FDD and CD-ROM respectively. Only 3.5" floppy disk drives (720 KB and 1.44 MB) and slim CD-ROM drives can be attached to the metal plate and CD-ROM support bracket.

1. Detach and remove the plastic rear cover and side panel.
2. There is a metal plate which holds the FDD and slim CD-ROM drive to the metal shielding case. There is also a slim CD-ROM support bracket which is attached to the shielding case. There are two screws ("A") on the metal plate. Unscrew these two screws. (See Fig. 4-5.)
3. Push the metal plate toward the outside of the unit. This will free it from the two lugs of the shielding case.
4. Slide the CD-ROM support bracket toward the outside of the panel PC, and remove it.
5. Place the FDD on the metal plate. There are four small screws, two on each side of the metal plate. Tighten these screws.
6. Place the support bracket against the slim CD-ROM drive. It should fit neatly into the space allocated for the bracket. (See Fig. 4-5.)
7. Attach the support bracket to the slim CD-ROM drive by tightening the two small screws located in the bracket.
8. Insert the FDD assembly into the shielding case. Then insert the slim CD-ROM drive assembly into the shielding case. Make sure that the hooked lug on the slim CD-ROM drive assembly engages into the corresponding slot of the combined FDD assembly and shielding case.

9. Connect the FDD cable (26-pin to 26-pin) and CD-ROM cable (40-pin to 40-pin). The other end of the FDD cable is connected to connector CN10 on the PC board. The other end of the CD-ROM cable is connected to connector CN18 on the PC board.
10. Slide the FDD assembly and slim CD-ROM assembly toward the inside of the panel PC, as far as they will go.
11. Secure the two screws ("A") of the metal plate to the shielding case.

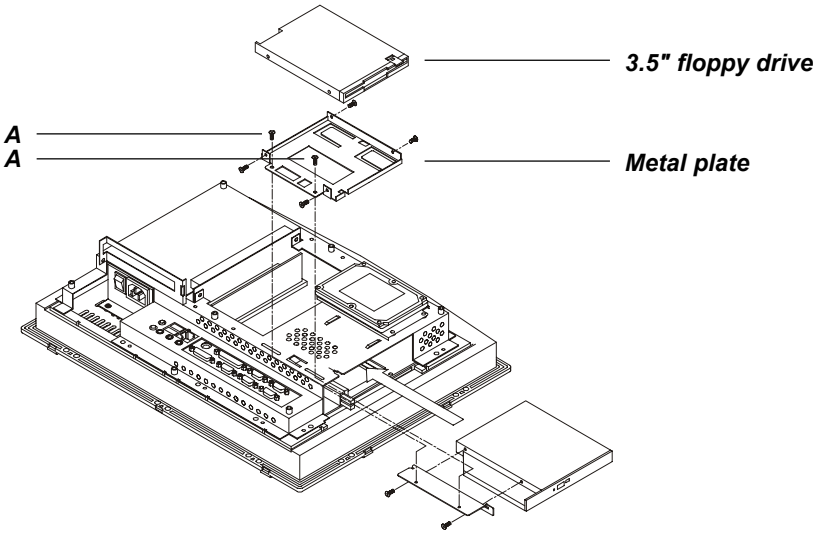


Figure 4-5: Installing the FDD and slim CD-ROM drive

CHAPTER 5

Jumper Settings and Connectors


This chapter tells how to set up the panel PC hardware, including instructions on setting jumpers and connecting peripherals, switches and indicators. Be sure to read all the safety precautions before you begin the installation procedures.

- Jumpers and Connectors
- CPU Installation
- CMOS Clear for External RTC (JP8)
- COM Port Interface
- Internal -12 V Source Selection Setting (JP1)
- VGA Interface
- Watchdog Timer Configuration

5.1 Jumpers and Connectors


5.1.1 Setting jumpers

You can configure your panel PC to match the needs of your application by setting jumpers. A jumper is the simplest kind of electrical switch. It consists of two metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To “close” a jumper, you connect the pins with the clip. To “open” a jumper you remove the clip. Sometimes a jumper will have three pins, labeled 1, 2, and 3. In this case, you would connect either pins 1 and 2 or pins 2 and 3.



Open Closed Closed 2 - 3

The jumper settings are schematically depicted in this manual as follows:



Open Closed Closed 2 - 3

A pair of needle-nose pliers may be helpful when working with jumpers.

If you have any doubts about the best hardware configuration for your application, contact your local distributor or sales representative before you make any changes.

5.1.2 Jumpers and switch

The motherboard of the panel PC has a number of jumpers that allow you to configure your system to suit your applications. The table below lists the function of each of the board's jumpers.

Table 5-1: Jumpers and their functions

Label	Function
JP1	Internal -12 V source selection setting
JP2	Wake on LAN (Reserved)
JP3	COM2 RS-232/422/485 setting
JP4	COM2 RS-232/422/485 setting
JP5	COM2 RS-232/422/485 setting
JP6	COM3 / COM4 Pin 9 output type setting
JP7	Watchdog timer action
JP8	CMOS clear for external RTC
JP9	COM1 / COM2 Pin 9 output type setting
SW3	Panel type setting

5.1.3 Locating jumpers and switch

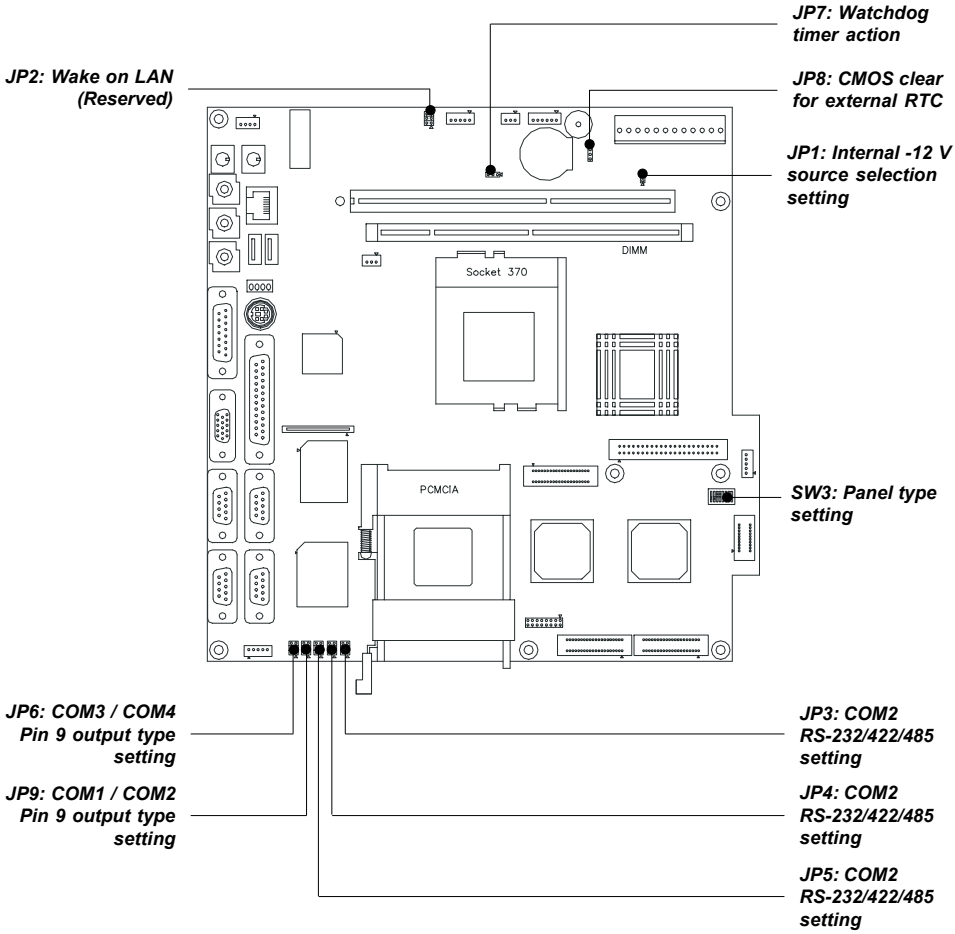


Figure 5-1: Locating jumpers on the PPC-123 motherboard

5.1.4 Connectors

Onboard connectors link the panel PC to external devices such as hard disk drives or floppy drives. The table below lists the function of each of the board's connectors.

Table 5-2: Panel PC connectors

Label	Function
J1	AT power connector
J4	Inverter power connector
J6	Internal speaker connector (Reserved)
J8	Front panel control connector (Reserved)
J9	IR connector (Reserved)
CN2	Flat panel display connector
CN3	Flat panel display connector
CN4	PanelLink interface (Reserved)
CN10	FDD connector
CN16	EIDE hard disk drive connector
CN18	CD-ROM connector
CN23	Internal COM4 and PS/2 connector
FAN1	CPU fan power connector
FAN2	System fan power connector
SLOT1	PCI/ISA bus expansion connector

5.1.5 Locating connectors

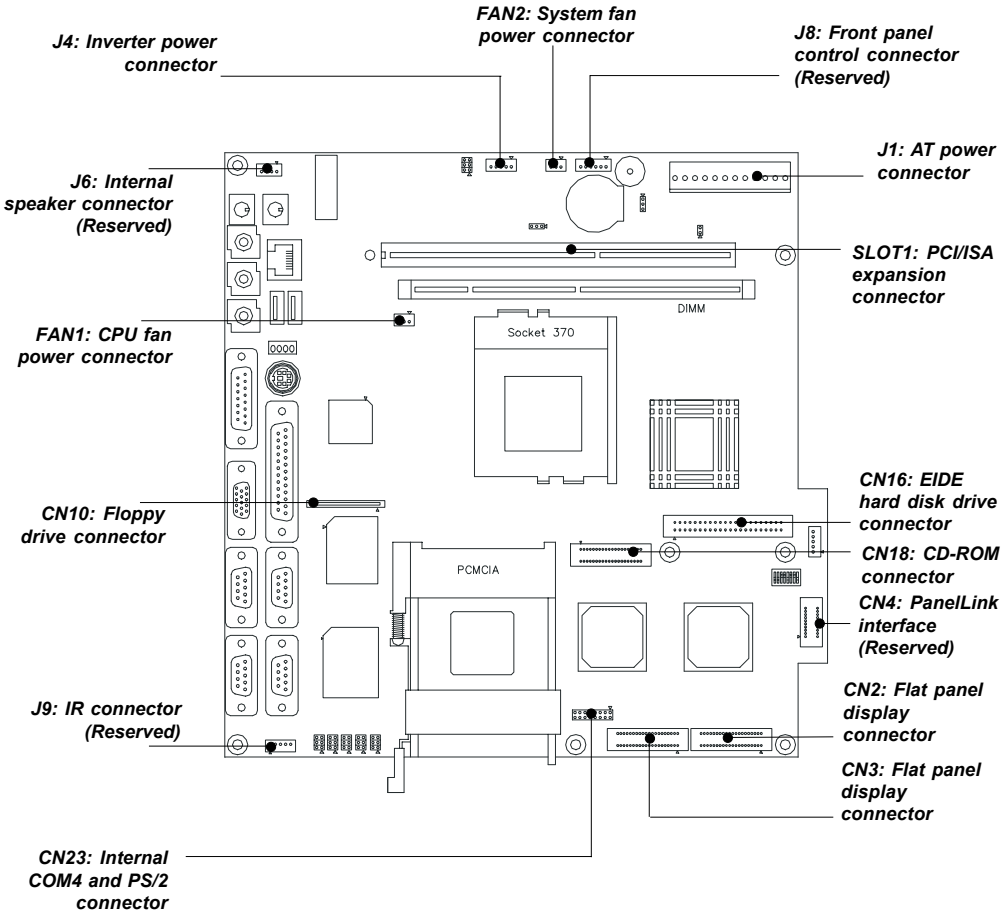


Figure 5-2: Locating connectors on the PPC-123 motherboard

5.2 CPU Installation

You can install an Intel Celeron™ or Pentium® III CPU without setting any frequency ratio or voltage.

5.3 CMOS Clear for External RTC (JP8)

Warning: *To avoid damaging the computer, always turn off the power supply before setting "Clear CMOS". Set the jumper back to "Normal operation" before turning on the power supply.*

Table 5-3: Clear CMOS / External RTC (JP8)

*Normal operation	Clear CMOS
	

* default setting



5.4 COM-port Interface

The panel PC provides four serial ports (COM1, 3, 4: RS-232; COM2: RS-232/422/485) in one COM port connector.

5.4.1 COM2 RS-232/422/485 setting (JP3, JP4, JP5)




COM2 can be configured to operate in RS-232, RS-422, or RS-485 mode. This is done via JP3, JP4 and JP5.

Table 5-4: COM2 RS-232/422/485 setting (JP3, JP4)

*RS-232	RS-422/485
	

* default setting

Table 5-5: COM2 RS-232/422/485 setting (JP5)

*RS-232	RS-422	RS-485
		

* default setting

The IRQ and the address ranges for COM1, 2, 3, and 4 are fixed. However, if you wish to disable the port or change these parameters later you can do this in the system BIOS setup. The table overleaf shows the default settings for the panel PC's serial ports.

COM1 and COM2 are one set. You can exchange the address range and interrupt IRQ of COM1 for the address range and interrupt IRQ of COM2. After exchanging, COM1's address range is 2F8 ~ 2FF and its request IRQ is IRQ3: and COM2's address range is 3F8 ~ 3FF and its interrupt IRQ is IRQ4.




COM3 and COM4 are another set. Their selectable function is the same as the COM1/COM2 set.

Table 5-6: Serial port default settings

Port	Address Range	Interrupt
COM1	3F8 ~ 3FF	IRQ4
COM2	2F8 ~ 2FF	IRQ3
COM3	3E8 ~ 3EF	IRQ10
COM4	2E8 ~ 2EF	IRQ5

5.4.2 COM1 / COM2 pin 9 output type setting (JP9)

Table 5-7: COM1 / COM2 pin 9 output type setting (JP9)




*Normal operation	+5 V output	+12 V output
		

* default setting

Note: Pins 1, 3 and 5 are for COM1.
Pins 2, 4 and 6 are for COM2.

5.4.3 COM3 / COM4 pin 9 output type setting (JP6)

Table 5-8: COM3/COM4 pin 9 output type setting (JP6)

*Normal operation	+5 V output	+12 V output
		

* default setting

Note: Pins 1, 3 and 5 are for COM3.
Pins 2, 4 and 6 are for COM4.

5.5 Internal -12 V source selection setting (JP1)

The panel PC provides an internal -12 V source in an extension slot available for various extension card applications.

Table 5-9: Internal -12 V setting (JP1)

On-board -12 V Support	External -12 V Input
	

*default setting

5.6 VGA Interface

The panel PC's AGP VGA interface can drive conventional CRT displays. It is also capable of driving a wide range of flat panel displays, including electroluminescent (EL), gas plasma, passive LCD and active LCD displays. The board has two connectors to support these displays simultaneously: one for standard CRT VGA monitors, and one for flat panel displays.

CRT display port information can be found in Section 3.9 this manual.

Pin assignments for the flat panel display connector, backlight connector and other related connectors are shown in Appendix D.

5.6.1 LCD panel power setting

The panel PC's AGP SVGA interface supports 5 V and 3.3 V LCD displays. The LCD cable already has a built-in default setting. You do not need to adjust any jumper or switch to select the panel power.

5.6.2 Panel type select (SW3)

SW3 is a 8-pin dip switch for selecting panel type and display mode. A 800 x 600 TFT LCD is used in the PPC-123, so the switch is preset according to the table below. The switch is already defaulted for the PPC-123's LCD, so it should not be modified. If you require modification for a special purpose, we recommend that you consult your distributor or our sales repreentative for detailed information.

Table 5-10: Panel type select (SW3)

Panel type	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
TFT 800 x 600	ON	ON	OFF	ON	ON	OFF	ON	ON



5.7 Watchdog Timer Configuration

An onboard watchdog timer reduces the chance of disruptions which EMP (electromagnetic pulse) interference can cause. This is an invaluable protective device for standalone or unmanned applications. Setup involves one jumper and running the control software. (Refer to Appendix B.)

5.7.1 Watchdog activity selection (JP7)

When the watchdog timer activates (i.e. CPU processing has come to a halt), it can reset the system or generate an interrupt on IRQ11. This can be set via jumper JP7 as shown below:

Table 5-11: Watchdog activity selection (JP7)

***System reset**	**IRQ11**
	

* default setting

CHAPTER 6

PCI Bus Ethernet Interface

This chapter provides information on Ethernet configuration.

- Introduction
- Installation of Ethernet Driver
  - for Windows 95
  - for Windows 98
  - for Windows NT
  - for Wiindows 2000/ME
- Further Information

6.1 Introduction

The PPC-123 is equipped with a high performance 32-bit Ethernet chipset which is fully compliant with IEEE 802.3 100 Mbps CSMA/CD standards. It is supported by major network operating systems. It is also both 100Base-T and 10Base-T compatible. The medium type can be configured via the RSET8139.exe program included on the utility disk.

The Ethernet port provides a standard RJ-45 jack. The network boot feature can be utilized by incorporating the boot ROM image files for the appropriate network operating system. The boot ROM BIOS files are combined with system BIOS, which can be enabled/disabled in the BIOS setup.

6.2 Installation of Ethernet Driver

Before installing the Ethernet driver, note the procedures below. You must know which operating system you are using in your PPC-123, and then refer to the corresponding installation flow chart. Then just follow the steps described in the flow chart. You will quickly and successfully complete the installation, even if you are not familiar with instructions for Windows.


Important: The following windows illustrations are examples only. You must follow the flow chart instructions and pay attention to the instructions which then appear on your screen.

Note 1: The CD-ROM drive is designated as "D" throughout this chapter.


Note 2: <Enter> means pressing the "Enter" key on the keyboard.

6.2.1 Installation for Windows 95


1. a. Select "Start", "Settings", "Control Panel", "System".
   b. Click the "Device Manager" and "Other Devices" items.
   c. Remove the "PCI Ethernet Controller" item.




2. a. Select "Start", "Settings", "Control Panel", and "Network" icons.
   b. Click the "Add" button.

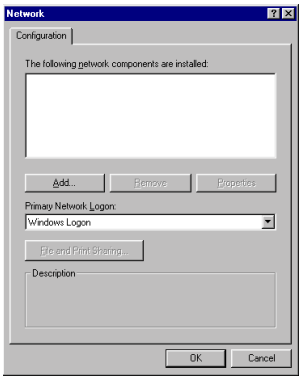

3. a. Select "Adapter", and then click the "Add" button.




4. a. Press the "Have Disk..." button.



5.

a. Type the path "D:\PPC123~7\LAN\W95OSR2"


b. Click the "OK" button.

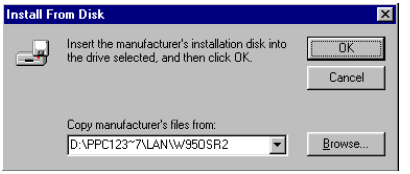

6.

a. Choose the highlighted "Realtek RTL8139(A/B/C/8130)PCI Fast Ethernet".


b. Press the "OK" button.

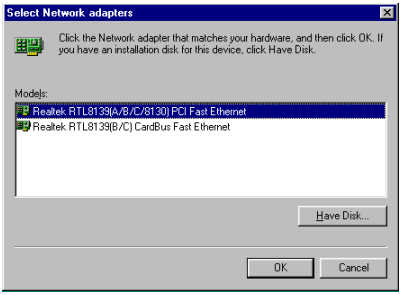

7.


a. Press the "Add..." button to select suitable services or protocol.

b. Press the "OK" button to finish network configuration.

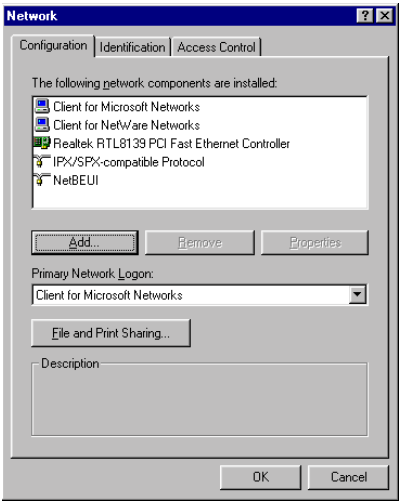


8.


a. Press the "Yes" button to start your computer.

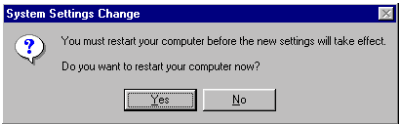


end

6.2.2 Installation for Windows 98

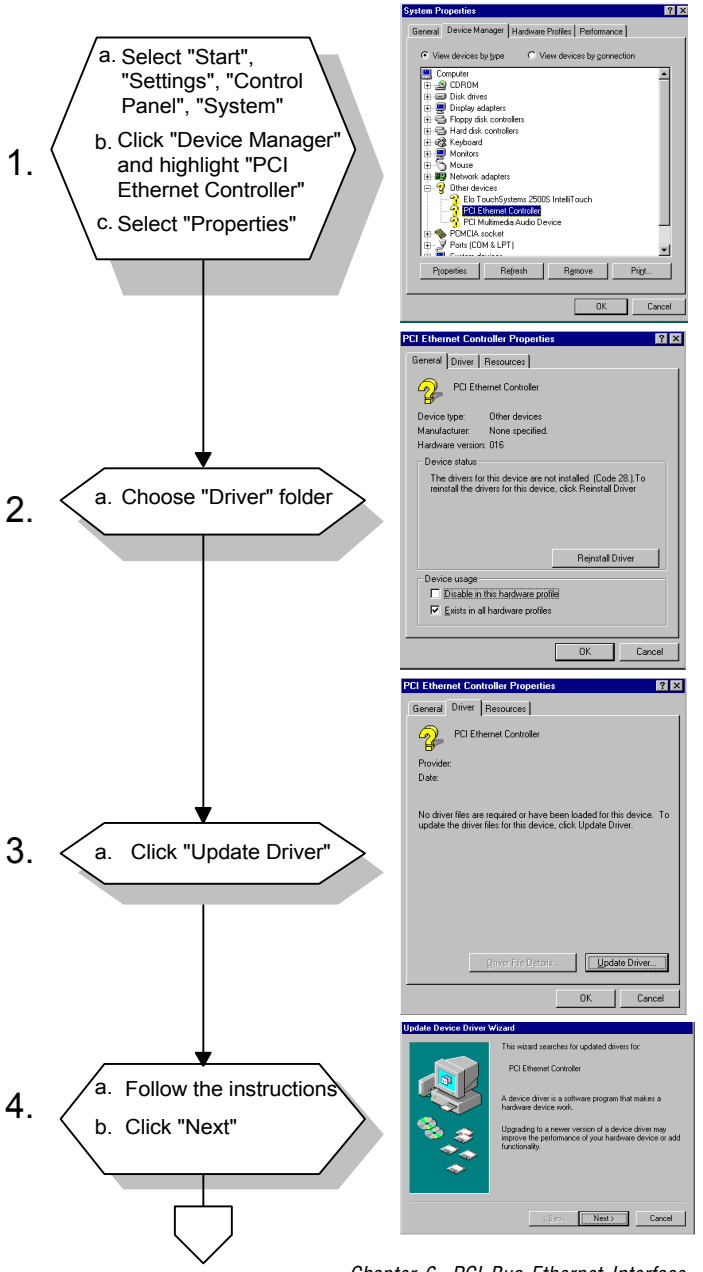


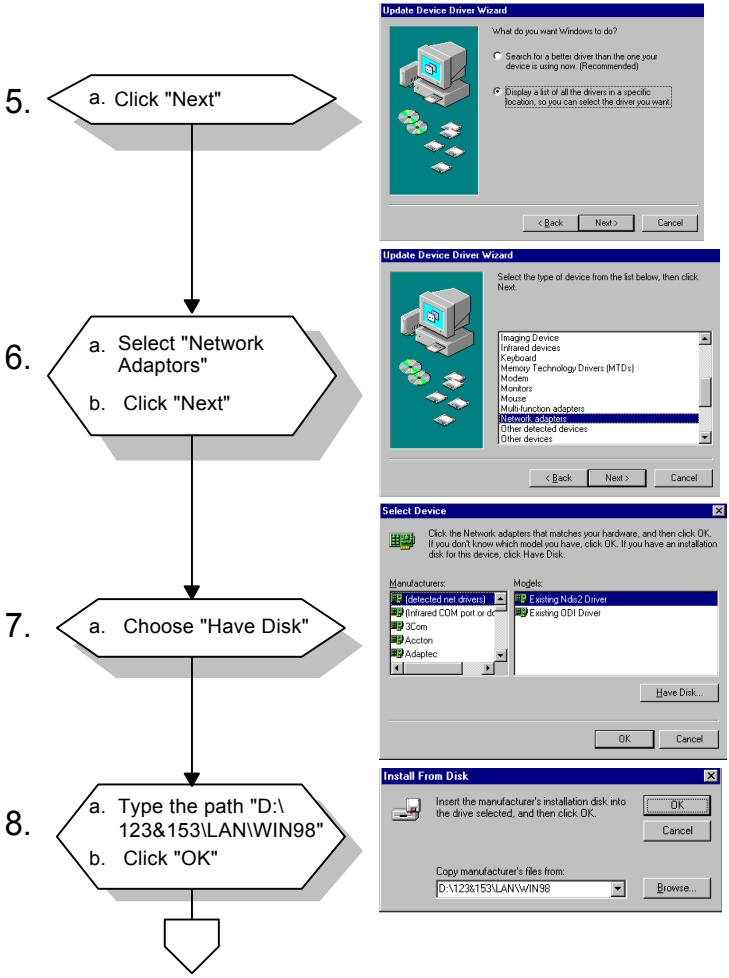
5.
a. Click "Next"
6.
a. Select "Network Adaptors"
b. Click "Next"
7.
a. Choose "Have Disk"
8.
a. Type the path "D:\123&153\LAN\WIN98"
b. Click "OK"
Update Device Driver Wizard
What do you want Windows to do?
Search for a better driver than the one your device is using now. (Recommended)
Display a list of all the drivers in a specific location, so you can select the driver you want.
< Back
Next >
Cancel
Update Device Driver Wizard
Select the type of device from the list below, then click Next.
Imaging Device
Infrared devices
Keyboard
Memory Technology Drivers (MTDs)
Modem
Monitors
Mouse
Multi-function adapters
Network adapters
Other detected devices
Other devices
< Back
Next >
Cancel
Select Device
Click the Network adapters that matches your hardware, and then click OK. If you don't know which model you have, click OK. If you have an installation disk for this device, click Have Disk.
Manufacturers:
Models:
(detected net drivers)
(Infrared COM port or dc
3Com
Accton
Adaptec
Existing Ndis2 Driver
Existing ODI Driver
Have Disk...
OK
Cancel
Install From Disk
Insert the manufacturer's installation disk into the drive selected, and then click OK.
OK
Cancel
Copy manufacturer's files from:
D:\123&153\LAN\WIN98
Browse...

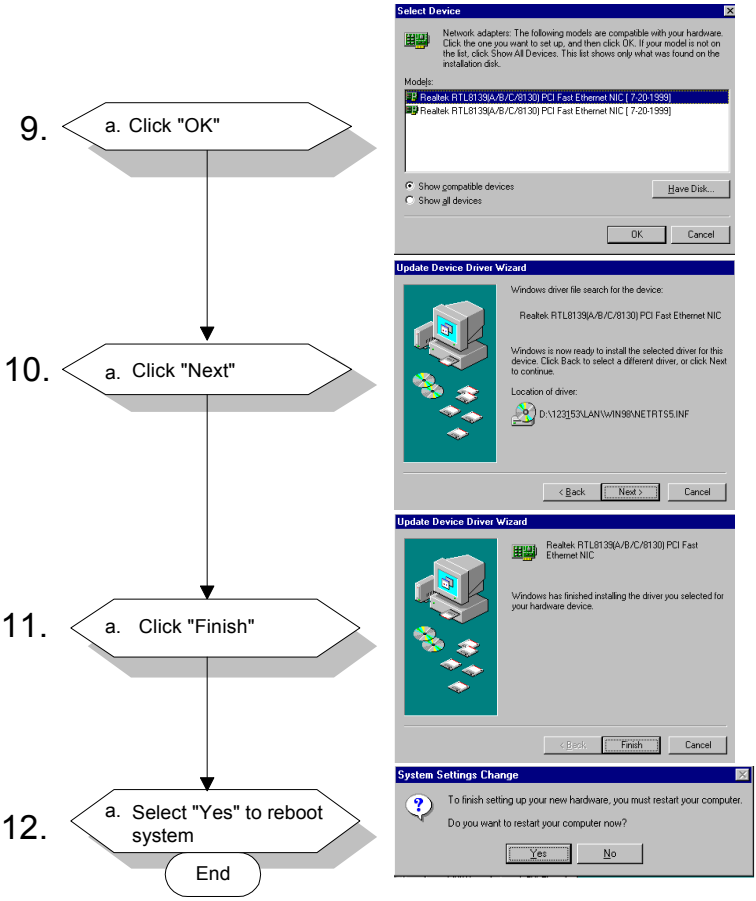

9.
a. Click "OK"
10.
a. Click "Next"
11.
a. Click "Finish"
12.
a. Select "Yes" to reboot system
End
Select Device
Network adapters: The following models are compatible with your hardware. Click the one you want to set up, and then click OK. If your model is not on the list, click Show All Devices. This list shows only what was found on the installation disk.
Models:
Realtek RTL8139(A/B/C/8130) PCI Fast Ethernet NIC [7-20-1999]
Realtek RTL8139(A/B/C/8130) PCI Fast Ethernet NIC [7-20-1999]
Show compatible devices
Show all devices
Have Disk...
OK
Cancel
Update Device Driver Wizard
Windows driver file search for the device:
Realtek RTL8139(A/B/C/8130) PCI Fast Ethernet NIC
Windows is now ready to install the selected driver for this device. Click Back to select a different driver, or click Next to continue.
Location of driver:
D:\123153\LAN\WIN98\NETRTS5.INF
< Back
Next >
Cancel
Update Device Driver Wizard
Realtek RTL8139(A/B/C/8130) PCI Fast Ethernet NIC
Windows has finished installing the driver you selected for your hardware device.
< Back
Finish
Cancel
System Settings Change
To finish setting up your new hardware, you must restart your computer.
Do you want to restart your computer now?
Yes
No

6.2.3 Installation for Windows NT


1.
a. Select "Start", "Settings", "Control Panel", and then double click the "Network" icon.
b. Choose the "Adapters" label.
c. Click the "Add" button.

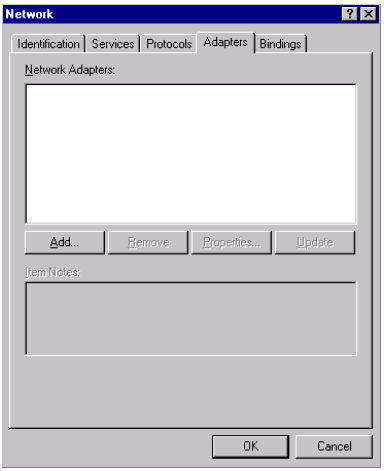


2.
a. Press "Have Disk...".

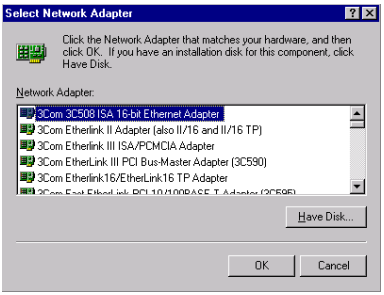

3.
a. Type the path "D:\PPC123&153\LAN\WINNT.
b. Press the "OK" button.

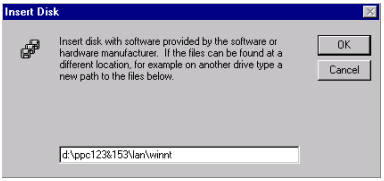

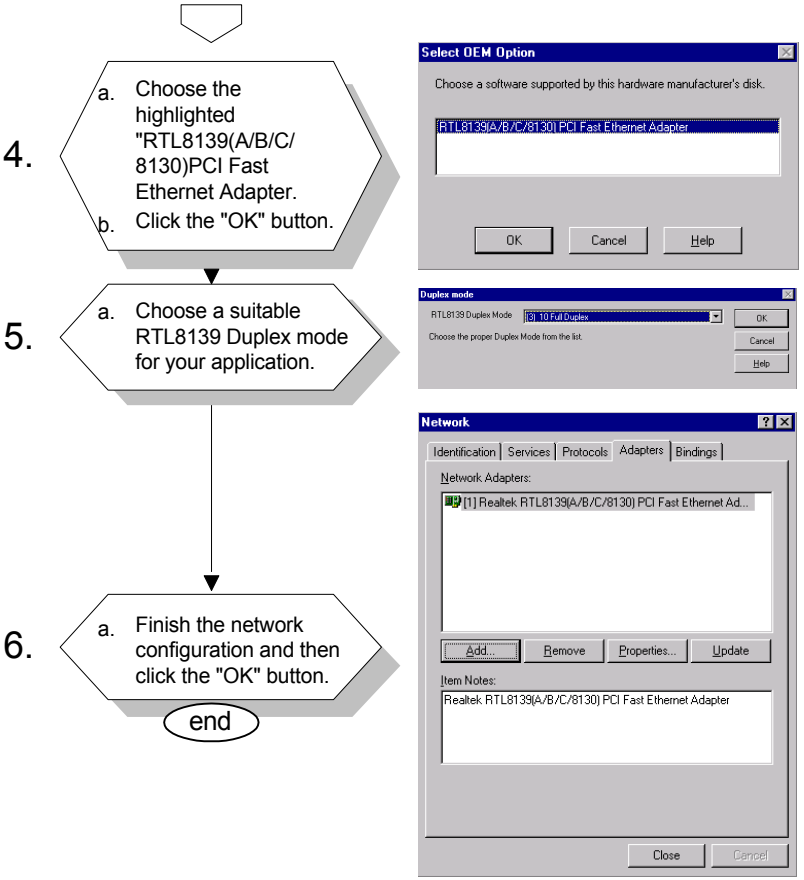

6.2.4 Installation for Windows 2000/ME

After finishing the Windows 2000/ME installation, the system will automatically detect the Ethernet hardware and install the Ethernet driver from the drivers database from Windows 2000 or Windows ME when the system reboots.

Users are not required to install the Ethernet driver themselves.

6.3 Further Information

Realtek website: **www.realtek.com.tw**

Advantech websites: **www.advantech.com**
www.advantech.com.tw

CHAPTER 7

AGP SVGA Setup

- Introduction
- Installation of SVGA Driver
  - for Windows 95/98
  - for Windows NT
  - for Windows 2000
  - for Windows ME
- Further Information

7.1 Introduction

The PPC-123 has an onboard AGP flat panel/VGA interface. The specifications and features are described as follows:

7.1.1 Chipset

The PPC-123 uses a Lynx3DM8 SMI721 chipset from Silicon Motion Inc. for its AGP/SVGA controller. It supports many popular LCD, EL, and gas plasma flat panel displays and conventional analog CRT monitors. The SMI721 VGA BIOS supports monochrome LCD, EL, color TFT and STN LCD flat panel displays. In addition, it also supports interlaced and non-interlaced analog monitors (color and monochrome VGA) in high-resolution modes while maintaining complete IBM VGA compatibility. Digital monitors (i.e. MDA, CGA, and EGA) are NOT supported. Multiple frequency (multisync) monitors are handled as if they were analog monitors.

7.1.2 Display memory

With onboard 8 MB display memory, the VGA controller can drive CRT displays or color panel displays with resolutions up to 1280 x 1024 at 16 M colors.

7.1.3 Display types

CRT and panel displays can be used simultaneously. The PPC-123 can be set in one of three configurations: on a CRT, on a flat panel display, or on both simultaneously. The system is initially set to simultaneous display mode. If you want to enable the CRT display only or the flat panel display only, please contact Silicon Motion Inc. or our sales representative for detailed information.

7.2 Installation of SVGA Driver


Complete the following steps to install the SVGA driver. Follow the procedures in the flow chart that apply to the operating system that you you are using within your PPC-123.

Important: The following windows illustrations are examples only. You must follow the flow chart instructions and pay attention to the instructions which then appear on your screen.


Note 1: The CD-ROM drive is designated as "D" throughout this chapter.

Note 2: <Enter> means pressing the "Enter" key on the keyboard.

7.2.1 Installation for Windows 95/98

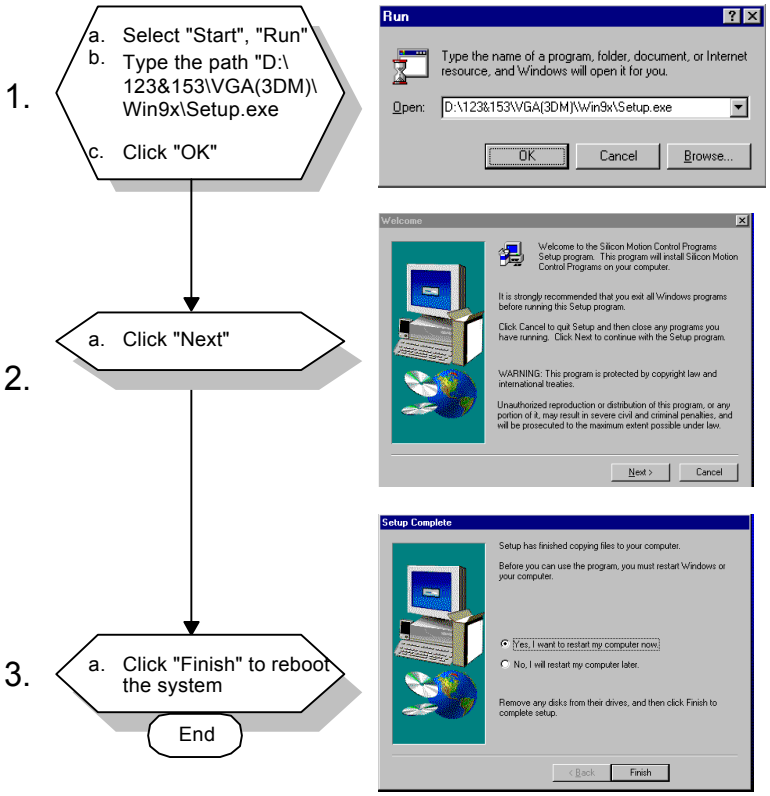



7.2.2 Installation for Windows NT

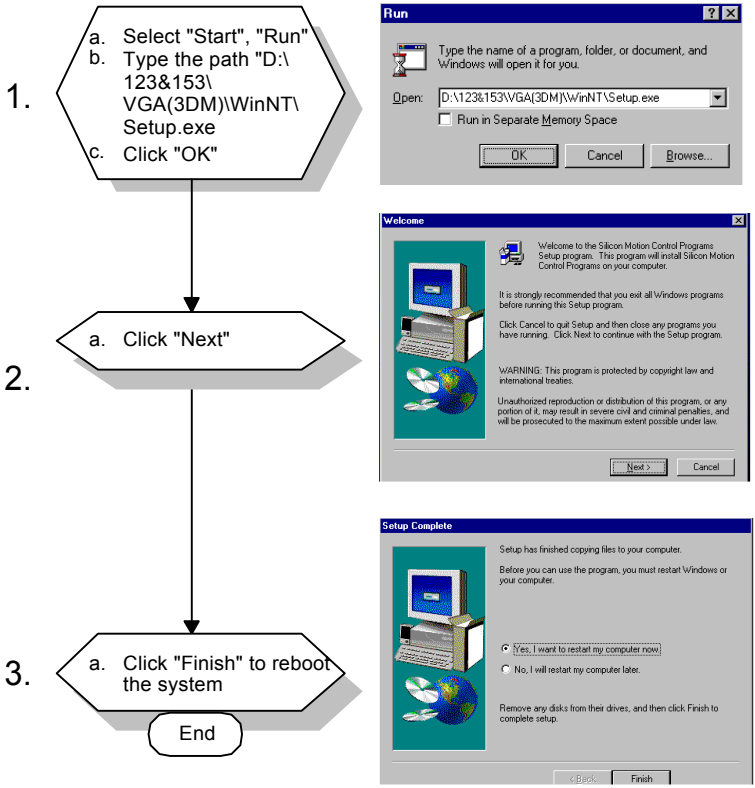



Note: Service Pack X (X=3, 4, 5, 6...) must be installed first before you install the Windows NT VGA driver.

7.2.3 Installation for Windows 2000

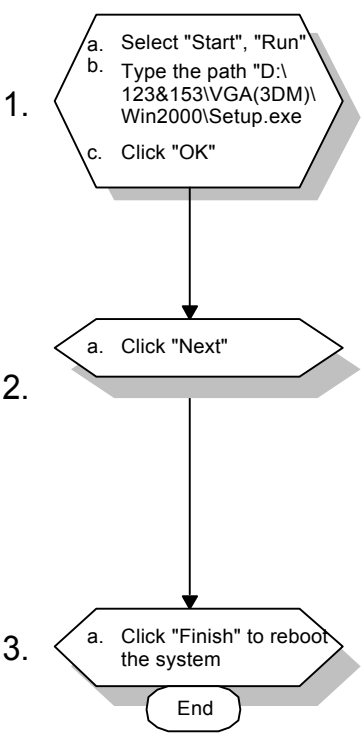


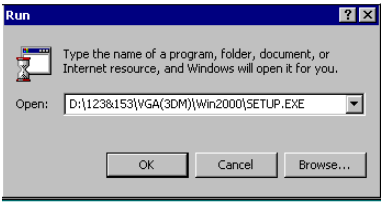

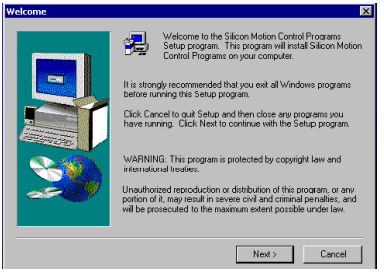

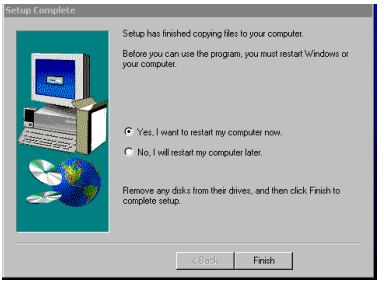

7.2.4 Installation for Windows ME

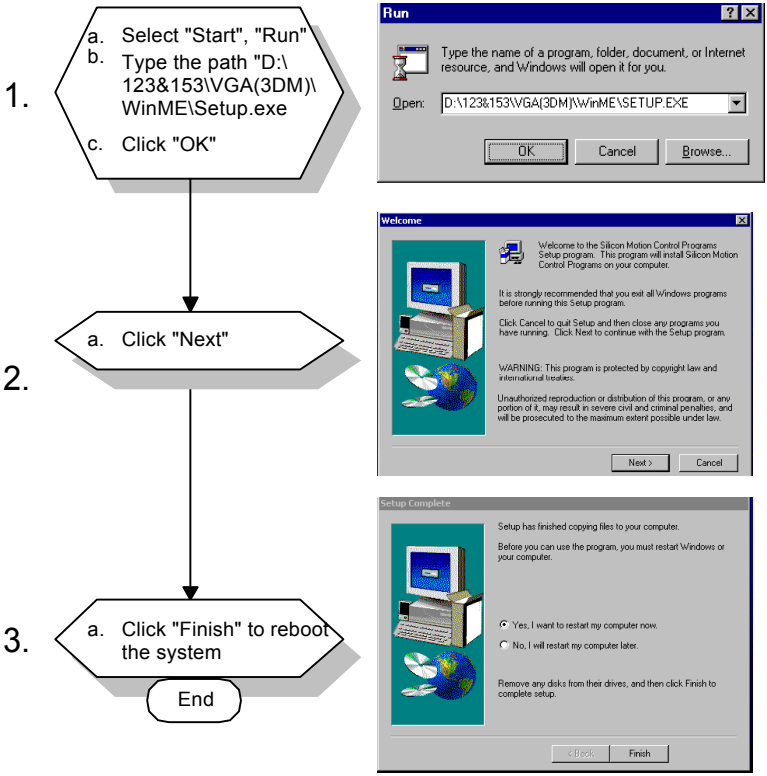

7.3 Further Information

For further information about the AGP SVGA installation in your PPC-123, including driver updates, troubleshooting guides and FAQ lists, visit the following web resources:

Silicon Motion website: **www.siliconmotion.com**

Advantech websites: **www.advantech.com**
www.advantech.com.tw

CHAPTER 8

Audio

- Introduction
- Installation of Audio Driver
  - for Windows 95/98
  - for Windows NT
  - for Windows 2000/ME

8.1 Introduction

The PPC-123's onboard audio interface provides high-quality stereo sound and FM music synthesis (ESFM) by using the ES1946S audio controller from ESS Technology, Inc. The audio interface can record, compress, and play back voice, sound, and music with a built-in mixer control. The PPC-123's onboard audio interface also supports the Plug and Play (PnP) standard and provides PnP configuration for audio, FM, and MPU-104 logical devices. It is compatible with Sound Blaster, Sound Blaster Pro version 3.01, voice, and music functions. The ESFM
synthesizer is register compatible with the OPL3 and has extended capabilities.

8.2 Installation of Audio Driver

Before installing the audio driver, please take note of the procedures detailed below. You must know which operating system you are using in your PPC-123, and then refer to the corresponding installation flow chart. Just follow the steps in the flow chart. You can quickly and successfully complete the installation, even though you are not familiar with instructions for Windows.


Important: The following windows illustrations are examples only. You must follow the flow chart instructions and pay attention to the instructions which then appear on your screen.

Note 1: The CD-ROM drive is designated as "D" throughout this chapter.


Note 2: <Enter> means pressing the "Enter" key on the keyboard.

8.2.1 Installation for Windows 95/98


1. a. Select "Start", "RUN".
   b. Enter the driver path: "D:\PPC123&153\Audio\win9x(only)\Setup.exe"

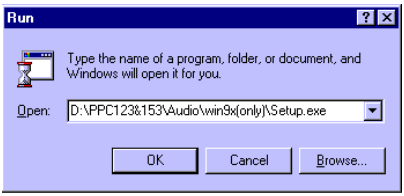

2. a. Click "Next" to continue the installation.

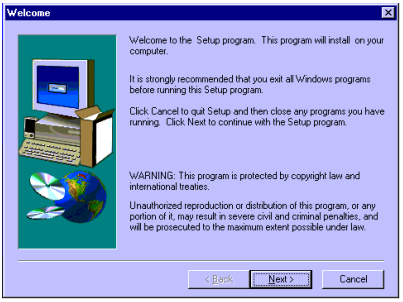

3. a. Select "Upgrade Drivers".
   b. Click "Next".

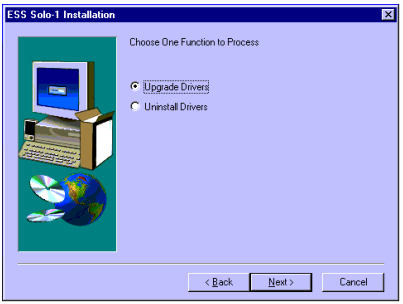

4. a. When installation is completed, click "Finish" to restart your computer.




5.

a. After installation, select "Start", "Settings", "Control Panel", "System".

b. Click the "Device Manager" tab to see the result of your installation.

End

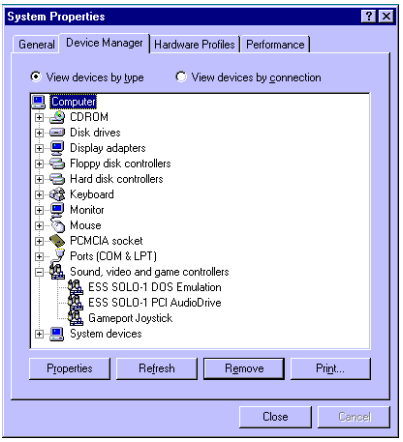

8.2.2 Installation for Windows NT


1. a. Select "Start", "Settings", "Control Panel".
   b. Double Click the "Multimedia" icon.




2. a. Select the "Devices", item.
   b. Click the "Add..." button.




3. a. Choose the "Unlisted or Updated Driven" item.
   b. Click the "OK" buttom.

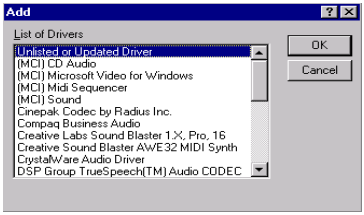

4. a. Type the path "D:\ ppc123&153\audio\ nt40\
   b. Click the "OK" buttom.

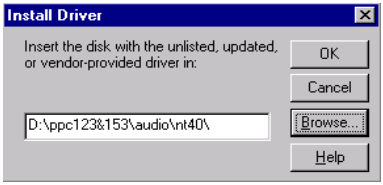

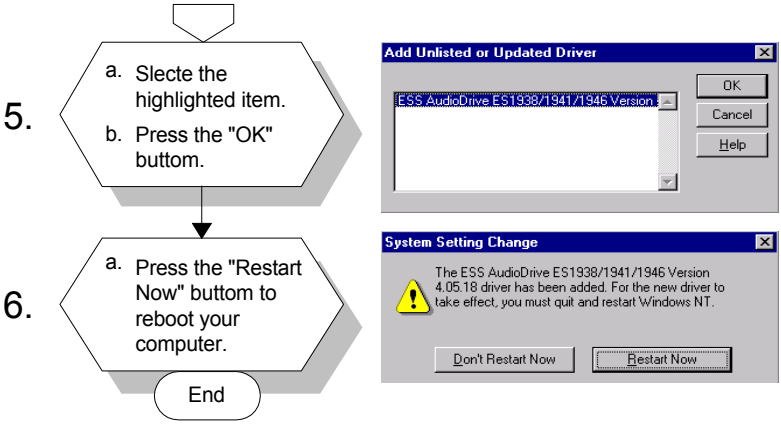

8.2.3 Installation for Windows 20000/ME

After finishing the Windows 2000 or Windows ME installation, the system can automatically detect the audio hardwre and install the driver from the driver database in Windows 2000 or Windows ME when the system reboots.

It is not necessary to install the audio driver manually.

CHAPTER 9

Award BIOS Setup

This chapter describes how to set BIOS configuration data.

9.1 Award BIOS Setup

The PPC-123 comes with an Award BIOS chip that contains the ROM setup for your system. This chip serves as an interface between the processor and the rest of the mainboard's components. This chapter explains the information contained in the setup program and tells you how to modify the settings according to your system configuration. Some setup items will not be explained, because it is recommended that users do not change such items.

Note: Values for the various setup items that appear on your own screen (including default values) may not be the same as the values shown on the screen figures in this chapter. This is because the BIOS is revised and updated from time to time. If in doubt, check
Advantech's web site for the latest BIOS versions and related information.

9.2 CMOS Setup Utility

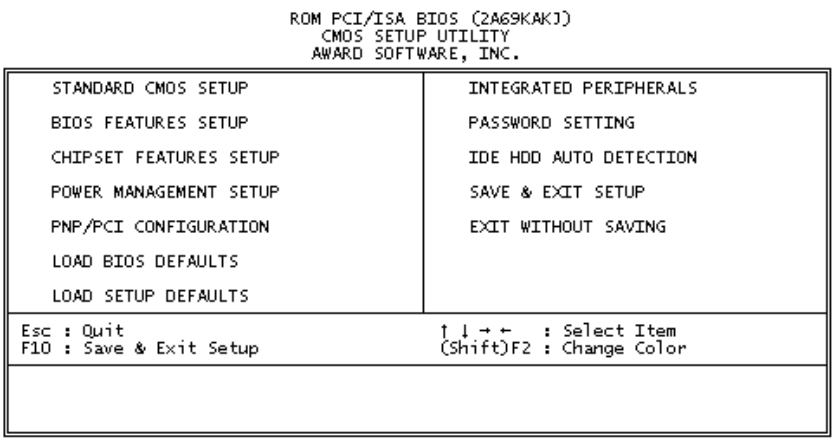


Figure 9-1: Setup program initial screen

A setup program, built into the system BIOS, is stored in the CMOS RAM that allows the configuration settings to be changed. This program is executed when the user changes the system configuration; when the user changes the system backup battery; or when the system detects a
configuration error and asks the user to run the setup program. At power-on RAM testing, the message "Press DEL to enter Setup" appears. After pressing the "DEL" key, the CMOS setup utility screen will appear as shown in Fig. 9-1. Use the arrow keys to select and press "Enter" to run the selected program.

9.3 Standard CMOS Setup

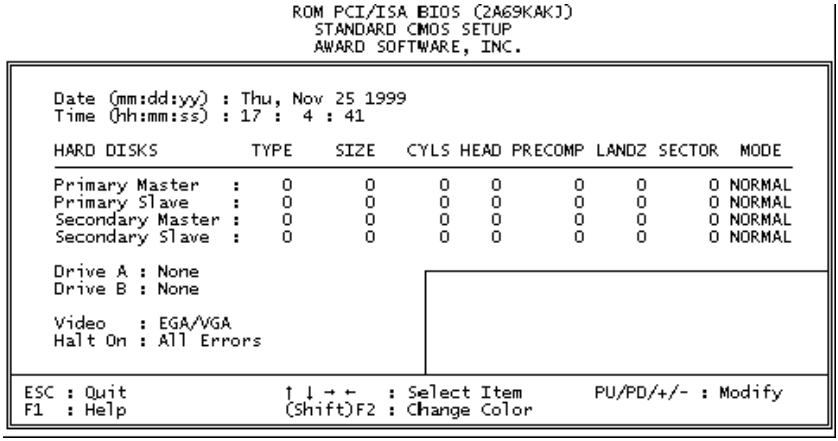


Figure 9-2: CMOS setup screen

The standard CMOS setup screen is shown above. System BIOS automatically detects memory size, so no changes are necessary. It has a few items requiring setting. Each item may have one or more optional settings. System BIOS allows you to change the system date and time, IDE hard disk, floppy disk drive types for drives A: and B:, boot-up video display mode, and POST error handling selection. Use the arrow keys to highlight the item and then use the "PgUp" or "PgDn" keys to select the value you want for each item.

9.3.1 Hard Disk Configurations

TYPE

Select from 1 to 45 to fill the remaining fields with predefined values for disk drives. Select "User" to fill the remaining fields. Select "Auto" to detect the HDD type automatically.

SIZE

Hard disk size. The unit is megabytes (MB).

CYLS

The cylinder number of the hard disk.

HEAD

The read/write head number of the hard disk.

PRECOMP

The cylinder number at which the disk drive changes the write timing.

LANDZ

The cylinder number where the disk drive heads (read/write) are seated when the disk drive is parked.

SECTOR

The sector number of each track defined on the hard disk.

MODE

Select "Auto" to detect the mode type automatically. If your hard disk supports the LBA mode, select "LBA" or "Large". However, if your hard disk supporting cylinder is more than 1024 MB and does not support the LBA function, you have to select "Large". If your hard disk supporting cylinder is below 1024 MB, select "Normal".

9.4 BIOS Features Setup

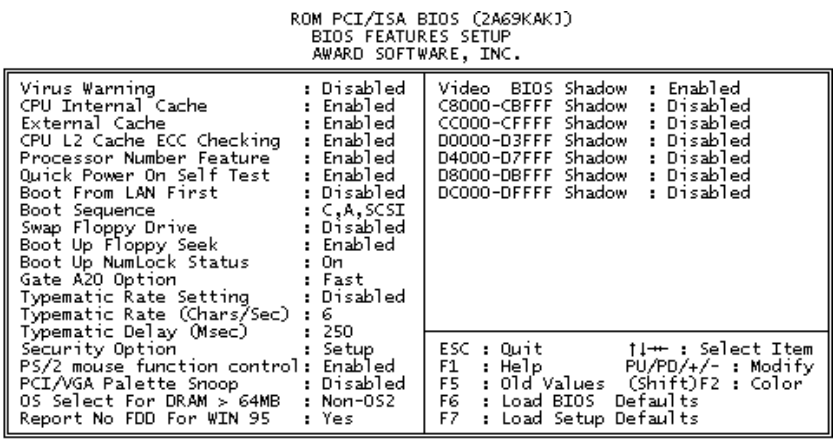


Figure 9-3: BIOS features setup screen

Moving around the BIOS Features and Chipset Features setup programs works the same way as moving around the Standard CMOS setup
program. (Refer to the next section for Chipset Features setup.) The BIOS Features setup program is shown above. Users are not encouraged to run the BIOS and Chipset Features setup programs. Your system should have been fine-tuned before shipping. Improper setup may cause the system to fail, so consult your dealer before making any changes.

Virus Warning

When enabled, it assigns the BIOS to monitor the master boot sector and the DOS sector of the first hard disk drive.

The options are: Disabled (Default), Enabled.

CPU Internal Cache

When enabled, it improves system performance. Disable this item when testing or troubleshooting.

The options are: Enabled (Default), Disabled.

External Cache

When enabled, supports an external cache SRAM.

The options are: Enabled (Default), Disabled.

CPU L2 Cache ECC Checking

Allows the CPU L2 cache to enable the memory parity check.

The options are: Disabled (Default), Enabled.

Quick Power On Self Test

When enabled, allows the BIOS to bypass the extensive memory test.

The options are: Disabled (Default), Enabled.

Boot From LAN First

Enables the system to boot from a LAN.

The options are: Disabled (Default), Enabled.

Boot Sequence

Allows the system BIOS to first try to boot the operating system from the selected disk drive.

The options are:

C, A, SCSI (Default)

LS/ZIP, C

C (only)

SCSI, C, A

SCSI, A, C

F, A, SCSI

E, A, SCSI

D, A, SCSI

CDROM, C, A

C, CDROM, A

Swap Floppy Drive

When enabled, allows you to switch the order in which the operating system accesses the floppy drives during boot-up.

The options are: Disabled (Default), Enabled.

Boot Up Floppy Seek

When enabled, assigns the BIOS to perform floppy disk drive tests by issuing seek commands. Note that such tests are time-consuming.

The options are: Enabled (Default), Disabled.

Boot Up NumLock Status

When set to "On", allows the BIOS to automatically enable the NumLock function when the system boots up.

The options are: On (Default), Off.

Typematic Rate Setting

The term typematic means that when a keyboard key is held down, the character is repeatedly entered until the key is released. When this item is enabled, you may change the typematic repeat rate.

The options are: Disabled (Default), Enabled.

Typematic Rate (Chars/Sec)

Sets the rate of a character repeat when the key is held down.

The options are: 6 (Default), 8, 10, 12, 15, 20, 24, 30.

Typematic Delay (msec)

Sets the delay time before a character is repeated.

The options are: 250 (Default), 500, 750, 1000 milliseconds.

Security Option

Allows you to set the security level of the system.

The options are: Setup (Default), System.

PS/2 Mouse Function Control

When enabled, the PS/2 mouse is activated.

The options are: Disabled (Default), Enabled.

PCI/VGA Palette Snoop

When enabled, allows you to install an enhanced graphics adapter card. If your graphics adapter card does not support the Palette Snoop function, set at "Disabled" to avoid system malfunctions.

The options are: Disabled (Default), Enabled.

OS Select For DRAM > 64MB

If your operating system (OS) is OS2, select "OS2". Otherwise, stay with the default setting Non-OS2.

Report No FDD For WIN 95

Assigns IRQ6 for the FDD.

The options are: Yes (Default), No.

Video BIOS Shadow

When enabled, allows the BIOS to copy the video ROM code of the add-on video card to the system memory, giving faster access.

The options are: Enabled (Default), Disabled.

C8000-CBFFF Shadow through to DC000-DFFFF Shadow

When enabled, allows the BIOS to copy the BIOS ROM code of the add-on card to the system memory for faster access. It may improve the performance of the add-on card. Some add-on cards will not function properly if their BIOS ROM codes are shadowed. To use this option correctly, you need to know the memory address range used by the BIOS ROM of each add-on card.

The options are: Disabled (Default), Enabled.

9.5 Chipset Features Setup

Note: It is strongly recommended that setup items in this section NOT be changed, because advanced knowledge is required to effect such changes.

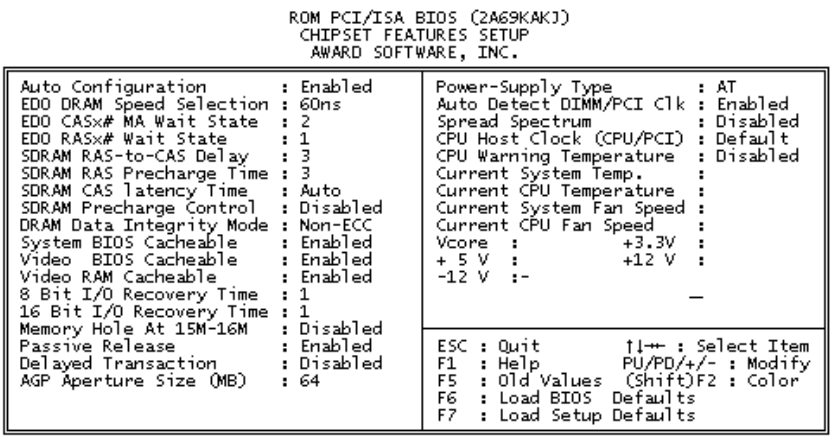


Figure 9-4: Chipset features setup screen

EDO CASX# MA Wait State

Sets the EDO CASX# MA wait state.

The options are: 1 (Default), 2.

EDO RASX# Wait State

Sets the EDO RASX# wait state.

The options are: 1 (Default), 2.

SDRAM CAS Latency Time

Sets the SDRAM CAS latency time.

The options are: Auto (Default), 2, 3.

SDRAM Data Integrity Mode

When set as Non-ECC, supports standard 64-bit DIMM RAM modules. When set as ECC, supports standard 72-bit ECC RAM modules.

The options are: Non-ECC (Default), ECC.

System BIOS Cacheable

When enabled, allows the ROM area FOOOH-FFFFH to be cacheable when the cache controller is activated. The recommended setting is "Disabled", especially for high speed CPUs (200 MHz and above).

Video BIOS Cacheable

When enabled, allows the system to use the video BIOS codes from SRAMs, instead of the slower DRAMs or ROMs.

The options are: Enabled (Default), Disabled.

Video RAM Cacheable

Enables video RAM to be cacheable.

The options are: Disabled (Default), Enabled.

16 Bit I/O Recovery Time

Sets 16-bit I/O signal recovery time.

The options are: 1 (Default), 2, 3, 4, N/A.

Memory Hole at 15M-16M

When enabled, the memory hole at the 15 MB address will be relocated to the 15 ~ 16 MB address range of the ISA cycle when the processor accesses the 15 ~ 16 MB address area.

When disabled, the memory hole at the 15 MB address will be treated as a DRAM cycle when the processor accesses the 15 ~ 16 MB address.

The options are: Disabled (Default), Enabled.

Delayed Transaction

When disabled, the syatem operates normally. When enabled, the system can support lower-speed ISA devices.

The options are: Disabled (Default), Enabled.

Spread Spectrum

When disabled, the syatem operates normally. When enabled, the spread spectrum will be set to 0.5% (CNTR).

The options are: Disabled (Default), Enabled.

9.6 Power Management Setup

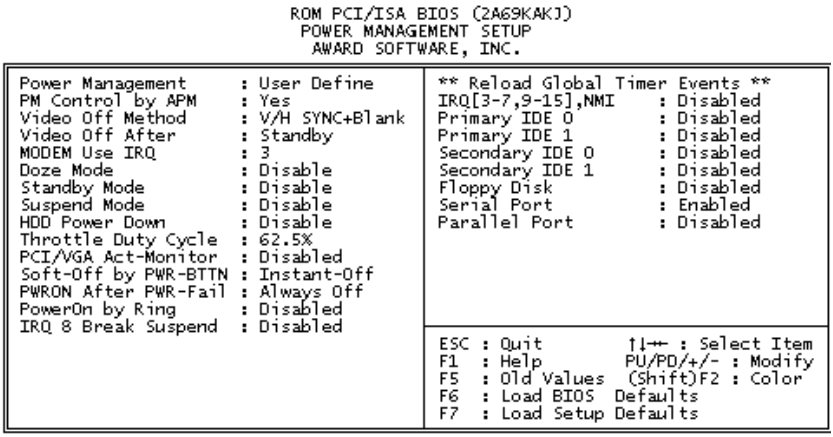


Figure 9-5: Power Management setup screen

Power Management

When enabled, allows you to use Power Management features.

The options are: Disabled (Default), Enabled.

PM Control by APM

The option "No" allows the BIOS to ignore the APM (Advanced Power Management) specification. Selecting "Yes" will allow the BIOS to wait for APM's prompt before it enters Doze mode, Standby mode, or Suspend mode. If the APM is installed, it will prompt the BIOS to set the system into power saving mode after all tasks are done.

The options are: Yes (Default), No.

Video Off Option

This feature provides the selections for the video display power saving mode. The option "Susp, Stby → Off" allows the video display to go blank if the system enters Suspend or Standby mode. The option "Suspend → Off" allows the video display to go blank if the system enters Suspend mode. The option "All Modes → Off" allows the video display to go blank if the system enters Doze mode or Suspend mode. The option "Always On" allows the video display to stay in Standby mode even when the system enters Doze or Suspend mode.

The options are: Susp, Stby → Off (Default), Suspend → Off, All Modes → Off, Always On.

Video Off Method

"DPMS Supported" allows the BIOS to blank off the screen display with your VGA card which supports DPMS (Display Power Management Signaling function). "Blank Screen" allows the BIOS to blank the screen display by turning off the red-green-blue signals.

The options are: DPMS Supported (Default), Blank Screen.

MODEM Use IRQ

This feature allows you to select the IRQ# to meet your modem's IRQ#.

The options are: 3 (Default), 4, 5, 7, 9, 10, 11, NA.

Doze Mode

The system will not enter Doze mode, because this option is designated as "Disabled".

Standby Mode

The system will not enter Standby mode, because this option is designated as "Disabled".

Suspend Mode

The system will not enter Suspend mode, because this option is designated as "Disabled".

HDD POWER Down

Selecting "Disabled" will turn off the hard disk drive (HDD) motor. Selecting "1 Min.. 15 Min" allows you to define the HDD idle time before the HDD enters Power Saving Mode.

The options "1 Min.. 15 Min" and "When Suspend" will not work concurrently. When the HDD is in Power Saving Mode, any access to the HDD will wake it up.

The options are: Disabled (Default), 1 Min., 15 Min.

PNP OS Installed

Select Yes if the installed system supports the PnP function. Select No if the installed system does not support the PnP function.

The options are: No (Default), Yes.

Note: Under certain operating systems such as Windoes NT 4.0 (Build 1381), the CD auto-insertion feature might have some effect on power management. It is recommended that the CD-ROM drive use the secondary channel, and that the following Power Management Setup features be set:
HDD & FDD: Off
IRQ15 (Reserved): Secondary

9.7 PNP/PCI Configuration Setup

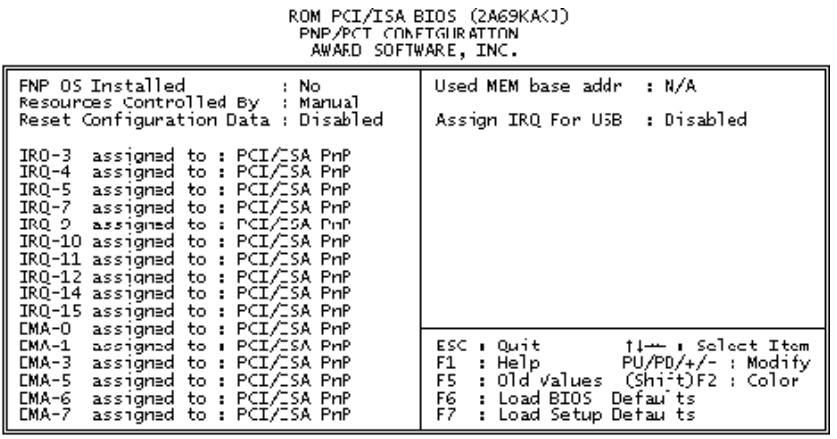


Figure 9-6: PNP/PCI configuration setup screen

PNP OS Installed

Select Yes if the installed system supports the PnP function. Select No if the installed system does not support the PnP function.

The options are: No (Default), Yes.

Resources Controlled By

If set at "Auto", the BIOS automatically arranges all system resources for you. If there are conflicts or you are not satisfied with the configuration, simply set all the resources listed in the above figure by selecting "Manual".

The options are: Manual (Default), Auto.

The manual options assigned to IRQ-/DMA- are: Legacy ISA, PCI/ISA PnP.

Reset Configuration Data

When enabled, this feature allows the system to clear the last BIOS configuration data and then reset the data with the default BIOS configuration data.

The options are: Disabled (Default), Enabled.

Used MEM base addr

Choose and use the MEM base address.

The options are: N/A (Default), C800 ~ DC00.

Assign IRQ for USB

Assigns an IRQ for the USB.

The options are: Disabled (Default), Enabled.

9.8 Load BIOS Defaults

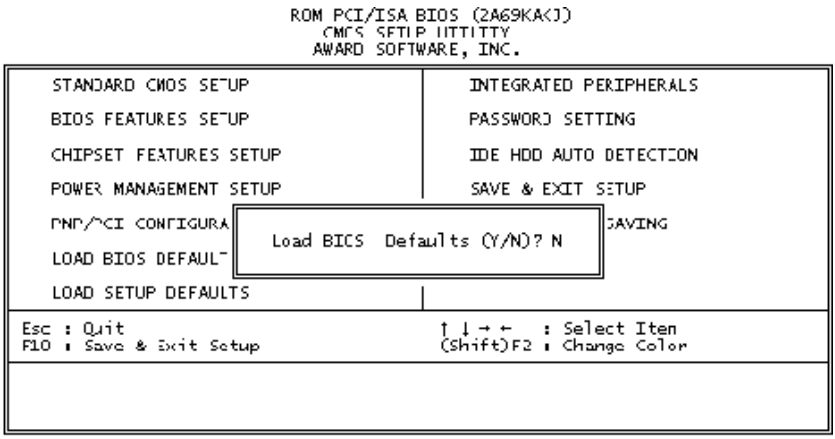


Figure 9-7: Load BIOS defaults screen

The BIOS defaults screen contains the most appropriate values of the system parameters that allow minimum system performance.

9.9 Load Setup Defaults

Selecting this field loads the factory defaults for BIOS and Chipset Features. The system will automatically detect these defaults.

9.10 Integrated Peripherals

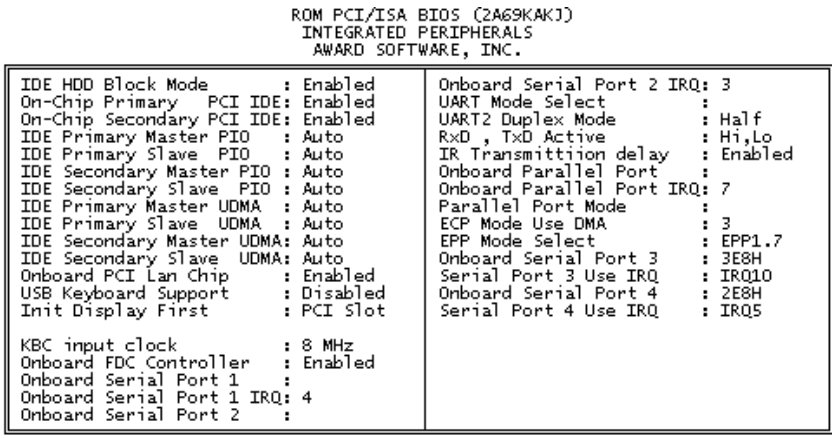


Figure 9-8: Integrated peripherals screen

IDE HDD Block Mode

This allows your hard disk controller to use the fast block mode to transfer data to and from your hard disk drive (HDD).

The options are: Enabled (Default), Disabled.

IDE Primary/Secondary Master/Slave PIO

IDE hard disk drive controllers can support up to separate hard drives.

These drives have a master/slave relationship which is determined by the cabling configuration used to attach them to the controller. Your system supports two IDE controllers - a primary and a secondary - so you have the ability to install up to four separate hard disks.

PIO means Programmed Input/Output. Rather than having the BIOS issue a series of commands to effect a transfer to or from the disk drive, PIO allows the BIOS to tell the controller what it wants and then let the controller and the CPU perform the task by themselves.

Your system supports five modes, numbered from 0 through 4, which differ primarily in timing. When "Auto" is selected, the BIOS will choose the best available mode.

The options are: Auto, (Default), Disabled.

Primary/Secondary Master/Slave Ultra DMA

DMA means Direct Memory Access. Ultra DMA is faster than DMA. DMA is a method of transferring data to or from memory at a fast rate, without involving the CPU.

When you select "Auto", the BIOS will choose the best available mode.

The options are: Auto (Default), Disabled.

Onboard FDD Controller

When enabled, the floppy disk drive (FDD) controller is activated.

The options are: Enabled (Default), Disabled.

Onboard Serial Ports 1 & 2

If the serial ports use the onboard I/O controller, you can modify your serial port parameters.

The options for Port 1 are: 3F8/IRQ4 (Default), 2E8/IRQ3, Disabled, 2F8/IRQ3, 3E8/IRQ4.

The options for Port 2 are: 2F8/IRQ3 (Default), 3E8/IRQ4, 2E8/IRQ3, Disabled, 3F8/IRQ4.

Onboard Serial Ports 3 & 4

If the serial ports use the onboard I/O controller, you can modify your serial port parameters.

The options for Port 3 are: 3E8/IRQ10 (Default), 2E8/IRQ5, Disabled.

The options for Port 4 are: 2E8/IRQ5 (Default), Disabled, 3E8/IRQ10.

Onboard Parallel Port

If the parallel port uses the onboard I/O controller, you can modify your parallel port paramaters. When you select "Disabled", the next two setup items will disappear.

The options are: 378/IRQ7 (Default), 3BC/IRQ7, 278/IRQ5, Disabled.

Parallel Port Mode

You can choose different data transfer modes for your system.

The options are: ECP & EPP (Default), SPP, EPP, ECP.

ECP Mode Use DMA

You can choose different DMA modes for data transfer.

The options are: 3 (Default), 1.

9.11 Password Setting

To enable the password setting, select the item from the Standard CMOS Setup. You will be prompted to create your own password. Type your password up to eight characters and press "Enter". You will be asked to confirm the password. Type the password again and press "Enter". You may also press "Esc" to abort the selection and not enter a password. To disable the password, press "Enter" when you are prompted to enter the password. A message will appear, confirming the password is disabled.

Under the BIOS Features setup, if "System" is selected under the Security Option field and the Supervisor Password is enabled, you will be
prompted for the supervisor password every time you try to enter the CMOS Setup utility. If "System" is selected and User Password is enabled, you will be requested to enter the user password every time you reboot the system. If "Setup" is selected under the Security Option field and User Password is enabled, you will be prompted only when you reboot the system.

9.12 IDE HDD Auto Detection

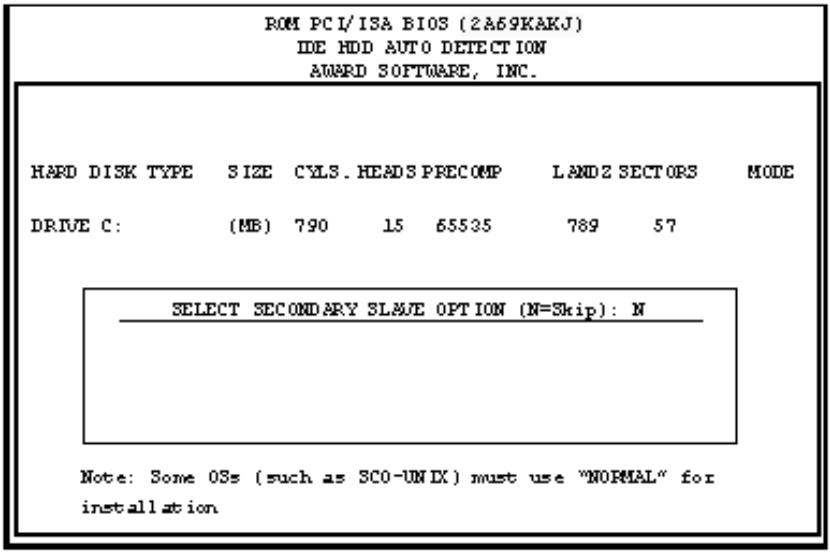


Figure 9-9: IDE HDD auto detection screen

The IDE Hard Disk Drive Auto Detection feature automatically configures your new hard disk. Use it for quick configuration of new hard disk drives. This feature allows you to set the parameters of up to four IDE HDDs. The option with "(Y)" is recommended by the system BIOS. You may also key in your own parameters instead of setting them
according to the system BIOS. After keying in all settings, press "Esc" to return to the main menu. For confirmation, enter the Standard CMOS Setup feature.

9.13 Save and Exit Setup

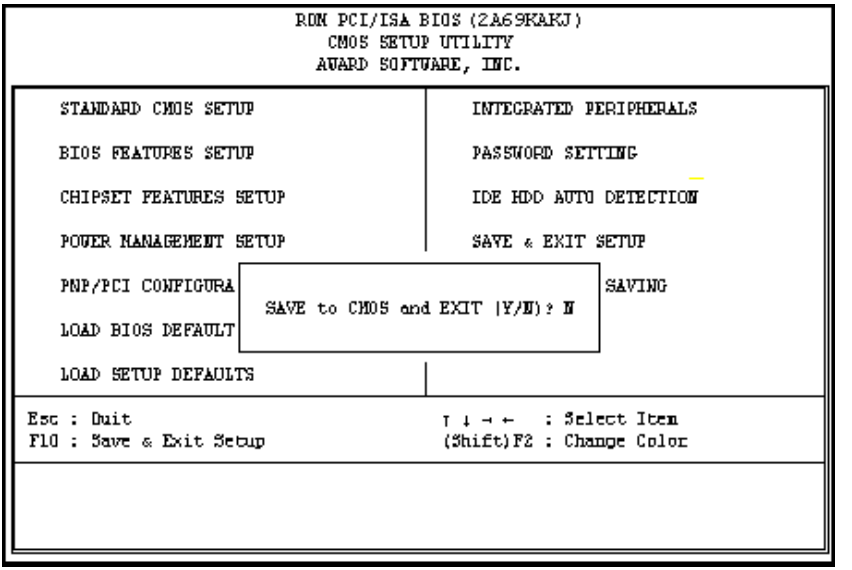


Figure 9-10: Save and exit setup screen

After you have made changes in the BIOS setup, press "Esc" to return to the main menu. Move the cursor to "Save and Exit Setup", or press "F10" and then press "Y", to change the CMOS Setup. If you did not change anything, press "Esc" again or move the cursor to "Exit Without Saving" and press "Y" to retain the setup settings. The following message will appear at the center of the screen to allow you to save data to CMOS and exit the setup utility:

```
SAVE to CMOS and EXIT (Y/N)?
```

9.14 Exit Without Saving

If you select this feature, the following message will appear at the center of the screen to allow you to exit the setup utility without saving CMOS modifications:

```
Quit Without Saving (Y/N) ?
```

CHAPTER 10

PCMCIA

- Introduction
- Installation of PCMCIA Driver
  - for Windows 95

10.1 Introduction

The PPC-123 is equipped with a high performance PCMCIA interface which complies with the 1995 PCMCIA card standard by using the RICOH Cardbus controller. The panel PC supports two PCMCIA card/cardbus slots. Two sockets support both a 16-bit PCMCIA card and a 32-bit Cardbus simultaneously, with hot insertion and removal.

10.2 Installation of PCMCIA Driver

The PCMCIA driver for Windows 95 is included in the "Drivers and Utilities" CD-ROM included with your PPC-153. The installation procedure is shown in the next section in this chapter.

Other operating systems such as Windows 98 and Windows NT also support PCMCIA drivers. However, the drivers for these operating systems are not included in the "Drivers and Utilities" CD-ROM. Installation for these operating systems is not explained in this manual.


Important: The following windows illustrations are examples only. You must follow the flow chart instructions and pay attention to the instructions which then appear on your screen.

Note 1: The CD-ROM drive is designated as "D" throughout this chapter.

Note 2: <Enter> means pressing the "Enter" key on the keyboard.

10.2.1 Installation for Windows 95


1. a. In "Start", "Run", type the path: D:\PPC123&153\Cardbus\win95osr2\Setup.exe

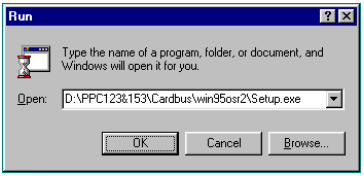

2. a. Click "Next".




3. a. Click "Yes".

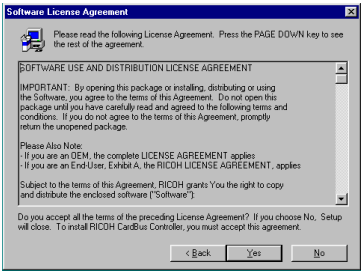

4. a. Click "Finish" to reboot the system.

End

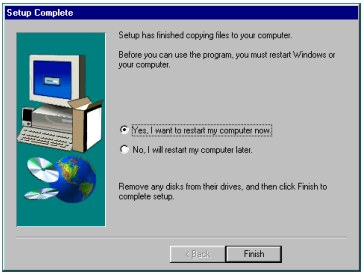

CHAPTER 11

Touchscreen

- Introduction
- Installation of Driver for Resistive Touchscreen
  - for Windows 95
  - for Windows 98
  - for Windows NT
  - for Windows 2000
  - for Windows ME
- Installation of Driver for Capacitive Touchscreen
  - for Windows 95/98/NT

11.1 Introduction

11.1.1 General information

The PPC-123's optional touchscreen incorporates advanced second-generation 5-wire resistive or impact-resistant capacitive technology. They allow 75% and 85% light transmission respectively and have an antiglare surface. All models provide greatly enhanced visual resolution. They also have new improved scratch-resistant features.

The touchscreen is manufactured from UL-recognized components. When properly installed, the touchscreen's ball impact resistance meets the UL 1950 standard. Its fire resistance meets the UL-746C, 19 mm (0.75") flame test standard. Systems incorporating the touchscreen, controllers, and cables have been approved to FCC Class A and Class B standards.

For more detailed information, please visit the following websites:

Resistive and SAW models: **www.elotouch.com**

Capacitive model: **www.microtouch.com**

11.1.2 General specifications

Please refer to Chapter 1, Section 1.3 of this manual.

11.1.3 Environmental specifications

Temperature: -10° ~ 50° C (operating)
-40° ~ 71° C (storage)

Relative humidity:
90 RH at 35° C (operating)
90 RH at 35° C for 240 hours, non-condensing (storage)

Chemical resistance: The active area of the touchscreen is resistant to

the following chemicals when exposed for a period of one hour at a temperature of 21° C (71° F):

- Acetone
- Methylene chloride
- Methyl ethyl ketone
- Isopropyl alcohol
- Hexane
- Ammonia-based glass cleaners
- Turpentine
- Mineral spirits
- Foods and beverages

11.2 Installation of Driver for Resistive Touchscreen

The touchscreen driver for Windows 95/98 contains a native, 32-bit driver and a 32-bit control panel program for the PPC-123 system.

To facilitate installation of the touchscreen driver, you should read the instructions in this chapter carefully before you attempt installation.


Important: The following windows illustrations are examples only. You must follow the flow chart instructions and pay attention to the instructions which then appear on your screen.

Note 1: The CD-ROM drive is designated as "D" throughout this chapter.

Note 2: <Enter> means pressing the "Enter" key on the keyboard.

11.2.1 Installation for Windows 95


1. a. Insert the "Drivers and Utilities" CD.
   b. Click the "Start" button, and then "Run".
   c. Type the path "D:\PPC123&153\Elotouch\Win95\Setup.exe".

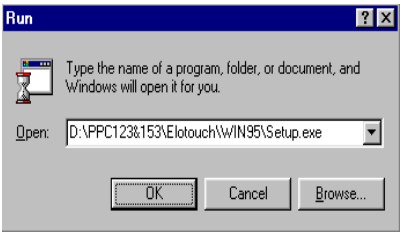


2. a. Click "Yes".




3. a. Select the "Smart serial Controller on COM4" item.
   b. Press the "OK" buttom.

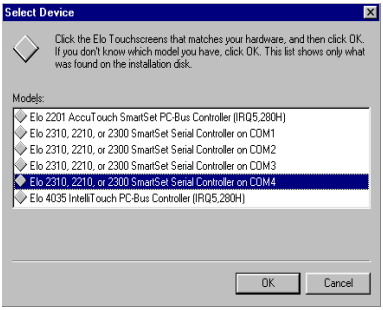


4. a. Click the "Yes" buttom to restart your computer.

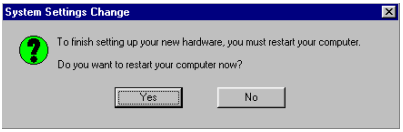


5.



a. Touch targets to calibrate the touchscreen controller.
End

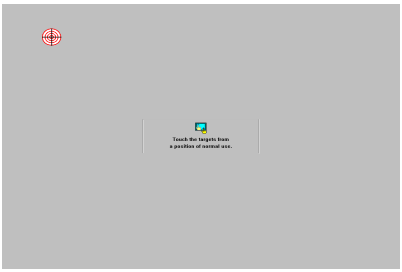


11.2.2 Installation for Windows 98


If you want to use the touchscreen driver CD-ROM accompanying your panel PC, refer to the following flow chart instructions.

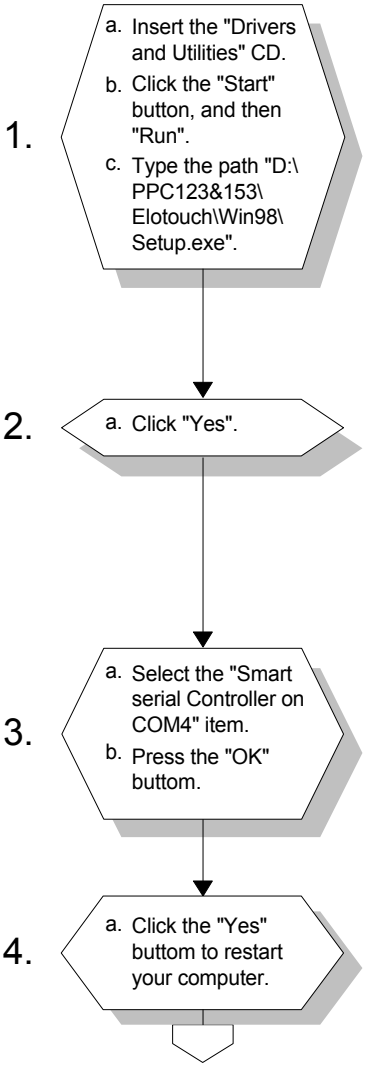

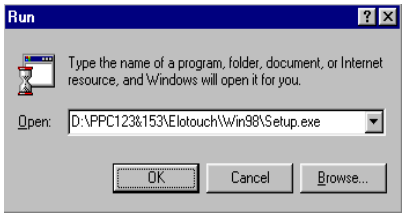





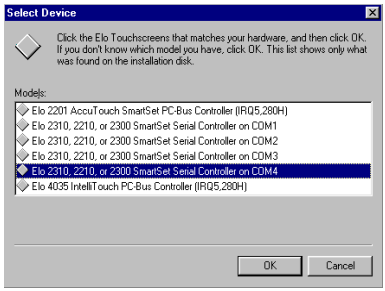

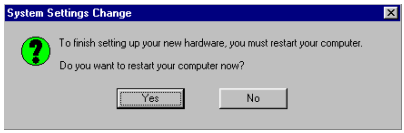



5.


a. Touch targets to calibrate the touchscreen controller.
End

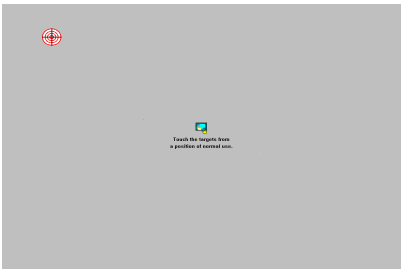


11.2.3 Installation for Windows NT

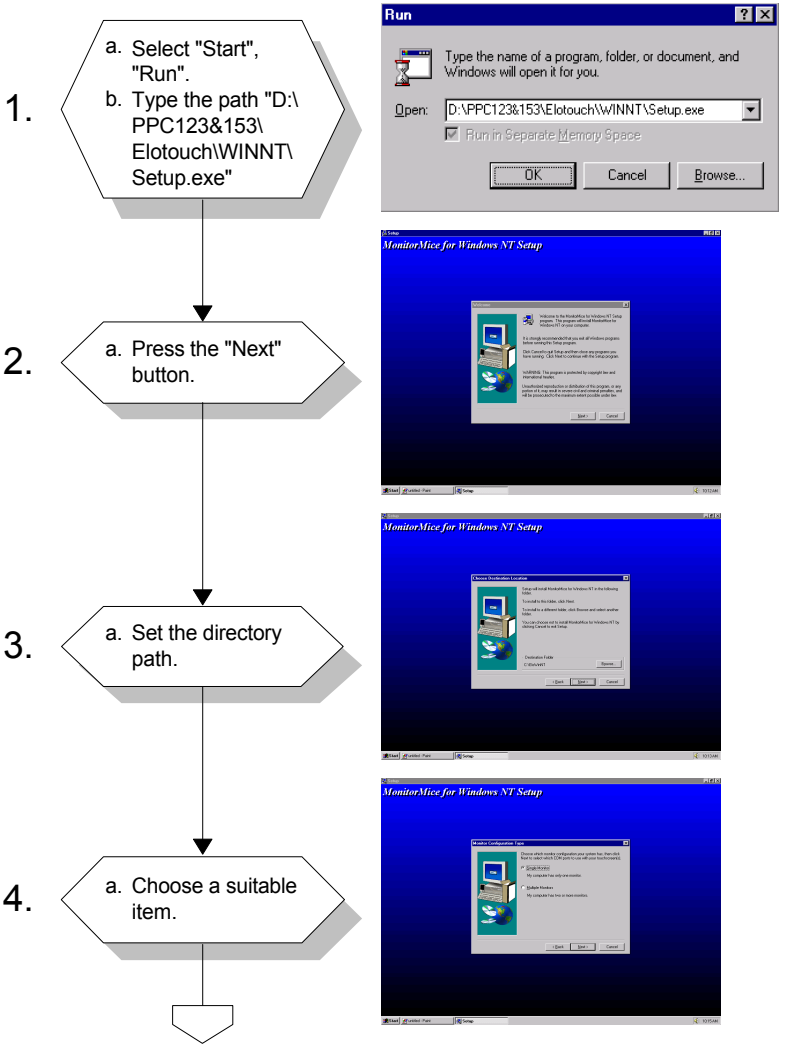

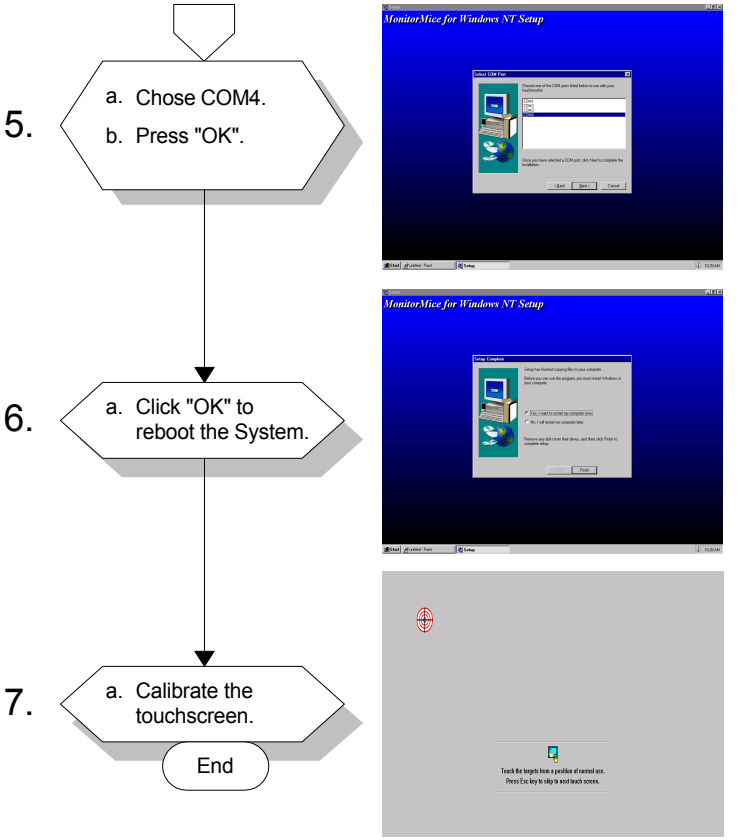
5.
a. Chose COM4.
b. Press "OK".
MonitorMice for Windows NT Setup
6.
a. Click "OK" to reboot the System.
MonitorMice for Windows NT Setup
7.
a. Calibrate the touchscreen.
End
Touch the targets from a position of normal use.
Press Esc key to skip to end touch screen.

11.2.4 Intallation for Windows 2000


1. a. Select "Start", "Run"
   b. Type the path "D:\ PPC123&153\ Elotouch\Win2k\
   c. Setup.exe" Click "OK"

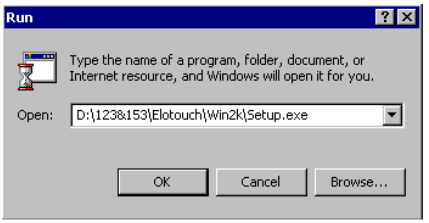


2. a. Press "Next"



3. a. Click "Yes"

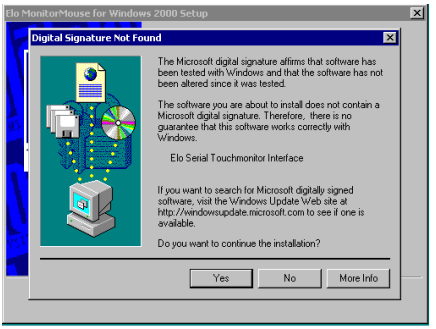


4. a. Select "Yes" to accept agreement

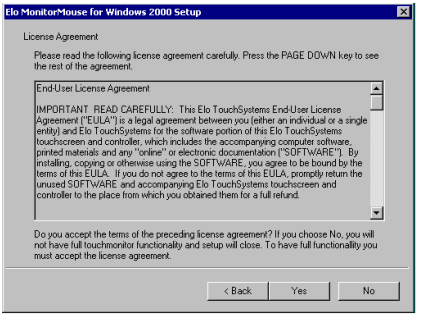

5. a. Choose "COM4"


b. Then click "Next"

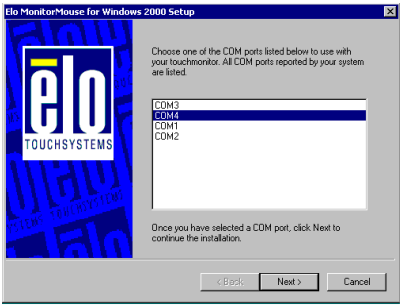


6. a. Press "Finish"




7. a. Click "Yes" to reboot the system

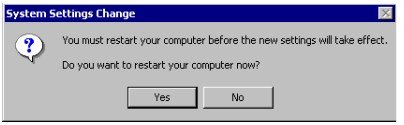


8. a. Calibrate the touch screen

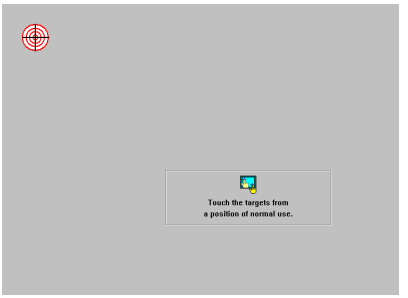


9.



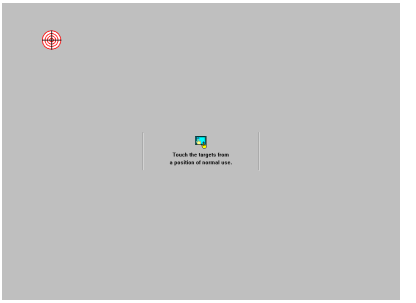


11.2.5 Installation for Windows ME


1. a. Select "Start", "Run"
   b. Type the path"D:\123&153\Elotouch\WInME\Setup.exe"
   c. Click "OK"

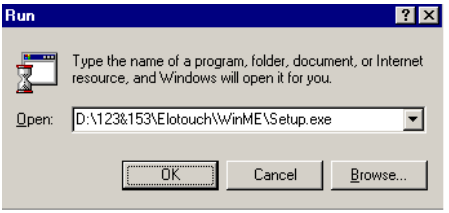


2. a. Click "Next"

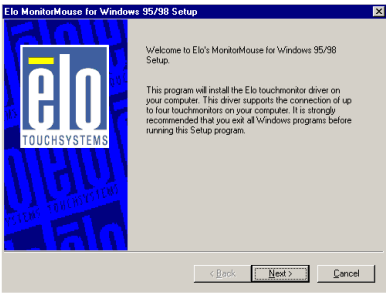


3. a. Click "Yes" to accept the agreement.

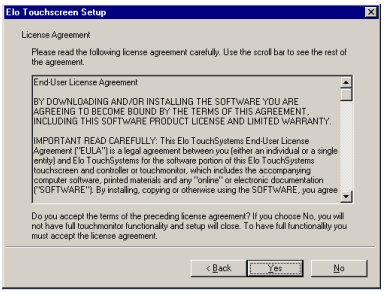

4. a. Press "Next"

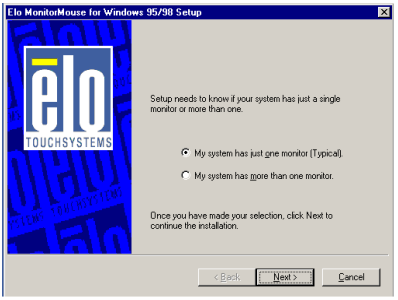

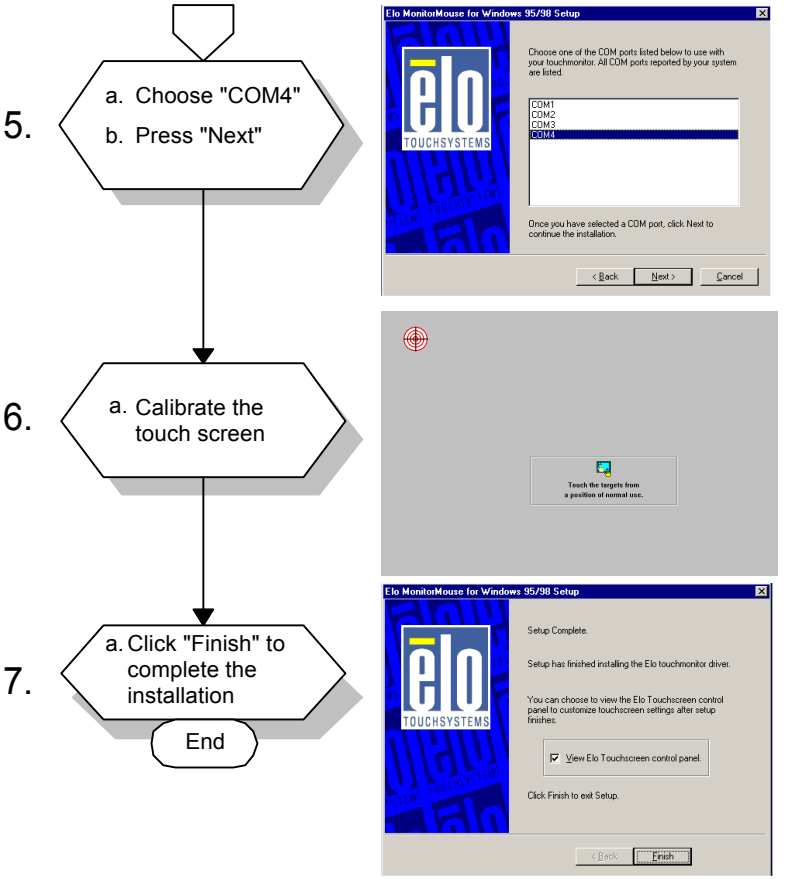
5.
a. Choose "COM4"
b. Press "Next"
Elo MonitorMouse for Windows 95/98 Setup
Choose one of the COM ports listed below to use with your touchmonitor. All COM ports reported by your system are listed.
COM1
COM2
COM3
COM4
Once you have selected a COM port, click Next to continue the installation.
< Back
Next >
Cancel
6.
a. Calibrate the touch screen
Touch the targets from a position of normal use.
7.
a. Click "Finish" to complete the installation
End
Elo MonitorMouse for Windows 95/98 Setup
Setup Complete.
Setup has finished installing the Elo touchmonitor driver.
You can choose to view the Elo Touchscreen control panel to customize touchscreen settings after setup finishes.
View Elo Touchscreen control panel.
Click Finish to exit Setup.
< Back
Finish

11.3 Installation of Driver for Capacitive Touchscreen

To facilitate installation of the touchscreen driver, you should read the instructions in this chapter carefully before you attempt installation.


Important: The following windows illustrations are examples only. You must follow the flow chart instructions and pay attention to the instructions which then appear on your screen.

Note 1: The CD-ROM drive is designated as "D" throughout this chapter.


Note 2: <Enter> means pressing the "Enter" key on the keyboard.

11.3.1 Installation for Windows 95/98/NT

1. a. Select "Start", "Run".
   b. Type in: D:\ PPC123&153\ Microtouch\Tware54\ Setup.exe

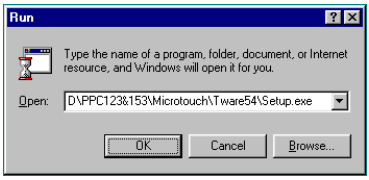


2. a. Follow the installation instructions, and click on "Next".

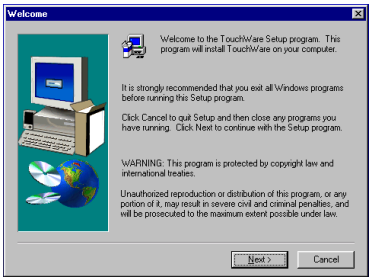


3. a. If you accept the terms of the License Agreement, click on "Yes".




4. a. Select the Serial [Default] controller.
   b. Click on "Next".

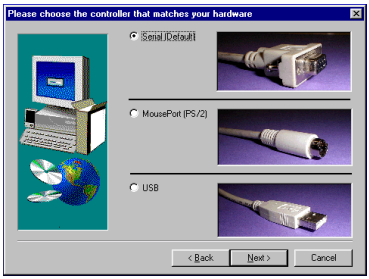

5. a. Select the "Express Install..." item.
   b. Click on "Next".

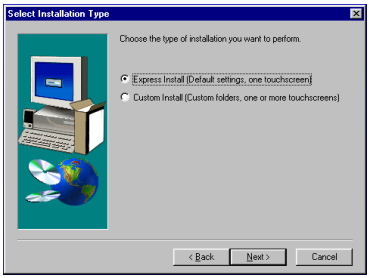

6. a. Select the "Yes, ..." item to reboot the system and finish the touchscreen driver installation.

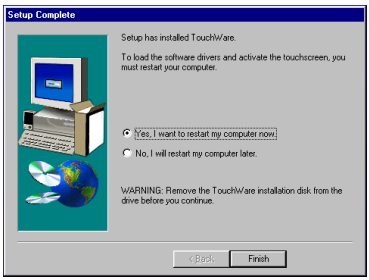


7. a. Click on "Calibrate" to calibrate the touchscreen.
   b. Touch the "target point" for a moment, until the next "Touch enable" message appears. Then touch the next "target point".



8. a. Click on "Done" to save the calibration data.

End

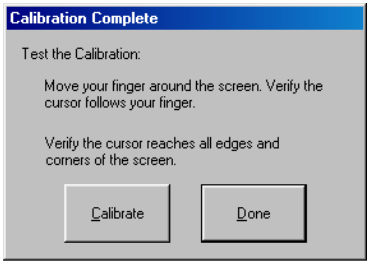

APPENDIX A

LCD Specifications and Selection Settings

A.1 PPC-123 LCD Specifications

Display type: 12.1" TFT LCD

Max. resolution: 800 x 600

Colors: 256 K

Dot size (mm): 0.33 x 0.33

Viewing angle: 100°

Luminance: 200 cd/m^2 or above

Temperature: 0 ~ 50° C

***VR control**: Brightness

Simultaneous mode: Yes

LCD MTBF: 50,000 hours

Backlight MTBF: 25,000 hours

* The VR control knob is located in the I/O section on the rear side of the panel PC.

Note: The color LCD display installed in the panel PC is high-quality and reliable. However, it may contain a few defective pixels which do not always illuminate. With current technology, it is impossible to completely eliminate defective pixels. Advantech is actively working to improve this technology.

APPENDIX B

Programming the Watchdog Timer

The PPC-123 is equipped with a watchdog timer that resets the CPU or generates an interrupt if processing comes to a standstill for any reason. This feature ensures system reliability in industrial standalone or unmanned environments.

B.1 Programming the Watchdog Timer

To program the watchdog timer, you must write a program which writes I/O port address 443 (hex). The output data is a time interval value. The value range is from 01 (hex) to 3E (hex), and the related time interval is from 1 sec. to 62 sec.

Data	Time Interval
01	1 sec.
02	2 sec.
03	3 sec.
04	4 sec.
•	•
•	•
•	•
3E	62 sec.

After data entry, your program must refresh the watchdog timer by rewriting the I/O port 443 (hex) while simultaneously setting it. When you want to disable the watchdog timer, your program should read I/O port 443 (hex).

The following example shows how you might program the watchdog timer in BASIC:

```
10        REM  Watchdog timer example program
20        OUT &H443, data REM  Start and restart the
          watchdog
30        GOSUB 1000 REM  Your application task #1,
40        OUT &H443, data REM  Reset the timer
50        GOSUB 2000 REM  Your application task #2,
60        OUT &H443, data REM  Reset the timer
70        X=INP (&H443) REM, Disable the watchdog timer
80        END

1000      REM  Subroutine #1, your application task
•         •
•         •
•         •
1070      RETURN
2000      REM  Subroutine #2, your application task
•         •
•         •
•         •
2090      RETURN
```

APPENDIX C

Full Disassembly Procedures

C.1 Full Disassembly Procedures

If you want to completely disassemble the panel PC, follow the step-by-step procedures below. Users should be aware that Advantech Co., Ltd. takes no responsibility whatsoever for any problems or damage caused by the user disassembly of the panel PC. Make sure the power cord of the panel PC is unplugged before you start disassembly.

The following procedures do not include the detailed disassembly procedures for the CPU, HDD, CD-ROM drive, FDD, and SRAM; all of which can be found in Chapter 4.

1. Unscrew the seven screws on the rear cover, and remove it. The PCI/ISA expansion slot cover can be detached by removing the two additional screws.
2. Remove the side panel by pushing it outward.
3. Unscrew the four screws that attach the CPU cover.
4. Detach the flat cable of the HDD, FDD and CD-ROM drive. Remove the two screws on the PCI/ISA bus expansion card. Remove the ten screws on the side rim of the shielding case. Carefully move the shielding case to the right to bypass the eject buttons of the PCMCIA slot, before removing the case from the

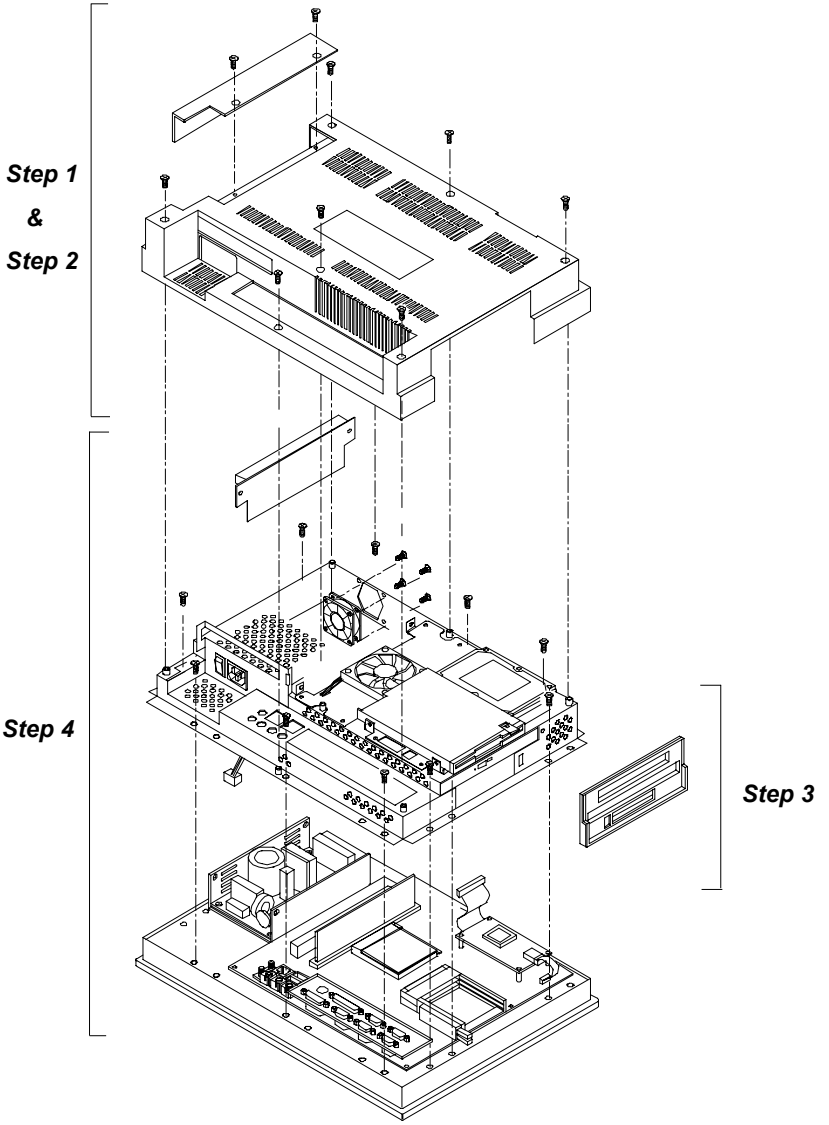


Figure C-1: Disassembly steps 1 - 4

machine. The electric fan and power inlet can also be removed from the case by unscrewing the screws.

5. Unscrew the fourteen screws of the I/O bracket with a hexagonal screwdriver. The EMI protection cover lies below the I/O bracket. You can now remove both the bracket and the cover from the I/O ports.
6. Detach the flat cables of the speaker, LCD inverter, touchscreen and LCD from the motherboard. You can remove the motherboard from the LCD holding plate.

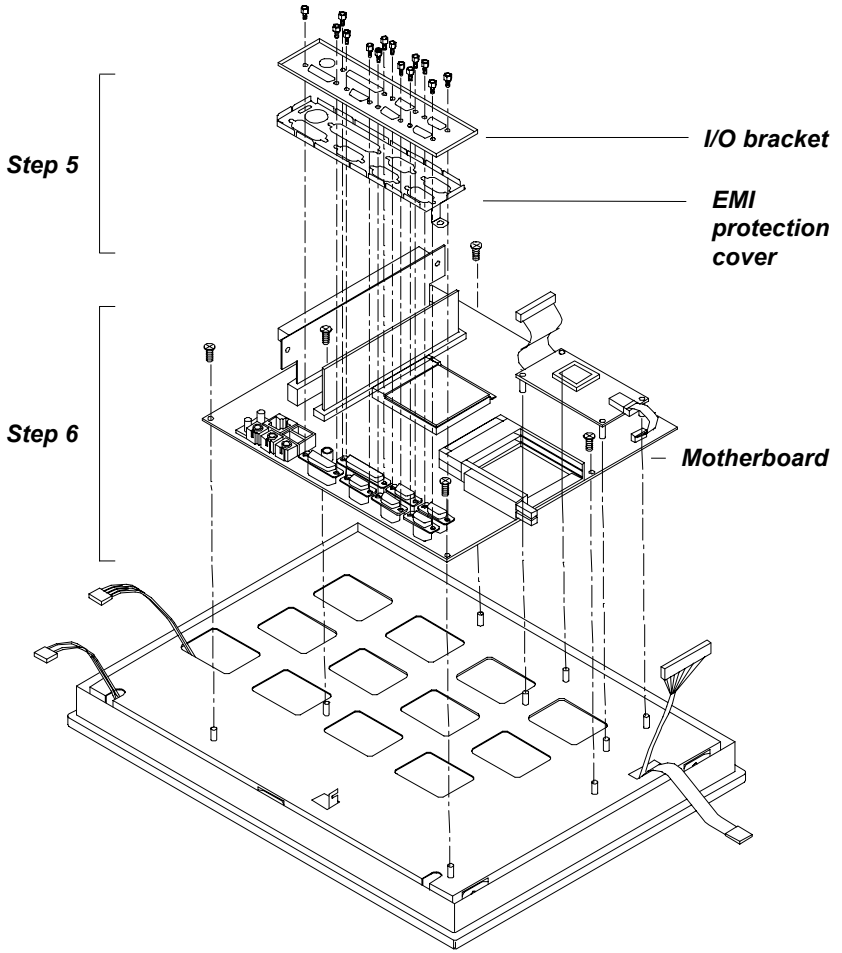


Figure C-2: Disassembly steps 5 - 6

7. Unscrew the four screws on the power supply board. The power supply board can be detached from the LCD holding plate after unplugging the two cables from the power inlet and motherboard.
8. Detach the LCD holding plate and LCD by unscrewing the four screws at the bottom. The LCD inverter can also be detached by unscrewing the three screws at the bottom.
9. Detach the cables of the LCD, touchscreen, LCD inverter and speaker from the holes of the holding plate.
10. Detach the touchscreen by removing it from the the LCD. The rubber pad around the touchscreen and glass can also be detached.
11. The speakers are located on the two sides of the front cover.

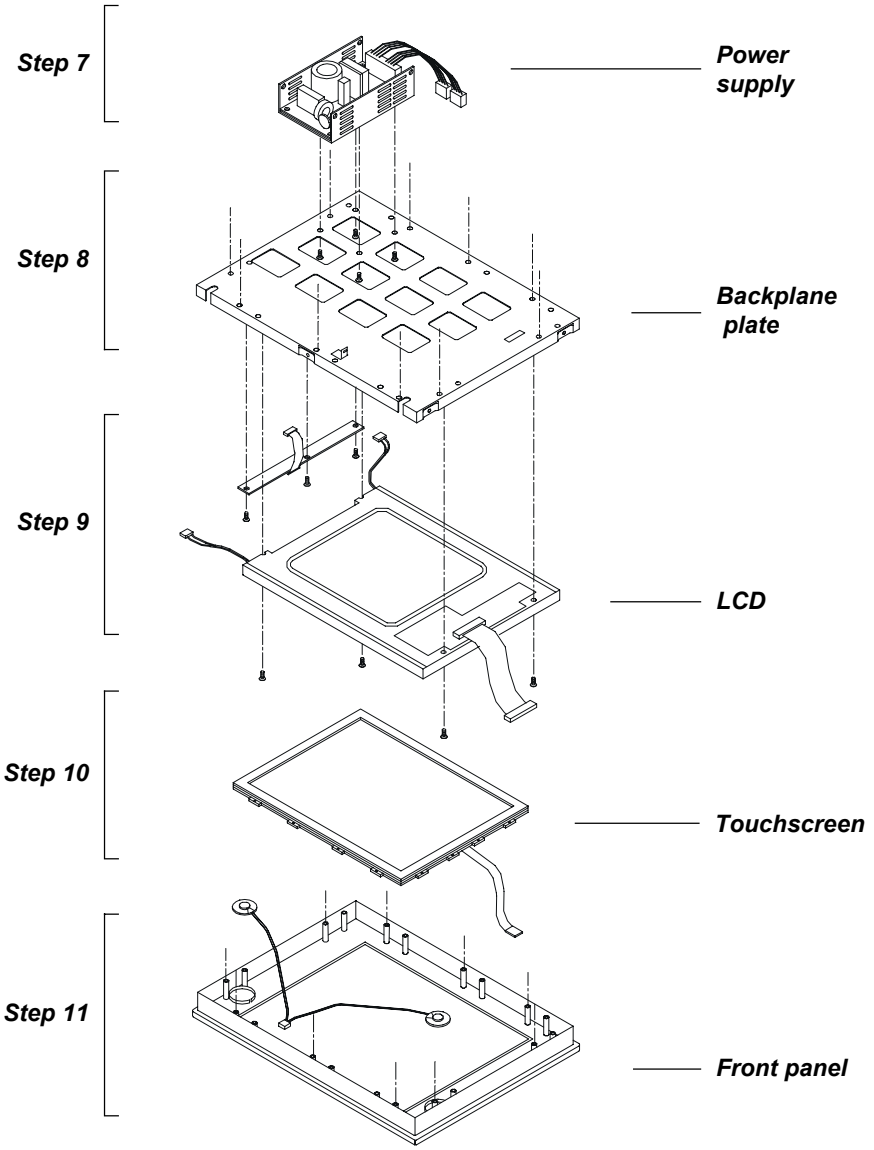


Figure C-3: Disassembly steps 7 - 11

APPENDIX D

Pin Assignments

- AT Power Connector (J1)
- TV Output Connector (J2) (*Reserved)
- Inverter Power Connector (J4)
- Internal Speaker Connector (J6)
- Front Panel Control Connector (J8)
- IR Connector (J9)
- Flat Panel Display Connector (CN2)
- Flat Panel Display Connector (CN3)
- PanelLink Interface (CN4) (Reserved)
- Floppy Drive Connector (CN10)
- EIDE Hard Disk Drive Connector (CN16)
- CD-ROM Connector (CN18)
- CPU Fan Power Connector (FAN1)
- System Fan Power Connector (FAN2)
- PCI/ISA Expansion Connector (SLOT1)
- Internal COM4 and PS/2 connector (CN23)
- COM2

D.1 AT Power Connector (J1)

Table D-1: AT power connector (J1)


Pin	Signal
1	PS_NO #
2	+5 VSB
3	+12 V
4	-12 V
5	GND
6	GND
7	GND
8	GND
9	-5 V
10	+5 V
11	+5 V
12	+5 V



D.2 TV Output Connector (J2) (*Reserved)

Table D-2: TV output connector (J2)


Pin	Signal
1	Y
2	C
3	GND
4	GND
5	CVBS



D.3 Inverter Power Connector (J4)

Table D-3: Inverter power connector (J4)

Pin	Signal
1	+12 V
2	GND
3	ENABKL
4	Brightness Adj.
5	+5 V



D.4 Internal Speaker Connector (J6)




Table D-4: Internal speaker connector (J6)

Pin	Signal
1	Speaker out_R -
2	Speaker out_R +
3	Speaker out_L +
4	Speaker out_L -

D.5 Front Panel Control Connector (J8) (*Reserved)

Table D-5: Front panel control connector (J8) (*Reserved)

Pin	Signal
1	Vcc
2	GND
3	HDD LED
4	Reset SW
5	Power SW
6	NC



D.6 IR Connector (J9)





Table D-6: IR connector (J9) (Reserved)

Pin	Signal
1	V_{cc}
2	NC
3	IR_IN
4	GND
5	IR_OUT

D.7 Flat Panel Display Connector (CN2)

Table D-7: Flat panel display connector (CN2)


Pin	Signal	Pin	Signal
1	VDDSAFE5	2	VDDSAFE5
3	GND	4	GND
5	VDDSAFE3	6	VDDSAFE3
7	Vcon	8	GND
9	P0	10	P1
11	P2	12	P3
13	P4	14	P5
15	P6	16	P7
17	P8	18	P9
19	P10	20	P11
21	P12	22	P13
23	P14	24	P15
25	P16	26	P17
27	P18	28	P19
29	P20	30	P21
31	P22	32	P23
33	GND	34	GND
35	SHFCLK	36	FLM
37	M/DE	38	LP
39	ENABKL	40	ENAVEE

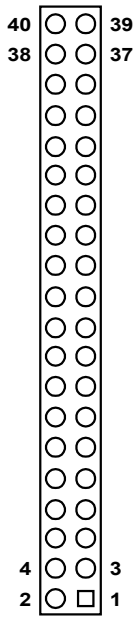

D.8 Flat Panel Display Connector (CN3)

Table D-8: Flat panel display connector (CN3)


Pin	Signal	Pin	Signal
1	VDDSAFE5	2	VDDSAFE5
3	GND	4	GND
5	VDDSAFE3	6	VDDSAFE3
7	Vcon	8	GND
9	P24	10	P25
11	P26	12	P27
13	P28	14	P29
15	P30	16	P31
17	P32	18	P33
19	P34	20	P35
21	NC	22	NC
23	NC	24	NC
25	NC	26	NC
27	NC	28	NC
29	NC	30	NC
31	NC	32	NC
33	GND	34	GND
35	SHFCLK	36	FLM
37	M/DE	38	LP
39	ENABKL	40	ENAVEE

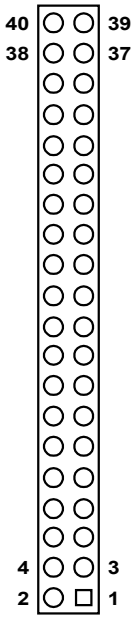

D.9 Panel Link Interface (CN4) (*Reserved)

Table D-9: PanelLink Interface (CN4) (*Reserved)

Pin	Signal	Pin	Signal
1	TXC-	11	TX1+
2	GND	12	NC
3	TXC+	13	TX2-
4	GND	14	NC
5	TX0-	15	TX2+
6	GND	16	EDGE
7	TX0+	17	2NDSDA
8	GND	18	Vcc
9	TX1-	19	2NDSCL
10	NC	20	GND



D.10 Floppy Drive Connector (CN10)

Table D-10: Floppy drive connector (CN10)

Pin	Signal	Pin	Signal
1	V_{CC} (+5 V)	14	STEP
2	INDEX	15	GND
3	V_{CC} (+5 V)	16	WRITE DATA
4	DRIVE SELECT	17	GND
5	V_{CC} (+5 V)	18	WRITE ENABLE
6	DISK CHANGE	19	GND
7	NC	20	TRACK 0
8	NC	21	GND
9	NC	22	WRITE PROTECT
10	MOTOR ON	23	GND
11	NC	24	READ DATA
12	DIRECTION	25	GND
13	DENSITY SELECT	26	SIDE 1 SELECT



D.11 EIDE Hard Disk Drive Connector (CN16)

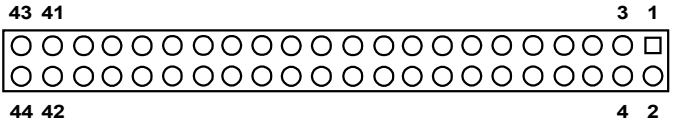


Table D-11: EIDE hard disk drive connector (CN16)


Pin	Signal	Pin	Signal
1	IDE RESET #	2	GND
3	DATA 7	4	DATA 8
5	DATA 6	6	DATA 9
7	DATA 5	8	DATA 10
9	DATA 4	10	DATA 11
11	DATA 3	12	DATA 12
13	DATA 2	14	DATA 13
15	DATA 1	16	DATA 14
17	DATA 0	18	DATA 15
19	SIGNAL GND	20	CABLE SELECT
21	HDD DREQ	22	GND
23	IO WRITE	24	GND
25	IO READ	26	GND
27	HD READY	28	N/C
29	HDACK 0 #	30	GND
31	IRQ14	32	N/C
33	ADDR 1	34	N/C
35	ADDR 0	36	ADDR 2
37	HDD SELECT 0 #	38	HDD SELECT 1 #
39	IDE ACTIVE 0 #	40	GND
41	V_{CC}	42	V_{CC}
43	GND	44	N/C

low active

D.12 CD-ROM Connector (CN18)

Table D-12: CD-ROM connector (CN18)

Pin	Signal	Pin	Signal
1	Audio_L	2	Audio_R
3	GND	4	GND
5	IDE RESET #	6	DATA8
7	DATA7	8	DATA9
9	DATA6	10	DATA10
11	DATA5	12	DATA11
13	DATA4	14	DATA12
15	DATA3	16	DATA13
17	DATA2	18	DATA14
19	DATA1	20	DATA15
21	DATA0	22	HDD DREQ
23	GND	24	IO READ
25	IO WRITE	26	GND
27	HD READY	28	HD ACK 0 #
29	IRQ 15	30	NC
31	ADDR1	32	NC
33	ADDR0	34	ADDR2
35	HDD SELECT 0 #	36	HDD SELECT 1 #
37	V_{CC} (+5 V)	38	V_{CC} (+5 V)
39	GND	40	GND

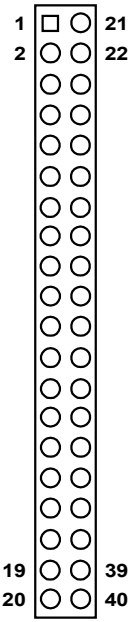

low active

D.13 CPU Fan Power Connector (FAN1)




Table D-13: CPU fan power connector (FAN1)

Pin	Signal
1	GND
2	+12 V
3	FAN_DET

D.14 System Fan Power Connector (FAN2)




Table D-14: Fan power connector (FAN2)

Pin	Signal
1	GND
2	+12 V
3	FAN_DET

D.15 PCI/ISA Bus Expansion Connector (SLOT1)

side view

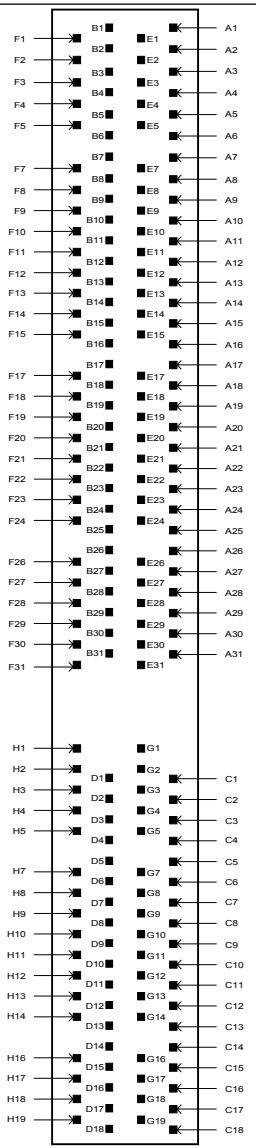


Table D-15: PCI/ISA slot pin assignments (Pins A and B)

Pin	Signal	Pin	Signal
A1	IOCHK	B1	GND
A2	SD7	B2	RST
A3	SD6	B3	V_{cc}
A4	SD5	B4	IRQ9
A5	SD4	B5	NC
A6	SD3	B6	DRQ2
A7	SD2	B7	-12 V
A8	SD1	B8	OWS
A9	SD0	B9	+12 V
A10	IORDY	B10	GND
A11	AEN	B11	SMW
A12	SA19	B12	SMR
A13	SA18	B13	IOW
A14	SA17	B14	IOR
A15	SA16	B15	DACK3
A16	SA15	B16	DRQ3
A17	SA14	B17	DACK1
A18	SA13	B18	DRQ1
A19	SA12	B19	REF
A20	SA11	B20	SCLK
A21	SA10	B21	IRQ7
A22	SA9	B22	IRQ6
A23	SA8	B23	IRQ5
A24	SA7	B24	IRQ4
A25	SA6	B25	IRQ3
A26	SA5	B26	DACK2
A27	SA4	B27	TC
A28	SA3	B28	ALE
A29	SA2	B29	V_{cc}
A30	SA1	B30	OSC
A31	SA0	B31	GND

Table D-16: PCI/ISA slot pin assignments (Pins C and D)

Pin	Signal	Pin	Signal
C1	SBHE	D1	MEM16
C2	LA23	D2	IO16
C3	LA22	D3	IRQ10
C4	LA21	D4	IRQ11
C5	LA20	D5	IRQ12
C6	LA19	D6	IRQ15
C7	LA18	D7	IRQ14
C8	LA17	D8	DACKO
C9	MEMR	D9	DRQ0
C10	MEMW	D10	DACK5
C11	SD8	D11	DRQ5
C12	SD9	D12	DACK6
C13	SD10	D13	DRQ6
C14	SD11	D14	DACK7
C15	SD12	D15	DRQ7
C16	SD13	D16	V_{CC}
C17	SD14	D17	MASTER
C18	SD15	D18	GND

Table D-17: PCI/ISA slot pin assignments (Pins E and F)

Pin	Signal	Pin	Signal
E1	GND	F1	GND
E2	GND	F2	GND
E3	INT 1	F3	INT3
E4	INT 2	F4	INT4
E5	V_{CC}	F5	V_{CC}
E6	---	F6	---
E7	V_{CC}	F7	V_{CC}
E8	RST	F8	PCLK2
E9	GNT2	F9	(V)
E10	REQ2	F10	GNT3
E11	GND	F11	GND
E12	PCLK1	F12	REQ3
E13	GND	F13	AD31
E14	AD30	F14	AD29
E15	NC	F15	NC
E16	---	F16	---
E17	NC	F17	NC
E18	AD28	F18	AD27
E19	AD26	F19	AD25
E20	AD24	F20	CBE3
E21	AD22	F21	AD23
E22	AD20	F22	AD21
E23	AD18	F23	AD19
E24	NC	F24	NC
E25	---	F25	---
E26	---	F26	NC
E27	AD16	F27	AD17
E28	FRAME	F28	IRDY
E29	CBE2	F29	DEVSEL
E30	TRDY	F30	LOCK
E31	STOP	F31	PERR


Table D-18: PCI/ISA slot pin assignments (Pins G and H)

Pin	Signal	Pin	Signal
G1	---	H1	SERR
G2	---	H2	AD15
G3	CBE1	H3	AD14
G4	PAR	H4	AD12
G5	GND	H5	GND
G6	---	H6	KEY
G7	GND	H7	GND
G8	AD13	H8	AD10
G9	AD11	H9	AD8
G10	AD9	H10	AD7
G11	CBEO	H11	AD5
G12	AD6	H12	AD3
G13	AD4	H13	AD1
G14	AD2	H14	AD0
G15	---	H15	KEY
G16	V_{cc}	H16	V_{cc}
G17	V_{cc}	H17	V_{cc}
G18	GND	H18	GND
G19	GND	H19	GND

D.16 Touchscreen Connector (CN23)

Table D-19: Internal COM4 and PS/2 Connector (CN23)

Pin	Signal	Pin	Signal
1	NRLSD	2	NDSR
3	NRX	4	NRTS
5	NTX	6	NCTS
7	NDTR	8	NRI
9	GND	10	GND
11	MSDAT	12	EXT MSDAT
13	MSCLK	14	EXT MSCLK
15	Vcc	16	Vcc



D.17 COM2




Table D-20: COM2

Pin	Signal		
	RS-232	RS-422	RS-485
1	DCD	TX-	DATA-
2	RX	TX+	DATA+
3	TX	RX+	---
4	DTR	RX-	---
5	GND	GND	---
6	DSR	---	---
7	RTS	---	---
8	CTS	---	---
9	RI	---	---

APPENDIX E

Mounting Instructions

- Introduction
- Panel Mounting
- Desktop Stand Mounting
- Swingarm Stand Mounting

E.1 Introduction

The PPC-123 can be placed as is on a shelf or table, mounted into a panel, or mounted on a customized swingarm or desktop stand.

E.2 Panel Mounting

E.2.1 Introduction

Panel mounting can help system integrators conveniently integrate the panel PC into their system.

To construct a suitable panel, refer to the following cutout dimensions diagram.

Note: The panel thickness should not exceed 10 mm.

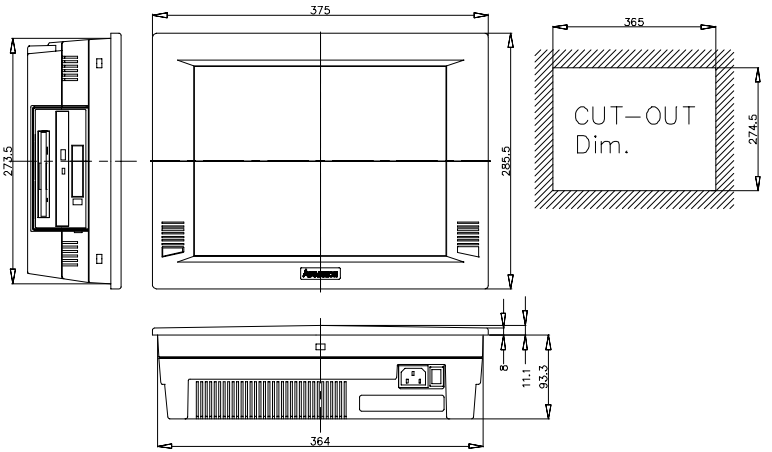


Figure E-1: Cutout dimensions of the PPC-123

E.2.2 Installation procedure

To mount the PPC-123 into a panel:

1. There are six plastic caps located along the four sides of the panel PC. Pry them off with a flat-head screwdriver.
2. Insert the fixation wedges into the holes and tighten them with the screws provided.

Note: The panel thickness should not exceed 10 mm.

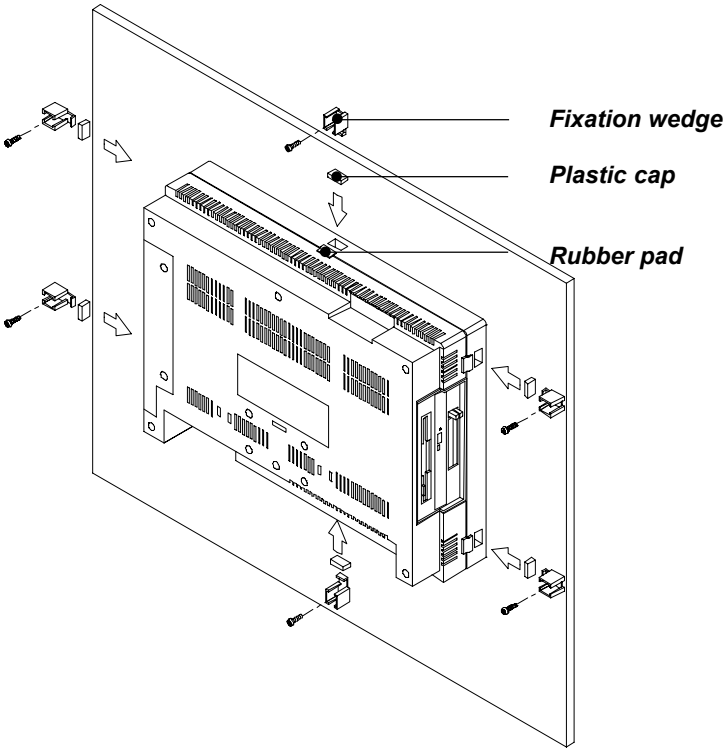


Figure E-2: Panel mounting

E.3 Desktop Stand Mounting

The PPC-123 has a customized stand suitable for desktops and other horizontal locations. A unique spring inside the stand enables the panel PC's vertical tilt to be adjusted about 30 degrees. The stand is available from Advantech Co.

Follow these procedures to set up the stand:

1. Remove the rear cover of the panel PC by unscrewing the seven screws.
2. Attach the holding plate of the stand to the inside of the rear cover of the panel PC using the five screws provided. (See Fig. E-3.)
3. Reattach the rear cover of the panel PC.
4. Attach the main body of the stand to the rear cover of the panel PC using the four screws provided.
5. Slide the main body of the stand into the stand base. Tighten it with the two screws provided.
6. Attach the rear cover of the stand to the main body of the stand by snapping the lugs of the rear cover into the slots of the main body. When the rear cover locks into place, you will hear a click.
7. Attach the top cover of the stand to the main body of the stand by snapping the lugs of the top cover into the slots of the main body. The cover must be rotated as it is snapped into place. When the top cover locks into place, you will hear a click.

Note: The base of the stand has two plastic caps. If you pry off the caps, you can attach the stand to your desktop using the two screw holes.


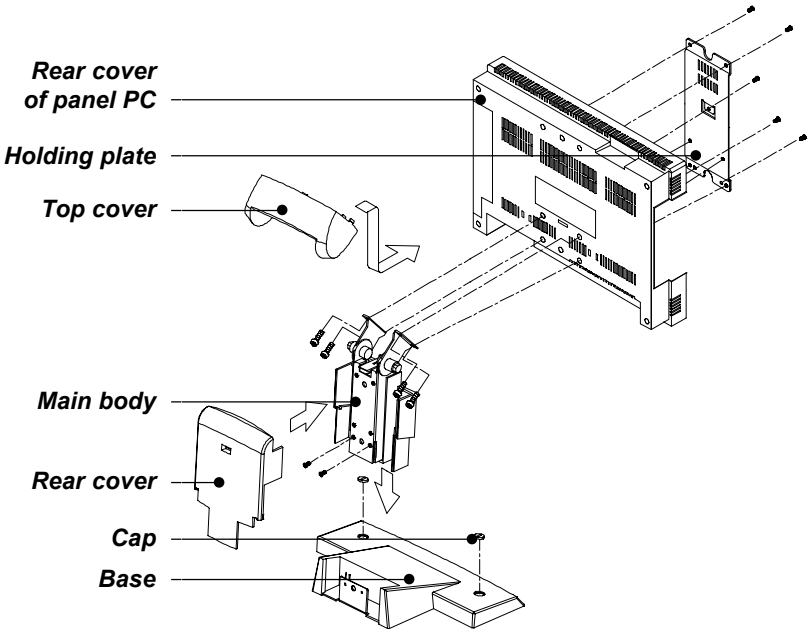


Figure E-3: Desktop stand mounting

E.4 Swingarm Stand Mounting

The PPC-123 can be mounted on a unique swingarm. This versatile accessory is easy to install and operate, and can be rotated through a wide range of angles. Its dimensions are shown in Figure E-4 below, and it is available from Advantech Co., Ltd.

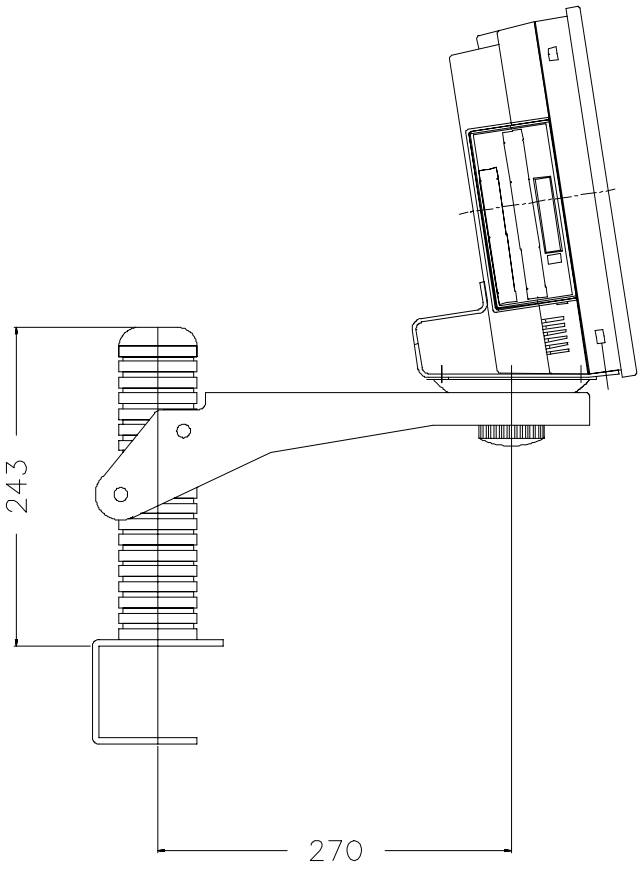

Unit: mm

Figure E-4: Swingarm stand mounting

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP