ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Parker / Compumotor Gemini GT6-L8 / GT6-L8-NK* at our website: *Click HERE*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

6K Connections to Gemini Drive

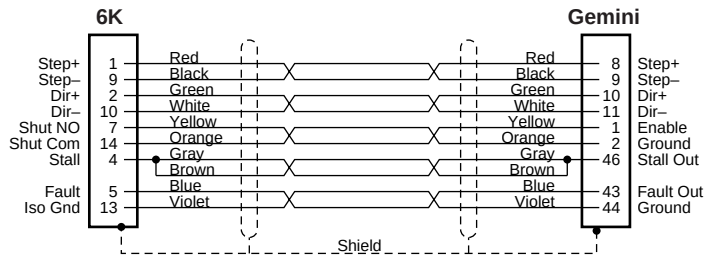

6200 Connections to Gemini Drive

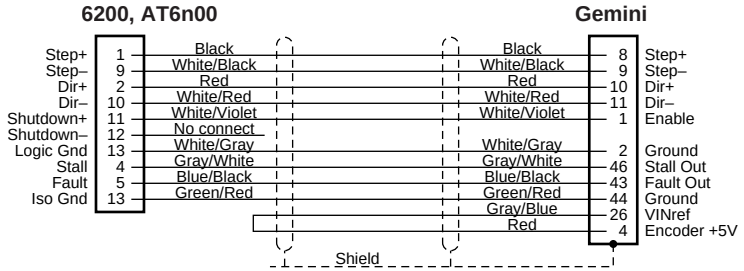

Protective Circuits

Short Circuit Protection
Inrush Current Protection
Drive Overtemperature Protection
Undervoltage Protection
Regeneration Protection

Environmental Specifications

Operating Temperature	Still Air:	45°C (113°F)
	Moving Air:	50°C (122°F)
	Minimum:	0°C (32°F)
Storage Temperature:	-40°C – 85°C (-40°F – 185°F)	
Humidity:	0 – 95%, non-condensing	

Troubleshooting

Commonly used status commands (binary status bits are numbered 1 to n, from left to right):

TERRLG	Error log reports the last 10 error conditions (cleared with CERRLG).
TAS	General report, including fault conditions.
TASX	Additional report of conditions not covered with TAS.
TCS	If TASX bit #7 or bit #28 is set, you can identify the cause with TCS.
TINO	Bit #6 indicates status of Enable input ("1" = OK to enable drive).
TIN	Status of digital inputs, including end-of-travel inputs.
TOUT	Status of digital outputs.


You must configure all motor parameters. Be sure to follow the drive configuration procedure (see *Chapter 2 Installation*).

Any fault condition causes the drive to shut down.

The drive can not be enabled (DRIVE1) unless the Enable input is grounded and the Reset input is not grounded.

Use one of three methods to reset the drive (all command settings are remembered after reset):
Issue the RESET command.
Momentarily close the Reset input.
Cycle power to the drive.

Quick Reference Guide

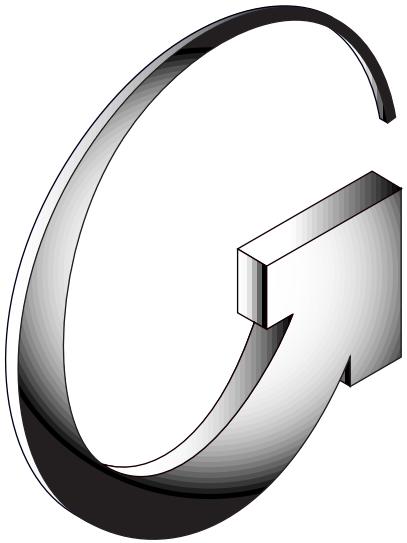


Gemini GT Stepper Drive

Compumotor Division
Parker Hannifin Corporation
p/n 88-017777-01 A (effective September 22, 1999)

RS-232/485 Connector – Configuration Port

To configure all drive parameters, connect a PC or HPC to this port. Use Motion Planner or Pocket Motion Planner for drive configuration.

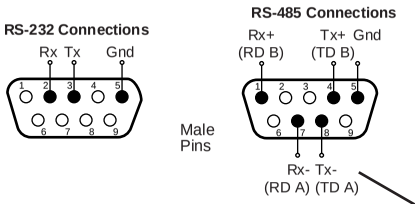

+24VDC/Relay Connector

Keep Alive Power:


+24VDC provides keep alive power to Drive


Relay:

When drive is enabled, it holds relay closed.


Relay rating: 5A at 24VDC or 120VAC.

If drive is faulted or disabled, relay will open. (Typical use: control of motor brake.)




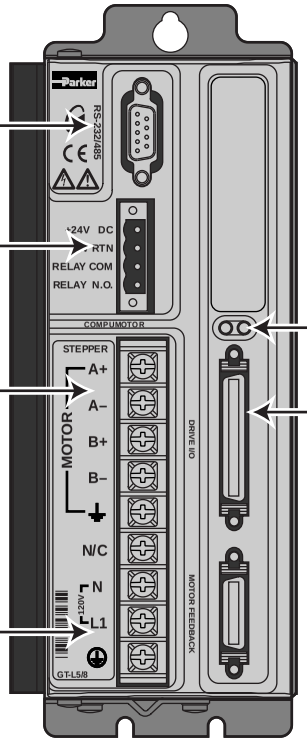


Motor Output Connections

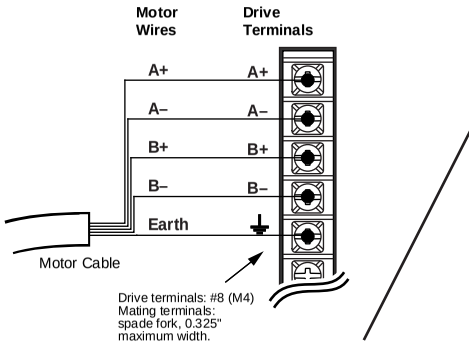


AC Input Connections

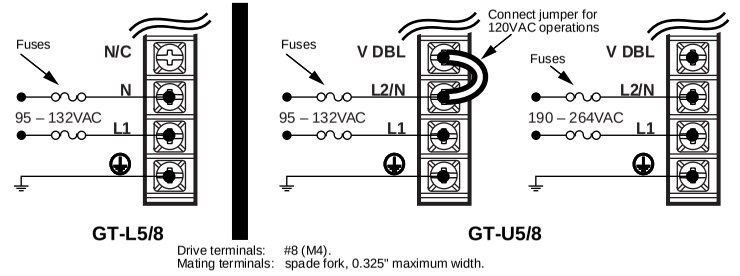

Multiple Drive Connections

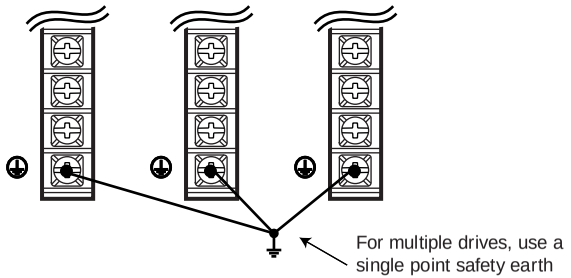


LEDs



LED Color:

Left	Right	Indicated State*
Off	Yel	Initialization
Red (flash)	Off	Awaiting flash download
Grn (flash)	Yel (flash)	Programming flash memory
Red	Grn	Keep alive mode
Grn	Grn (flash)	Incoming steps (variable rate)
Grn	Yel/Grn (flash)	Autorun mode
Red	Off	Drive not enabled
		Drive faulted
Grn	Off	Drive ready

50 Pin DRIVEI/O Connector

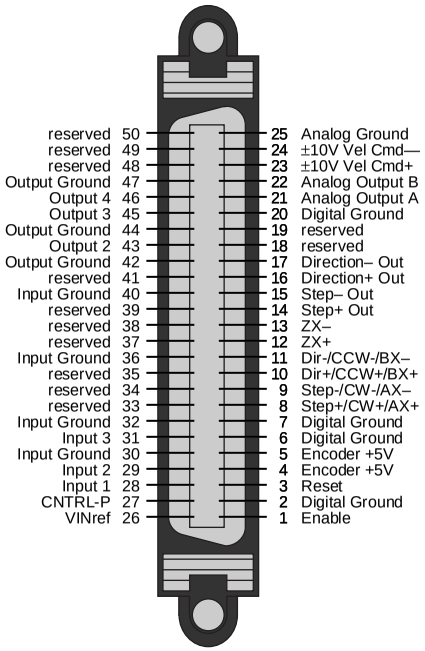

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP